

An interpretation of:
Rublyovo - Arkhangelskoye smart city, Zaha Hadid, MOSCOW (Russia)

PROFILES FOR FLOORS




PROTERMINAL

POLISHED AND BRUSHED
STAINLESS STEEL AISI 304/1.4301-V2A

PROTERMINAL is a professional edging profile used mainly to join similar or different floor materials (e.g. tiles/tiles - tiles/parquet/marble/laminates/carpeting /linoleum, etc.) of differing thickness.

PROTERMINAL in stainless steel is also used to protect steps and decking, as a floor edging profile and skirting covering. Match with PROLISTEL strips in stainless steel AISI 304/1.4301-V2A with polished or brushed and in aluminium with anodized or polished chrome finish.

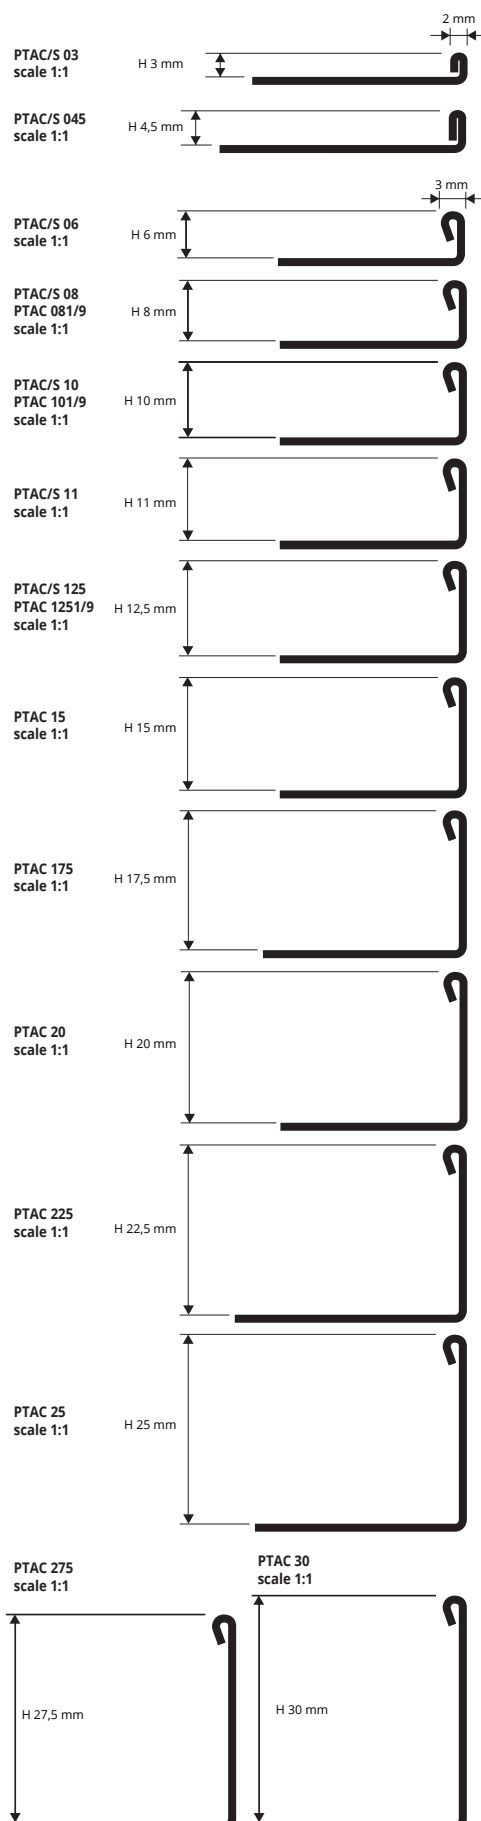

POLISHED STAINLESS ST. AISI 304/1.4301-V2A with protective film
bar length 2,7 lm - pack. 40 Pcs - 108 lm - 10/10 mm
(H 15 to H 30 mm - pack. 20 Pcs - 54 lm)

Article	H mm	€/lm	€/Pc
PTAC 03	3	8,95	24,16
PTAC 045	4,5	9,12	24,62
PTAC 06	6	9,51	25,68
PTAC 08	8	9,84	26,57
PTAC 10	10	10,35	27,95
PTAC 11	11	10,53	28,43
PTAC 125	12,5	10,73	28,97
PTAC 15	15	11,25	30,38
PTAC 175	17,5	11,89	32,10
PTAC 20	20	12,19	32,91
PTAC 225	22,5	12,96	34,99
PTAC 25	25	13,79	37,23
PTAC 275	27,5	14,31	38,64
PTAC 30	30	14,82	40,01

POLISHED STAINLESS ST. AISI 304/1.4301-V2A with protective film
bar length 1 lm - pack. 40 Pcs - 40 lm - 10/10 mm

Article	H mm	€/lm	€/Pc
PTAC 081	8	/	10,35
PTAC 101	10	/	10,79
PTAC 1251	12,5	/	11,25

POLISHED STAINLESS ST. AISI 304/1.4301-V2A with protective film
bar length 0,9 lm - pack. 40 Pcs - 36 lm - 10/10 mm

Article	H mm	€/lm	€/Pc
PTAC 089	8	/	9,33
PTAC 109	10	/	9,71
PTAC 1259	12,5	/	10,08




BRUSHED STAINLESS ST. AISI 304/1.4301-V2A with protective film
bar length 2,7 lm - pack. 40 Pcs - 108 lm - 10/10 mm
(H 15 to H 30 mm - pack. 20 Pcs - 54 lm)

Article	H mm	€/lm	€/Pc
PTACS 03	3	10,41	28,11
PTACS 045	4,5	11,36	30,67
PTACS 06	6	11,75	31,73
PTACS 08	8	12,14	32,78
PTACS 10	10	12,58	33,97
PTACS 11	11	12,78	34,51
PTACS 125	12,5	13,03	35,18
PTACS 15	15	14,24	38,45
PTACS 20	20	14,56	39,31


COLOURS



EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

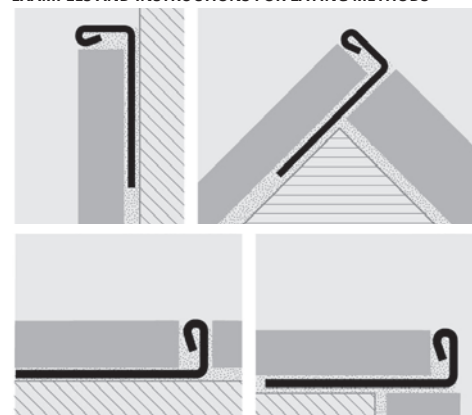

1. Choose the PROTERMINAL with the same height as the thickness of the covering. 2. Apply the adhesive onto the area of application of the profile. 3. Lay and align the profile pressing the perforated flange into the adhesive. 4. Lay the tiles, aligning them so that the top edge of the profile is "flush" with the tile. 5. Use the adhesive to seal any empty interstices.

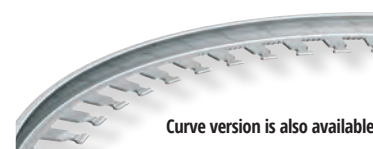

Curve version is also available

SUITABLE FOR USE IN CONTACT WITH FOODSTUFFS.

* = Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed


Prices are referred to whole packs 10% increase for minimum orders of 10 Pcs 20% increase for orders of less than 10 Pcs.



PROTERMINAL are manufactured with the same forms and sections, as well as in the very resistant material, the stainless shiny steel 316/1.4401-V4A, suitable for outdoors and marine environment with much presence of saltiness and considerable atmospheric agents. They are used as protection for the external angles of tiles, in order to separate or to create the separating joints in the pavements, to terminate the finishing of wall coverings, for platforms, stair steps, bathtubs, etc. They guarantee the impeccable work, ensuring considerable aesthetic effect as well. They strengthen the tile edge and prevents from chipping and breakages. Required by new European regulations on safety and accident prevention in public and private places.

PROTERMINAL

POLISHED STAINLESS STEEL
AISI 316/1.4404-V4A

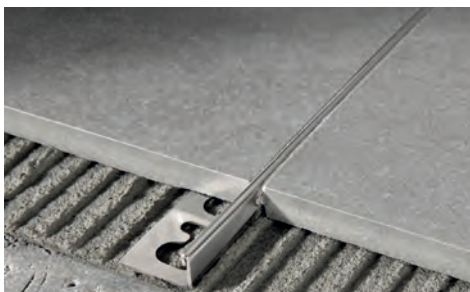

POLISHED STAINLESS ST. AISI 316L/1.4404-V4A
with protective film
bar length 2,7 lm - pack. 40 Pcs - 108 lm - 10/10 mm



Article	H mm	€/lm	€/Pc
PTACM 06	6	12,38	33,43
PTACM 08	8	12,80	34,56
PTACM 10	10	13,46	36,34
PTACM 125	12,5	13,94	37,64

EXAMPLES OF LAYING




COLOURS



ACM - Polished stainless steel
AISI 316L

SUITABLE FOR USE IN CONTACT WITH FOODSTUFFS.

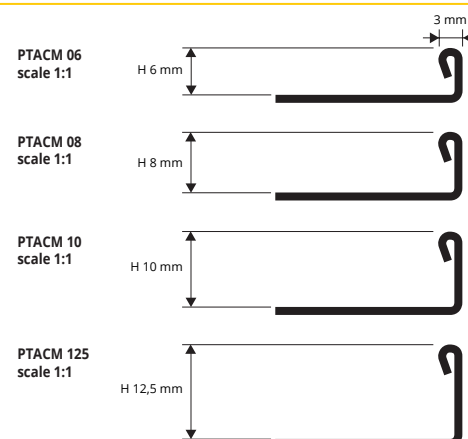

PROTERMINAL is a professional edging profile used mainly to join similar or different floor materials (e.g. tiles/tiles - tiles/parquet/marble/granite, etc.) of differing thickness.

PROTERMINAL in brass is also used to protect steps and decking, as a floor edging profile, to cover skirting, decking and worktops and to frame doormats.

PROTERMINAL

POLISHED, NATURAL, ANTIQUE BRASS and
BRUSHED



POLISHED BRASS thermo packed
bar length 2,70 lm - pack. 20 Pcs 54 lm

Article	H mm	€/lm	€/Pc
PTOL 06	6	10,87	29,35
PTOL 08	8	11,50	31,05
PTOL 10	10	12,39	33,45
PTOL 125	12,5	13,39	36,15
PTOL 15	15	14,38	38,83
PTOL 20	20	16,96	45,79
PTOL 25	25	21,58	58,27

ANTIQUÉ BRASS thermo packed
bar length 2,70 lm - pack. 20 Pcs - 54 lm

Article	H mm	€/lm	€/Pc
PTOB 06	6	26,62	71,87
PTOB 08	8	27,77	74,98
PTOB 10	10	30,29	81,78
PTOB 125	12,5	32,66	88,18
PTOB 15	15	37,27	100,63
PTOB 20	20	43,31	116,94
PTOB 25	25	50,24	135,65

BRUSHED BRASS thermo packed
bar length 2,70 lm - pack. 20 Pcs - 54 lm

Article	H mm	€/lm	€/Pc
PTOS 06	6	10,87	29,35
PTOS 08	8	11,50	31,05
PTOS 10	10	12,39	33,45
PTOS 125	12,5	13,39	36,15
PTOS 15	15	14,38	38,83
PTOS 20	20	16,96	45,79
PTOS 25	25	21,58	58,27

NATURAL BRASS thermo packed

bar length 2,70 lm pack. 20 Pcs 54 lm (H 6 mm - 40 Pcs 108 lm)

Article	H mm	€/lm	€/Pc
PTON 06	6	8,35	22,55
PTON 08	8	8,87	23,95
PTON 10	10	9,50	25,65
PTON 125	12,5	10,29	27,78
PTON 15	15	11,03	29,78
PTON 20	20	12,97	35,02
PTON 25	25	14,96	40,39

NATURAL BRASS thermo packed

bar length 1 lm - pack. 40 Pcs - 40 lm

Article	H mm	€/lm	€/Pc
PTON 061	6	/	21,68
PTON 081	8	/	22,95
PTON 101	10	/	24,57
PTON 1251	12,5	/	26,24

NATURAL BRASS thermo packed


bar length 0,90 lm - pack. 40 Pcs - 36 lm

Article	H mm	€/lm	€/Pc
PTON 069	6	/	19,63
PTON 089	8	/	20,74
PTON 109	10	/	22,25
PTON 1259	12,5	/	23,65




Curve version is also available

COLOURS




Chrome-plated Brass version page 37

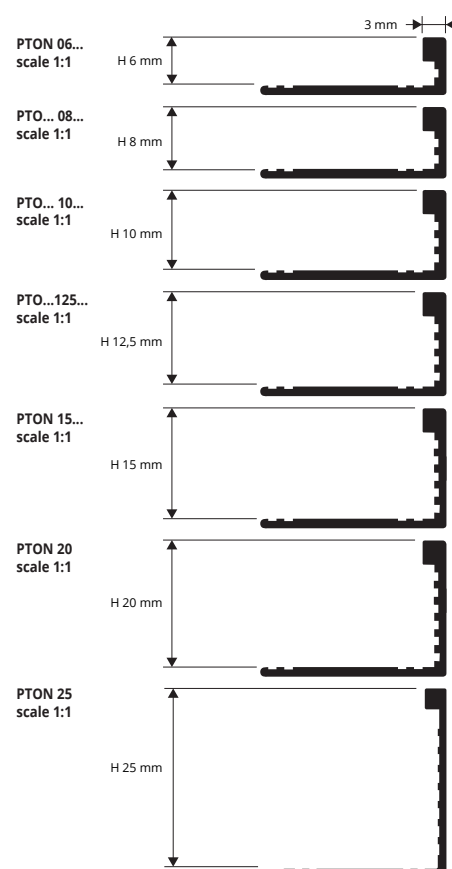

1. Choose the "PROTERMINAL" with the same height as the thickness of the floor/wall covering. 2. Apply the adhesive onto the area of application of the profile. 3. Lay and align the profile pressing the perforated flange into the adhesive. 4. Lay the tiles, aligning them so that the top edge of the profile is "flush" with the tile. Use the adhesive to seal any empty interstices. Oxidation marks may be easily removed by polishing the profiles with specific products to be found on sale such as Sidol, Smac and similar.

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS



News 2022

* = Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed


Prices are referred to whole packs 10% increase for minimum orders of 10 Pcs 20% increase for orders of less than 10 Pcs.

PROTERMINAL

NATURAL ALUMINIUM AND
ANODIZED SILVER ALUMINIUM

PROTERMINAL is a professional edging profile designed to protect and decorate the outside corners of tile, mosaic and marble coverings of differing thickness.

PROTERMINAL in aluminium is also used to join different floor materials and to protect steps and decking. Excellent as the edging trim skirtings and for bathroom and kitchen wall coverings. Match with PROLISTEL ALL strips in anodized aluminium with silver and polished chrome finish and with PROLISTEL ACC strips in AISI 304-1.4301 stainless steel with polished or brushed.

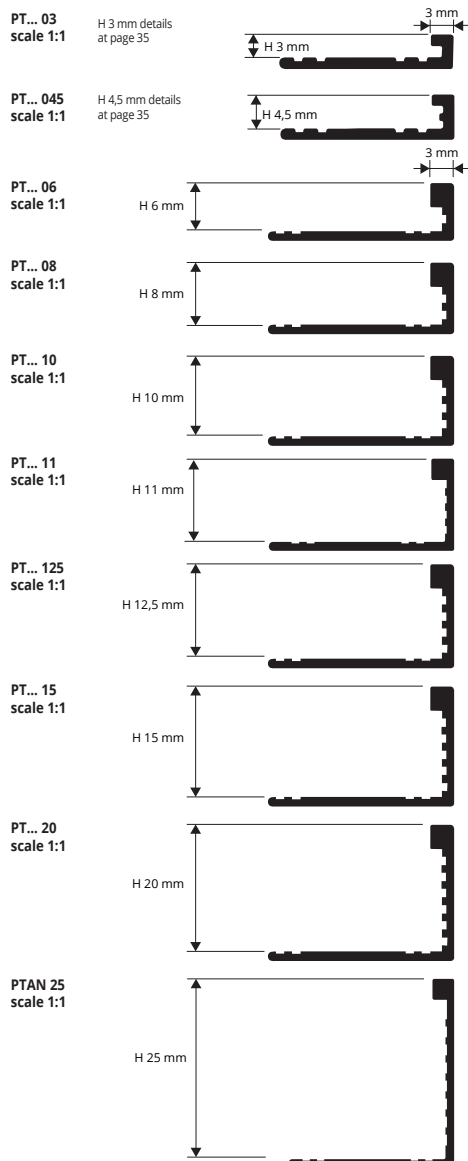

NATURAL ALUMINIUM thermo packed 10 Pcs
bar length 2,70 lm - pack. 40 Pcs - 108 lm

Article	H mm	€/lm	€/Pc
PTAN 06	6	2,93	7,91
PTAN 08	8	3,06	8,26
PTAN 10	10	3,20	8,64
PTAN 11	11	3,30	8,91
PTAN 125	12,5	3,38	9,13
PTAN 15	15	3,71	10,02
PTAN 20	20	4,34	11,72
PTAN 25	25	5,09	13,74


NATURAL ALUMINIUM thermo packed 10 Pcs
bar length 0,90 lm - pack. 40 Pcs - 36 lm

Article	H mm	€/lm	€/Pc
PTAN 069	6	/	3,06 *
PTAN 089	8	/	4,97 *
PTAN 109	10	/	3,32 *
PTAN 1259	12,5	/	3,44 *

COLOURS



EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

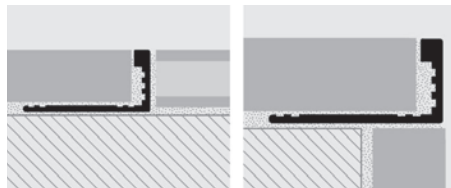

ANODIZED SILVER ALUMINIUM thermo packed
bar length 2,70 lm - pack. 40 Pcs - 108 lm

Article	H mm	€/lm	€/Pc
PTAA 06	6	4,03	10,88
PTAA 08	8	4,09	11,04
PTAA 10	10	4,34	11,72
PTAA 11	11	4,73	12,77
PTAA 125	12,5	4,99	13,47
PTAA 15	15	5,30	14,31
PTAA 20	20	6,20	16,74

NATURAL ALUMINIUM thermo packed 10 Pcs
bar length 1 lm - pack. 40 Pcs - 40 lm

Article	H mm	€/lm	€/Pc
PTAN 061	6	/	3,77 *
PTAN 081	8	/	3,89 *
PTAN 101	10	/	4,03 *
PTAN 1251	12,5	/	4,27 *

Also available Polished version and curve version

1. Choose the "PROTERMINAL" with the same height as the thickness of the covering. 2. Apply the adhesive onto the area of application of the profile. 3. Lay and align the profile pressing the perforated flange into the adhesive. 4. Lay the tiles, aligning them so that the top edge of the profile is "flush" with the tile. 5. Use the adhesive to seal any empty interstices.

© 2022 All rights reserved by Progress Profiles. Printed in Italy





PROLEVIGAL are separating profiles used to create the technical joint in the special types of pavements such as marble- Venice- palladium ones, that must be smoothed after their laying process. The particular "L" shape with the cut/drilled base and 2,5 mm thick vertical edge consent the perfect smoothing and constant thickness as well. Available in natural aluminium and natural brass, various thickness, as well in outlined/bent **PROLEVIGAL CURVES** BRASS versions.

PROLEVIGAL


NATURAL BRASS




NATURAL BRASS thermo packed 10 Pcs
bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	H mm	€/lm	€/Pc	
PLGON 08	8	9,60	25,92	*
PLGON 10	10	10,00	27,00	
PLGON 125	12,5	10,68	28,84	
PLGON 125/5	12,5	20,74	56,00	*
PLGON 15	15	11,61	31,35	
PLGON 175	17,5	12,44	33,59	*
PLGON 20	20	13,65	36,86	
PLGON 30	30	16,62	44,87	*

COLOURS



ON - Natural brass

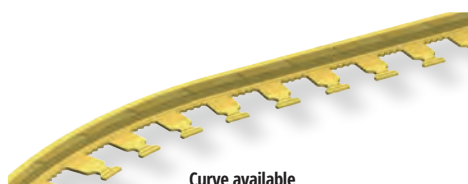


Curve available

+30 % ON GROSS PRICES FOR CURVE VERSION.
ADD **CV** AFTER THE ARTICLE CODE.
E.g.: PLGON 08 (CURVE) PLGON**CV** 08

AVAILABLE MINIMUM QUANTITY 200 PCS by color and height



OL - Polished brass OB - Antique brass
Price to be agreed. Production delay 4/5 weeks

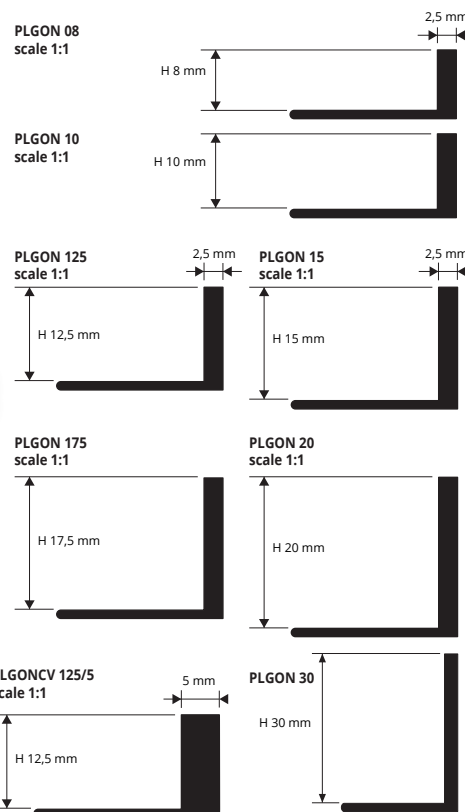

PROLEVIGAL are separating profiles used to create the technical joint in the special types of pavements such as marble- Venice- palladium ones, that must be smoothed after their laying process. The particular "L" shape with the cut/drilled base and 2,5 mm thick vertical edge consent the perfect smoothing and constant thickness as well. Available in natural aluminium and natural brass, various thickness, as well in outlined/bent **PROLEVIGAL CURVE** AL versions.

PROLEVIGAL

NATURAL ALUMINIUM




NATURAL ALUMINIUM thermo packed 10 Pcs
bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	H mm	€/lm	€/Pc
PLGAN 045	4,5	2,56	6,91
PLGAN 06	6	2,80	7,56
PLGAN 08	8	3,12	8,42
PLGAN 10	10	3,18	8,59
PLGAN 125	12,5	3,49	9,42
PLGAN 15	15	3,85	10,40
PLGAN 175	17,5	4,27	11,53
PLGAN 20	20	4,46	12,04

COLOURS




AN - Natural alum.

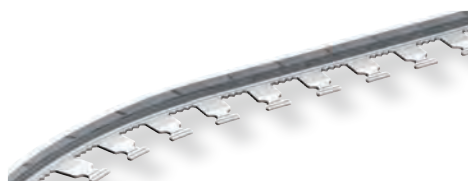

Curve available

+30 % ON GROSS PRICES FOR CURVE VERSION.
ADD **CV** AFTER THE ARTICLE CODE.
E.g.: PLGAN 08 (CURVES) PLGAN**CV** 08

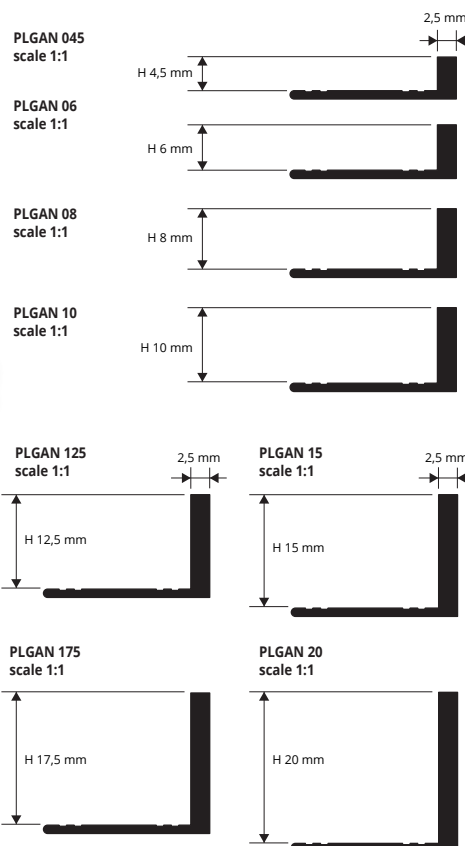


News 2022

* = Production on demand with minimum quantity of 200 pcs. Production delay 4/5 weeks. Price to be agreed


Prices are referred to whole packs 10% increase for minimum orders of 10 Pcs 20% increase for orders of less than 10 Pcs.

PROELEGANT

NATURAL, POLISHED
AND CHROMED BRASS

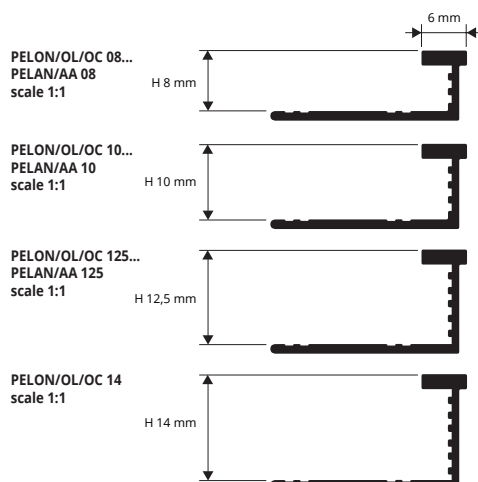

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

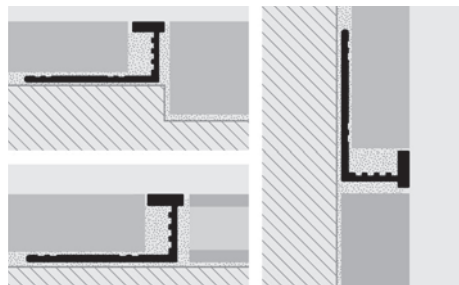

1. Choose the "PROELEGANT" with the same height as the thickness of the wall covering/floor. 2. Apply the adhesive onto the area of application of the profile. 3. Lay and align the profile pressing the perforated flange into the adhesive. 4. Lay the tiles, aligning them so that the top edge of the profile is "flush" with the tile. 5. Use the adhesive to seal any empty interstices. Oxidation marks may be easily removed by polishing the profiles with specific products to be found on sale such as Sidol, Smac and similar.

PROELEGANT is a refined profile, with 6 mm visible surface, designed to cover the joint between two types of floor covering, tiles - parquet, marble or granite, bestowing a prestige aesthetic effect that is ideal for indoor and outdoor finishes, even when subject to considerable loads. **PROELEGANT** is available in polished, natural and chromed brass. It is available in various heights in order to satisfy all technical, practical and, in particular, decorative requirements. The chromed version may be used as a decorative strip in the wall covering.



POLISHED BRASS thermo packed

bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	H mm	€/lm	€/Pc
PELOL 08	8	15,96	43,09 *
PELOL 10	10	16,38	44,23
PELOL 125	12,5	17,01	45,93
PELOL 14	14	17,59	47,49 *

NATURAL BRASS thermo packed 10 Pcs

bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	H mm	€/lm	€/Pc
PELON 08	8	12,23	33,02 *
PELON 10	10	13,28	35,86
PELON 125	12,5	13,49	36,42
PELON 14	14	14,60	39,42 *

COLOURS

OC - Chromed brass	OL - Polished brass	ON - Natural brass



CHROMED BRASS thermo packed

bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	H mm	€/lm	€/Pc
PELOC 08	8	20,11	54,30 *
PELOC 10	10	20,53	55,43
PELOC 125	12,5	21,11	57,00
PELOC 14	14	21,63	58,40 *

NATURAL BRASS thermo packed 5 Pcs

bar length 0,90 lm - pack. 40 Pcs - 36 lm



Article	H mm	€/lm	€/Pc
PELON 089	8	/	11,73 *
PELON 109	10	/	12,71 *
PELON 1259	12,5	/	13,23 *

© 2022 All rights reserved by Progress Profiles. Printed in Italy

PROELEGANT

NATURAL ALUMINIUM AND
ANODIZED SILVER ALUMINIUM

EXAMPLES OF LAYING (for instructions see the product above)

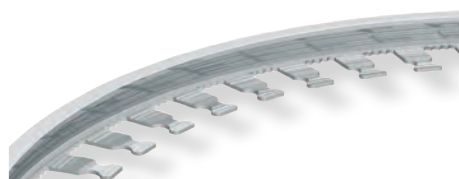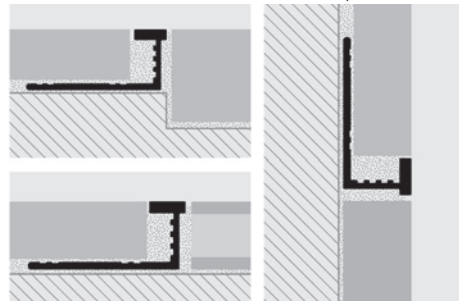

Curve available, see page 103

PROELEGANT is a refined profile, with 6 mm visible surface, designed to cover the joint between two types of floor covering, tiles - parquet, marble or granite, bestowing a prestige aesthetic effect that is ideal for indoor and outdoor finishes, even when subject to considerable loads. **PROELEGANT** is available in natural and anodized silver aluminium. It is available in various heights in order to satisfy all technical, practical and, in particular, decorative requirements. The anodized version may be used as a decorative strip in the wall covering.



NATURAL ALUMINIUM thermo packed 10 Pcs

bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	H mm	€/lm	€/Pc
PELAN 08	8	4,99	13,47 *
PELAN 10	10	5,30	14,31
PELAN 125	12,5	5,63	15,20

COLOURS

AN - Natural alum.	AA - Anodized silver alum.



ANODIZED SILVER ALUMINIUM thermo packed


bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	H mm	€/lm	€/Pc
PELAA 08	8	6,26	16,90 *
PELAA 10	10	6,58	17,77
PELAA 125	12,5	6,91	18,66




PROFINAL

POLISHED, BRUSHED AND SANDED
STAINLESS STEEL AISI 304/1.4301-V2A

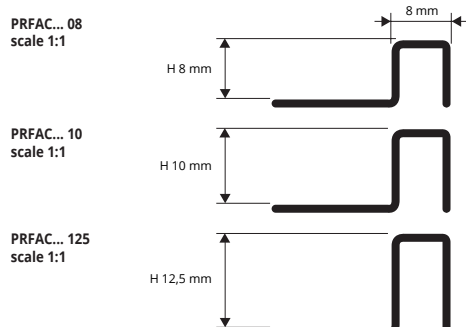

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

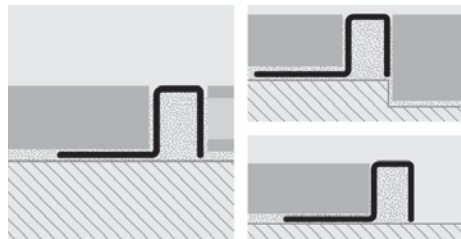

1. Choose the "PROFINAL" with the same height as the thickness of the covering. 2. Apply the adhesive onto the area of application of the profile. 3. Lay and align the profile pressing the perforated flange into the adhesive. 4. Lay the tiles, aligning them so that the top edge of the profile is "flush" with the tile. 5. Use the adhesive to seal any empty interstices.

PROFINAL is a profile in stainless steel AISI 304/1.4301-V2A polished, brushed and sanded. It is available in three widths 8, 10 and 12.5 mm. Ideal for joining two types of floor on the same level (e.g. tile/tile or tile/wood), creating a decorative separating profile. It is also suitable as a step nosing or to create a decorative strip in the covering. It protects the edge and withstands high loads and frequent traffic.



POLISHED STAINLESS ST. AISI 304/1.4301-V2A with protective film
bar length 2,7 lm - pack. 20 Pcs - 54 lm - 10/10 mm

Article	H mm	€/lm	€/Pc
PRFAC 08	8	13,33	35,99
PRFAC 10	10	14,02	37,85
PRFAC 125	12,5	15,19	41,01

COLOURS

AC - Polished stainless steel AISI 304/1.4301-V2A	ACS - Brushed stainless steel AISI 304/1.4301-V2A	ACSB - Sanded stainless steel AISI 304/1.4301-V2A



BRUSHED STAINLESS ST. AISI 304/1.4301-V2A with protective film
bar length 2,7 lm - pack. 20 Pcs - 54 lm - 10/10 mm

Article	H mm	€/lm	€/Pc
PRFACS 08	8	14,56	39,31
PRFACS 10	10	15,20	41,04
PRFACS 125	12,5	16,03	43,28


SANDED STAINLESS STEEL AISI 304/1.4301-V2A with protective film
bar length 2,7 lm - pack. 20 Pcs - 54 lm - 10/10 mm

Article	H mm	€/lm	€/Pc
PRFACSB 08	8	15,57	42,04
PRFACSB 10	10	16,24	43,85
PRFACSB 125	12,5	17,08	46,12


SUITABLE FOR USE IN CONTACT WITH FOODSTUFFS.

PROFINAL

NATURAL, POLISHED,
CHROMED AND ANTIQUE BRASS

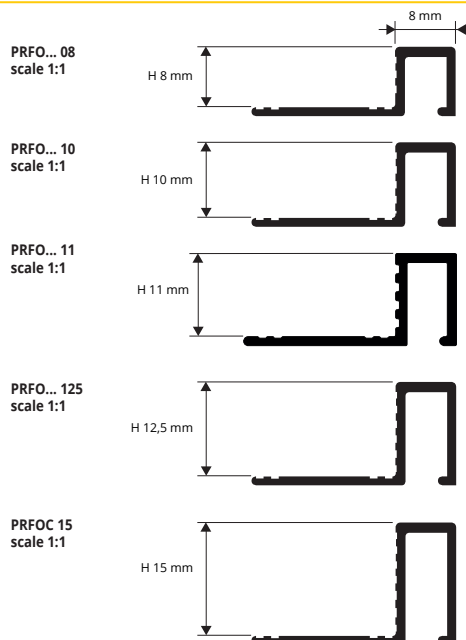

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

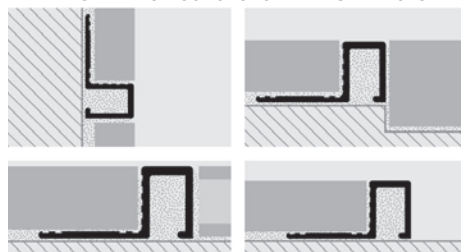

PROFINAL is a profile in natural, polished, chromed and antique brass. It is available in three widths 8, 10 and 12.5 mm. Ideal for joining two types of floor on the same level (e.g. tile/tile or tile/wood), creating a decorative separating profile. It is also suitable as a step nosing or to create a decorative strip in the covering. It protects the edge and withstands high loads and frequent traffic.



NATURAL BRASS thermo packed 5 Pcs
bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	H mm	€/lm	€/Pc
PRFON 08	8	13,18	35,59
PRFON 10	10	15,33	41,39
PRFON 125	12,5	16,91	45,66

COLOURS

OC - Chromed brass	OL - Polished brass	ON - Natural brass
OB - Antique brass		

1. Choose the "PROFINAL" with the same height as the thickness of the covering. 2. Apply the adhesive onto the area of application of the profile. 3. Lay and align the profile pressing the perforated flange into the adhesive. 4. Lay the tiles, aligning them so that the top edge of the profile is "flush" with the tile. 5. Use the adhesive to seal any empty interstices. Oxidation marks may be easily removed by polishing the profiles with specific products to be found on sale such as Sidol, Smac and similar.



POLISHED BRASS thermo packed
bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	H mm	€/lm	€/Pc
PRFOL 08	8	16,64	44,93
PRFOL 10	10	17,75	47,93
PRFOL 125	12,5	18,90	51,03

CHROMED BRASS thermo packed
bar length 2,7 lm - pack. 20 Pcs - 54 lm (H 15 mm - 40,5 lm)

Article	H mm	€/lm	€/Pc
PRFOC 08	8	21,21	57,27
PRFOC 10	10	23,36	63,07
PRFOC 11	11	24,52	66,20
PRFOC 125	12,5	25,31	68,34
PRFOC 15	15	26,72	72,14

ANTIQU BRASS thermo packed
bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	H mm	€/lm	€/Pc
PRFOB 08	8	35,18	94,99
PRFOB 10	10	38,22	103,19
PRFOB 125	12,5	40,95	110,57

* = Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed

Prices are referred to whole packs 10% increase for minimum orders of 10 Pcs 20% increase for orders of less than 10 Pcs.

PROFINAL is a profile in natural and anodized silver aluminium. It is available in three widths 8, 10 and 12.5 mm. Ideal for joining two types of floor on the same level (e.g. tile/tile or tile/wood), creating a decorative separating profile. It is also suitable as a step nosing or to create a decorative strip in the covering. It protects the edge and withstands high loads and frequent traffic.

PROFINAL

NATURAL ALUMINIUM AND
ANODIZED SILVER ALUMINIUM



NATURAL ALUMINIUM thermo packed 10 Pcs
bar length 2,7 lm - pack. 40 Pcs - 108 lm


Article	H mm	€/lm	€/Pc
PRFAN 08	8	5,10	13,77
PRFAN 10	10	5,49	14,82
PRFAN 125	12,5	5,81	15,69

COLOURS




ANODIZED SILVER ALUMINIUM thermo packed
bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	H mm	€/lm	€/Pc
PRFAA 08	8	6,76	18,25
PRFAA 10	10	7,09	19,14
PRFAA 125	12,5	7,41	20,01

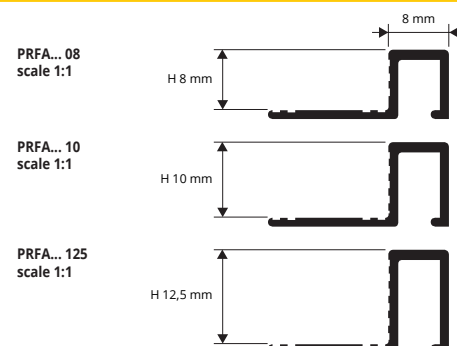

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

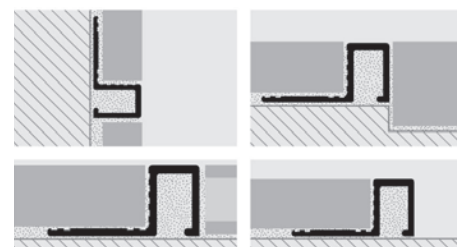

1. Choose the "PROFINAL" with the same height as the thickness of the covering. 2. Apply the adhesive onto the area of application of the profile. 3. Lay and align the profile pressing the perforated flange into the adhesive. 4. Lay the tiles, aligning them so that the top edge of the profile is "flush" with the tile. 5. Use the adhesive to seal any empty interstices. Oxidation marks may be easily removed by polishing the profiles with specific products to be found on sale such as Sidol, Smac and similar.

PROSQUARE


NATURAL BRASS




NATURAL BRASS
bar length 3 lm - pack. 20 Pcs - 60 lm

Article	L x H mm	€/lm	€/Pc
PQEON 108	10 X 8	21,46	57,94

COLOURS



PQEON 108
scale 1:1



PROANGLE

CHROMED, POLISHED BRASS




CHROMED, POLISHED BRASS thermo packed
bar length 2,7 lm - pack. 20 Pcs - 54 lm (PGAOC 10 : 27 lm)


Article	L x H mm	€/lm	€/Pc
PGAOC 10	10 X 10	25,76	69,55
PGAOL 10	10 X 10	20,70	55,89



COLOURS



PGAOL/OC 10
scale 1:1




* = Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed

Prices are referred to whole packs 10% increase for minimum orders of 10 Pcs 20% increase for orders of less than 10 Pcs.

PROJOINT

NATURAL AND POLISHED BRASS

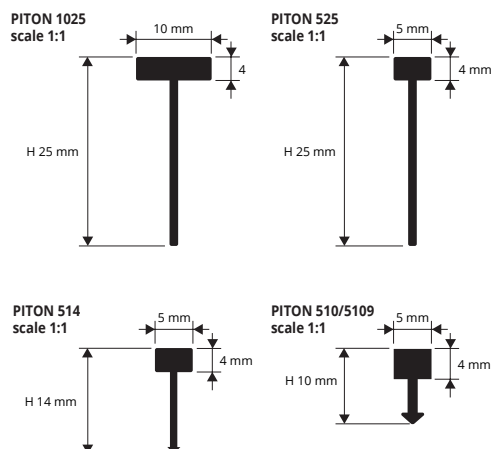

POLISHABLE NATURAL BRASS

bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	L x H mm	€/lm	€/Pc
PITON 1025	10 X 25	16,21	43,77
PITON 525	5 X 25	8,68	23,44
PITON 514	5 X 14	8,31	22,44
PITON 510	5 X 10	7,35	19,84

POLISHED BRASS

bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	L x H mm	€/lm	€/Pc
PITOL 1025	10 X 25	21,89	59,10 *
PITOL 525	5 X 25	11,73	31,67 *
PITOL 514	5 X 14	11,21	30,27 *
PITOL 510	5 X 10	9,92	26,78 *



POLISHABLE NATURAL BRASS

bar length 0,90 lm - pack. 40 Pcs

Article	L x H mm	€/lm	€/Pc
PITON 5109	5 X 10	/	15,97

CONSISTING OF 1 ECOBLISTER WITH 2 PCS. OF 0.90 LM

POLISHED BRASS

bar length 0,90 lm - pack. 40 Pcs


Article	L x H mm	€/lm	€/Pc
PITOL 5109	5 X 10	/	21,57 *

CONSISTING OF 1 ECOBLISTER WITH 2 PCS. OF 0.90 LM

COLOURS

ON	ON DEMAND
ON - Natural brass	OL - Polished brass


EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

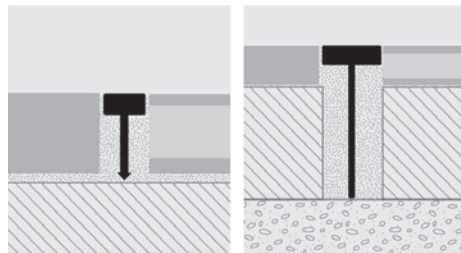


1. Choose "PROJOINT" according to the desired height.
2. Cut "PROJOINT" to the desired length.
3. Cut with a trowel the fresh screed following the floor edges.
4. Apply the profile inside the fresh screed taking care to align it with the surface of the floor. After laying the joint should be 0,5 mm below the floor covering surface. 5. Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation. Remove immediately all grout remains from the profile surface.
- Adhesive laying
3. Apply the adhesive on the support where the profile will be laid. After laying the joint should be 0,5 mm below the floor covering surface. 4. Lay the tiles aligning them with the profile leaving a 2 mm joint. Remove immediately all the remains of adhesive from the profile surface. 5. Fill the joints between the profile and the tile with grout, in order to avoid water stagnation. Remove immediately all grout remains from the profile surface.

PROJOINT

NATURAL ALUMINIUM

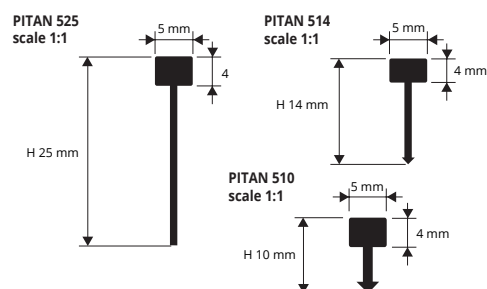

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

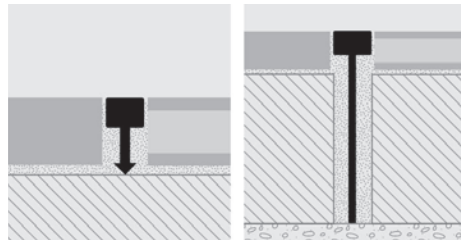

1. Choose "PROJOINT" according to the desired height.
2. Cut "PROJOINT" to the desired length.
3. Cut with a trowel the fresh screed following the floor edges.
4. Apply the profile inside the fresh screed taking care to align it with the surface of the floor. After laying the joint should be 0,5 mm below the floor covering surface. 5. Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation. Remove immediately all grout remains from the profile surface.
- Adhesive laying
3. Apply the adhesive on the support where the profile will be laid. After laying the joint should be 0,5 mm below the floor covering surface. 4. Lay the tiles aligning them with the profile leaving a 2 mm joint. Remove immediately all the remains of adhesive from the profile surface. 5. Fill the joints between the profile and the tile with grout, in order to avoid water stagnation. Remove immediately all grout remains from the profile surface.

NATURAL ALUMINIUM

bar length 2,70 lm - pack. 40 Pcs - 108 lm

Article	L x H mm	€/lm	€/Pc
PITAN 525	5 X 25	3,50	9,45
PITAN 514	5 X 14	3,20	8,64
PITAN 510	5 X 10	2,63	7,10

COLOURS

AN
AN - Natural alum.

* = Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed


Prices are referred to whole packs 10% increase for minimum orders of 10 Pcs 20% increase for orders of less than 10 Pcs.



PROCANAL is a channel for joining floors and also for use as strips in wall coverings. This profile is made in natural, polished and chromed brass as well as natural or anodized silver aluminium. It is also used as a cable channel for the insertion of wires and conduits in all types of floor.

PROCANAL

NATURAL, POLISHED,
CHROMED, ANTIQUE AND BRUSHED BRASS
NATURAL AND ANODIZED SILVER ALUMINIUM

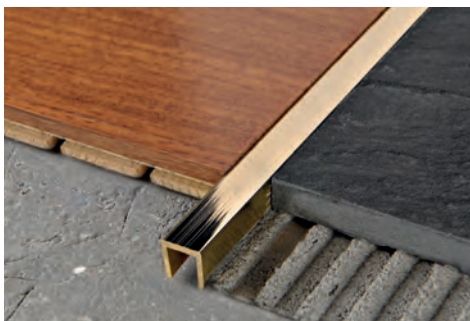

NATURAL BRASS thermo packed 10 Pcs - POLISHED, CHROMED, NATURAL, ANTIQUE AND BRUSHED BRASS thermo packed
bar length 2,7 lm - pack. 40 Pcs - 108 lm (PCLOC 10 - 81 lm)

Article	L x H mm	€/lm	€/Pc
PCLON 10	10 X 10	12,60	34,02
PCLOL 10	10 X 10	14,28	38,56
PCLOC 10	10 X 10	20,32	54,86
PCLOB 10	10 X 10	33,81	91,29
PCLOS 10	10 X 10	14,28	38,56




NATURAL ALUMINIUM thermo packed 10 Pcs ANODIZED SILVER ALUMINIUM thermo packed
bar length 2,7 lm - pack. 40 Pcs - 108 lm


Article	L x H mm	€/lm	€/Pc
PCLAN 10	10 X 10	2,90	7,83
PCLAA 10	10 X 10	3,86	10,42

Available Stainless steel AISI 304/1.4301-V2A
"PROLISTEL" 10x10 PLTAC 10 / PLTACS 10

PCL... 10
scale 1:1




EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

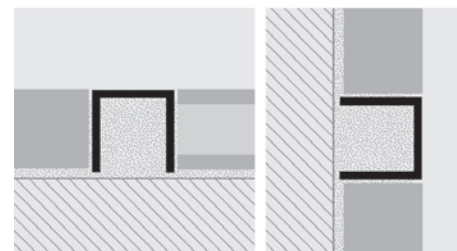


1. Choose the profile in the required material and finish. 2. Apply the adhesive onto the area of application. 3. Lay the "PROCANAL". 4. Continue laying by aligning it "flush" with the covering. 5. Use the adhesive to seal any empty interstices. Oxidation marks may be easily removed by polishing the profiles with specific products to be found on sale such as Sidol, Smac and similar.

COLOURS

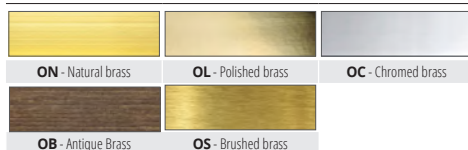

COLOURS



PROFLAT is a range of 20 and 40 mm natural brass or steel strips 3 mm thick. Ideal for dividing up flooring on the same level, they may be polished in situ and also curved/shaped to create decorative patterns that are particularly recommended for marble, Palladian, Venetian and cement or resin-based floors.

PROFLAT

STAINLESS STEEL AISI 304/1.4301-V2A
NATURAL BRASS



STAINLESS STEEL AISI 304/1.4301-V2A
bar length 3 lm - pack. 5 Pcs - 15 lm

Article	L x H mm	€/lm	€/Pc
GPLAC 2033	3 X 20	11,58	34,74
GPLAC 4033	3 X 40	18,90	56,70

STAINLESS STEEL AISI 304/1.4301-V2A
bar length 3 lm - pack. 5 Pcs - 15 lm

Article	L x H mm	€/lm	€/Pc
GPLAC 2053	5 X 20	18,52	50,00
GPLAC 5053	5 X 50	38,96	105,19

SUITABLE FOR USE IN CONTACT WITH FOODSTUFFS.
Available ON REQUEST IN Brushed Stainless steel



POLISHABLE NATURAL BRASS
bar length 2,7 lm - pack. 5 Pcs - 13,5 lm


Article	L x H mm	€/lm	€/Pc
GPLON 2025	2,5 X 20	13,46	36,34
GPLON 4025	2,5 X 40	17,88	48,28

COLOURS




1. Choose "PROFLAT" according to the desired height and visible surface. 2. Cut "PROFLAT" to the desired length. 3. Cut with a trowel the fresh screed following the floor edges. 4. Apply the profile inside the fresh screed taking care to align it with the surface of the floor. After laying the joint should be 0,5 mm below the floor covering surface. 5. Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation. Remove immediately all grout remains from the profile surface.


GPLAC 203../205..
scale 1:1




GPLON 2025
scale 1:1




GPLAC 403../505..
scale 1:1



GPLON 4025
scale 1:1



EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

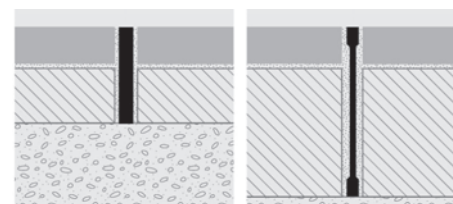

© = News 2022


* = Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed

Prices are referred to whole packs 10% increase for minimum orders of 10 Pcs 20% increase for orders of less than 10 Pcs.

PROSLIDER

POLISHED AND BRUSHED
STAINLESS STEEL AISI 304/1.4301-V2A

PROSLIDER is a sloping terminal transition profile in stainless steel AISI 304/1.4301-V2A designed to join different height floors in a perfect, stepless way. This particularly sturdy profile with the bent base sloping inwards withstands and supports high loads and frequent passage of manual trolleys and vehicles in addition to protecting the edge of the higher floor. **PROSLIDER** is used in particular to join tile or wood to an existing floor. Available in AISI 304/1.4301-V2A stainless steel in various heights to accommodate all differences in level.

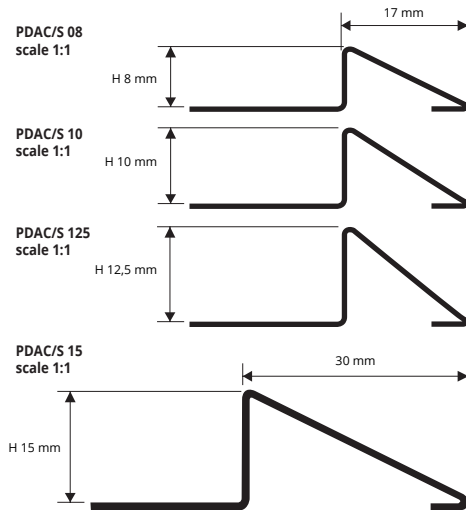

POLISHED STAINLESS ST. AISI 304/1.4301-V2A with protective film
bar length 2,7 lm - pack. 20 Pcs - 54 lm - 10/10 mm

Article	H mm	€/lm	€/Pc
PDAC 08	8	13,39	36,15
PDAC 10	10	14,48	39,10
PDAC 125	12,5	16,56	44,71
PDAC 15	15	20,70	55,89
PDAC 20	20	25,91	69,96




BRUSHED STAINLESS ST. AISI 304/1.4301-V2A with protective film
bar length 2,7 lm - pack. 20 Pcs - 54 lm - 10/10 mm

Article	H mm	€/lm	€/Pc
PDACS 08	8	16,66	44,98
PDACS 10	10	17,63	47,60
PDACS 125	12,5	21,01	56,73
PDACS 15	15	22,33	60,29
PDACS 20	20	28,01	75,63

SUITABLE FOR USE IN CONTACT WITH FOODSTUFFS.

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

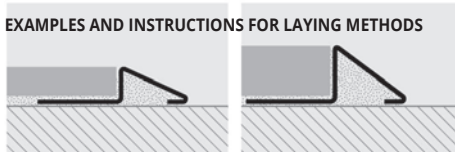

1. Choose the profile with the required height and finish. 2. Fill the profile cavity with adhesive and apply the adhesive onto the area of application. 3. Lay the "PROSLIDER". 4. Align it "flush" with the floor/covering. 5. Use the adhesive to seal any empty interstices.

COLOURS


AC - Polished stainless steel AISI 304/1.4301-V2A	ACS - Brushed stainless steel AISI 304/1.4301-V2A

PROSLIDER

POLISHED AND NATURAL BRASS

PROSLIDER is a sloping terminal transition profile designed to join different height floors in a perfect, stepless way. This particularly sturdy profile withstands and supports high loads and frequent passage of manual trolleys and vehicles in addition to protecting the edge of the higher floor. **PROSLIDER** is used in particular to join tile or wood to an existing floor. Available in natural and polished brass in various heights to accommodate all differences in level.

transition profiles

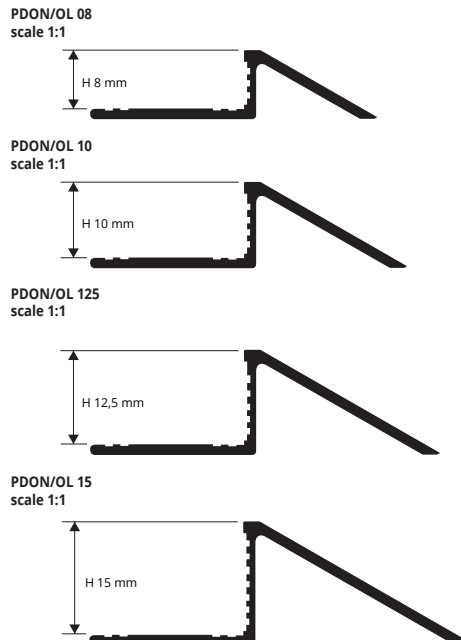

NATURAL BRASS thermo packed 5 Pcs
bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	H mm	€/lm	€/Pc
PDON 08	8	13,60	13,60 *
PDON 10	10	15,61	15,61 *
PDON 125	12,5	19,50	19,50 *
PDON 15	15	23,82	23,82 *



POLISHED BRASS thermo packed
bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	H mm	€/lm	€/Pc
PDOL 08	8	17,34	46,82 *
PDOL 10	10	19,35	52,25 *
PDOL 125	12,5	23,24	62,75 *
PDOL 15	15	27,22	73,49 *

INSTRUCTIONS FOR LAYING

1. Choose the profile with the required height H, material and finish. 2. Fill the profile cavity with adhesive and apply the adhesive onto the area of application. 3. Lay the "PROSLIDER". 4. Align it "flush" with the floor/covering. 5. Use the adhesive to seal any empty interstices. Oxidation marks on profiles in natural and polished brass may be easily removed by polishing the profiles with specific products to be found on sale such as Sidel, Smac and similar.

COLOURS

ON - Natural brass	OL - Polished brass



PROSLIDER is a sloping terminal transition profile designed to join different height floors in a perfect, stepless way. This particularly sturdy profile withstands and supports high loads and frequent passage of manual trolleys and vehicles in addition to protecting the edge of the higher floor. **PROSLIDER** is used in particular to join tile or wood to an existing floor.

Available in natural and anodized silver aluminium in various heights to accommodate all differences in level.

PROSLIDER

NATURAL ALUMINIUM AND
ANODIZED SILVER ALUMINIUM



NATURAL ALUMINIUM thermo packed 5 Pcs
bar length 2,7 lm - pack. 40 Pcs - 108 lm


Article	H mm	€/lm	€/Pc
PDAN 08	8	4,46	12,04
PDAN 10	10	5,05	13,63
PDAN 125	12,5	5,87	15,85

COLOURS




ANODIZED SILVER ALUMINIUM thermo packed
bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	H mm	€/lm	€/Pc
PDAA 08	8	6,46	17,44
PDAA 10	10	6,91	18,66
PDAA 125	12,5	7,54	20,36

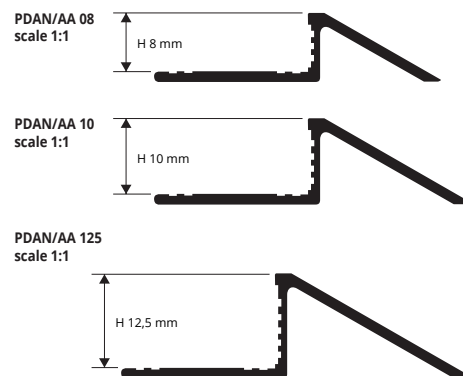

transition profiles

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

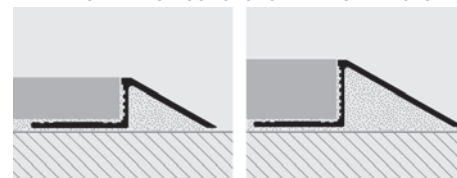


1. Choose the profile with the required height H, material and finish. 2. Fill the profile cavity with adhesive and apply the adhesive onto the area of application. 3. Lay the "PROSLIDER". 4. Align it "flush" with the floor/covering. 5. Use the adhesive to seal any empty interstices.

PROSLIDER LR is a sloping terminal transition profile designed to join different height floors in a perfect, stepless way. This particularly sturdy profile withstands and supports high loads and frequent passage of manual trolleys and vehicles in addition to protecting the edge of the higher floor. **PROSLIDER LR** is used in particular to join tile or wood to an existing floor.

Available in natural and anodized silver aluminium in various heights to accommodate all differences in level.

PROSLIDER LR

NATURAL ALUMINIUM AND
ANODIZED SILVER ALUMINIUM

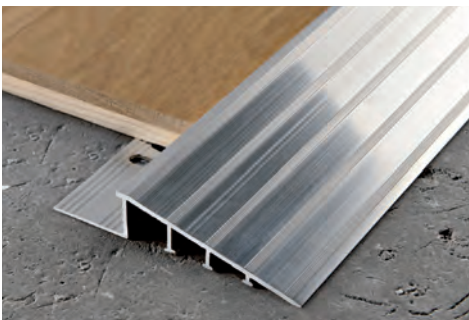

NATURAL ALUMINIUM thermo packed 5 Pcs
bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	H mm	€/lm	€/Pc
PDLRAN 10	10	12,83	34,64
PDLRAN 125	12,5	15,97	43,12
PDLRAN 15	15	18,33	49,49
PDLRAN 20	20	23,25	62,78

COLOURS




ANODIZED SILVER ALUMINIUM thermo packed
bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	H mm	€/lm	€/Pc
PDLRAA 10	10	16,73	45,17
PDLRAA 125	12,5	18,84	50,87
PDLRAA 15	15	21,65	58,45
PDLRAA 20	20	25,89	69,90


INSTRUCTIONS FOR LAYING

1. Choose the profile with the required height H, material and finish. 2. Fill the profile cavity with adhesive and apply the adhesive onto the area of application. 3. Lay the "PROSLIDER LR". 4. Align it "flush" with the floor/covering. 5. Use the adhesive to seal any empty interstices.

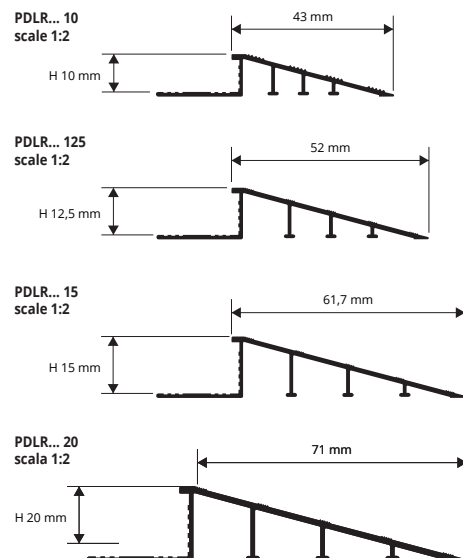

transition profiles


EXAMPLES OF LAYING

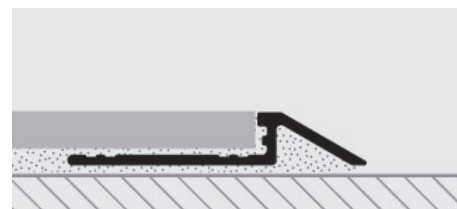

PROSLIDER WOOD

NATURAL OAK
WITH ALUMINIUM BASE

PROSLIDER WOOD is a sloping terminal transition profile in real natural oak with glued-on, punched aluminium base, designed to join different height floors in a perfect, stepless way. This particularly sturdy profile withstands and supports high loads and frequent passage of manual trolleys and vehicles in addition to protecting the edge of the higher floor. Available in various heights to accommodate all differences in level.

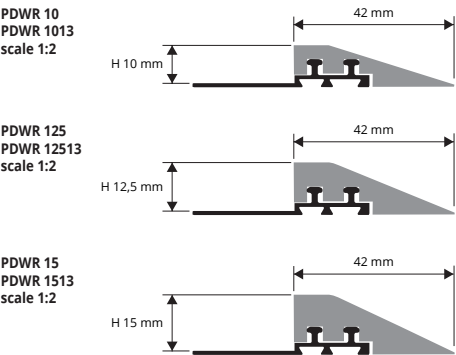

NATURAL OAK with ALUMINIUM BASE

bar length 2,7 lm - pack. 10 Pcs - 27 lm


Article	H mm	€/lm	€/Pc
PDWR 10	10	22,64	61,13 *
PDWR 125	12,5	26,44	71,39 *
PDWR 15	15	31,67	85,51 *

NATURAL OAK with ALUMINIUM BASE

bar length 1,35 lm - pack. 20 Pcs - 27 lm

Article	H mm	€/lm	€/Pc
PDWR 1013	10	/	33,59 *
PDWR 12513	12,5	/	39,27 *
PDWR 1513	15	/	42,78 *

EXAMPLES OF LAYING

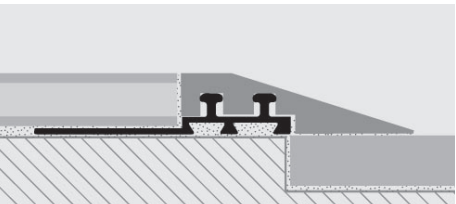

INSTRUCTIONS FOR LAYING

1. Choose the "PROSLIDER WOOD" with the required height. 2. Apply the adhesive onto the area of application of the profile. 3. Lay and align the profile pressing the perforated flange into the adhesive. 4. Align it "flush" with the floor/covering. 5. Use the adhesive to seal any empty interstices.

COLOURS





PROCARPET ACC is a profile in stainless steel 304/1.4301-V2A used for joining two floors of differing thickness and in particular for joining a tiled or parquet floor to wall-to-wall carpeting, making a perfect join thanks to the vertical part of less than 4 mm. In addition to completely protecting the edge of the higher floor, this particularly sturdy profile withstands high loads and supports the frequent passage of manual trolleys, vehicles and intense pedestrian traffic.

PROCARPET ACC

STAINLESS STEEL AISI 304/1.4301-V2A



POLISHED STAINLESS ST. AISI 304/1.4301-V2A with protective film
bar length 2,7 lm - pack. 20 Pcs - 54 lm - 10/10 mm

Article	H mm	€/lm	€/Pc
PRTAC 08	8	10,94	29,54 *
PRTAC 10	10	12,01	32,43
PRTAC 125	12,5	15,46	41,74 *

COLOURS




BRUSHED STAINLESS ST. AISI 304/1.4301-V2A with protective film
bar length 2,7 lm - pack. 20 Pcs - 54 lm - 10/10 mm

Article	H mm	€/lm	€/Pc
PRTACS 08	8	13,67	36,91 *
PRTACS 10	10	15,00	40,50
PRTACS 125	12,5	19,30	52,11 *

INSTRUCTIONS FOR LAYING


1. Choose the "PROCARPET ACC" taking into consideration the exact height of the floor. 2. Using a notched spreader apply the adhesive onto the area of application of the profile. 3. Lay and align the profile, cut to the necessary length, pressing the perforated flange into the adhesive. 4. Lay the tiles, aligning them so that the top edge of the profile is "flush" with the tile. 5. Fill the profile/tile area of contact with adhesive to prevent the accumulation of water in any voids.

SUITABLE FOR USE IN CONTACT WITH FOODSTUFFS.

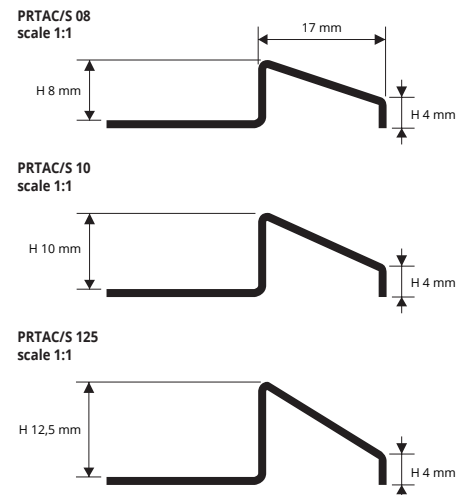

transition profiles

EXAMPLES OF LAYING

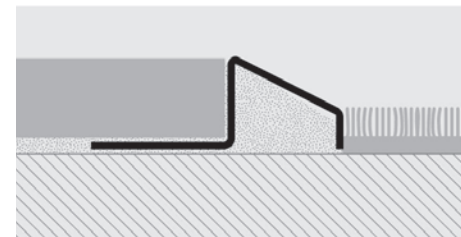

PROCARPET OTT is a profile in brass (natural or polished) used for joining two floors of differing thickness and in particular for joining a tiled or parquet floor to wall-to-wall carpeting, making a perfect join thanks to the vertical part of less than 4 mm. In addition to completely protecting the edge of the higher floor, this particularly sturdy profile withstands high loads and supports the frequent passage of manual trolleys, vehicles and intense pedestrian traffic.

PROCARPET OTT



POLISHED AND NATURAL BRASS



NATURAL BRASS thermo packed 5 Pcs
bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	H mm	€/lm	€/Pc
PRTON 08	8	38,26	40,17 *
PRTON 10	10	43,44	45,61 *

COLOURS

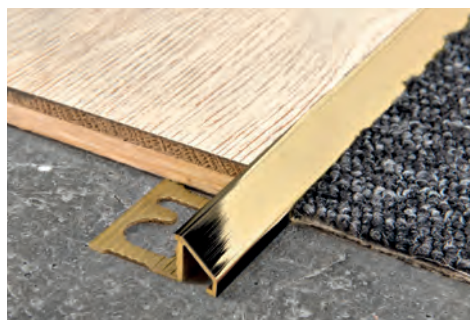


POLISHED BRASS thermo packed
bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	H mm	€/lm	€/Pc
PRTOL 08	8	18,60	50,22 *
PRTOL 10	10	20,62	55,67 *


INSTRUCTIONS FOR LAYING

1. Choose the "PROCARPET OTT" taking into consideration the exact height of the floor. 2. Using a notched spreader apply the adhesive onto the area of application of the profile. 3. Lay and align the profile, cut to the necessary length, pressing the perforated flange into the adhesive. 4. Lay the tiles, aligning them so that the top edge of the profile is "flush" with the tile. 5. Fill the profile/tile area of contact with adhesive to prevent the accumulation of water in any voids. Profiles in natural or polished brass may be subject to oxidation in environments with high degrees of humidity. Resulting marks may be easily removed by polishing the profiles with specific products to be found on sale such as Sidol, Smac and.

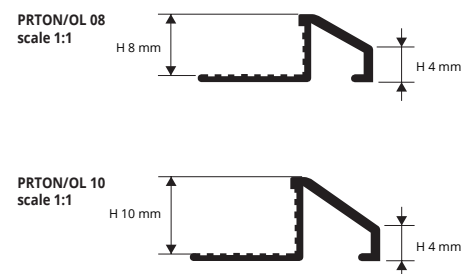

transition profiles

EXAMPLES OF LAYING

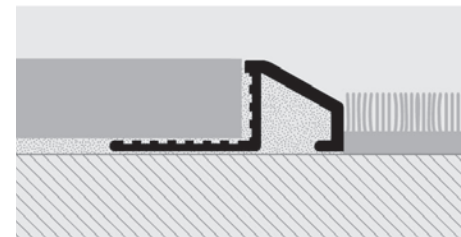

* = Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed


Prices are referred to whole packs 10% increase for minimum orders of 10 Pcs 20% increase for orders of less than 10 Pcs.

PROCARPET ALL

NATURAL AND ANODIZED
SILVER ALUMINIUM

PROCARPET ALL is a profile in aluminium (natural or silver anodized) used for joining two floors of differing thickness and in particular for joining a tiled or parquet floor to wall-to-wall carpeting, making a perfect join thanks to the vertical part of less than 4 mm. In addition to completely protecting the edge of the higher floor, this particularly sturdy profile withstands high loads and supports the frequent passage of manual trolleys, vehicles and intense pedestrian traffic.

transition profiles

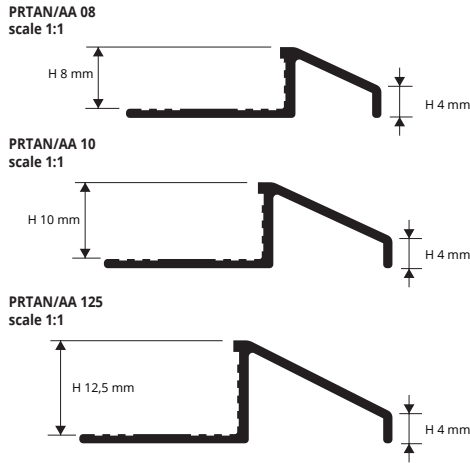


NATURAL ALUMINIUM thermo packed 5 Pcs
bar length 2,70 lm - pack. 20 Pcs - 54 lm

Article	H mm	€/lm	€/Pc
PRTAN 08	8	4,58	12,37
PRTAN 10	10	5,16	13,93
PRTAN 125	12,5	5,94	16,04

ANODIZED SILVER ALUMINIUM thermo packed
bar length 2,70 lm - pack. 20 Pcs - 54 lm

Article	H mm	€/lm	€/Pc
PRTAA 08	8	5,37	14,50
PRTAA 10	10	6,31	17,04
PRTAA 125	12,5	7,48	20,20

EXAMPLES OF LAYING

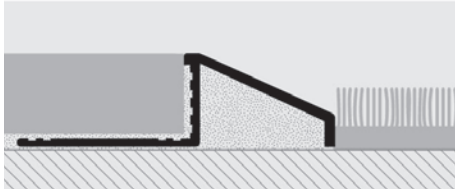

INSTRUCTIONS FOR LAYING

1. Choose the "PROCARPET ALL" taking into consideration the exact height of the floor. 2. Using a notched spreader apply the adhesive onto the area of application of the profile. 3. Lay and align the profile, cut to the necessary length, pressing the perforated flange into the adhesive. 4. Lay the tiles, aligning them so that the top edge of the profile is "flush" with the tile. 5. Fill the profile/tile area of contact with adhesive to prevent the accumulation of water in any voids.

COLOURS




PROSKID


POLISHED BRASS AND
ANODIZED SILVER ALUMINIUM

PROSKID is a sloping profile ideal for the stepless joining of two existing floors of differing heights where no transition profile was installed at the time of laying. Silicone is used for the laying. The notching on the profile helps anchorage of the silicone or adhesive. Hardwearing and attractive.

transition profiles

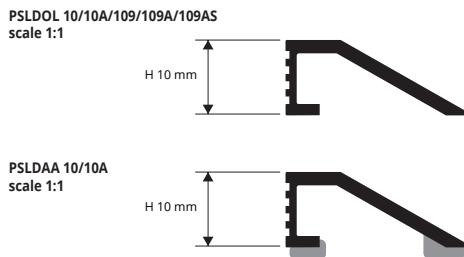

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

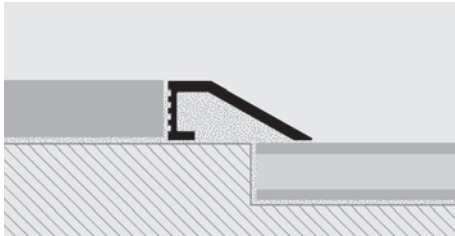

1. Choose the "PROCARPET" taking into consideration the exact height of the floor. 2. Using a notched spreader apply the adhesive onto the area of application of the profile. 3. Lay and align the profile, cut to the necessary length, pressing the perforated flange into the adhesive. 4. Lay the tiles, aligning them so that the top edge of the profile is "flush" with the tile. 5. Fill the profile/tile area of contact with adhesive to prevent the accumulation of water in any voids.

POLISHED BRASS thermo packed
bar length 2,70 lm - pack. 20 Pcs - 54 lm

Article	H mm	€/lm	€/Pc
PSLDOL 10	10	18,27	49,33
PSLDOL 10A	10	20,19	54,51

"A" at the end of the product code = Item with adhesive

POLISHED BRASS thermo packed
bar length 0,90 lm - pack. 20 Pcs

Article	H mm	€/lm	€/Pc
PSLDOL 109AS	10	/	22,73

"AS" at the end of the product code = Item with adhesive

POLISHED BRASS thermo packed
bar length 0,90 lm - pack. 20 Pcs

Article	H mm	€/lm	€/Pc
PSLDOL 109	10	/	19,92
PSLDOL 109A	10	/	21,46

"A" at the end of the product code = Item with adhesive

ANODIZED SILVER ALUMINIUM thermo packed
bar length 2,70 lm - pack. 20 Pcs - 54 lm

Article	H mm	€/lm	€/Pc
PSLDAA 10	10	5,94	16,04
PSLDAA 10A	10	7,28	19,66

"A" at the end of the product code = Item with adhesive

COLOURS



* = Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed

Prices are referred to whole packs 10% increase for minimum orders of 10 Pcs 20% increase for orders of less than 10 Pcs.




PROLEVALL 29 is a transition profile in anodized aluminium available in the self-adhesive or punched versions. It is used to give a clean-cut, elegant finish when joining and compensating differences in level of floors that are already laid and in differing or same materials e.g. ceramic tiles-wood-parquet-marble, etc. It joins and compensates a thickness between 4 and 6mm. **PROLEVALL 29** ensures a perfect finish with little height, covering any flaws created during laying, while the contoured edges guarantee perfect adherence to the floor.

PROLEVALL 29


ANODIZED ALUMINIUM WITH
SELF-ADHESIVE AND PUNCHED



PLV... 29A
PLV... 299AS
PLV... 2910AS
scale 1:1



PLV... 29F
PLV... 298FS
PLV... 299FS
PLV... 2910FS
scale 1:1



transition profiles

FLOORS

ANODIZED ALUM. with adhesive thermo packed

bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	H x L mm	€/lm	€/Pc
PLV... 29A	5,5 X 29	6,31	17,04

ANODIZED ALUM. with adhesive thermo packed

bar length 0,83 lm - pack. 20 Pc

Article	H x L mm	€/lm	€/Pc
PLV... 298AS	5,5 X 29	/	6,20

ANODIZED ALUM. with adhesive thermo packed

bar length 0,93 lm - pack. 20 Pc

Article	H x L mm	€/lm	€/Pc
PLV... 299AS	5,5 X 29	/	6,97

ANODIZED ALUM. with adhesive thermo packed

bar length 1,03 lm - pack. 20 Pc

Article	H x L mm	€/lm	€/Pc
PLV... 2910AS	5,5 X 29	/	7,59

ANODIZED ALUM. punched thermo packed

bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	H x L mm	€/lm	€/Pc
PLV... 29F	5,5 X 29	4,91	13,26

ANODIZED ALUM. punched with screws and screw anchors

thermo packed - bar length 0,83 lm - pack. 20 Pc

Article	H x L mm	€/lm	€/Pc
PLV... 298FS	5,5 X 29	/	5,76

ANODIZED ALUM. punched with screws and screw anchors

thermo packed - bar length 0,93 lm - pack. 20 Pc

Article	H x L mm	€/lm	€/Pc
PLV... 299FS	5,5 X 29	/	5,87

ANODIZED ALUM. punched with screws and screw anchors


thermo packed - bar length 1,03 lm - pack. 20 Pc

Article	H x L mm	€/lm	€/Pc
PLV... 2910FS	5,5 X 29	/	6,52


Available in the colours: AA - AO (AB, AT, CH e SB available on demand with a minimum quantity order of 100 pcs).

The code of the selected colour must be added to the article code. E.g.: PLV... 29A (chosen colour anodized gold alum.) PLVAO 29A.

COLOURS





AVAILABLE MINIMUM QUANTITY 100 PCS by color and height



(Price to be agreed. Production delay 4/5 weeks)

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

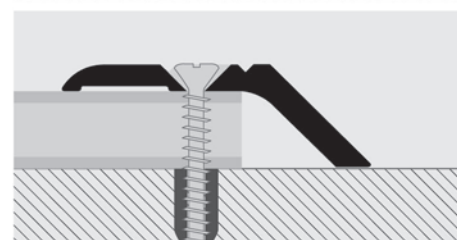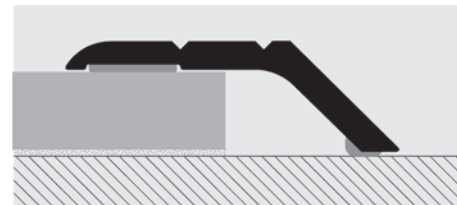

Adhesive version

1. Choose the suitable profile and cut it to the necessary length.
2. Degrease, wash and clean the solid surface thoroughly.
3. Remove the protective paper from the adhesive. 4. Lay the profile by applying pressure evenly over the whole surface without using a hammer.

Punched version

1. Choose the suitable profile and cut it to the necessary length.
2. Mark the position of the holes using the existing holes in the profile as reference. 3. Insert the screw anchors into the drilled holes.
4. Fix the profile using flathead screws suitable for the relative slots in the profile.

PROLEVALL 33 is a transition profile in extruded polished brass, available in the self-adhesive or punched versions. It is used to give a clean-cut, elegant finish when joining and compensating differences in level of floors that are already laid and in differing or same materials e.g. ceramic tiles-wood-parquet-marble, etc. It joins and compensates a thickness between 4 and 6mm. **PROLEVALL 33** ensures a perfect finish with little height, covering any flaws created during laying, while the contoured edges guarantee perfect adherence to the floor.

PROLEVALL 33

POLISHED BRASS
WITH SELF-ADHESIVE AND PUNCHED

POLISHED BRASS with adhesive thermo packed

bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	H x L mm	€/lm	€/Pc
PLVOL 33A	5,5 X 33	15,83	42,74

POLISHED BRASS with adhesive thermo packed

bar length 0,83 lm - pack. 20 Pc

Article	H x L mm	€/lm	€/Pc
PLVOL 338AS	5,5 X 33	/	14,31

POLISHED BRASS with adhesive thermo packed

bar length 0,93 lm - pack. 20 Pc

Article	H x L mm	€/lm	€/Pc
PLVOL 339AS	5,5 X 33	/	15,97

POLISHED BRASS with adhesive thermo packed

bar length 1,03 lm - pack. 20 Pc

Article	H x L mm	€/lm	€/Pc
PLVOL 3310AS	5,5 X 33	/	17,63

POLISHED BRASS punched thermo packed

bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	H x L mm	€/lm	€/Pc
PLVOL 33F	5,5 X 33	14,11	38,10

POLISHED BRASS punched with screws and screw anchors

thermo packed - bar length 0,83 lm - pack. 20 Pc

Article	H x L mm	€/lm	€/Pc
PLVOL 338FS	5,5 X 33	/	13,28

POLISHED BRASS punched with screws and screw anchors

thermo packed - bar length 0,93 lm - pack. 20 Pc


Article	H x L mm	€/lm	€/Pc
PLVOL 339FS	5,5 X 33	/	14,68

POLISHED BRASS punched with screws and screw anchors


thermo packed - bar length 1,03 lm - pack. 20 Pc

Article	H x L mm	€/lm	€/Pc
PLVOL 3310FS	5,5 X 33	/	15,97


COLOURS



PLVOL 33A
PLVOL 338AS
PLVOL 339AS
PLVOL 3310AS
scale 1:1




PLVOL 33F
PLVOL 338FS
PLVOL 339FS
PLVOL 3310FS
scale 1:1



transition profiles

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS



1. Choose the suitable profile and cut it to the necessary length.

Adhesive version
2. Degrease, wash and clean the solid surface thoroughly.
3. Remove the protective paper from the adhesive. 4. Lay the profile by applying pressure evenly over the whole surface without using a hammer.

Punched version
2. Mark the position of the holes using the existing holes in the profile as reference. 3. Insert the screw anchors into the drilled holes. 4. Fix the profile using flathead screws suitable for the relative slots in the profile.

* = Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed


Prices are referred to whole packs 10% increase for minimum orders of 10 Pcs 20% increase for orders of less than 10 Pcs.

PROLEVALL 305


POLISHED STAINLESS STEEL 1.4016
AND POLISHED BRASS
WITH SELF-ADHESIVE AND PUNCHED

PROLEVALL 305 is a transition/terminal profile for floors of medium thickness (from 3 to 7 mm), used to join and compensate two floors of differing height, material and thickness. Ideal as a finishing terminal, it covers flaws and chipping or splintering of tiles, wood and carpeting. Available in stainless steel 1.4016 and polished brass. A protective film protects the finish of the 2.70 m long bars with either self-adhesive backing or punched for fixing with screws and anchors. The 93 cm blister pack version (self pack) is shrink-wrapped with bar code.

transition profiles

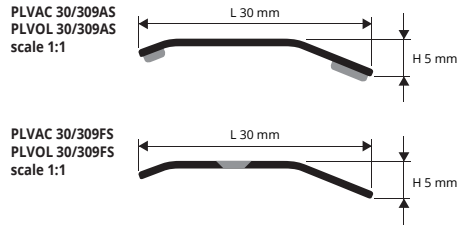

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

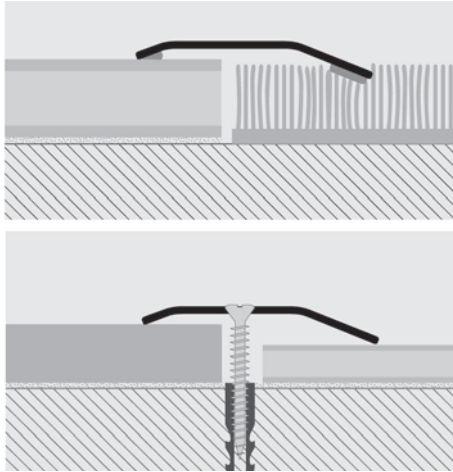

Adhesive version

1. Choose the suitable profile and cut it to the necessary length.
2. Degrease, wash and clean the solid surface thoroughly.
3. Remove the protective paper from the adhesive.
4. Lay the profile by applying pressure evenly over the whole surface without using a hammer.

Punched version

1. Choose the suitable profile and cut it to the necessary length.
2. Mark the position of the holes using the existing holes in the profile as reference.
3. Insert the screw anchors into the drilled holes.
4. Fix the profile using flathead screws suitable for the relative slots in the profile.



POLISHED STAINLESS ST. 1.4016 with adhesive thermo packed
bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	H x L mm	€/lm	€/Pc
PLVAC 30A	5 X 30	6,79	18,33

POLISHED STAINLESS ST. 1.4016 with adhesive thermo packed - bar length 0,93 lm - pack. 20 Pc

Article	H x L mm	€/lm	€/Pc
PLVAC 309AS	5 X 30	/	8,33

POLISHED BRASS with adhesive thermo packed
bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	H x L mm	€/lm	€/Pc
PLVOL 30A	5 X 30	9,01	24,33

POLISHED BRASS with adhesive thermo packed - bar length 0,93 lm - pack. 20 Pc

Article	H x L mm	€/lm	€/Pc
PLVOL 309AS	5 X 30	/	9,58

COLOURS



POLISHED STAINLESS ST. 1.4016 punched with protective film
bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	H x L mm	€/lm	€/Pc
PLVAC 30F	5 X 30	5,29	14,28

POL. STAINLESS ST. 1.4016 punched with screws and screw anchors thermo packed - bar length 0,93 lm - pack. 20 Pc

Article	H x L mm	€/lm	€/Pc
PLVAC 309FS	5 X 30	/	7,17

POLISHED BRASS punched with protective film
bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	H x L mm	€/lm	€/Pc
PLVOL 30F	5 X 30	7,30	19,71

POL. BRASS punched with screws and screw anchors thermo packed - bar length 0,93 lm - pack. 20 Pc

Article	H x L mm	€/lm	€/Pc
PLVOL 309FS	5 X 30	/	8,15


ON DEMAND HAND-BRUSHED STAINLESS STEEL
(Price to be agreed. Production delay 4/5 weeks)

PROLEVALL 32


ANODIZED ALUMINIUM WITH
SELF-ADHESIVE AND PUNCHED

PROLEVALL 32 are transition profiles in anodized aluminium available in the self-adhesive or punched versions. They are used to give a clean-cut, elegant finish when joining and compensating differences in level of floors that are already laid and in differing or same materials e.g. ceramic tiles-wood-parquet-marble, etc. They join and compensate a thickness between 7 and 9 mm. **PROLEVALL 32** ensures a perfect finish with little height, covering any flaws created during laying, while the contoured edges guarantee perfect adherence to the floor.

transition profiles



EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

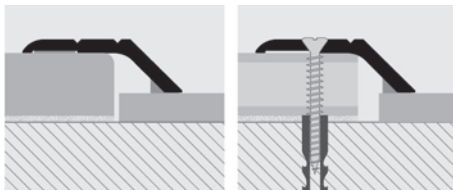

Adhesive version

1. Choose the suitable profile and cut it to the necessary length.
2. Degrease, wash and clean the solid surface thoroughly.
3. Remove the protective paper from the adhesive.
4. Lay the profile by applying pressure evenly over the whole surface without using a hammer.

Punched version

1. Choose the suitable profile and cut it to the necessary length.
2. Mark the position of the holes using the existing holes in the profile as reference.
3. Insert the screw anchors into the drilled holes.
4. Fix the profile using flathead screws suitable for the relative slots in the profile.



ANODIZED SILVER and GOLD ALUMINIUM thermo packed - bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	L x H mm	€/lm	€/Pc
PLV... 32A	32 X 8	8,04	21,71
PLV... 32F	32 X 8	5,37	14,50

"A" at the end of the product code = Item with adhesive
"F" at the end of the product code = Punched Item

Available in the colours: AA - AO (AB - AT, CH e SB available on demand with a minimum quantity order of 100 pcs).
The code of the selected colour must be added to the article code. E.g.: PLV... 32F (chosen colour Anodized gold alum.) PLVAO 32F.

COLOURS



ANODIZED SILVER and GOLD ALUMINIUM thermo packed - bar length 0,93 lm - pack. 20 Pc

Article	L x H mm	€/lm	€/Pc
PLV... 329AS	32 X 8	/	8,18
PLV... 329FS	32 X 8	/	6,20

"AS" at the end of the product code = Item with adhesive
"FS" at the end of the product code = Punched Item

AVAILABLE MINIMUM QUANTITY 100 PCS by color and height



(Price to be agreed. Production delay 4/5 weeks)

* = Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed

Prices are referred to whole packs 10% increase for minimum orders of 10 Pcs 20% increase for orders of less than 10 Pcs.



PROLEVALL 358 are transition profiles in polished extruded brass, available in the self-adhesive or punched versions. They are used to give a clean-cut, elegant finish when joining and compensating differences in level of floors that are already laid and in differing or same materials e.g. ceramic tiles-wood-parquet-marble, etc. They join and compensate a thickness between 7 and 9 mm. **PROLEVALL 358** ensures a perfect finish with little height, covering any flaws created during laying, while the contoured edges guarantee perfect adherence to the floor.

PROLEVALL 358

POLISHED BRASS
WITH SELF-ADHESIVE AND PUNCHED




POLISHED BRASS thermo packed - bar length 2,7 lm
pack 20 Pcs - 54 lm (PLVOL 358F: 15 Pcs - 40,5 lm)

Article	L x H mm	€/lm	€/Pc
PLVOL 358A	35 X 8	22,62	61,07
PLVOL 358F	35 X 8	21,01	56,73 *

"A" at the end of the product code = Item with adhesive
"F" at the end of the product code = Punched Item

COLOURS



OL - Polished brass


POLISHED BRASS thermo packed
bar length 0,90 lm - pack 20 Pc




Article	L x H mm	€/lm	€/Pc
PLVOL 3589AS	35 X 8		21,59
PLVOL 3589FS	35 X 8		20,19

"AS" at the end of the product code = Item with adhesive
"FS" at the end of the product code = Punched Item

PLVOL 358A/PLVOL 3589AS
PLVOL 358F/PLVOL 3589FS
scale 1:1



EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

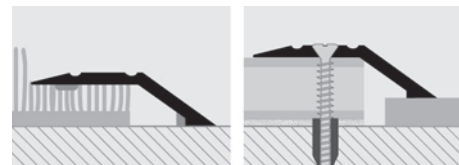

Adhesive version

1. Choose the suitable profile and cut it to the necessary length.
2. Degrease, wash and clean the solid surface thoroughly.
3. Remove the protective paper from the adhesive. 4. Lay the profile by applying pressure evenly over the whole surface without using a hammer.

Punched version

1. Choose the suitable profile and cut it to the necessary length.
2. Mark the position of the holes using the existing holes in the profile as reference. 3. Insert the screw anchors into the drilled holes. 4. Fix the profile using flathead screws suitable for the relative slots in the profile.

PROLEVALL 4413 are transition profiles in polished extruded brass and anodized aluminium available in the self-adhesive or punched versions. They are used to give a clean-cut, elegant finish when joining and compensating differences in level of floors that are already laid and in differing or same materials e.g. ceramic tiles-wood-parquet-marble, etc. They join and compensate a thickness between 13 and 15 mm. **PROLEVALL 4413** ensures a perfect finish with little height, covering any flaws created during laying, while the contoured edges guarantee perfect adherence to the floor.

PROLEVALL 4413

POLISHED BRASS AND
ANODIZED SILVER ALUMINIUM
WITH SELF-ADHESIVE AND PUNCHED



POLISHED BRASS thermo packed
bar length 2,7 lm - pack 10 Pcs - 27 lm

Article	L x H mm	€/lm	€/Pc
PLVOL 4413A	44 X 13	22,45	60,62 *
PLVOL 4413F	44 X 13	20,68	55,84 *

"A" at the end of the product code = Item with adhesive
"F" at the end of the product code = Punched Item

POLISHED BRASS thermo packed
bar length 0,90 lm - pack 20 Pc



Article	L x H mm	€/lm	€/Pc
PLVOL 44139AS	44 X 13		24,27 *
PLVOL 44139FS	44 X 13		23,00 *

"AS" at the end of the product code = Item with adhesive
"FS" at the end of the product code = Punched Item

COLOURS



AA - Anodized silver alum.


AO - Anodized gold alum.

AVAILABLE MINIMUM QUANTITY 100 PCS by color and height




(Price to be agreed. Production delay 4/5 weeks)


PLVOL 4413A/PLVOL 44139AS
PLVOL 4413F/PLVOL 44139FS
scale 1:1

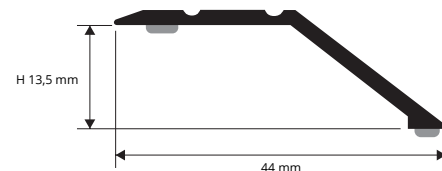

PLV... 4413A/PLV... 4413F
scale 1:1

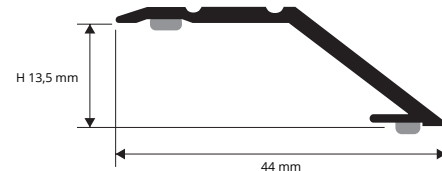

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

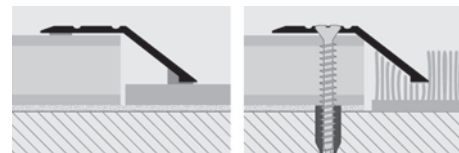

Adhesive version

1. Choose the suitable profile and cut it to the necessary length.
2. Degrease, wash and clean the solid surface thoroughly.
3. Remove the protective paper from the adhesive. 4. Lay the profile by applying pressure evenly over the whole surface without using a hammer.

Punched version

1. Choose the suitable profile and cut it to the necessary length.
2. Mark the position of the holes using the existing holes in the profile as reference. 3. Insert the screw anchors into the drilled holes. 4. Fix the profile using flathead screws suitable for the relative slots in the profile.

transition profiles

* = Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed


Prices are referred to whole packs 10% increase for minimum orders of 10 Pcs 20% increase for orders of less than 10 Pcs.

PRONIVO


ANODIZED ALUMINIUM

transition profiles

PNV... 713A
scale 1:1



EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

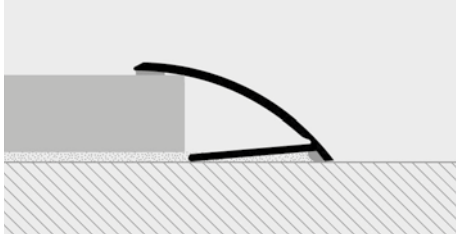

1. Choose the suitable profile and cut it to the necessary length.
2. Degrease, wash and clean the solid surface thoroughly.
3. Remove the protective paper from the adhesive.
4. Lay the profile by applying pressure evenly over the whole surface without using a hammer.

PRONIVO is a transition and edging profile with a rounded shape in anodized aluminium with tap-down edge. It is ideal to give a clean-cut, elegant finish when joining and compensating differences in level of floors that are already laid and in differing or same materials e.g. ceramic tiles-wood-parquet. With its rounded shape it compensates for differences in thickness between 7 and 13 mm where no profile was installed at the time of laying. **PRONIVO** ensures a perfect finish and is easy to lay with the self-adhesive backing guaranteeing perfect adherence to the floor.




ANODIZED ALUMINIUM self-adhesive thermo packed
bar length 2,7 lm - pack. 30 Pcs - 81 lm

Article	H mm	€/lm	€/Pc
PNVAA 713A	7/13	7,02	18,95


Available in the colours: AA (AO available on demand with a minimum quantity order of 100 pcs). The code of the selected colour must be added to the article code.
E.g.: PNV... 713 (chosen colour anodized gold alum.) PNVAO 713A.

COLOURS



AA - Anodized silver alum.

AVAILABLE MINIMUM QUANTITY 100 PCS by color and height



AO - Anodized gold alum.


(Price to be agreed. Production delay 4/5 weeks)

PROTRANS


ANODIZED ALUMINIUM

transition profiles

PTS... 613A
PTS... 6139AS
scale 1:1



EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

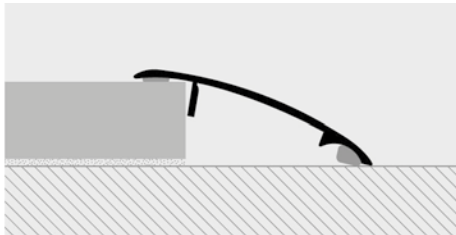

1. Choose the suitable profile and cut it to the necessary length.
2. Degrease, wash and clean the solid surface thoroughly.
3. Remove the protective paper from the adhesive.
4. Lay the profile by applying pressure evenly over the whole surface without using a hammer.

PROTRANS is a transition and edging profile with a rounded shape in anodized aluminium. It is ideal to give a clean-cut, elegant finish when joining and compensating differences in level of floors that are already laid and in differing or same materials e.g. ceramic tiles-wood-parquet. With its rounded shape it compensates for differences in thickness between 6 and 13 mm where no profile was installed at the time of laying. **PROTRANS** ensures a perfect finish and is easy to lay with the self-adhesive backing guaranteeing perfect adherence to the floor.



ANODIZED ALUMINIUM self-adhesive thermo packed
bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	H mm	€/lm	€/Pc
PTSAA 613A	6 / 13	6,70	18,09

Available in the colours: AA (AO, AT, CH e SB available on demand with a minimum quantity order of 100 pcs). The code of the selected colour must be added to the article code. E.g.: PTS... 613A (chosen colour anodized gold alum.) PTSAA 613A.

COLOURS



AA - Anodized silver alum.

ANODIZED ALUMINIUM self-adhesive thermo packed - bar length 0,90 lm - pack. 20 Pcs



Article	H mm	€/lm	€/Pc
PTS... 6139AS	6 / 13	//	7,09


AVAILABLE MINIMUM QUANTITY 100 PCS by color and height




(Price to be agreed. Production delay 4/5 weeks)

PROFLOOR 712 is a self-adhesive sloping terminal transition profile in AISI 304/1.4301-V2A stainless steel with protective film. It is used to give a clean-cut, elegant finish when joining and compensating differences in level of floors that are already laid and in differing or same materials e.g. ceramic tiles-wood-parquet-marble. It joins and compensates a thickness between 7 and 12mm. **PROFLOOR 712** ensures a perfect finish with little height, covering any flaws created during laying of the floor. Easy to lay; the high-strength elastomer adhesive ensures an excellent grip.



POLISHED STAINLESS ST. AISI 304/1.4301-V2A self-adhesive thermo packed - bar length 0,93 lm - pack. 20 Pcs 


Article	L x H mm	€/lm	€/Pc
PFRAC 7129AS	38 X 7/12	/	9,47

POLISHED STAINLESS ST. AISI 304/1.4301-V2A self-adhesive thermo packed - bar length 1,66 lm - pack. 20 Pcs 


Article	L x H mm	€/lm	€/Pc
PFRAC 71216AS	38 X 7/12	/	16,67

POLISHED STAINLESS ST. AISI 304/1.4301-V2A self-adhesive thermo packed - bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	L x H mm	€/lm	€/Pc
PFRAC 712A	38 X 7/12	8,97	24,22

POLISHED STAINLESS ST. AISI 304/1.4301-V2A self-adhesive thermo packed - bar length 0,83 lm - pack. 20 Pcs 

Article	L x H mm	€/lm	€/Pc
PFRAC 7128AS	38 X 7/12	/	8,54

POLISHED STAINLESS ST. AISI 304/1.4301-V2A self-adhesive thermo packed - bar length 1,03 lm - pack. 20 Pcs 

Article	L x H mm	€/lm	€/Pc
PFRAC 71210AS	38 X 7/12	/	10,41

COLOURS




On demand hand-brushed stainless steel (Price to be agreed. Production delay 4/5 weeks)


PROFLOOR 712

POLISHED STAINLESS STEEL
AISI 304/1.4301-V2A WITH SELF-ADHESIVE

PFRAC 712A/7128AS/7129AS/71210AS/71216AS
scale 1:1

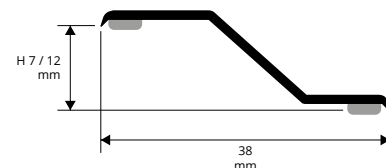

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

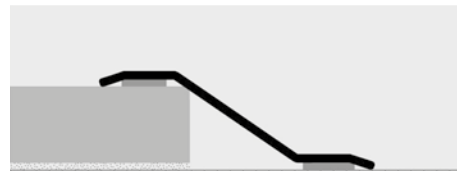


1. Choose the suitable profile and cut it to the necessary length.
2. Degrease, wash and clean the solid surface thoroughly.
3. Remove the protective paper from the adhesive.
4. Lay the profile by applying pressure evenly over the whole surface without using a hammer.

transition profiles


FLOORS

PROFLOOR 712 is a self-adhesive sloping terminal transition profile in polished brass with protective film. It is used to give a clean-cut, elegant finish when joining and compensating differences in level of floors that are already laid and in differing or same materials e.g. ceramic tiles-wood-parquet-marble. It joins and compensates a thickness between 7 and 12mm. **PROFLOOR 712** ensures a perfect finish with little height, covering any flaws created during laying of the floor. Easy to lay; the high-strength elastomer adhesive ensures an excellent grip.



POLISHED BRASS self-adhesive thermo packed bar length 0,93 lm - pack. 20 Pcs 


Article	L x H mm	€/lm	€/Pc
PFROL 7129AS	38 X 7/12	/	12,14

POLISHED BRASS self-adhesive thermo packed bar length 1,66 lm - pack. 20 Pcs 


Article	L x H mm	€/lm	€/Pc
PFROL 71216AS	38 X 7/12	/	21,46

POLISHED BRASS self-adhesive thermo packed bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	L x H mm	€/lm	€/Pc
PFROL 712A	38 X 7/12	11,89	32,10

POLISHED BRASS self-adhesive thermo packed bar length 0,83 lm - pack. 20 Pcs 

Article	L x H mm	€/lm	€/Pc
PFROL 7128AS	38 X 7/12	/	10,86

POLISHED BRASS self-adhesive thermo packed bar length 1,03 lm - pack. 20 Pcs 

Article	L x H mm	€/lm	€/Pc
PFROL 71210AS	38 X 7/12	/	13,40

COLOURS




OL - Polished brass


PROFLOOR 712

POLISHED BRASS
WITH SELF-ADHESIVE

PFROL 712A/7128AS/7129AS/71210AS/71216AS
scale 1:1

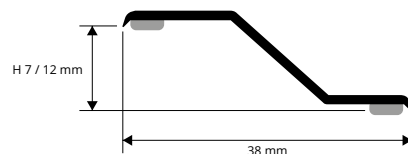

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

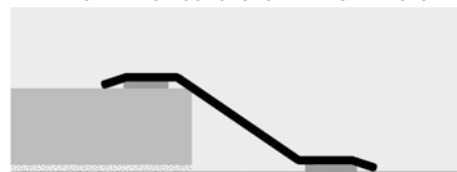

1. Choose the suitable profile and cut it to the necessary length.
2. Degrease, wash and clean the solid surface thoroughly.
3. Remove the protective paper from the adhesive.
4. Lay the profile by applying pressure evenly over the whole surface without using a hammer.

transition profiles

PROFLOOR 712 is a self-adhesive sloping terminal transition profile in anodized aluminium with silver-gold-bronze finish with protective film. It is used to give a clean-cut, elegant finish when joining and compensating differences in level of floors that are already laid and in differing or same materials e.g. ceramic tiles-wood-parquet-marble. It joins and compensates a thickness between 7 and 12mm. **PROFLOOR 712** ensures a perfect finish with little height, covering any flaws created during laying of the floor. Easy to lay; the high-strength elastomer adhesive ensures an excellent grip.



Anodized ALUMINIUM self-adhesive thermo packed bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	L x H mm	€/lm	€/Pc
PFR... 712A	38 X 7/12	6,76	18,25

Available in the colours: AA - AO - AB (AT, CH and SB available on demand with a minimum quantity order of 100 pcs). The code of the selected colour must be added to the article code. E.g.: PFR... 712A (chosen colour anodized gold alum.) PFRAO 712A.



Anodized ALUMINIUM self-adhesive thermo packed - bar length 0,93 lm - pack. 20 Pcs 

Article	L x H mm	€/lm	€/Pc
PFR... 7129AS	38 X 7/12	/	7,59

PROFLOOR 712

ANODIZED GOLD, SILVER AND BRONZE
ALUMINIUM WITH SELF-ADHESIVE

PFR... 712A/7129AS
scale 1:1



COLOURS



AVAILABLE MINIMUM QUANTITY 100 PCS by color and height



(Price to be agreed. Production delay 4/5 weeks)


transition profiles

PROGRESS 712


POLISHED STAINLESS STEEL AISI 304/1.4301
AND POLISHED BRASS WITH SELF-ADHESIVE

transition profiles

PRSAC 712A/7129AS
PRSOL 712A/7129AS
scale 1:1



EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

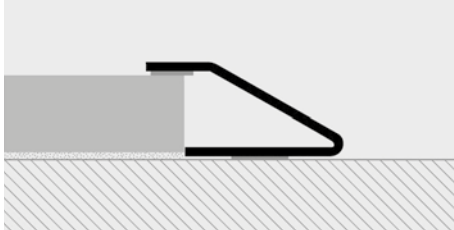

1. Choose the suitable profile and cut it to the necessary length.
2. Degrease, wash and clean the solid surface thoroughly.
3. Remove the protective paper from the adhesive. 4. Lay the profile by applying pressure evenly over the whole surface without using a hammer.

PROGRESS 712 is a self-adhesive sloping terminal transition profile in stainless steel 1.4301 and polished brass with protective film. It is used to give a clean-cut, elegant finish when joining and compensating differences in level of floors that are already laid and in differing or same materials e.g. ceramic tiles-wood-parquet-marble, etc. It joins and compensates a thickness between 7 and 12mm.

PROGRESS 712 ensures a perfect finish with little height, covering any flaws created during laying of the floor. Easy to lay; the high-strength elastomer adhesive ensures an excellent grip.



POLISHED STAINLESS ST. AISI 304/1.4301-V2A self-adhesive thermo packed - bar length 2,7 lm - pack. 20 Pcs - 54 lm


Article	H x L mm	€/lm	€/Pc
PRSAC 712A	27 X 7/12	11,89	32,10

POLISHED STAINLESS ST. AISI 304/1.4301-V2A self-adhesive thermo packed - bar length 0,90 lm - pack. 20 Pcs

Article	L x H mm	€/Pc
PRSAC 7129AS	27 X 7/12	13,03

COLOURS

AC - Polished stainless steel AISI 304/1.4301-V2A	OL - Polished brass

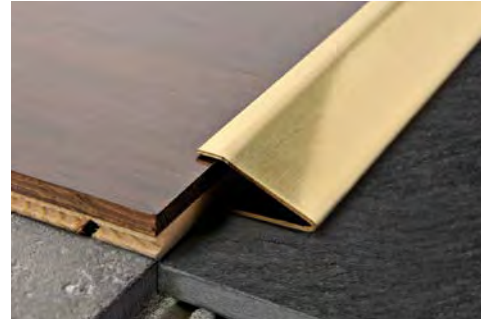

POLISHED BRASS self-adhesive thermo packed bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	H x L mm	€/lm	€/Pc
PRSOL 712A	27 X 7/12	14,00	37,80

POLISHED BRASS self-adhesive thermo packed bar length 0,90 lm - pack. 20 Pcs

Article	L x H mm	€/Pc
PRSOL 7129AS	27 X 7/12	14,31

SUITABLE FOR USE IN CONTACT WITH FOODSTUFFS.


On demand hand-brushed stainless steel
(Price to be agreed. Production delay 4/5 weeks)

PROFLOOR 1216


POLISHED STAINLESS STEEL AISI 304/1.4301
AND POLISHED BRASS WITH SELF-ADHESIVE

transition profiles

PFRAC 1216A/12169AS
PFROL 1216A/12169AS
scale 1:1

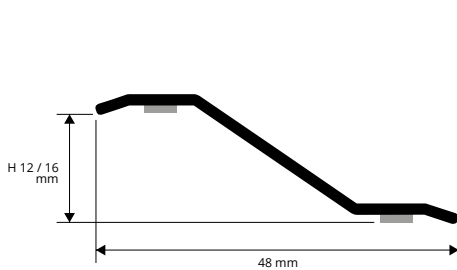

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

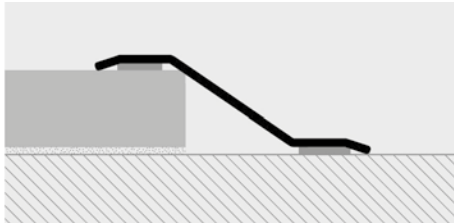

1. Choose the suitable profile and cut it to the necessary length.
2. Degrease, wash and clean the solid surface thoroughly.
3. Remove the protective paper from the adhesive. 4. Lay the profile by applying pressure evenly over the whole surface without using a hammer.



POLISHED STAINLESS ST. AISI 304/1.4301-V2A self-adhesive thermo packed - bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	L x H mm	€/lm	€/Pc
PFRAC 1216A	48 X 12/16	13,71	37,02

POLISHED STAINLESS ST. AISI 304/1.4301-V2A self-adhesive thermo packed - bar length 0,93 lm - pack. 20 Pcs

Article	L x H mm	€/Pc
PFRAC 12169AS	48 X 12/16	13,45

SUITABLE FOR USE IN CONTACT WITH FOODSTUFFS.

On demand hand-brushed stainless steel
(Price to be agreed. Production delay 4/5 weeks)



POLISHED BRASS self-adhesive thermo packed bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	L x H mm	€/lm	€/Pc
PFROL 1216A	48 X 12/16	18,01	48,63

POLISHED BRASS self-adhesive thermo packed bar length 0,93 lm - pack. 20 Pcs

Article	L x H mm	€/Pc
PFROL 12169AS	48 X 12/16	18,09

COLOURS

AC - Polished stainless steel AISI 304/1.4301-V2A	OL - Polished brass

PROLINOLEUM is a self-adhesive transition profile in anodized aluminium with gold/silver finish. It is used to give a clean-cut, elegant finish to hardwearing surfaces in PVC or linoleum and other thin materials between 2-3 mm thick. **PROLINOLEUM** ensures a perfect finish with little height, covering any flaws created during laying of the floor. Easy to lay; the high-strength elastomer adhesive ensures an excellent grip.



ANODIZED GOLD AND SILVER ALUMINIUM thermo packed
bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	H x L mm	€/lm	€/Pc
PLU ... 16	2,5 X 16	4,09	11,04

Available in the colours: AA (AO, AT, CH and SB available on demand with a minimum quantity order of 100 pcs). The code of the selected colour must be added to the article code.
E.g.: PLU ... 16 (chosen finish anod. gold) PLUAO 16.

COLOURS



AA - Anodized silver alum.

AVAILABLE MINIMUM QUANTITY 100 PCS by color and height



AO - Anodized gold alum. AT - Anodized titanium alum. CH - Anod. champagne alum. SB - Anod. sand aluminium
(Price to be agreed. Production delay 4/5 weeks)




ANODIZED GOLD AND SILVER ALUMINIUM thermo packed - WITH ADHESIVE - bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	H x L mm	€/lm	€/Pc
PLU ... 16A	2,5 X 16	5,17	13,96


PROLINOLEUM

ANODIZED GOLD AND SILVER ALUMINIUM
WITH AND WITHOUT SELF-ADHESIVE

PLU ... 16
PLU ... 16A
scale 1:1



EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

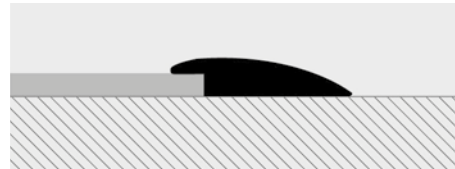

1. Choose the suitable profile and cut it to the necessary length.
2. Degrease, wash and clean the solid surface thoroughly.
3. Remove the protective paper from the adhesive.
4. Lay the profile by applying pressure evenly over the whole surface without using a hammer.


profiles for low thicknesses

PROFLOOR 24 is a self-adhesive transition profile with chamfered edges in stainless steel 1.4016 and polished brass with protective film. It is used to give a clean-cut, elegant finish to hardwearing surfaces in PVC and linoleum - carpeting and other thin materials between 2 and 5mm thick. **PROFLOOR 24** ensures a perfect finish with little height, covering any flaws created during laying of the floor. Easy to lay; the high-strength elastomer adhesive ensures an excellent grip.



POLISHED STAINLESS ST. AISI 304/1.4301-V2A self-adhesive thermo packed - bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	L x H mm	€/lm	€/Pc
PFRAC 24A	2/4,5 X 30	6,79	18,33

POLISHED STAINLESS ST. AISI 304/1.4301-V2A self-adhesive thermo packed - bar length 0,93 lm - pack. 20 Pcs  **SELF PACK**

Article	L x H mm	€/Pc
PFRAC 249AS	2/4,5 X 30	7,49


SUITABLE FOR USE IN CONTACT WITH FOODSTUFFS.

On demand hand-brushed stainless steel
(Price to be agreed. Production delay 4/5 weeks)



POLISHED BRASS self-adhesive thermo packed
bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	L x H mm	€/lm	€/Pc
PFRAC 24A	2/4,5 X 30	9,01	24,33

POLISHED BRASS self-adhesive thermo packed - bar length 0,93 lm - pack. 20 Pcs  **SELF PACK**

Article	L x H mm	€/Pc
PFRAC 249AS	2/4,5 X 30	9,58

COLOURS




AC - Polished stainless steel AISI 304/1.4301-V2A OL - Polished brass


PROFLOOR 24

POLISHED STAINLESS STEEL AISI 304/1.4301
AND POLISHED BRASS WITH SELF-ADHESIVE

PFRAC 24A/249A
PFRAC 24A/249A
scale 1:1



EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

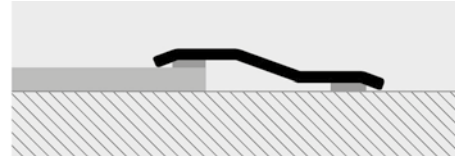

1. Choose the suitable profile and cut it to the necessary length.
2. Degrease, wash and clean the solid surface thoroughly.
3. Remove the protective paper from the adhesive.
4. Lay the profile by applying pressure evenly over the whole surface without using a hammer.

profiles for low thicknesses


PROSLIDER KL ALL

ANODIZED SILVER ALUMINIUM


PROSLIDER KL ALL is a slide shape progressive transition terminal square suitable for connecting perfectly without steps two floor levels. The particular strength of the square allows to resist and bear heavy loads and frequent passages of manual trolleys and motor vehicles besides protecting the edge of the higher floor. The **PROSLIDER KL ALL** is especially used to connect LA Kerlite/Laminam and thin ceramic tiles to each other or else it is used with wood and/or a pre-existing floor. Available in anodized aluminium.

profiles for low thicknesses

PDKLAA 045
scale 1:1

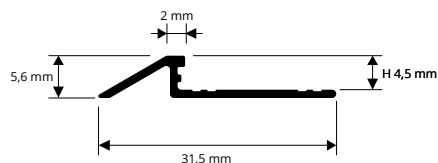

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS




1. Choose the profile with the required finish.
2. Fill the profile cavity with adhesive and apply the adhesive onto the area of application.
3. Lay the "PROSLIDER KL ALL".
4. Align it flush with the floor/covering.
5. Use the adhesive to seal any empty interstices.

ANODIZED SILVER ALUMINIUM thermo packed
bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	H mm	€/lm	€/Pc
PDKLAA 045	4,5	6,20	16,74

COLOURS



AA - Anodized silver alum.


PROCOVER 1045 ALL

ANODIZED AND POLISHED
SILVER, CHROME AND GOLD ALUMINIUM



PROCOVER 1045 ALL is a joint cover profile in anodized aluminium. It is applied at the end of the laying process between two adjoining floors placed at the same level, with a gap of 3 to 6 mm between the two kerlite /laminam/ or thin ceramic tile floors laid with the adhesive. It protects the external edge of the floor/covering. It is easy to lay and aesthetically pleasing. The design of the profile with lower vertical arrowhead part allows excellent anchorage with silicone / adhesive.

profiles for low thicknesses

PCR...1045
scale 1:1



EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

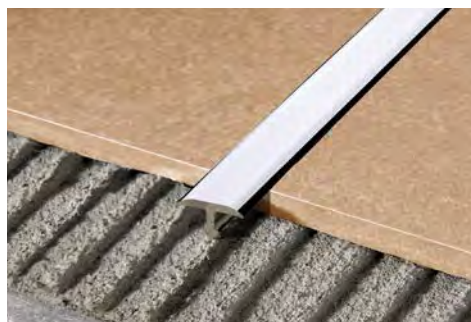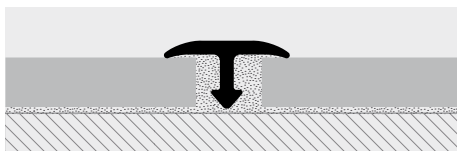

1. Choose "PROCOVER 1045 ALL" in the desired finish considering a side lap of 2/3 mm.
2. Fill the gap with single-pack silicone or with the adhesive used for laying the floor.
3. Bury the profile into the adhesive, making sure that both side laps of the profile rest on the coverings to be joined.

IMPORTANT: Take care of the external edges of the aluminium "PROCOVER 1045 ALL". They must be protected from aggressive substances such as adhesives and sealants and from smoothing or scraping action.

ANODIZED SILVER ALUMINIUM thermo packed
bar length 2,7 lm - pack. 40 Pcs - 108 lm


Article	H mm	€/lm	€/Pc
PCRAA 1045	4,5	3,38	9,13

POLISHED CHROME/GOLD ALUMINIUM thermo packed

bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	H mm	€/lm	€/Pc
PCRBC 1045	4,5	5,81	15,69
PCRBO 1045	4,5	5,81	15,69


COLOURS




AA - Anodized silver alum.



BC - Polished chrome alum.



BO - Polished gold alum.

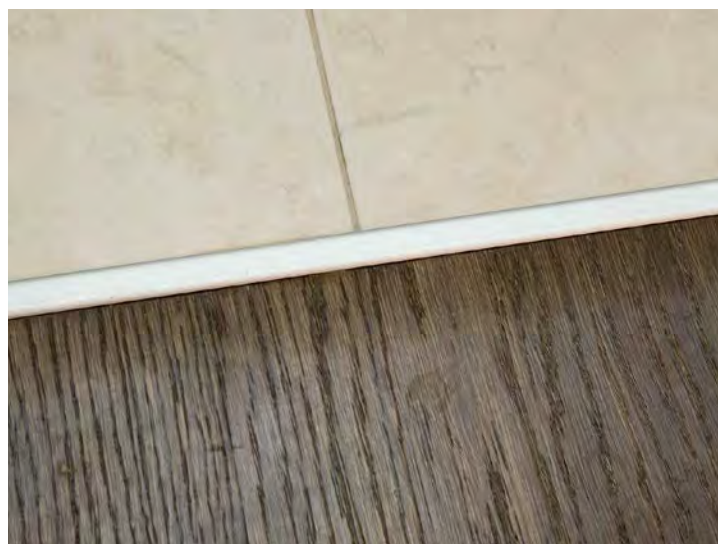




PROCOVER


POLISHED AND BRUSHED
STAINLESS STEEL AISI 304/1.4301-V2A

PROCOVER is a joint-cover profile in stainless steel (polished or brushed) with aluminium supports. It is applied at the end of laying two adjoining floors with the same height, having left a 6 - 24 mm gap between the two floors set in a thin bed of adhesive. It protects the outside edges of the floor/covering. It is easy to lay and attractive. The design of the profile with lower vertical arrowhead part allows excellent anchorage with the silicone/adhesive. The aluminium structure with the stainless steel lining provides it with a high level of resistance to cuts and deformation.

threshold - joint-cover profiles

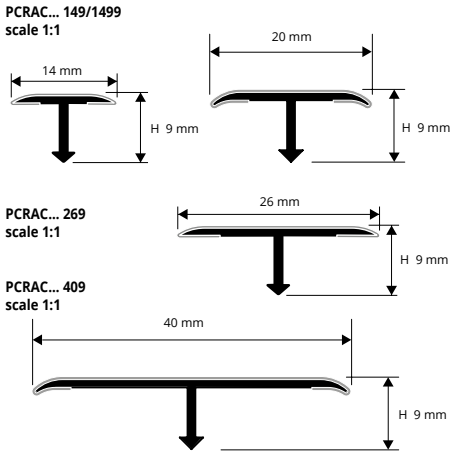

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

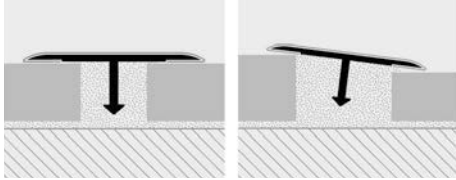

1. Choose the "PROCOVER" with the width suitable for the gap between the two floors to be joined, taking into consideration 2/3 mm side lap. 2. Fill the gap with single-pack silicone or with the adhesive used for laying the floor. 3. Bury the profile into the adhesive, making sure that both side laps of the profile rest on the coverings to be joined.



POLISHED STAINLESS ST. AISI 304/1.4301-V2A
with protective film - bar length 2,7 lm
(PCRAC 1499 - bar length 0,90 lm) - 4/10 mm



Article	Pcs/Pack	L x H mm	€/lm	€/Pc
PCRAC 149	40	14 X 9	10,86	29,32
PCRAC 1499	20	14 X 9	-	10,97
PCRAC 209	40	20 X 9	14,12	38,12
PCRAC 269	30	26 X 9	15,52	41,90
PCRAC 409	20	40 X 9	20,75	56,03

COLOURS



BRUSHED STAINLESS ST. AISI 304/1.4301-V2A
with protective film - bar length 2,7 lm - 4/10 mm
(PCRACS 1499 - bar length 0,90 lm - pack 20 Pcs)



Article	Pcs/Pack	L x H mm	€/lm	€/Pc
PCRACS 149	40	14 X 9	13,71	37,02
PCRACS 1499	20	14 X 9	-	13,46
PCRACS 209	40	20 X 9	15,59	42,09
PCRACS 269	30	26 X 9	19,51	52,68
PCRACS 409	20	40 X 9	23,52	63,50


SUITABLE FOR USE IN CONTACT WITH FOODSTUFFS.

PROCOVER


POLISHED, CHROMED AND ANTIQUE BRASS

PROCOVER is a joint-cover profile in polished, chromed and antique brass. It is applied at the end of laying two adjoining floors with the same height, having left a 6 - 24 mm gap between the two floors set in a thin bed of adhesive. It protects the outside edges of the floor/covering. It is easy to lay and attractive. The design of the profile with lower vertical arrowhead part allows excellent anchorage with the silicone/adhesive.

threshold - joint-cover profiles

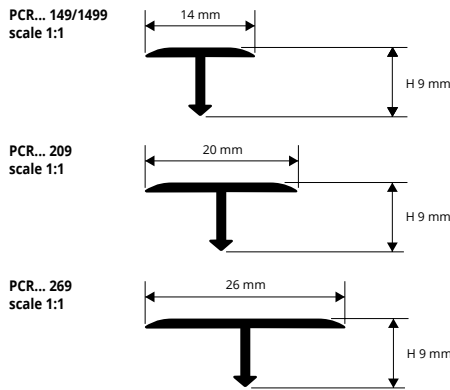

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

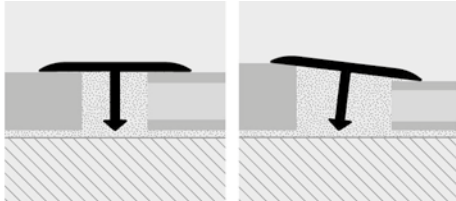

1. Choose the "PROCOVER" with the width suitable for the gap between the two floors to be joined, taking into consideration 2/3 mm side lap. 2. Fill the gap with single-pack silicone or with the adhesive used for laying the floor. 3. Bury the profile into the adhesive, making sure that both side laps of the profile rest on the coverings to be joined.

Profiles in natural or polished brass may be subject to oxidation in environments with high degrees of humidity. Resulting marks may be easily removed by polishing the profiles with specific products to be found on sale such as Sidol, Smac and similar.



POLISHED BRASS thermo packed - bar length 2,7 lm
(PCROL 1499 - bar length 0,90 lm - pack 40 Pcs)



Article	Pcs/Pack	L x H mm	€/lm	€/Pc
PCROL 149	20	14 X 9	7,19	19,41
PCROL 1499	40	14 X 9	-	7,69
PCROL 209	20	20 X 9	10,87	29,35
PCROL 269	20	26 X 9	13,13	35,45

CHROMED BRASS (polished stainless st. effect) thermo packed
bar length 2,7 lm - pack 20 Pcs - 54 lm

Article	L x H mm	€/lm	€/Pc
PCROC 149	14 X 9	14,44	38,99
PCROC 209	20 X 9	16,80	45,36
PCROC 269	26 X 9	19,95	53,87




ANTIQUÉ BRASS thermo packed
bar length 2,7 lm - pack 20 Pcs - 54 lm

Article	L x H mm	€/lm	€/Pc
PCROB 149	14 X 9	23,05	62,24
PCROB 209	20 X 9	26,09	70,44
PCROB 269	26 X 9	28,82	77,81

BRUSHED BRASS thermo packed
bar length 2,7 lm - pack 20 Pcs - 54 lm

Article	L x H mm	€/lm	€/Pc
PCROS 149	14 X 9	7,19	19,41
PCROS 209	20 X 9	10,87	29,35
PCROS 269	26 X 9	13,13	35,45

COLOURS



News 2022

* = Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed

Prices are referred to whole packs 10% increase for minimum orders of 10 pcs. 20% increase for orders of less than 10 pcs.



PROCOVER is a joint-cover profile in anodized aluminium. It is applied at the end of laying two adjoining floors with the same height, having left a 6 - 24 mm gap between the two floors set in a thin bed of adhesive. It protects the outside edges of the floor/covering. It is easy to lay and attractive. The design of the profile with lower vertical arrowhead part allows excellent anchorage with the silicone/adhesive.

PROCOVER

ANODIZED SILVER, DARK BRONZE ALUMINIUM



ANODIZED SILVER, DARK BRONZE ALUMINIUM
thermo packed - bar length 2,7 lm
(PCRAA 1499 - bar length 0,90 lm - pack. 40 Pcs)



Article	Pcs/Pack	L x H mm	€/lm	€/Pc
PCRAA 149	40	14 X 9	3,89	10,50
PCRDB 149	40	14 X 9	4,97	13,42
PCRAA 1499	40	14 X 9	/	4,60
PCRAA 209	40	20 X 9	4,16	11,23
PCRDB 209	40	20 X 9	5,40	14,58
PCRAA 269	40	26 X 9	5,17	13,96
PCRDB 269	40	26 X 9	6,73	18,17
PCRAA 409	20	40 X 9	7,59	20,49
PCRDB 409	20	40 X 9	9,88	26,68

COLOURS



AA - Anodized silver alum.	DB - Anod. dark bronze alum.
----------------------------	------------------------------

AVAILABLE MINIMUM QUANTITY 100 PCS by color and height


AT - Anodized titanium alum.	AB - Anodized bronze alum.	AO - Anodized gold alum.
------------------------------	----------------------------	--------------------------

Available on demand PCRAT, PCRAAB and PCRAO.
Price: add +20% to the price of PCRAA.

PCRAA - DB 149 curvable available

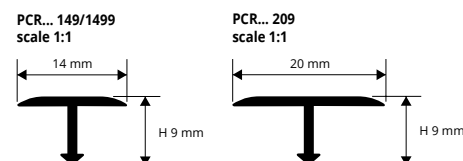

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

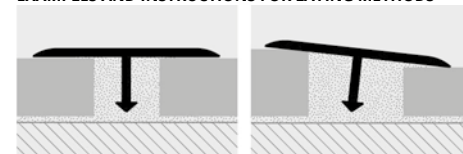

1. Choose the "PROCOVER" with the width suitable for the gap between the two floors to be joined, taking into consideration 2/3 mm side lap. 2. Fill the gap with single-pack silicone or with the adhesive used for laying the floor. 3. Bury the profile into the adhesive, making sure that both side laps of the profile rest on the coverings to be joined.

PROCOVER WOOD is a joint-cover profile in aluminium covered with a very strong film available in 77 wooden finishes (72 on demand). It is applied at the end of laying two adjoining floors with the same height, having left a 6 - 24 mm gap between the two floors set in a thin bed of adhesive. It protects the outside edges of the floor/covering. It is easy to lay and attractive. The design of the profile with lower vertical arrowhead part allows excellent anchorage with the silicone/adhesive.

ALUMINIUM COVERED WOODEN FINISHES thermo packed
bar length 2,7 lm - pack. 40 Pcs - 108 lm (L 26 mm - 54 lm)

Article	L x H mm	€/lm	€/Pc
PCRA... 149	14 X 9	6,29	16,98
PCRA... 269	26 X 9	11,06	29,86

Available in the wood finishes: 05W - 11W - 28W - 29W - 30W.
The code of the selected colour must be added to the article code.
Es.: PCRA... 149 (chosen finish light oak) PCRA04W 149.





COLOURS


05W - Light oak (strip)	11W - Decapè bleached	28W - Aspen oak	29W - White oak	30W - Grey oak
-------------------------	-----------------------	-----------------	-----------------	----------------

PROCOVER WOOD

ALUMINIUM COVERED WITH PROTECTIVE FILM IN 77 WOODEN FINISHES (72 on demand)



EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

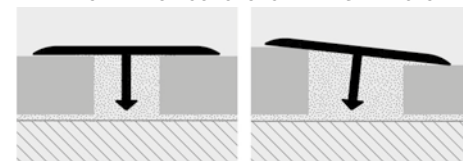

1. Choose the "PROCOVER" with the width suitable for the gap between the two floors to be joined, taking into consideration 2/3 mm side lap. 2. Fill the gap with single-pack silicone or with the adhesive used for laying the floor. 3. Bury the profile into the adhesive, making sure that both side laps of the profile rest on the coverings to be joined.

PROCOVER INSERT for inserting Procover profiles

VINYL RESIN / BLACK RUBBER

Vinyl resin/rubber profile "U-form" for inserting PROCOVER with PINBFT 45 or PINBFT 40 Proinsert System base.


VINYL RESIN/RUBBER

length 2,7 lm and/or in rolls 100 lm

Article	€/lm	€/Pc	€/rotolo
PCPCR 2,7ML	3,62	9,77	/
PCPCR 100ML	3,62	/	362,00

PROINSERT BASE 45 AND BASE 40 - alum. punched - perfored
bar length 2,7 lm - pack. 20 Pcs - 54 lm


Article	Larg. mm	€/lm	€/Pc
PINBFT 45	45	6,07	16,39
PINBFT 40	40	5,99	16,17

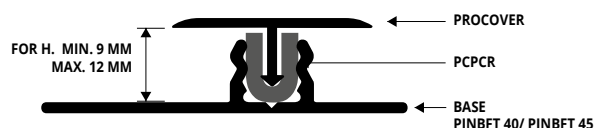

* = Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed


Prices are referred to whole packs 10% increase for minimum orders of 10 pcs. 20% increase for orders of less than 10 pcs.

INSERT
+BASE 45/40
scale 1:1

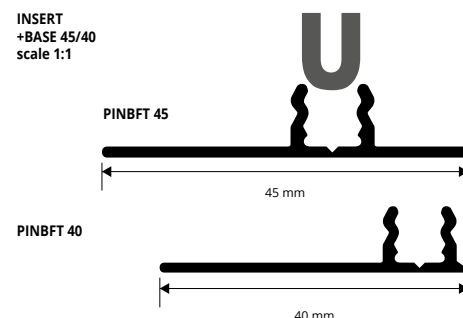

PROPLATE

POLISHED STAINLESS 1.4016 STEEL
SELF-ADHESIVE OR PUNCHED

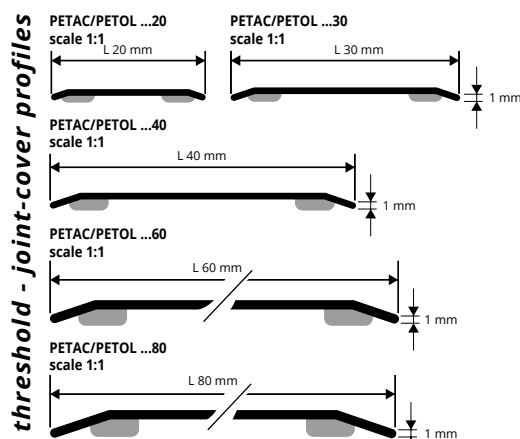

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS



1. Choose "PROPLATE" in the required width and material and whether punched or with self-adhesive backing. 2. Cut the profile to the required length. When laying the self-adhesive Proplate, clean, degrease and dry the surface, checking that the temperature for application is at least 15°. 3. Remove the protective paper from the adhesive and lay the profile correctly applying a uniform vertical pressure by hand without moving the profile and without using iron/steel hammers. 4. When laying the punched version, align the profile and mark the position of the holes using the holes in the profile as reference. 5. Insert suitable screw anchors (usually Ø 3mm screws & 5x25mm screw anchors) 6. Align the profile and tighten the galvanised or brassed flathead screws.

PROPLATE is a flat joint-cover profile with special profiled edges for perfect adherence to flooring. Made in stainless steel 1.4016 with a protective film and available with or without adhesive or for certain widths also in the punched version. Available in widths of 20 - 30 - 40 - 60 - 80 mm with protective film.



POLISHED STAINLESS 1.4016 ST. thermo packed - ADHESIVE
bar length 2,70 lm - pack. 20 Pcs - 54 lm (L 20 - 30mm - 108 lm) - 10/10 mm

Article	Width	€/lm	€/Pc
PETAC 20A	20mm	6,34	17,12
PETAC 30A	30mm	6,79	18,33
PETAC 40A	40mm	9,82	26,51
PETAC 60A	60mm	17,15	46,30
PETAC 80A	80mm	21,66	58,48

POLISHED STAINLESS 1.4016 STEEL thermo packed - without holes
bar length 2,70 lm - pack. 20 Pcs - 54 lm - 10/10 mm

Article	Width	€/lm	€/Pc
PETAC 60	60mm	15,06	40,66
PETAC 80	80mm	19,55	52,79

PETAC 60A/80A/60/80, with 12/10 thickness available on demand.

PUNCHED POLISHED STAINLESS 1.4016 ST. with protective film
bar length 2,70 lm - pack. 20 Pcs - 54 lm (L 30mm - 108 lm) - 10/10 mm

Article	Width	€/lm	€/Pc
PETAC 30F	30mm	5,29	14,28
PETAC 40F	40mm	8,29	22,38



POLISHED STAINLESS 1.4016 ST. thermo packed
ADHESIVE bar length 0,93 lm - pack. 20 Pcs - 10/10 mm

Article	Width	€/Pc
PETAC 309AS	30mm	6,83
PETAC 609AS	60mm	16,96
PETAC 809AS	80mm	21,80

POLISHED STAINLESS 1.4016 ST. thermo packed -
PUNCHED WITH SCREWS
bar length 0,93 lm - pack. 20 Pcs - 10/10 mm

Article	Width	€/Pc
PETAC 309FS	30mm	5,55


COLOURS



AC - Polished stainless steel 1.4016


PROPLATE

POLISHED BRASS
SELF-ADHESIVE OR PUNCHED

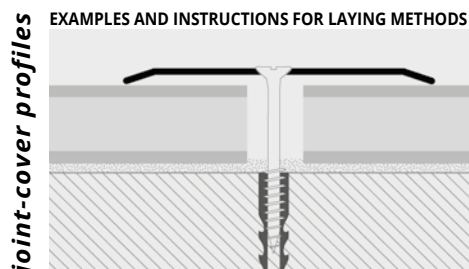

1. Choose "PROPLATE" in the required width and material and whether punched or with self-adhesive backing. 2. Cut the profile to the required length. When laying the self-adhesive Proplate, clean, degrease and dry the surface, checking that the temperature for application is at least 15°. 3. Remove the protective paper from the adhesive and lay the profile correctly applying a uniform vertical pressure by hand without moving the profile and without using iron/steel hammers. 4. When laying the punched version, align the profile and mark the position of the holes using the holes in the profile as reference. 5. Insert suitable screw anchors (usually Ø 3mm screws & 5x25mm screw anchors) 6. Align the profile and tighten the galvanised or brassed flathead screws.

COLOURS



OL - Polished brass



POLISHED BRASS thermo packed ADHESIVE
bar length 2,70 lm - pack. 20 Pcs - 54 lm (L 20/30mm - 108 lm) - 10/10 mm

Article	Width	€/lm	€/Pc
PETOL 20A	20mm	8,40	22,68
PETOL 30A	30mm	8,63	23,30
PETOL 40A	40mm	10,90	29,43
PETOL 60A	60mm	19,09	51,54
PETOL 80A	80mm	24,08	65,02

POLISHED BRASS thermo packed WITHOUT HOLES
bar length 2,70 lm - pack. 20 Pcs - 54 lm (L 20 mm - 108 lm) - 10/10 mm

Article	Width	€/lm	€/Pc
PETOL 20	20mm	6,78	18,31
PETOL 60	60mm	17,44	47,09
PETOL 80	80mm	22,39	60,45

PETOL 60A/80A/60/80 with 13/10 thickness available on demand.

POLISHED BRASS with protective film PUNCHED
bar length 2,70 lm - pack. 20 Pcs - 54 lm (L 30 mm - 108 lm) - 10/10 mm

Article	Width	€/lm	€/Pc
PETOL 30F	30mm	7,02	18,95
PETOL 40F	40mm	9,29	25,08

POLISHED BRASS thermo packed ADHESIVE
bar length 0,83 lm - pack. 20 Pcs - 10/10 mm

Article	Width	€/Pc
PETOL 308AS	30mm	8,27
PETOL 408AS	40mm	10,16

POLISHED BRASS thermo packed
bar length 0,93 lm - pack. 20 Pcs - 10/10 mm

Article	Width	€/Pc
PETOL 309AS	30mm	9,20
PETOL 309FS	30mm	7,99
PETOL 409AS	40mm	11,82
PETOL 409FS	40mm	10,47
PETOL 609AS	60mm	17,41
PETOL 809AS	80mm	22,01

"AS" at the end of the product code = Item with adhesive
"FS" at the end of the product code = Punched Item

POLISHED BRASS thermo packed
bar length 1,03 lm - pack. 20 Pcs - 10/10 mm

Article	Width	€/Pc
PETOL 3010AS	30mm	10,47
PETOL 4010AS	40mm	12,72
PETOL 4010FS	40mm	11,62

"AS" at the end of the product code = Item with adhesive
"FS" at the end of the product code = Punched Item

POLISHED BRASS thermo packed ADHESIVE
bar length 1,66 lm - pack. 20 Pcs - 10/10 mm

Article	Width	€/Pc
PETOL 3016AS	30mm	16,54
PETOL 4016AS	40mm	20,99

* = Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed

Prices are referred to whole packs 10% increase for minimum orders of 10 pcs. 20% increase for orders of less than 10 pcs.

PROPLATE 80 ALZ is a new aluminium joint cover, threshold cover. It is very resistant and suitable for covering the expanding joint of two different supporting structures, or to connect a floor with an adjoining one of the same or different kind. Particularly used in Industrial field, in the malls, sport facilities and gyms equipped with wood and/or resin floors.

PROPLATE 80 ALZ

KNURLED ANODIZED SILVER ALUMINIUM




ANODIZED SILVER ALUMINIUM thermo packed ADHESIVE
bar length 2,7 lm - pack. 20 Pcs - 54 lm (PETAA 80Z - 40,5 lm)

Article	Width mm	€/lm	€/Pc
PETAA 80ZA	80	18,52	50,00

ANODIZED SILVER ALUMINIUM thermo packed
bar length 2,7 lm - pack. 20 Pcs - 54 lm (PETAA 80Z - 40,5 lm)

Article	Width mm	€/lm	€/Pc
PETAA 80Z	80	17,24	46,55


COLOURS




AA - Anodized silver alum.

Punched version available on demand.

PETAA 80ZA
PETAA 80Z



EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

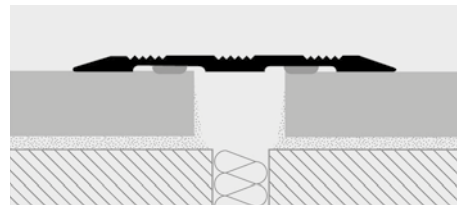

1. Choose "PROPLATE 80ALZ" model with or without sticker and cut it to the required length.

Adhesive version

2. Degrease, wash and clean accurately the solid floor. 3. Remove the protective label from the sticker (sticker model). 4. Rest the square pressing evenly without hammering.

Punched version

2. Perforate on one side and insert the nogs in the holes. 3. Fix and screw the square equipped with flared head screws suitable to the holes made.

threshold - joint-cover profiles

PROCOVER 14PT is a small aluminium joint cover / threshold cover square. It is used to finish technically floors laid at the same level in ceramic tiles/ ceramics ceramics / wood. It covers eventual laying flaws and guarantees that the floors which are underneath expand enough. In Gold-Silk anodized Aluminium and Bronze with sticker.

PROCOVER 14PT


ANODIZED SILVER, GOLD AND BRONZE ALUMINIUM



ANODIZED ALUMINIUM WITH ADHESIVE thermo packed
bar length 2,7 lm - pack. 40 Pcs - 108 lm


Article	Width mm	€/lm	€/Pc
PCRAA 14PTA	14	4,85	13,10
PCRAO 14PTA	14	4,85	13,10
PCRAB 14PTA	14	4,85	13,10

COLOURS



AA - Anodized silver alum.


AVAILABLE MINIMUM QUANTITY 100 PCS by color and height




AO - Anodized gold alum. AB - Anodized bronze alum.

(Price to be agreed. Production delay 4/5 weeks)

PCRAA 14PTA
PCRAO 14PTA
PCRAB 14PTA
scale 1:1



EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

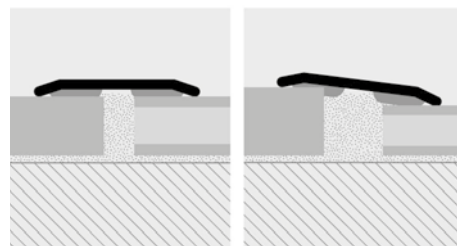

1. Choose the superficial finish of "PROCOVER 14PT" and cut it to the required length. 2. Degrease, wash and clean accurately the solid floor. 3. Remove the protective label from the sticker. 4. Lay the square pressing evenly without hammering.

threshold - joint-cover profiles

* = Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed

Prices are referred to whole packs 10% increase for minimum orders of 10 pcs. 20% increase for orders of less than 10 pcs.



PROSOL 18-30-35-40 in steel are self-adhesive joint - covers in stainless steel 1.4016 available in various widths. They are used to join floors of the same or differing material and thickness. The rounded shape also allows the profile to be used to edge shallow floors/parquet. 5 mm thick. **PROSOL** is normally used to cover flaws and defects created during laying of ceramic/wood/parquet floors by covering the joint/threshold. **PROSOL** is recommended for all sorts of public environments: hotels, offices, shops and private dwellings; it guarantees an impeccable and attractive finish.

PROSOL 18-30-35-40

STAINLESS STEEL 1.4016 WITH
SELF-ADHESIVE WITH PROTECTIVE FILM

FLOORS



STAINLESS ST. 1.4016 with adhesive
thermo packed - bar length 2,7 lm - pack. 40 Pcs - 108 lm (L 35/40 mm - 54 lm)

Article	Width-thick.	€/lm	€/Pc
PLSAC 18A	18 mm - 10/10	5,58	15,07
PLSAC 30A	30 mm - 10/10	6,13	16,55
PLSAC 35A	35 mm - 10/10	6,91	18,66
PLSAC 40A	40 mm - 12/10	9,66	26,08

STAINLESS ST. 1.4016 with adhesive
thermo packed - bar length 0,83 lm - pack. 20 Pcs 

Article	Width-thick.	€/Pc
PLSAC 308A	30 mm - 10/10	5,10
PLSAC 358A	35 mm - 10/10	5,74

On demand 0,73 or 0,63 lm bar length (quantity and prices to be agreed. Production delay 4/5 weeks).

STAINLESS ST. 1.4016 with adhesive
thermo packed - bar length 0,90 lm - pack. 20 Pcs 

Article	Width-thick.	€/Pc
PLSAC 189A	18 mm - 10/10	6,07

STAINLESS ST. 1.4016 with adhesive
thermo packed - bar length 0,93 lm - pack. 20 Pcs 

Article	Width-thick.	€/Pc
PLSAC 309A	30 mm - 10/10	5,69
PLSAC 359A	35 mm - 10/10	6,52

STAINLESS ST. 1.4016 with adhesive
thermo packed - bar length 0,83 lm - pack. 20 Pcs 

Article	Width-thick.	€/Pc
PLSAC 308AS	30 mm - 10/10	6,38
PLSAC 358AS	35 mm - 10/10	6,76

On demand 0,73 or 0,63 lm bar length (quantity and prices to be agreed. Production delay 4/5 weeks).

STAINLESS ST. 1.4016 with adhesive
thermo packed - bar length 0,93 lm - pack. 20 Pcs 

Article	Width-thick.	€/Pc
PLSAC 309AS	30 mm - 10/10	7,02
PLSAC 359AS	35 mm - 10/10	7,54
PLSAC 409AS	40 mm - 12/10	10,14


STAINLESS ST. 1.4016 with adhesive
thermo packed - bar length 1,03 lm - pack. 20 Pcs 

Article	Width-thick.	€/Pc
PLSAC 3010AS	30 mm - 10/10	7,73


STAINLESS ST. 1.4016 with adhesive
thermo packed - bar length 1,66 lm - pack. 20 Pcs 

Article	Width-thick.	€/Pc
PLSAC 3016AS	30 mm - 10/10	12,14
PLSAC 3516AS	35 mm - 10/10	13,17


PLSAC 18A/189A
scale 1:1




PLSAC 30A/3010AS/309A/309AS/308A/308AS/3016AS
scale 1:1



PLSAC 35A/359A/359AS/358A/358AS
scale 1:1





PLSAC 40A/409AS
scale 1:1



threshold - joint-cover profiles

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

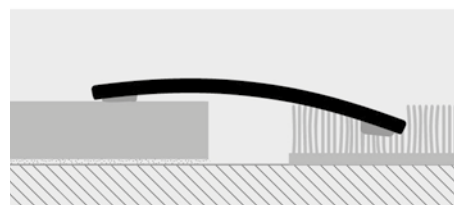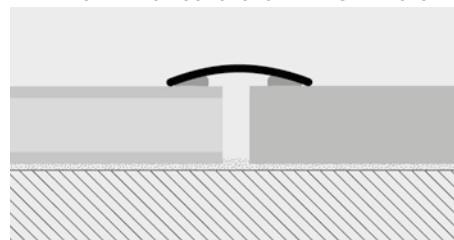

1. Choose the suitable profile and cut it to the necessary length.
2. Degrease, wash and clean the solid surface thoroughly.
3. Remove the protective paper from the adhesive.
4. Lay the profile by applying pressure evenly over the whole surface without using a hammer.

COLOURS



On demand hand-brushed stainless steel
(Prices to be agreed. Production delay 4/5 weeks)



* = Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed


Prices are referred to whole packs, 10% increase for minimum orders of 10 Pcs, 20% increase for orders of less than 10 Pcs.

PROSOL 30-35-40


PUNCHED STAINLESS STEEL 1.4016
WITH PROTECTIVE FILM

PROSOL 30-35-40 in steel are punched joint - covers in stainless steel 1.4016 available in various widths. They are used to join floors of the same or differing material and thickness. The rounded shape also allows the profile to be used to edge shallow floors max. 5 mm thick. **PROSOL** is normally used to cover flaws and defects created during laying of ceramic/wood/parquet floors by covering the joint/threshold. **PROSOL** is recommended for all sorts of public environments: hotels, offices, shops and private dwellings; it guarantees an impeccable and attractive finish.


PLSAC 30F/308F/309F/308FS/309FS/3010FS/3016FS
scale 1:1



PLSAC 35F/358F/359F/358FS/359FS/3516FS
scale 1:1



PLSAC 40F/409FS
scale 1:1



STAINLESS ST. 1.4016 punched - with protective film
bar length 2,7 lm - pack. 20 Pcs - 54 lm (L 30 mm - 108 lm)

Article	Width-thick.	€/lm	€/Pc
PLSAC 30F	30 mm - 10/10	4,66	12,58
PLSAC 35F	35 mm - 10/10	5,55	14,99
PLSAC 40F	40 mm - 12/10	8,14	21,98

STAINLESS ST. 1.4016 punched thermo packed
bar length 0,83 lm - pack. 20 Pcs

Article	Width-thick.	€/lm	€/Pc
PLSAC 308F	30 mm - 10/10	3,89	
PLSAC 358F	35 mm - 10/10	4,60	*

STAINLESS ST. 1.4016 punched thermo packed
bar length 0,93 lm - pack. 20 Pcs

Article	Width-thick.	€/lm	€/Pc
PLSAC 309F	30 mm - 10/10	4,34	
PLSAC 359F	35 mm - 10/10	5,17	*

STAINLESS ST. 1.4016 punched with screws and screw anchors
thermo packed - bar length 0,83 lm - pack. 20 Pcs

Article	Width-thick.	€/lm	€/Pc
PLSAC 308FS	30 mm - 10/10	5,24	
PLSAC 358FS	35 mm - 10/10	5,87	*

STAINLESS ST. 1.4016 punched with screws and screw anchors
thermo packed - bar length 0,93 lm - pack. 20 Pcs

Article	Width-thick.	€/lm	€/Pc
PLSAC 309FS	30 mm - 10/10	5,69	
PLSAC 359FS	35 mm - 10/10	6,46	*
PLSAC 409FS	40 mm - 12/10	8,99	*



STAINLESS ST. 1.4016 punched with screws and screw anchors
thermo packed - bar length 1,03 lm - pack. 20 Pcs

Article	Width-thick.	€/lm	€/Pc
PLSAC 3010FS	30 mm - 10/10	6,31	

STAINLESS ST. 1.4016 punched with screws and screw anchors
thermo packed - bar length 1,66 lm - pack. 20 Pcs

Article	Width-thick.	€/lm	€/Pc
PLSAC 3016FS	30 mm - 10/10	9,45	
PLSAC 3516FS	35 mm - 10/10	11,18	*

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

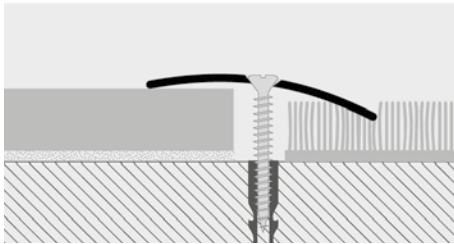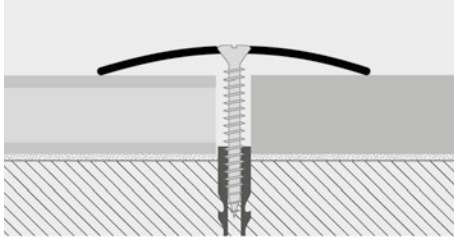

1. Choose the suitable profile and cut it to the necessary length.
2. Mark the position of the holes using the existing holes in the profile as reference.
3. Insert the screw anchors into the drilled holes.
4. Fix the profile using flathead screws suitable for the relative slots in the profile.

COLOURS



On demand hand-brushed stainless steel (Prices to be agreed. Production delay 4/5 weeks)

* = Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed

Prices are referred to whole packs, 10% increase for minimum orders of 10 Pcs, 20% increase for orders of less than 10 Pcs.

PROSOL 18-30-35-40 in brass are self-adhesive joint - covers in polished brass available in various widths. They are used to join floors of the same or differing material and thickness. The rounded shape also allows the profile to be used to edge shallow floors max. 5 mm thick. **PROSOL** is normally used to cover flaws and defects created during laying of ceramic/wood/parquet floors by covering the joint/threshold. **PROSOL** is recommended for all sorts of public environments: hotels, offices, shops and private dwellings; it guarantees an impeccable and attractive finish.

PROSOL 18-30-35-40

POLISHED BRASS WITH SELF-ADHESIVE
WITH PROTECTIVE FILM

FLOORS



POLISHED BRASS with adhesive thermo packed
bar length 2,7 lm - pack. 40 Pcs - 108 lm (L 35/40mm - 54 lm)

Article	Width-thick.	€/lm	€/Pc
PLSOL 18A	18 mm - 10/10	7,54	20,36
PLSOL 30A	30 mm - 10/10	8,12	21,92
PLSOL 35A	35 mm - 10/10	9,96	26,89
PLSOL 40A	40 mm - 10/10	18,65	50,35

POLISHED BRASS with adhesive thermo packed
bar length 0,83 lm - pack. 20 Pcs

Article	Width-thick.	€/Pc
PLSOL 308AS	30 mm - 10/10	7,79
PLSOL 358AS	35 mm - 10/10	9,45

POLISHED BRASS with adhesive thermo packed
bar length 0,83 lm - pack. 20 Pcs

Article	Width-thick.	€/Pc
PLSOL 308A	30 mm - 10/10	6,70

On demand 0,73 or 0,63 lm bar length (quantity and prices to be agreed. Production delay 4/5 weeks).

POLISHED BRASS with adhesive thermo packed
bar length 0,90 lm - pack. 20 Pcs

Article	Width-thick.	€/Pc
PLSOL 189A	10 mm - 10/10	7,79

POLISHED BRASS with adhesive thermo packed
bar length 0,93 lm - pack. 20 Pcs

Article	Width-thick.	€/Pc
PLSOL 309A	30 mm - 10/10	7,54
PLSOL 359A	35 mm - 10/10	9,26
PLSOL 409A	40 mm - 10/10	17,24

POLISHED BRASS with adhesive thermo packed
bar length 1,03 lm - pack. 20 Pcs

Article	Width-thick.	€/Pc
PLSOL 3010A	30 mm - 10/10	8,37

POLISHED BRASS with adhesive thermo packed
bar length 1,66 lm - pack. 20 Pcs

Article	Width-thick.	€/Pc
PLSOL 3016A	30 mm - 10/10	13,46

POLISHED BRASS with adhesive thermo packed
bar length 0,93 lm - pack. 20 Pcs

Article	Width-thick.	€/Pc
PLSOL 309AS	30 mm - 10/10	8,48
PLSOL 359AS	35 mm - 10/10	10,47
PLSOL 409AS	40 mm - 10/10	18,74

POLISHED BRASS with adhesive thermo packed
bar length 1,03 lm - pack. 20 Pcs

Article	Width-thick.	€/Pc
PLSOL 3010AS	30 mm - 10/10	9,51
PLSOL 3510AS	35 mm - 10/10	11,56

POLISHED BRASS with adhesive thermo packed
bar length 1,66 lm - pack. 20 Pcs


Article	Width-thick.	€/Pc
PLSOL 3016AS	30 mm - 10/10	15,20
PLSOL 3516AS	35 mm - 10/10	18,57
PLSOL 4016AS	40 mm - 10/10	32,96

COLOURS




OL - Polished brass


PLSOL 18A/189A
scale 1:1



PLSOL 30A/308A/309A/3010A/3016A/308AS/309AS/3010AS/3016AS
scale 1:1



PLSOL 35A/359A/358AS/359AS/3510AS/3516AS
scale 1:1





PLSOL 40S/409S/409SS/416SS
scale 1:1



threshold - joint-cover profiles

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

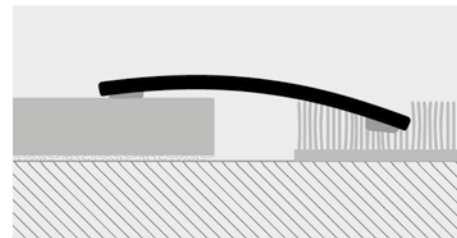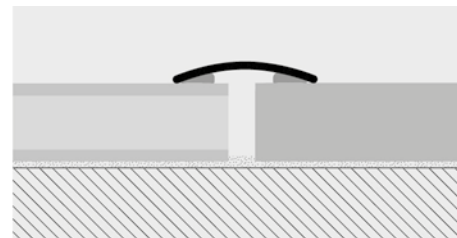

1. Choose the suitable profile and cut it to the necessary length.
2. Degrease, wash and clean the solid surface thoroughly.
3. Remove the protective paper from the adhesive.
4. Lay the profile by applying pressure evenly over the whole surface without using a hammer.


* = Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed

Prices are referred to whole packs, 10% increase for minimum orders of 10 Pcs, 20% increase for orders of less than 10 Pcs.


PROSOL 30-35-40

PUNCHED POLISHED BRASS
WITH PROTECTIVE FILM


PLSOL 30F/308F/309F/3010F/3016F/308FS/309FS/3010FS/3016FS
scale 1:1





PLSOL 35F/359F/358FS/359FS/3510FS/3516FS
scale 1:1



PLSOL 40F/409F/409FS/4016FS
scale 1:1




EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

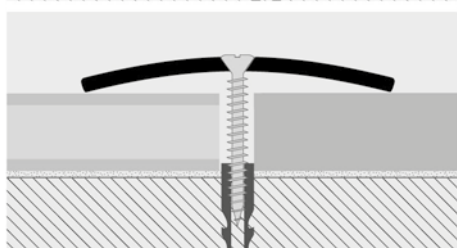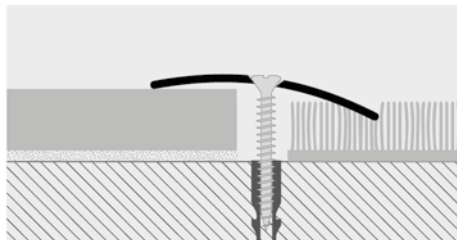

1. Choose the suitable profile and cut it to the necessary length.
2. Mark the position of the holes using the existing holes in the profile as reference.
3. Insert the screw anchors into the drilled holes.
4. Fix the profile using flathead screws suitable for the relative slots in the profile.

PROSOL 30-35-40 in brass are punched joint - covers in polished brass available in various widths. They are used to join floors of the same or differing material and thickness. The rounded shape also allows the profile to be used to edge shallow floors max. 5 mm thick. **PROSOL** is normally used to cover flaws and defects created during laying of ceramic/wood/parquet floors by covering the joint/threshold. **PROSOL** is recommended for all sorts of public environments: hotels, offices, shops and private dwellings; it guarantees an impeccable and attractive finish.

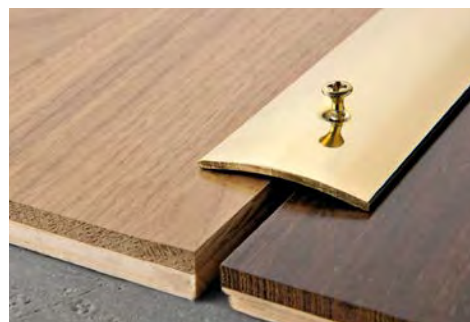

POLISHED BRASS punched with protective film

bar length 2,7 lm - pack. 40 Pcs - 108 lm (L 35/40mm - 54 lm)

Article	Width-thick.	€/lm	€/Pc
PLSOL 30F	30 mm - 10/10	6,52	17,60
PLSOL 35F	35 mm - 10/10	8,31	22,44
PLSOL 40F	40 mm - 10/10	16,99	45,87

POLISHED BRASS punched thermo packed

bar length 0,83 lm - pack. 20 Pcs



Article	Width-thick.	€/Pc
PLSOL 308F	30 mm - 10/10	5,42

POLISHED BRASS punched thermo packed

bar length 0,93 lm - pack. 20 Pcs



Article	Width-thick.	€/Pc
PLSOL 309F	30 mm - 10/10	6,07
PLSOL 359F	35 mm - 10/10	7,73
PLSOL 409F	40 mm - 10/10	15,09

POLISHED BRASS punched thermo packed

bar length 1,03 lm - pack. 20 Pcs



Article	Width-thick.	€/Pc
PLSOL 3010F	30 mm - 10/10	6,76

POLISHED BRASS punched thermo packed

bar length 1,66 lm - pack. 20 Pcs



Article	Width-thick.	€/Pc
PLSOL 3016F	30 mm - 10/10	10,86

POLISHED BRASS punched with screws and screw anchors thermo packed - bar length 0,83 lm - pack. 20 Pcs



Article	Width-thick.	€/Pc
PLSOL 308FS	30 mm - 10/10	6,83
PLSOL 358FS	35 mm - 10/10	8,43

On demand 0,73 or 0,63 lm bar length (quantity and prices to be agreed. Production delay 4/5 weeks).

POLISHED BRASS punched with screws and screw anchors thermo packed - bar length 0,93 lm - pack. 20 Pcs



Article	Width-thick.	€/Pc
PLSOL 309FS	30 mm - 10/10	7,48
PLSOL 359FS	35 mm - 10/10	9,26
PLSOL 409FS	40 mm - 10/10	17,38

POLISHED BRASS punched with screws and screw anchors thermo packed - bar length 1,03 lm - pack. 20 Pcs




Article	Width-thick.	€/Pc
PLSOL 3010FS	30 mm - 10/10	6,76
PLSOL 3510FS	35 mm - 10/10	10,29

POLISHED BRASS punched with screws and screw anchors thermo packed - bar length 1,66 lm - pack. 20 Pcs



Article	Width-thick.	€/Pc
PLSOL 3016FS	30 mm - 10/10	13,03
PLSOL 3516FS	35 mm - 10/10	16,10
PLSOL 4016FS	40 mm - 10/10	30,53

COLOURS



OL - Polished brass

PROSOL 30-35-40 are self-adhesive or punched joint - covers in polished brass available in various widths. They are used to join floors of the same or differing material and thickness. The rounded shape also allows the profile to be used to edge shallow floors max. 5 mm thick. **PROSOL** is normally used to cover flaws and defects created during laying of ceramic/wood/parquet floors by covering the joint/threshold.

PROSOL is recommended for all sorts of public environments: hotels, offices, shops and private dwellings; it guarantees an impeccable and attractive finish.

PROSOL 30-35-40

ANODIZED GOLD AND SILVER
ALUMINIUM WITH SELF-ADHESIVE AND PUNCHED



ANODIZED ALUMINIUM with adhesive thermo packed
bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	Width-thick.	€/lm	€/Pc
PLS... 30A	30 mm - 1,3	5,37	14,50
PLSAA 35A	35 mm - 1,5	6,46	17,44
PLSAA 40A	40 mm - 2	7,54	20,36

Available in the colours: AA - AO (AB, AT, CH and SB available on demand with a minimum quantity order of 100 pcs).
The code of the selected colour must be added to the article code. E.g.: PLS... 30A (chosen finish anod. silver) PLSAA 30A.

ANODIZED ALUMINIUM punched thermo packed
bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	Width-thick.	€/lm	€/Pc
PLS... 30F	30 mm - 1,3	3,89	10,50
PLSAA 35F	35 mm - 1,5	4,99	13,47
PLSAA 40F	40 mm - 2	6,13	16,55

ANODIZED ALUMINIUM with adhesive thermo packed - bar length 0,83 lm - pack. 20 Pcs



Article	Width-thick.	€/Pc
PLSAA 308AS	30 mm - 10/10	5,42

On demand 0,73 or 0,63 lm bar length (quantity and prices to be agreed. Production delay 4/5 weeks).

ANODIZED ALUMINIUM with adhesive thermo packed - bar length 0,93 lm - pack. 20 Pcs



Article	Width-thick.	€/Pc
PLS... 309AS	30 mm - 10/10	6,07

ANODIZED ALUMINIUM with adhesive thermo packed - bar length 1,03 lm - pack. 20 Pcs



Article	Width-thick.	€/Pc
PLS... 3010AS	30 mm - 10/10	6,64

ANODIZED ALUMINIUM with adhesive thermo packed - bar length 1,66 lm - pack. 20 Pcs



Article	Width-thick.	€/Pc
PLSAA 3016AS	30 mm - 10/10	10,53

ANODIZED ALUMINIUM with adhesive thermo packed - bar length 0,93 lm - pack. 20 Pcs



Article	Width-thick.	€/Pc
PLS... 309A	30 mm - 10/10	4,99

ANODIZED ALUM. punched with screws and screw anchors thermo packed - bar length 0,83 lm - pack. 20 Pcs



Article	Width-thick.	€/Pc
PLS... 308FS	30 mm - 10/10	4,60

ANODIZED ALUM. punched with screws and screw anchors thermo packed - bar length 0,93 lm - pack. 20 Pcs



Article	Width-thick.	€/Pc
PLSAA 309FS	30 mm - 10/10	4,99

ANODIZED ALUMINIUM punched with screws and screw anchors thermo packed - bar length 1,66 lm - pack. 20 Pcs




Article	Width-thick.	€/Pc
PLS... 3016FS	30 mm - 10/10	8,48

ANODIZED ALUMINIUM punched thermo packed - bar length 0,93 lm - pack. 20 Pcs



Article	Width-thick.	€/Pc
PLSAA 309F	30 mm - 10/10	3,64

COLOURS




ON DEMAND MINIMUM 100 PCS by color and height



(Prices to be agreed. Production delay 4/5 weeks)


PLS... 30A/309A/308AS/309AS/3010AS/3016AS
scale 1:1




PLS... 35A
scale 1:1



PLS... 40A
scale 1:1



PLS... 30F/309F/308FS/309FS/3016FS
scale 1:1






PLS... 35F
scale 1:1



PLS... 40F
scale 1:1



EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

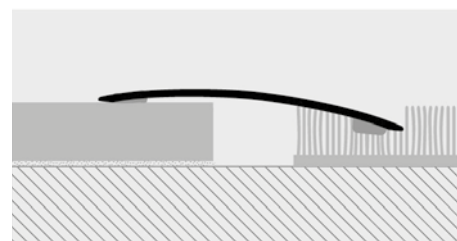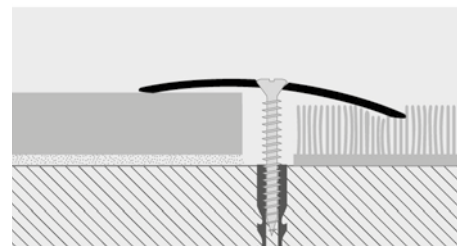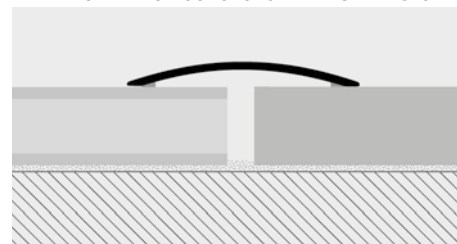

1. Choose the suitable profile and cut it to the necessary length.

Adhesive version

2. Degrease, wash and clean the solid surface thoroughly.
3. Remove the protective paper from the adhesive. 4. Lay the profile by applying pressure evenly over the whole surface without using a hammer.

Punched version

2. Mark the position of the holes using the existing holes in the profile as reference. 3. Insert the screw anchors into the drilled holes. 4. Fix the profile using flathead screws suitable for the relative slots in the profile.

* = Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed

Prices are referred to whole packs, 10% increase for minimum orders of 10 Pcs, 20% increase for orders of less than 10 Pcs.



PROLEVALL 25-35-38-50 are joint – covers in anodized aluminium with gold, silver and bronze finish in various widths with a more or less knurled flat surface, available with self-adhesive backing or punched in various lengths. They are used to join floors of the same or differing material e.g. ceramic tiles, wood, marble, parquet or laminated, mainly to cover flaws created during laying or expansion joints. The chamfered edges ensure perfect adhesion to the floor, while the flat top allows perfect door closure. Recommended for dwellings and public environments with intense pedestrian traffic. Easy to lay; the high-strength elastomer adhesive ensures an excellent grip.

PROLEVALL 25-35-38-50

ANODIZED GOLD AND SILVER
ALUMINIUM WITH SELF-ADHESIVE AND PUNCHED



ANODIZED ALUMINIUM with adhesive thermo packed
bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	Width mm	€/lm	€/Pc
PLV... 25A	25	5,37	14,50
PLV... 35A	35	6,38	17,23
PLV... 38A	38	6,97	18,82
PLV... 50A	50	8,45	22,82

Available in the colours: AA - AO (AB, AT, CH and SB available on demand with a minimum quantity order of 100 pcs). The code of the selected colour must be added to the article code. E.g.: PLV... 25A (chosen finish anod. silver) PLVAA 25A.

ANODIZED ALUMINIUM punched thermo packed
bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	Width mm	€/lm	€/Pc
PLV... 25F	25	3,96	10,69
PLV... 35F	35	4,99	13,47
PLV... 38F	38	5,55	14,99
PLV... 50F	50	7,25	19,58

Available in the colours: AA - AO (AB, AT, CH and SB available on demand with a minimum quantity order of 100 pcs). The code of the selected colour must be added to the article code. E.g.: PLV... 25F (chosen finish anod. silver) PLVAA 25F.

OFF-CENTRE HOLES ON DEMAND

ANODIZED ALUMINIUM with adhesive thermo packed - bar length 0,93 lm - pack. 20 Pcs

Article	Width mm	€/Pc
PLV... 259AS	25	6,07
PLV... 359AS	35	6,97
PLV... 389AS	38	7,59
PLV... 509AS	50	9,06

Available in the colours: AA - AO (AB, AT, CH and SB available on demand with a minimum quantity order of 100 pcs). The code of the selected colour must be added to the article code. E.g.: PLV... 259AS (chosen finish anod. silver) PLVAA 259AS.

ANODIZED ALUM. punched with screws and screw anchors thermo packed - bar length 0,93 lm - pack. 20 Pcs

Article	Width mm	€/Pc
PLV... 259FS	25	5,05
PLV... 359FS	35	5,94
PLV... 389FS	38	6,26
PLV... 509FS	50	7,73

PLV... 259FS-359FS available in the colours: AA - AO (AB, AT, CH and SB available on demand with a minimum quantity order of 100 pcs). The code of the selected colour must be added to the article code. E.g.: PLV... 359FS (chosen finish anod. silver) PLVAA 359FS.

ANODIZED ALUMINIUM with adhesive thermo packed - bar length 1,03 lm - pack. 20 Pcs

Article	Width mm	€/Pc
PLV... 3510AS	35	7,65

ANODIZED ALUMINIUM with adhesive thermo packed - bar length 1,66 lm - pack. 20 Pcs

Article	Width mm	€/Pc
PLV... 3516AS	35	12,26

The code of the selected colour must be added to the article code. E.g.: PLV... 3510AS (chosen colour anodized gold alum.) PLVAA 3510AS.


ANODIZED ALUM. punched with screws and screw anchors thermo packed - bar length 1,03 lm - pack. 20 Pcs

Article	Width mm	€/Pc
PLV... 3510FS	35	6,52


ANODIZED ALUM. punched with screws and screw anchors thermo packed - bar length 1,66 lm - pack. 20 Pcs

Article	Width mm	€/Pc
PLV... 3516FS	35	10,14

COLOURS




ON DEMAND MINIMUM 100 PCS by color and height




(Prices to be agreed. Production delay 4/5 weeks)

1. Choose the suitable profile and cut it to the necessary length.
- Adhesive version**
2. Degrease, wash and clean the solid surface thoroughly.
3. Remove the protective paper from the adhesive.
4. Lay the profile by applying pressure evenly over the whole surface without using a hammer.
- Punched version**
2. Mark the position of the holes using the existing holes in the profile as reference.
3. Insert the screw anchors into the drilled holes.
4. Fix the profile using flathead screws suitable for the relative slots in the profile.

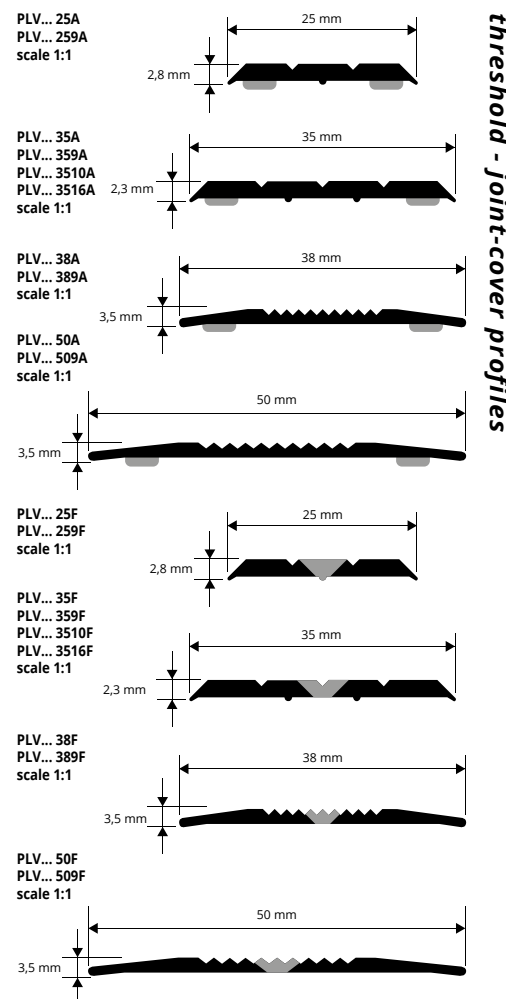

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

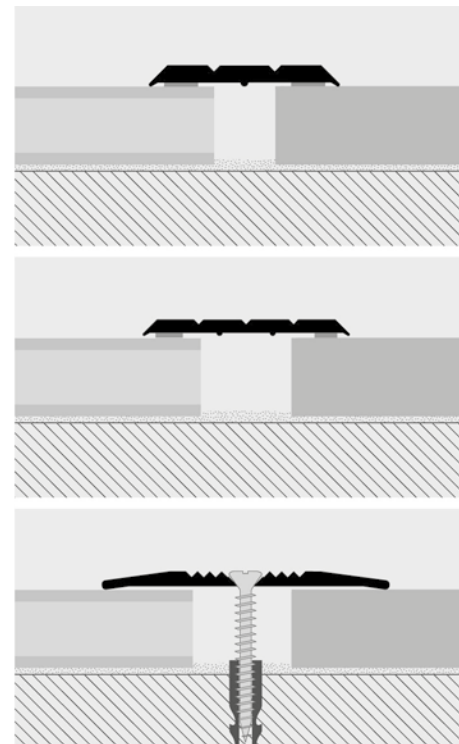

* = Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed

Prices are referred to whole packs, 10% increase for minimum orders of 10 Pcs, 20% increase for orders of less than 10 Pcs.

PROMOQUETTE


ANODIZED GOLD AND SILVER
ALUMINIUM WITH OR WITHOUT SELF-ADHESIVE

carpet gripper profiles


PMQ... 12/ 126/2
scale 1:1



PMQ... 12A /127AS /128AS /129AS
scale 1:1



EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

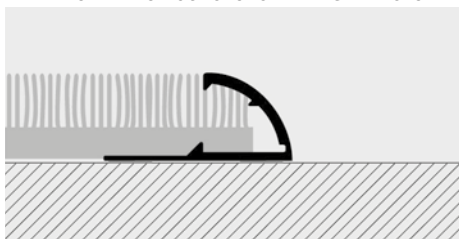

1. Cut the profile to the necessary length. 2. Fix the "PROMOQUETTE" to the floor using screws/nails or double-sided adhesive tape. 3. Insert the carpeting into the curved side with the necessary tension. 4. Apply pressure evenly over the edge of the profile until it closes over and secures the carpeting.

PROMOQUETTE is an anodized aluminium rounded edging profile with tap-down edge, which is ideal for the clean-cut, elegant finishing of carpeted floors. The carpeting is inserted inside the curved/rounded section, which is then pressed down until the carpeting is secured, thereby also protecting the edge. **PROMOQUETTE** ensures a perfect finish, covering any flaws created during laying and protecting the edge. Easy to lay with the self-adhesive backing ensuring perfect adherence to the floor.



ANODIZED GOLD and SILVER ALUMINIUM ADHESIVE thermo packed - bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	H mm	€/lm	€/Pc
PMQ... 12A	7/12	5,49	14,82
PMQ... 12	7/12	4,21	11,37

"A" at the end of the product code = Item with adhesive.
Available in the colours: AA - AO. (AB available on demand with a minimum quantity order of 100 pcs). The code of the selected colour must be added to the article code. E.g.: PMQ... 12A (chosen colour Anodized gold alum.) PMQAO 12A.

ANODIZED GOLD and SILVER ALUMINIUM thermo packed - bar length 0,67 lm - pack. 2 Pcs

Article	H mm	€/Pc
PMQ... 126/2	7/12	7,41

ANODIZED SILVER ALUMINIUM ADHESIVE thermo packed - bar length 0,73 lm - pack. 20 Pcs

Article	H mm	€/Pc
PMQAA 127AS	7/12	5,05


ANODIZED GOLD, SILVER and BRONZE ALUM. ADHESIVE thermo packed - bar length 0,83 lm - pack. 20 Pcs

Article	H mm	€/Pc
PMQ... 128AS	7/12	5,69


ANODIZED GOLD, SILVER and BRONZE ALUM. ADHESIVE thermo packed - bar length 0,93 lm - pack. 20 Pcs

Article	H mm	€/Pc
PMQ... 129AS	7/12	6,20

COLOURS



ON DEMAND MINIMUM 100 PCS by color and height



(Prices to be agreed. Production delay 4/5 weeks)

PROMOQUETTE FIX


ANODIZED GOLD AND SILVER
ALUMINIUM PUNCHED OR NOTCHED

carpet gripper profiles


PMF... 14F
scale 1:1



PMF... 14D
scale 1:1

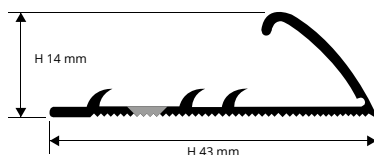

EXAMPLES OF LAYING

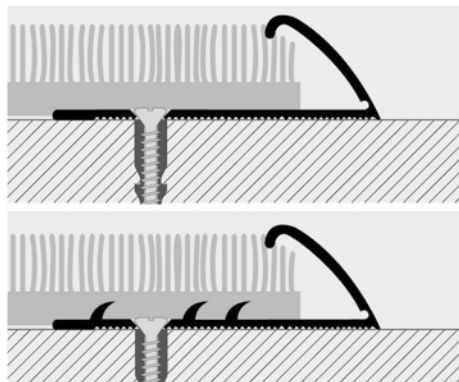

PROMOQUETTE FIX is a profile in anodized aluminium made as a terminal profile to edge carpeted floors held under tension or simply laid with double-sided adhesive tape. Two versions are available: notched or with holes/notches for laying under tension and then permanently fixed with screws/nails; or the punched version to edge without holding under tension. **PROMOQUETTE FIX** ensures an impeccable finish to the edge of carpeting that is not always perfectly cut. It speeds up laying time and the result is attractive.



ANODIZED GOLD and SILVER ALUMINIUM thermo packed - bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	H mm	€/lm	€/Pc
PMF... 14F	14	4,73	12,77
PMFAA 14D	14	7,15	19,31


"D" at the end of the product code = Item with notched
"F" at the end of the product code = Punched Item

Available in the colours: AO - AA. (AB available on demand with a minimum quantity order of 100 pcs).
The code of the selected colour must be added to the article code.
E.g.: PMF... 14F (chosen colour anodized gold alum.) PMFAO 14F.

INSTRUCTIONS FOR LAYING

1. Cut the profile to the necessary length. 2. Fix the "PROMOQUETTE FIX" to the floor using screws/nails. 3. Insert the carpeting into the curved side with the necessary tension. 4. Apply pressure evenly over the edge of the profile until it closes over and secures the carpeting.

COLOURS



ON DEMAND MINIMUM 100 PCS by color and height



(Prices to be agreed. Production delay 4/5 weeks)

PROMOQUETTE GIN is a profile in anodized aluminium with tap-down edge for edging or joining floors in carpeting, PVC, linoleum, ceramic tiles/wood, etc. Two versions are available: punched for laying under tension and then permanently fixed with screws/nails or the adhesive version for laying with glue and which can be taken up if required. **PROMOQUETTE GIN** guarantees an impeccable finish and offers the dual function of both joining and of covering any flawed edges of the floors. It speeds up laying time and the result is attractive.

PROMOQUETTE GIN

ANODIZED GOLD, SILVER AND BRONZE ALUMINIUM WITH SELF-ADHESIVE AND PUNCHED



ANODIZED GOLD, SILVER AND BRONZE ALUMINIUM ADHESIVE thermo packed - bar length 2,7 lm - pack 20 Pcs - 54 lm

Article	H mm	€/lm	€/Pc
PMGAA 813A	8/13	9,07	24,49
PMGAO 813A	8/13	9,07	24,49
PMGAB 813A	8/13	9,07	24,49
PMGAT 813A	8/13	9,07	24,49
PMGCH 813A	8/13	9,07	24,49
PMGSB 813A	8/13	9,07	24,49

Available in the colours: AO - AA - AB (AT, CH and SB available on demand with a minimum quantity order of 100 pcs). The code of the selected colour must be added to the article code. E.g.: PMG... 813F (chosen colour anodized gold alum.) PMGAO 813F.


ANODIZED GOLD, SILVER AND BRONZE ALUMINIUM PUNCHED thermo packed - bar length 2,7 lm - pack 20 Pcs - 54 lm

Article	H mm	€/lm	€/Pc
PMGAA 813F	8/13	7,15	19,31
PMGAO 813F	8/13	7,15	19,31
PMGAB 813F	8/13	7,15	19,31
PMGAT 813F	8/13	7,15	19,31
PMGCH 813F	8/13	7,15	19,31
PMGSB 813F	8/13	7,15	19,31


COLOURS



ON DEMAND MINIMUM 100 PCS by color and height




(Prices to be agreed. Production delay 4/5 weeks)

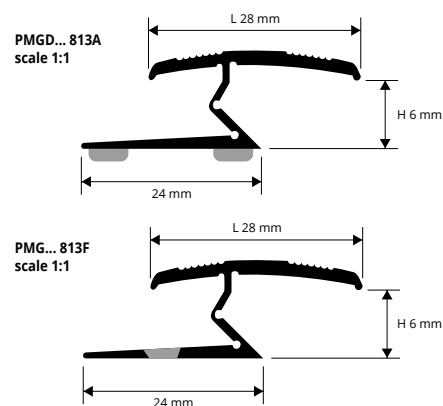

carpet gripper profiles

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

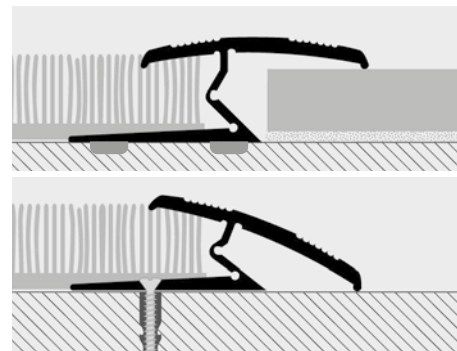

1. Cut the profile to the necessary length. 2. Fix the "PROMOQUETTE GIN" to the floor using screws/nails or two-sided adhesive tape. 3. Lay the required floor, inserting the carpeting, PVC, linoleum, ceramic tile or wood under the upper curved part. 4. Apply pressure evenly on the edges of the profile until they close and secure the flooring on both sides.


PROMOQUETTE CLIP is an aluminum profile, which allows to combine two carpet in practical and fast way. The profile is composed by a base and a TOP serrated, thanks to its particular section, allows to cover and fix the edges of the carpet with the connection of the top to the base. **PROMOQUETTE CLIP** in anodized aluminum is suitable for closed environment is required where a good resistance to mechanical and chemical stresses.

PROMOQUETTE CLIP


ANODIZED SILVER ALUMINIUM TOP AND NOTCHED BASE



COLOURS



PMC... 525D scale 1:1



carpet gripper profiles

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS



1. Cut the profile to the necessary length. 2. Fix the punched/notched base to the floor using screws/nails or two-sided adhesive tape. 3. Lay the carpeting by gluing or holding under tension. 4. With the help of a wooden tapping block and a hammer, apply pressure evenly over the whole of the top profile until it clicks into the base, thereby securing the carpeting on both sides.

ANODIZED SILVER ALUMINIUM thermo packed bar length 2,7 lm - pack 20 Pcs - 54 lm

Article	H mm	€/lm	€/Pc
PMCAA 525D	5	12,39	33,45

* = Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed

Prices are referred to whole packs, 10% increase for minimum orders of 10 Pcs, 20% increase for orders of less than 10 Pcs.