

An interpretation of: Kaufmann "Fallingwater" House, Frank Ll. Wright, Pennsylvania (USA), 1939




SHOWER AND DRAINAGE SYSTEMS

PROSHOWER LINEAR KIT SYSTEM

PROSHOWER LINEAR KIT SYSTEM is an innovative solution, which combines functionality and design to answer to all requirements of the shower.




| Article | | Description | | Pc/Pack. | €/Pc |
|---------------------|---------------------------|---|-----|----------------------------|--------|
| PSHPANEK | PROSHOWER LINEAR KIT BA | SE | | 1 | 450,09 |
| | | | | D (D 1 | |
| Article | | Kit components | | Pc/Pack. | |
| PSHPAN | | Ided polystyrene 120x120 cm with glued Profoil | | 1 | |
| PRBFXB | PROBAND FIX white | | | 2 | |
| PRBPE 1507 | ROLL PROBAND 150 - 7,5 Im | 1 | | 1 | |
| PFLO 0405 | PROFOIL ROLL - 5 Im | | | 1 | |
| PIAA 40212 | ALUMINUM PROFILES (scre | ed leveling profile) length 120 cm | | 2 | |
| PRSPD 10 | PVC TOWEL | | | 1 | |
| PROSHOWER F PSHI | | PROFOIL PFLO 0405 | | PROBAND 150 PROBAND 150 | |
| | 96° | | | | |
| PROBA PRB | | PVC TOWEL PRSPD 10 | ALU | IMINUM PROF PIAA 40212 | ILES |
| Article | | Description | | Pc/Pack. | €/Pc |
| PSHPAN | Proshower pan | el in moulded polystyrene 120x120 cm with glued Profoil | | 1 | 234,41 |
| | 31 nm | Slope 2 % | | | 1 |



| | mm mm | Slope 2 % | | Ļ |
|---|-----------------|---|----------|--------|
| | 15 mm + | | | 35 mm |
| | 4 | 1200 mm | | _→ ' |
| | Article | Description | Pc/Pack. | €/Pc |
| l | PSHPANXT 60120 | PROSHOWER PANEL EXTENSION 120x60 cm for PROSHOWER PANEL LINEAR - Slope 2% | 1 | 117,21 |
| | PSHPANXTL 60120 | LATERAL PROSHOWER PANEL EXTENSION 60x120 cm for PROSHOWER PANEL LINEAR - Slope 2% | 1 | 117,21 |

| | | | 12(| 00 |
|----|-----|----|-----|-----|
| | | D | es | c |
| Ν | 12 | 0x | 60 | cn |
| ١S | 101 | 11 | 50> | (12 |
| | | | | |
| | | | | |
| | | | | |



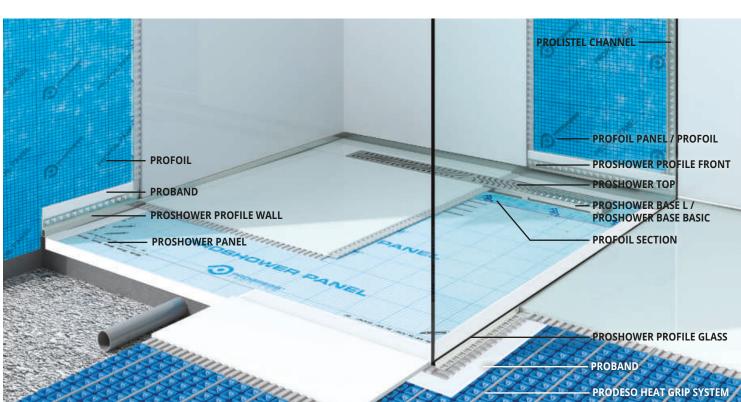

190

0




PROSHOWER BASE L is a channel body in stainless steel AISI 304/1.4301 - V2A steel for the realisation of floorlevel shower. The body channel, with an overall height of 85 mm, is completed by 6 different grids in stainless steel. **PROSHOWER BASE L** undergoes electro-polishing and subsequent passivation, which guarantees excellent resistence in any environment. Its low thickness combined with the fully adjustable siphon, the modularity and the high number of grids make it a much sought-after solution.

PROSHOWER **BASE L** SUPER POLISHED STAINLESS STEEL AISI 304/1.4301-V2A



DUCT BODY MADE OF AISI 304 STAINLESS STEEL

| Article | Description | Pc/Pack. | €/Pc |
|------------|-----------------------------------|----------|--------|
| PSHWDL 30 | PROSHOWER BASE L-ACC-L 30 x 8 cm | 1 | 333,01 |
| PSHWDL 70 | PROSHOWER BASE L-ACC-L 70 x 8 cm | 1 | 424,42 |
| PSHWDL 80 | PROSHOWER BASE L-ACC-L 80 x 8 cm | 1 | 450,53 |
| PSHWDL 90 | PROSHOWER BASE L-ACC-L 90 x 8 cm | 1 | 476,66 |
| PSHWDL 100 | PROSHOWER BASE L-ACC-L 100 x 8 cm | 1 | 502,77 |
| PSHWDL 120 | PROSHOWER BASE L-ACC-L 120 x 8 cm | 1 | 568,07 |

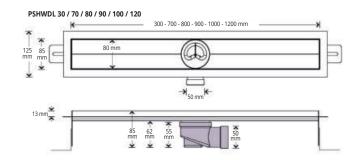



UPON REQUEST


PROSHOWER BASE L with vertical siphon complete of installed Profoil membrane (code ref. PSHWDVS...). Drain Ø 50 mm.

PROSHOWER BASE BASIC is a water collecting duct system in polypropylene for floor showers, available in several lengths and grids.



GREY POLYPROPYLENE





GREY POLYPROPYLENE DUCT BODY

| Article | Description | Pc/Pack. | €/Pc |
|-----------|-------------------------------------|----------|--------|
| PSHWBB 60 | PROSHOWER BASE BASIC - 60 x 8 cm PP | 1 | 195,88 |
| PSHWBB 70 | PROSHOWER BASE BASIC - 70 x 8 cm PP | 1 | 208,95 |
| PSHWBB 80 | PROSHOWER BASE BASIC - 80 x 8 cm PP | 1 | 222,00 |
| PSHWBB 90 | PROSHOWER BASE BASIC - 90 x 8 cm PP | 1 | 235,06 |



UPON REQUEST

PROSHOWER BASE BASIC with vertical siphon complete of installed Profoil membrane (code ref. PSHWBBVS...). Drain Ø 50 mm

PROFOIL SECTION

HDPE E PP GUAINE

SHOWER SYSTEMS

PROFOIL SECTION AND DOUBLE SIDED TAPE 3 Im

| Article | L | Pc/Pack. | €/Pc |
|------------|--------|----------|-------|
| PSHANT 30 | 30 cm | 1 | 19,59 |
| PSHANT 60 | 60 cm | 1 | 22,21 |
| PSHANT 70 | 70 cm | 1 | 24,82 |
| PSHANT 80 | 80 cm | 1 | 30,03 |
| PSHANT 90 | 90 cm | 1 | 35,26 |
| PSHANT 100 | 100 cm | 1 | 40,49 |
| PSHANT 120 | 120 cm | 1 | 47,01 |







PROSHOWER TOP

SUPER-POLISHED STAINLESS STEEL AISI 304 / 1.4301 - V2A

PROSHOWER TILE - tileable



PROSHOWER LINE

PSHWL 60/70/80/90/100/120



PROSHOWER DESIGN

PSHWD 30/60/70/80/90/100/120



PROSHOWER STRIPS

PSHWST 60/70/80/90/100/120

SHOWER SYSTEMS



PROSHOWER GRILL

PSHWGR 60/70/80/90/100/120



PROSHOWER SQUARE PSHWSO 60/70/80/90/100/120



PROSHOWER TILE - SUPER-POLISHED STAINLESS STEEL AISI 304 / 1.4301 - V2A - Pack. 1 Pc

| | Article | Lenght cm | Width cm | €/Pc |
|---|------------|-----------|----------|--------|
| 0 | PSHWT 30* | 30 | 8 | 137,12 |
| 0 | PSHWT 60** | 60 | 8 | 156,71 |
| 0 | PSHWT 70 | 70 | 8 | 163,23 |
| 0 | PSHWT 80 | 80 | 8 | 169,76 |
| 0 | PSHWT 90 | 90 | 8 | 176,31 |
| 0 | PSHWT 100* | 100 | 8 | 195,88 |
| 0 | PSHWT 120* | 120 | 8 | 215,47 |

*PSHWT 30,100,120 Provided only combined with Proshower Base L. **PSHWT 60 Provided only combined with Proshower Base Basic.

PROSHOWER LINE - SUPER-POLISHED STAINLESS STEEL AISI 304 / 1.4301 - V2A - Pack. 1 Pc

| Article | Lenght cm | Width cm | €/Pc | | |
|--------------|-----------|----------|--------|--|--|
| O PSHWL 60** | 60 | 8 | 156,71 | | |
| O PSHWL 70 | 70 | 8 | 163,23 | | |
| O PSHWL 80 | 80 | 8 | 169,76 | | |
| O PSHWL 90 | 90 | 8 | 176,31 | | |
| O PSHWL 100* | 100 | 8 | 195,88 | | |
| O PSHWL 120* | 120 | 8 | 215,47 | | |
| | | | | | |

*PSHWL 100,120 Provided only combined with Proshower Base L.

**PSHWL 60 Provided only combined with Proshower Base Basic.

PROSHOWER DESIGN - SUPER-POLISHED STAINLESS STEEL AISI 304 / 1.4301 - V2A - Pack. 1 Pc

| Article | Lenght cm | Width cm | €/Pc | |
|--------------|-----------|----------|--------|---|
| O PSHWD 30* | 30 | 8 | 137,12 | * |
| PSHWD 60** | 60 | 8 | 156,71 | |
| PSHWD 70 | 70 | 8 | 163,23 | |
| O PSHWD 80 | 80 | 8 | 169,76 | |
| PSHWD 90 | 90 | 8 | 176,31 | |
| O PSHWD 100* | 100 | 8 | 195,88 | |
| PSHWD 120* | 120 | 8 | 215,47 | |

*PSHWD 30,100,120 Provided only combined with Proshower Base L. **PSHWD 60 Provided only combined with Proshower Base Basic.

PROSHOWER STRIPS - SUPER-POLISHED STAINLESS STEEL AISI 304 / 1.4301 - V2A - Park 1 Pc

| Article | Lenght cm | Width cm | €/Pc | |
|-------------|-----------|----------|--------|---|
| PSHWST 60** | 60 | 8 | 156,71 | * |
| PSHWST 70 | 70 | 8 | 163,23 | * |
| PSHWST 80 | 80 | 8 | 169,76 | * |
| PSHWST 90 | 90 | 8 | 176,31 | * |
| PSHWST 100* | 100 | 8 | 195,88 | * |
| PSHWST 120* | 120 | 8 | 215,47 | * |

*PSHWST 100,120 Provided only combined with Proshower Base L. **PSHWST 60 Provided only combined with Proshower Base Basic.

PROSHOWER GRILL - SUPER-POLISHED STAINLESS STEEL AISI 304 / 1.4301 - V2A - Pack. 1 Pc

| Article | Lenght cm | Width cm | €/Pc | |
|-------------|-----------|----------|--------|---|
| PSHWGR 60** | 60 | 8 | 156,71 | * |
| PSHWGR 70 | 70 | 8 | 163,23 | * |
| PSHWGR 80 | 80 | 8 | 169,76 | * |
| PSHWGR 90 | 90 | 8 | 176,31 | * |
| PSHWGR 100* | 100 | 8 | 195,88 | * |
| PSHWGR 120* | 120 | 8 | 215,47 | * |

*PSHWGR 100,120 Provided only combined with Proshower Base L. **PSHWGR 60 Provided only combined with Proshower Base Basic.

PROSHOWER SQUARE - SUPER-POLISHED STAINLESS STEEL AISI 304 / 1.4301 - V2A - Pack. 1 Pc

| Article | Lenght cm | Width cm | €/Pc | |
|---------------------------------------|-----------------|-------------|----------------------------|---|
| PSHWSQ 60** | 60 | 8 | 156,71 | * |
| PSHWSQ 70 | 70 | 8 | 163,23 | * |
| PSHWSQ 80 | 80 | 8 | 169,76 | * |
| PSHWSQ 90 | 90 | 8 | 176,31 | * |
| PSHWSQ 100* | 100 | 8 | 195,88 | * |
| PSHWSQ 120* | 120 | 8 | 215,47 | * |
| PSHWSQ 80 PSHWSQ 90 PSHWSQ 100* | 80 90 100 | 8 8 8 | 169,76 176,31 195,88 | |

*PSHWSQ 100,120 Provided only combined with Proshower Base L. **PSHWSQ 60 Provided only combined with Proshower Base Basic.

6




🜟 = Production on demand with minimum quantity of 10 pcs. Production delay 4/5 weeks. Price to be agreed Prices are referred to whole packs.

= News 2023


DRAIN REDUCTION

POLYPROPYLENE

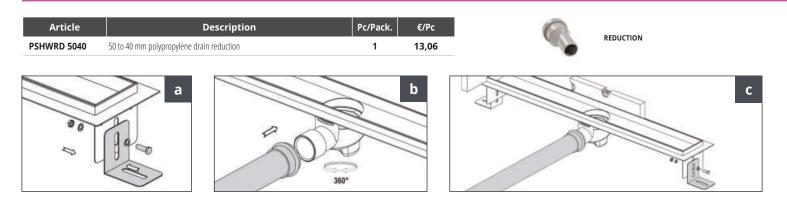

MODULAR ASSEMBLY KIT

| Article | Description | Pc/Pack. | €/Pc |
|---------|--|----------|-------|
| SHWRD | Modular assembly kit to make drain ducts of any length | 1 | 33,96 |

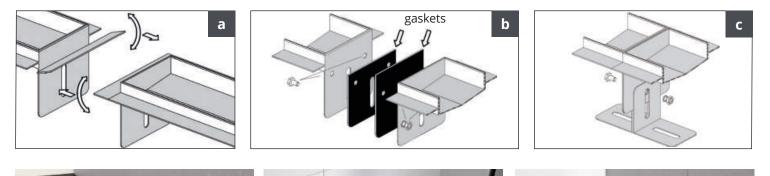







PROSHOWER BASE L PRO

SUPER-POLISHED STAINLESS STEEL AISI 316L / 1.4404 – V4A

PSHWP...


DUCT BODY MADE OF A STAINLESS STEEL AISI 316L / 1.4404 - V4A

thickness grid has excellent chemical resistance and is equipped with a 360° adjustable siphon.

| | Article | Description | Pc/Pack. | €/Pc |
|---------|-----------|---------------------------------------|----------|--------|
| 0 | PSHWP 30 | PROSHOWER BASE L PRO - L 30 x 5,5 cm | 1 | 170,89 |
| \odot | PSHWP 60 | PROSHOWER BASE L PRO - L 60 x 5,5 cm | 1 | 187,43 |
| ٢ | PSHWP 70 | PROSHOWER BASE L PRO - L 70 x 5,5 cm | 1 | 198,45 |
| \odot | PSHWP 80 | PROSHOWER BASE L PRO - L 80 x 5,5 cm | 1 | 209,48 |
| 0 | PSHWP 90 | PROSHOWER BASE L PRO - L 90 x 5,5 cm | 1 | 220,50 |
| 0 | PSHWP 100 | PROSHOWER BASE L PRO - L 100 x 5,5 cm | 1 | 231,53 |

PROSHOWER BASE L PRO is a stainless steel AISI 316L / 1.4404 – V4A drain for the realisation of floor-level and for wall shower drain. This drain is available in different lengths and equipped with different grids. The reduced

| Article | Kit components | Pc/Pack. |
|---------|--|----------|
| PSHWPNN | PROSHOWER BASE L PRO DUCT BODY | 1 |
| TASPRF | PROFOIL SECTION | 1 |
| SPSHWPT | POLYSTYRENE TEMPORARY CHANNEL PROTECTION | 1 |

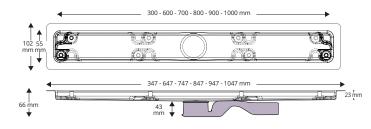





PROFOIL SECTION TASPRF...




POLYSTYRENE TEMPORARY CHANNEL PROTECTION SPSHWPT...

PROSHOWER TOP PRO

SUPER-POLISHED STAINLESS STEEL AISI 316L / 1.4404 - V4A

PROSHOWER TILE/LINE PRO

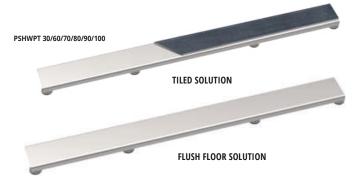

| Lenght cm | Width cm | €/Pc |
|-----------|----------------------------|--|
| 30 | 5,5 | 44,10 |
| 60 | 5,5 | 66,15 |
| 70 | 5,5 | 71,66 |
| 80 | 5,5 | 77,17 |
| 90 | 5,5 | 82,69 |
| 100 | 5,5 | 88,20 |
| | 30 60 70 80 90 | 30 5,5 60 5,5 70 5,5 80 5,5 90 5,5 |

Sold only in combination with Proshower Base L PRO

PROSHOWER DESIGN PRO



| PROSHOWER DESIGN PRO SUPER-POLISHED STAINLESS STEEL AISI 316L/1.4404-V4A | - Pack. 1 Pc |
|--|---------------------|
| | |

| Article | Lenght cm | Width cm | €/Pc |
|--------------|-----------|----------|-------|
| PSHWPD 30 | 30 | 5,5 | 55,13 |
| PSHWPD 60 | 60 | 5,5 | 77,17 |
| PSHWPD 70 | 70 | 5,5 | 82,69 |
| O PSHWPD 80 | 80 | 5,5 | 88,20 |
| 💿 PSHWPD 90 | 90 | 5,5 | 93,71 |
| O PSHWPD 100 | 100 | 5,5 | 99,23 |

Sold only in combination with Proshower Base L PRO




PROSHOWER BASE L PRO is also equipped with a wall drain box made of AISI 316L / 1.4404 - V4A stainless stel which recessed into the wall, allows to realize wall drains without compromising the water flow and the ease of cleaning.

WALL DRAIN BOX

| | WALL DRAIN BOX STAINLESS STEEL AISI 316L/1.4404-V4A | | | | | | | |
|---|---|--|----------|--------|--|--|--|--|
| | Article | Description | Pc/Pack. | €/Pc | | | | |
| 0 | KBPSHWPAC 30 | PROSHOWER BASE L PRO wall drain box 30 cm | 1 | 143,33 | | | | |
| 0 | KBPSHWPAC 60 | PROSHOWER BASE L PRO wall drain box 60 cm | 1 | 170,89 | | | | |
| 0 | KBPSHWPAC 70 | PROSHOWER BASE L PRO wall drain box 70 cm | 1 | 181,91 | | | | |
| ٢ | KBPSHWPAC 80 | PROSHOWER BASE L PRO wall drain box 80 cm | 1 | 192,94 | | | | |
| 0 | KBPSHWPAC 90 | PROSHOWER BASE L PRO wall drain box 90 cm | 1 | 231,53 | | | | |
| 0 | KBPSHWPAC 100 | PROSHOWER BASE L PRO wall drain box 100 cm | 1 | 242,55 | | | | |



INSTALLATION SECTION OF THE WALL DRAIN PROSHOWER BASE L PRO

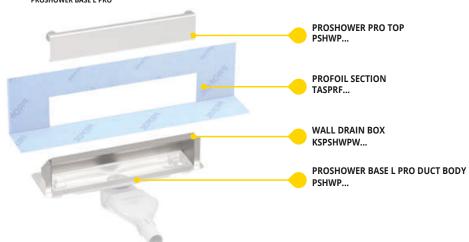








PROSHOWER PROFILE GLASS **PROSHOWER PROFILE GLASS** Suitable profile for fixing glass slabs in case of floor level showers with a a slope of 2%. Due to its particular shape and finish in satin-finish stainless steel AISI 304 / 1.4301 – V2A, it covers and decorates the visible side of the screed.

SATINED STAINLESS STEEL AISI 304 / 1.4301 - V2A

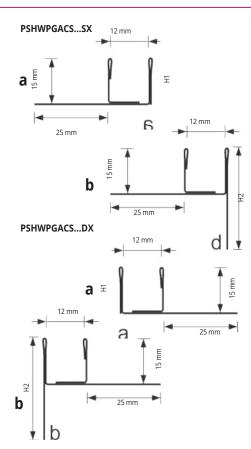






to be used with all kind of floor.

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS



1. Choose "PROSHOWER PROFILE GLASS" according to the desired length. 2. Cut "PROSHOWER PROFILE GLASS" to the desired length and apply the adhesive on the support where the profile will be laid. 3. Press the anchoring flange of "PROJOLLY SQUARE" into the adhesive. 4. Lay the tiles, aligning them with the profile leaving a 2 mm joint. Remove immediately all remains of adhesive from the surface of the profile. 5. Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile. 6. Insert the sheet of glass and seal.

SATINED STAINLESS STEEL AISI 304/1.4301-V2A - LEFT

H1 mm

15

15

15

SATINED STAINLESS STEEL AISI 304/1.4301-V2A - RIGHT

l1 mm

15

15

15

2% SLOPE

degreased and passivated - thermo packed - Pack. 1 Pc

H2 mm

33

43

53

H2 mm

33

43

53

€/Pc

125,00

170,00

225,00

€/Pc

а

L cm

100

150

200

L cm

100 cm 125.00

150 cm 170,00

200 cm 225,00

degreased and passivated - thermo packed - Pack. 1 Pc

Article

PSHWPGACS 100SX

PSHWPGACS 150SX

PSHWPGACS 200SX

Article

PSHWPGACS 100DX

PSHWPGACS 150DX

PSHWPGACS 200DX


PSHWPGACSDX

PROSHOWER PROFILE is a profile for floor level showers in stainless steel for the protection of the floor edges and as decoration of the screed visible side. The profile has a 2% slope. Its specific shape makes it an easy to lay profile

PROSHOWER PROFILE

SHOWER SYSTEMS SATINED STAINLESS STEEL AISI 304 / 1.4301 - V2A

Ħ



EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS



SATINED STAINLESS STEEL AISI 304/1.4301-V2A - RIGHT degreased and passivated - thermo packed - Pack. 1 Pc

| Article | H mm | H1 mm | H2 mm | L cm | €/Pc |
|------------------|------|-------|-------|------|--------|
| PSHWPACS 1010DX | 10 | 11 | 28 | 100 | 120,00 |
| PSHWPACS 1015DX | 10 | 11 | 38 | 150 | 140,00 |
| PSHWPACS 1020DX | 10 | 11 | 48 | 200 | 155,00 |
| PSHWPACS 12510DX | 12,5 | 13,5 | 30 | 100 | 120,00 |
| PSHWPACS 12515DX | 12,5 | 13,5 | 40 | 150 | 140,00 |
| PSHWPACS 12520DX | 12,5 | 13,5 | 50 | 200 | 155,00 |

SATINED STAINLESS STEEL AISI 304/1.4301-V2A - LEFT degreased and passivated - thermo packed - Pack. 1 Pc

| Article | H mm | H1 mm | H2 mm | L cm | €/Pc |
|------------------|------|-------|-------|------|--------|
| PSHWPACS 1010SX | 10 | 11 | 28 | 100 | 120,00 |
| PSHWPACS 1015SX | 10 | 11 | 38 | 150 | 140,00 |
| PSHWPACS 1020SX | 10 | 11 | 48 | 200 | 155,00 |
| PSHWPACS 12510SX | 12,5 | 13,5 | 30 | 100 | 120,00 |
| PSHWPACS 12515SX | 12,5 | 13,5 | 40 | 150 | 140,00 |
| PSHWPACS 12520SX | 12,5 | 13,5 | 50 | 200 | 155,00 |

1. Choose "PROSHOWER PROFILE" according to the desired length. 2. Cut "PROSHOWER PROFILE" to the desired length and apply the adhesive on the support where the profile will be laid. 3. Press the anchoring flange of "PROJOLLY SQUARE" into the adhesive. 4. Lay the tiles, aligning them with the profile leaving a 2 mm joint. Remove immediately all remains of adhesive from the surface of the profile. 5. Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile. 6. Insert the sheet of glass and seal.

PROSHOWER PROFILE FRONT is a satin-finish stainless steel AISI 304/1.4301-V2A profile. It is suitable to cover and decorate the visible part of wall in front of the shower tray in case of floor level showers with slope.

PROFILE FRONT

SATINED STAINLESS STEEL AISI 304 / 1.4301 - V2A

PROSHOWER

SATINED STAINLESS STEEL AISI 304/1.4301-V2A

| degreased and passivaled - thermo packed - Pack. TPC | | | | | | | |
|--|------|-------|------|--------|--|--|--|
| Article | Hmm | H1 mm | L cm | €/Pc | | | |
| PSHWPFACS 101028 | 10 | 28 | 100 | 77,00 | | | |
| PSHWPFACS 101038 | 10 | 38 | 100 | 79,00 | | | |
| PSHWPFACS 101048 | 10 | 48 | 100 | 81,00 | | | |
| PSHWPFACS 101528 | 10 | 28 | 150 | 97,00 | | | |
| PSHWPFACS 101538 | 10 | 38 | 150 | 100,00 | | | |
| PSHWPFACS 101548 | 10 | 48 | 150 | 103,00 | | | |
| PSHWPFACS 1251028 | 12,5 | 28 | 100 | 77,00 | | | |
| PSHWPFACS 1251038 | 12,5 | 38 | 100 | 79,00 | | | |
| PSHWPFACS 1251048 | 12,5 | 48 | 100 | 81,00 | | | |
| PSHWPFACS 1251528 | 12,5 | 28 | 150 | 97,00 | | | |
| PSHWPFACS 1251538 | 12,5 | 38 | 150 | 100,00 | | | |
| PSHWPFACS 1251548 | 12,5 | 48 | 150 | 103,00 | | | |


1. Choose "PROSHOWER PROFILE FRONT" according to the desired length. 2. Cut "PROSHOWER PROFILE FRONT" to the desired length and apply the adhesive on the support where the profile will be laid. 3. Press the anchoring flange of "PROJOLLY SQUARE" into the adhesive. 4. Lay the tiles,

aligning them with the profile leaving a 2 mm joint. Remove

immediately all remains of adhesive from the surface of the profile. **5.** Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation. Remove

immediately all the remains of grout from the surface of the

profile. 6. Insert the sheet of glass and seal.







100/150 cm

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS







PROSHOWER PROFILE WALL Profile in satin-finish stainless steel AISI 304 / 1.4301 – V2A. It is suitable to cover and decorate the visible part of wall beside the shower tray in case of floor level showers with a slope of 2%.

SATINED STAINLESS STEEL AISI 304/1.4301-V2A - RIGHT degreased and passivated - thermo packed - Pack. 1 Pc

© 2028. All dights reserved by Progress Profiles. Printed in Italy

| Article | Hmm | H1 mm | H2 mm | L cm | €/Pc |
|-------------------|------|-------|-------|------|--------|
| PSHWPLACS 1010DX | 10 | 10 | 28 | 100 | 65,00 |
| PSHWPLACS 1015DX | 10 | 10 | 38 | 150 | 80,00 |
| PSHWPLACS 1020DX | 10 | 10 | 48 | 200 | 105,00 |
| PSHWPLACS 12510DX | 12,5 | 10 | 28 | 100 | 65,00 |
| PSHWPLACS 12515DX | 12,5 | 10 | 38 | 150 | 80,00 |
| PSHWPLACS 12520DX | 12,5 | 10 | 48 | 200 | 105,00 |

SATINED STAINLESS STEEL AISI 304/1.4301-V2A - LEFT degreased and passivated - thermo packed - Pack. 1 Pc

| | - | | | | |
|-------------------|------|-------|-------|------|--------|
| Article | Hmm | H1 mm | H2 mm | L cm | €/Pc |
| PSHWPLACS 1010SX | 10 | 10 | 28 | 100 | 65,00 |
| PSHWPLACS 1015SX | 10 | 10 | 38 | 150 | 80,00 |
| PSHWPLACS 1020SX | 10 | 10 | 48 | 200 | 105,00 |
| PSHWPLACS 12510SX | 12,5 | 10 | 28 | 100 | 65,00 |
| PSHWPLACS 12515SX | 12,5 | 10 | 38 | 150 | 80,00 |
| PSHWPLACS 12520SX | 12,5 | 10 | 48 | 200 | 105,00 |


1. Choose "PROSHOWER PROFILE WALL" according to the desired length. 2. Cut "PROSHOWER PROFILE WALL" to the desired length and apply the adhesive on the support where the profile will be laid. 3. Press the anchoring flange of "PROJOLLY SQUARE" into the adhesive. 4. Lay the tiles, aligning them with the profile leaving a 2 mm joint. Remove immediately all remains of adhesive from the surface of the profile. 5. Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile. 5. Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile. 6. Insert the sheet of glass and seal



PSHWPLACS ...SX 2% SLOPE




EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS




100 / 150 / 200 cm

PROSHOWER PROFILE WALL

SATINED STAINLESS STEEL AISI 304 / 1.4301 - V2A






SHOWER SYSTEMS

а


PROLISTEL CHANNEL

STAINLESS STEEL AISI 304/1.4301-V2A

PLTCH... 08 - 10 - 11 -12.5




EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS



1. Choose "PROLISTEL CHANNEL" according to the visible surface and desired finish. 2. Cut "PROLISTEL CHANNEL" to the desired length and apply the adhesive on the surface where the profile will be laid. 3. Press "PROLISTEL CHANNEL" into the adhesive, aligning it with the tiles leaving a 2 mm. joint. Remove immediately all remains of adhesive from the surface of the profile. 4. Fill the joint between the profile and tiles with grout in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile.





POLISHED STAINLESS STEEL AISI 304/1.4301-V2A bar length 2.7 lm - pack. 1 Pc

workmanlike application.

| 0.1 | | | | |
|---------------|------|-----|-------|--------|
| Article | H mm | Lmm | €/ml | €/Pc |
| PLTCHAC 0812 | 8 | 12 | 45,64 | 123,23 |
| PLTCHAC 1012 | 10 | 12 | 48,18 | 130,09 |
| PLTCHAC 1112 | 11 | 12 | 50,71 | 136,92 |
| PLTCHAC 12512 | 12,5 | 12 | 53,25 | 143,78 |

POLISHED STAINLESS STEEL AISI 304/1.4301-V2A bar length 2,7 lm - pack. 1 Pc

POLISHED STAINLESS STEEL AISI 304/1.4301-V2A

Hmm

8

10

11

12,5

bar length 2,7 lm - pack. 1 Pc

Article

PLTCHAC 0810

PLTCHAC 1010

PLTCHAC 1110

PLTCHAC 12510

| | Article | H mm | L mm | €/ml | €/Pc | |
|---------------|-----------|------|------|-------|--------|---|
| PLTC | HAC 0808 | 8 | 08 | 45,64 | 123,23 | 1 |
| 📀 PLTC | HAC 1008 | 10 | 08 | 48,18 | 130,09 | 1 |
| PLTC | HAC 1108 | 11 | 08 | 50,71 | 136,92 | |
| | HAC 12508 | 12.5 | 08 | 53.25 | 143.78 | |

L mm

10

10

10

10

€/ml

45.64

48,18

50.71

53,25

€/Pc

123 23

PROLISTEL CHANNEL is a F-shaped strip in polished an satin-finish stainless steel AISI 304/1.4301-V2A suitable to decorate the wall coverings in ceramic tiles and natural stones. Its section allows the realization of a decorative

joint which can also be used as a guide for the fixing of sheets of glass on floors and walls. Its particular section and the availability in two different finishes make **PROLISTEL CHANNEL** a much sought-after profile that allows an easy

SATIN-FINISH STAINLESS STEEL AISI 304/1.4301-V2A bar length 2.7 lm - pack 1 Po

| parter parter parter parter | | | | | | |
|-----------------------------|------|------|-------|--------|--|--|
| Article | H mm | L mm | €/ml | €/Pc | | |
| PLTCHACS 0812 | 8 | 12 | 49,44 | 133,49 | | |
| PLTCHACS 1012 | 10 | 12 | 51,99 | 140,37 | | |
| PLTCHACS 1112 | 11 | 12 | 54,52 | 147,20 | | |
| PLTCHACS 12512 | 12,5 | 12 | 57,06 | 154,06 | | |

SATIN-FINISH STAINLESS STEEL AISI 304/1.4301-V2A bar length 2,7 lm - pack. 1 Pc

| | | Article | H mm | L mm | €/ml | €/Pc | |
|---|-----|----------------|------|------|-------|--------|---|
| 3 | * 🧿 | PLTCHACS 0808 | 8 | 08 | 49,44 | 133,49 | * |
|) | * 🧿 | PLTCHACS 1008 | 10 | 08 | 51,99 | 140,37 | * |
| 2 | * 🧿 | PLTCHACS 1108 | 11 | 08 | 54,52 | 147,20 | * |
| 3 | * 🧿 | PLTCHACS 12508 | 12,5 | 08 | 57,06 | 154,06 | * |

L mm

10

10

10

10

€/ml

49.44

51,99

54,52

57,06

€/Pc

133.49

140,37

147.20

154,06

*

*

*

SATIN-FINISH STAINLESS STEEL AISI 304/1.4301-V2A

H mm

8

10

11

12,5

bar length 2,7 lm - pack. 1 Pc

Article

2 PLTCHACS 0810

130,09 🛧 🕗 PLTCHACS 1010

136,92 🚼 😒 PLTCHACS 1110

143,78 🚼 🔿 PLTCHACS 12510

PROLISTEL CHANNEL is a F-shaped strip in anodized and polished aluminum suitable to decorate the wall coverings in

ceramic tiles and natural stones. Its section allows the realization of a decorative joint which can also be used as a guide


for the fixing of sheets of glass on floors and walls. Its particular section and the availability in two different finishes make **PROLISTEL CHANNEL** a much sought-after profile that allows an easy workmanlike application.




PROLISTEL CHANNEL

SHOWER SYSTEMS

ANODIZED AND POLISHED ALUMINIUM




EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS



Choose "PROLISTEL CHANNEL" according to the visible surface and desired finish.
 Cut "PROLISTEL CHANNEL" to the desired length and apply the adhesive on the surface where the profile will be laid.
 Press "PROLISTEL CHANNEL" into the adhesive, aligning it with the tiles leaving a 2 mm. joint. Remove immediately all remains of adhesive from the surface of the profile.
 Fill the joint between the profile and tiles with grout in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile.

PROGRESS[®]



ANODIZED SILVER ALUMINIUM har length **2.7 lm** - pack **40 Pcs - 108 lm**

| €/ml | €/Pc | | | | | | |
|-------|-------------------------|--|--|--|--|--|--|
| 15,03 | 40,58 | | | | | | |
| 16,33 | 44,09 | | | | | | |
| 17,30 | 46,71 | | | | | | |
| 18,28 | 49,36 | | | | | | |
| | 15,03 16,33 17,30 | | | | | | |

COLOURS

| ANODIZED | POLISHED |
|----------------------------|----------------------------|
| | |
| | |
| AA - Anodized silver alum. | BC - Polished chrome alum. |




POLISHED CHROME ALUMINIUM 400 1...

| bar lengui 2,7 m - pack. 40 PC | Dar lengtri 2,7 mi - pack. 40 PCS - 108 m | | | | | | |
|--|---|-------|-------|--|--|--|--|
| Article | Hmm | €/ml | €/Pc | | | | |
| PLTCHBC 08 | 8 | 17,64 | 47,63 | | | | |
| PLTCHBC 10 | 10 | 18,94 | 51,14 | | | | |
| PLTCHBC 11 | 11 | 19,92 | 53,78 | | | | |
| PLTCHBC 125 | 12,5 | 20,89 | 56,40 | | | | |



★ = Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed Prices are referred to whole packs.



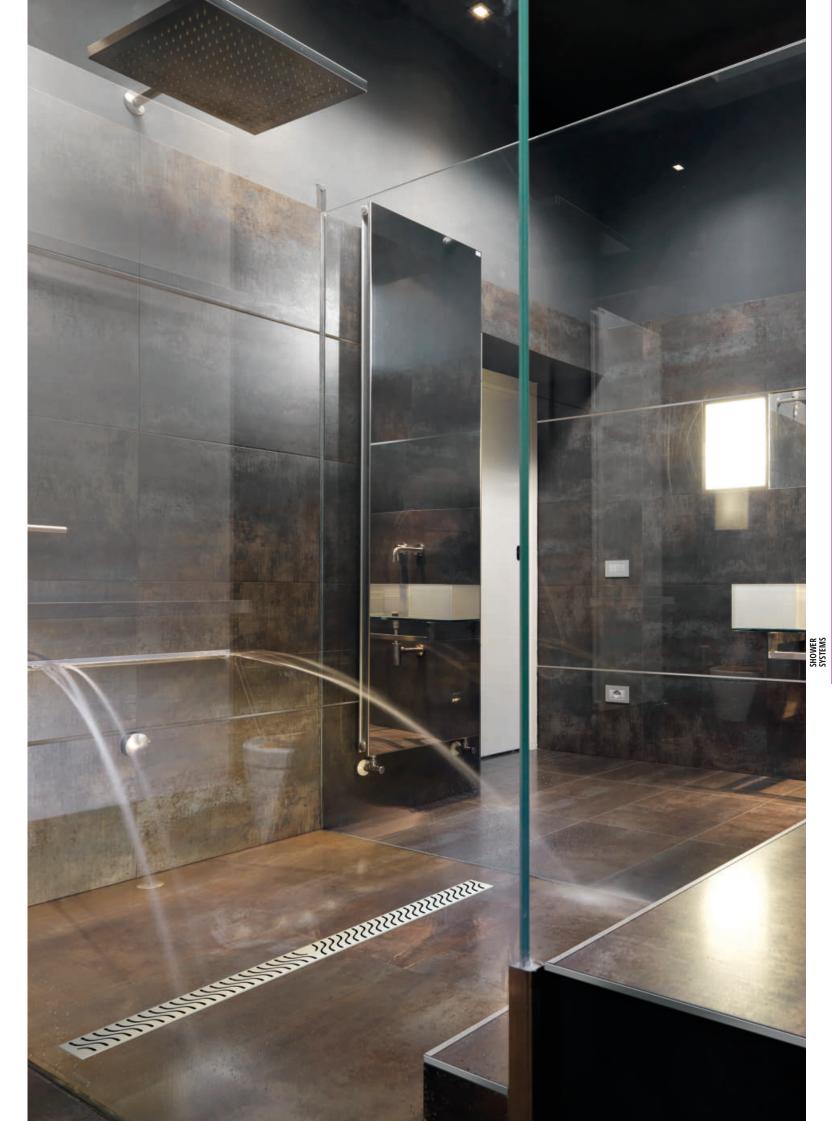

Prices are referred to whole packs.

PROSHOWER CENTRAL KIT SYSTEM

Article

PROSHOWER CENTRAL KIT SYSTEM is an innovative solution, which combines functionality and design to answer to all requirements of the shower.

Description

| PROSHOWER SYSTEM CENTRAL KIT | PSHPANCEK | PROSHOWER CENTRAL KIT SYSTEM | Description | PC/Pack 1 | . €/Pc 450,38 |
|--|---|------------------------------|--|---|------------------------------------|
| | Article PSHPANC PRBFXB PRBPE 1507 PFLO 0405 PRSPD 10 PSHLDK | | Kit components - moulded polystyrene 120 cm x 120 | Pc/Pack cm 1 2 1 1 1 1 1 1 1 1 1 | |
| | PATENTED PATENTED PROSHOWER PANEL CENTRAL PSHPANC | PROFOIL PFLO 0405 | PROBAND 150 PRBPE 1507 | PROBAND FIX PRBFXB | PVC TOWEL PRSPD 10 |
| Article PSHPANC PROSHOWER PANEL CEN | Description TRAL - moulded polystyrene 120 cm x 120 cm 1200 mer | Pc/Pack 1 | c. €/Pc 223,38 | PROSHOWER PANEL CENTR PSHPANC | AL |
| **0101 0 0 0 0 0 | ROFOIL | | | ROLISTEL CHANNEL PROFOIL PANEL / PROSHOWER DRA PROSHOWER DRA | IN TOP IN LATERAL EL CENTRAL |

Pc/Pack. €/Pc

200

PROGRESS"



PROSHOWER LATERAL DRAIN KIT are 2 central drain systems with lateral outflow equipped with a siphon, grate support, stainless steel grate, butyl double-sided ring for the fixing of the waterproof section, waterproof section and a protection cap with template function too that allows the correct positioning of the butyl ring and the waterproof section. LATERAL AND VERTICAL DRAIN KIT ensure a correct flow of rainwater.

Article Description Pc/Pack. €/Pc PSHLDK PROSHOWER DRAIN LATERAL KIT 1 158,49

AREA OF USE

- Use PROSHOWER BASE L PRO it can be used in any indoor and outdoor environment.
- Don't use In environments where very aggressive substances are used and a high concentrated load is expected.



PROSHOWER DRAIN CENTRAL PRO is a 10x10 cm stainless steel AISI 316L / 1.4404 – V4A drain for the realisation of floor-level shower. This low thickness drain is equipped with a grid that can also be tiled for floor-level drains. PROSHOWER DRAIN CENTRAL PRO has excellent chemical resistance and is equipped with a 360 ° adjustable siphon.

PROSHOWER DRAIN CENTRAL PRO

PROSHOWER

DRAIN KIT

LATERAL AND VERTICAL DRAINS

LATERAL DRAIN

| | Į |
|---|---|
| 0 | |
| | |
| | |
| | 4 |
| | 1 |
| | |
| | |
| | |
| | 1 |
| | |
| | |
| | |
| | 1 |
| | |
| | |

© 2028. All dights reserved by Progress Profiles. Printed in Italy

| | PROSHOWER DRAIN C | ENTRAL PRO - GRATE + POLYSTYRENE CHANNEL PROTECTION + PROFOIL SECTION + DUC | T BODY + SIP | HON |
|---|-------------------|---|--------------|--------|
| | Article | Description | Pc/Pack. | €/Pc |
| 0 | PSHWCP | PROSHOWER DRAIN CENTRAL PRO | 1 | 176,40 |
| | | | | |


AREA OF USE

- Use Balconies, terraces, outdoor surfaces of any size, kitchens and showers.
- Don't use In environments subject to heavy traffic and where washing with acidic and strong alkaline

substances is foreseen.

WARNINGS

After the drain installation, apply the protective cap. Before applying the butyl double-sided adhesive ring on the flange of the drain, thoroughly clean the flange of any dirt residue that may compromise its adhesion. Apply the butyl double-sided adhesive ring and the waterproofing section during the application of the waterproofing system.






HIGH DENSITY EXTRUDED POLYSTYRENE PANEL

PROFOIL PANEL

PROFOIL PANEL are high density extruded polystyrene panels covered on both sides with a steam- and waterproofing membrane. The membrane is waterproofing and the adhesive to fix them reinforces the panels for a quick and inexpensive laying.

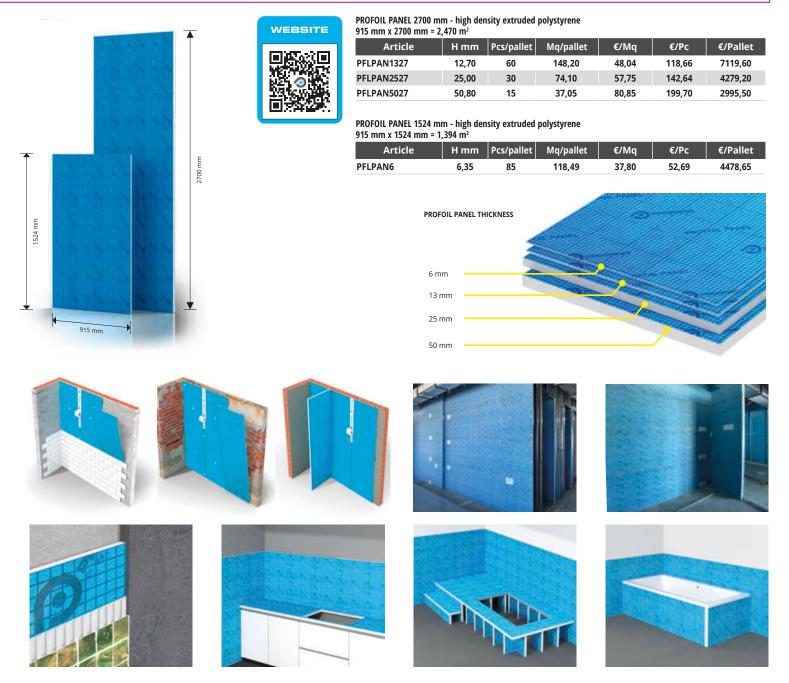

PROFOIL AND PROBAND DOWELS, WASHERS, SCREWS

STAINLESS STEEL/ZINC-COATED METAL/GLASS FIBER NET



SHOWER SYSTEMS

PROFOIL DOWELS - ZINC-COATED METAL - pack. 250 Pc

| TZPFP 140 140 1,89 472 TZPFP 170 170 2,09 522 | Article | L mm | €/Pc | €/Pack. |
|---|-----------|------|------|---------|
| TZPFP 170 170 2,09 522 | TZPFP 110 | 100 | 1,70 | 425,00 |
| | TZPFP 140 | 140 | 1,89 | 472,50 |
| | TZPFP 170 | 170 | 2,09 | 522,50 |
| TZPFP 200 2,28 570 | TZPFP 200 | 200 | 2,28 | 570,00 |

| 1 |
|---|
| PROFOIL DOWELS - STAINLESS STEEL - pack. 250 Pc |

| | 1 | | |
|-----------|------|------|---------|
| Article | L mm | €/Pc | €/Pack. |
| TIPFP 110 | 110 | 3,28 | 820,00 |
| TIPFP 140 | 140 | 3,53 | 882,50 |
| TIPFP 170 | 170 | 3,79 | 947,50 |
| TIPFP 200 | 200 | 4,04 | 1010,00 |
| TIPFP 250 | 250 | 4,70 | 1175,00 |
| | | | |

| - | - |
|---|---|
| - | |
| - | |

PROFOIL PANEL SCREWS (ZINC-COATED METAL)

| Article | Pcs/Pack. | L mm | €/Pc | €/Pack. |
|-----------|-----------|------|------|---------|
| VACPFP 35 | 1000 | 35 | 0,04 | 40,00 |
| VACPFP 55 | 1000 | 45 | 0,05 | 50,00 |
| VACPFP 80 | 1000 | 80 | 0,10 | 100,00 |
| | | | | |

| PROFOIL PANEL WASHERS | (ZINC-COATED METAL) - pack. 100 Pc | | | |
|-----------------------|------------------------------------|------|------|---------|
| Article | Pcs/Pack. | ø mm | €/Pc | €/Pack. |
| RFPFP 36 | 100 | 35 | 0,32 | 32,00 |



PROFOIL PANEL NICHE are prefabricated built-in elements of PROFOIL PANEL to make indoor wall niches and support surfaces. The niches can be linked to the waterproofing systems PROFOIL and PROFOIL PANEL. The fixing of the shelf inside the niche is optional. The shelf, part of the, can be fixed at the needed height. It is available in 4 sizes.

NICHE

PROFOIL PANEL

HIGH DENSITY EXTRUDED POLYSTYRENE


PFLPANICH 88

PFLPANICH 1212

| PROFOIL PANEL NICH | E - WATERPROOFING NICHE | | |
|--------------------|---|-----------|--------|
| Article | Description | Pcs/Pack. | €/Pc |
| PFLPANICH 88 | WATERPROOFING NICHE MADE OF PROFOIL PANEL of 12,5mm, Inside size of the niche 203,2 x 203,2 mm | 1 | 69,67 |
| PFLPANICH 1212 | WATERPROOFING NICHE MADE OF PROFOIL PANEL of 12,5mm, Inside size of the niche 304,8 x 304,8 mm | 1 | 81,01 |
| PFLPANICH 821 | WATERPROOFING NICHE MADE OF PROFOIL PANEL of 12,5mm, Inside size of the niche 203,2 x 533,4 mm | 1 | 107,13 |
| PFLPANICH 1221 | WATERPROOFING NICHE MADE OF PROFOIL PANEL of 12,5mm, Inside size of the niche 304,8 x 533,4 mm | 1 | 120,33 |

PFLPANICH 88

© 2028 All rights reserved by Progress Profiles. Printed in liely



PFLPANICH 1212



mm

531,4

203,2 mm


303,2 mn


PFLPANICH 1221

631,4 mm 533,4

304,8 mm

403,8 mm





PROGRESS"

PROFOIL PROFOIL PRO ROLLS IN HDPE AND PP

PROFOIL is a waterproofing polyethylene membrabe with nonwoven polypropylene fabric on both side that guarantees high adhesion to the support.

PROFOIL PRO is a waterproofing elastic polyethylene membrane with nonwoven polypropylene fabric on both side that guarantees high adhesion to the support.

| PROFOIL - ROLLS IN HDPE AND PP - Thickness 0,42 mm ROLLS IN HDPE AND PP - Thickness 0,42 mm | | | | | | |
|---|------------------------|----------|--------------|-------|--------|----------|
| Article | Width roll H x L lm | total m² | Rolls/pallet | €/m² | €/Roll | €/pallet |
| PFLO 0430 | 1 x 30 | 30 | 40 | 13,86 | 415,80 | 16632,00 |
| PFLO 0405 | 1 x 5 | 5 | 154 | 19,29 | 96,45 | 14853,00 |
| | | | | | | |

PROFOIL PRO - ELASTIC ROLLS IN HDPE AND PP - Thickness 0,42 mm PP

| Article | Width roll H x L lm | total m² | Rolls/pallet | €/m² | €/Roll | €/pallet |
|-------------|------------------------|----------|--------------|-------|--------|----------|
| PFLOPR 0430 | 1 x 30 | 30 | 40 | 16,28 | 488,40 | 19536,00 |

AREAS OF USE

• Use. Waterproofing of substrates and vertical structures before the laying of ceramic in areas subject to occasional contact with water like bathrooms and kitchens, saunas and Turkish baths. PROFOIL PRO can also be used in environments with permanent contact with water like swimming pools and tanks. • **Don't use.** On bituminous coverings, over insulating panels and lightweigh screed.

WARNINGS

Store in a cool and dry place avoiding direct sunlight and sources of heat. Read the data sheet before applying; in case of special applications please call the technical department.







WATERPROOFING ELASTIC MEMBRANE

| WATERPROOFING ELASTIC MEMBRANE | | | | | | |
|--------------------------------|---|----|----|-------|--------|---------|
| | Article Kg./ Bucket/ €/Kg. €/ Bucket Pallet €/Kg. €/ | | | | | |
| | PFLOPST 04 | 4 | 64 | 12,74 | 53,38 | 3416,32 |
| PROFOR | PFLOPST 10 | 10 | 36 | 12,09 | 126,65 | 4559,40 |

PROFOIL PASTE is a ready to use thin-layer waterproofing elastic membrane with low emissions of volatile organic compounds.

AREAS OF USE

• Use. Waterproofing for bathrooms, kitchens, showers, gypsum-based plasters, cement-based plaster and plasterboard walls.

• Don't use. For external application, on wet surfaces or substrates subject to moisture rising, in environments where water is always present, pools and tanks. WARNINGS

Store in a cool and dry place avoiding direct sunlight and sources of heat. Read the data sheet before applying; in case of special applications please call the technical department.

PROBAND150/250

ELASTIC ROLLS IN HDPE AND PP



SHOWER SYSTEMS

ROLLS IN HDPE AND PP - Thickness 0,42 mm

| Article | Roll width H mm x L lm | Rolls/ Pack. | €/Im | €/Roll | €/Pack. |
|------------|---------------------------|-----------------|------|--------|---------|
| PRBPE 1507 | 150 x 7,5 | 16 | 5,70 | 42,75 | 684,00 |
| PRBPE 1530 | 150 x 30 | 6 | 4,18 | 125,40 | 752,40 |
| PRBPE 2530 | 250 x 30 | 3 | 7,68 | 230,40 | 691,20 |

CORNERS and PIPE COLLAR

HDPE E PP



PRBE PRB

PREFORMED ELASTIC CORNERS AND PIPE COLLAR IN HDPE AND PP Thickness 0,42 mm

| Article | H x L mm | €/Pc | €/Pack. |
|---------|-----------|------|---------|
| PRBI | 60 x 120 | 8,23 | 82,30 |
| PRBE | 60 x 120 | 8,23 | 82,30 |
| PRBT | 125 x 125 | 7,29 | 72,90 |

PROBAND FIX

MOISTURE-CURE SEALANT



MOISTURE-CURE SEALANT

| pack. of 12 cartridges - B (white) - G (grey) | | | | | |
|--|-----|-------|--------|--|--|
| Article Cartridge Im €/Pc €/Pack. | | | | | |
| PRBFXB | 290 | 17,64 | 211,68 | | |
| PRBFXG | 290 | 17,64 | 211,68 | | |



GUN FOR MOISTURE-CURE SEALANT CARTRIDGE

| Article | Pc/Pack | €/Pc |
|----------|---------|--------|
| PRBFXGUN | 1 | 352,60 |
| | | |

PRBFXU...

MOISTURE-CURE SEALANT CARTRIDGE pack. of 12 cartridges - B (white) - G (grey)


| Articolo | Cartridge lm | €/Pc | €/Pack. |
|----------|--------------|-------|---------|
| PRBFXUB | 600 | 34,61 | 415,32 |
| PRBFXUG | 600 | 34,61 | 415,32 |






PROSHELF are tileable shelves in stainless steel AISI 316/1.4404-V4A for the underile installation. Thanks of their perforated fixing flaps, they are easily installed on the wall during the laying of the ceramic coating. They are available in 2 shapes, triangular for the corner installation and rectangular. These shelves are suitable for the installation in Bathroom and kitchens.

| | PROSHELF - STAINLESS STEEL AISI 316/1.4404-V4A TRIANGULAR TILEABLE SHELF | | | | |
|---------|--|-----------------|----------|-------|--------------------|
| | Article | size | Pc/Pack. | €/Pc | AISI 316 |
| 0 | PRSHLFTP24 | 170 mm x 240 mm | 1 | 83,04 | STAINLESS STEEL |
| \odot | PRSHLFTP30 | 212 mm x 300 mm | 1 | 95,09 | |
| | | | | | |

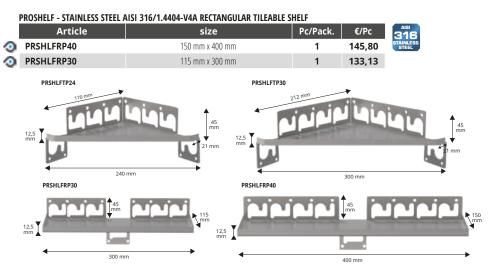

| PROSHELF - STAINLESS STEEL AISI 316/1.4404-V4A TRIANGULAR SHELF | | | | | |
|---|-----------------|--------------------|----------------|--|--|
| Article | size | Pc/Pack. | €/Pc | AISI 316 | |
| O PRSHLFTD24 | 170 mm x 240 mm | 1 | 126,79 | STAINLESS STEEL | |
| PRSHLFTD30 | 212 mm x 300 mm | 1 | 139,47 | | |
| | | | | | |
| | | Pc/Pack. | €/Pc | AISI | |
| | | Pc/Pack. | €/Pc 190,19 | AISI 316 STAINLESS STEEL | |
| Article | size | Pc/Pack. 1 1 | | 316 | |

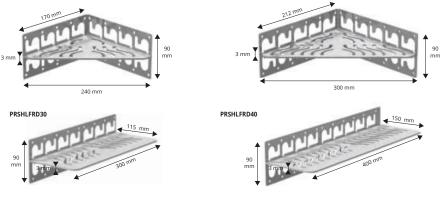

PRO GOBOARD PANEL highdensity polyisocyanurate foam panel, covered on both sides with a fibre-glass reinforced cement-based waterproof coating to allow the laying of tiles. The panels, tested for a resistance long duration, are available in thickness of 6,25 / 12,5 / 25 and 50 mm, size of 92 x 152 cm and 122 x 244 cm and can be used on floors, false ceilings, walls, showers and ceilings.

PRO GOBOARD PANEL - highdensity polyisocyanurate foam


| Article | Description | Pcs/pallet | m²/pallet | €/m² | €/Pc | €/Pallet |
|-----------|--|------------|-----------|--------|--------|----------|
| PGOBOR06 | PRO GOBOARD H 6,25 mm - 92 cm x 152 cm - 1,40 m ² | 75 | 105 | 40,75 | 57,05 | 4278,75 |
| PGOBOR125 | PRO GOBOARD H 12,5 mm - 92 cm x 152 cm - 1,40 m ² | 60 | 84 | 45,28 | 63,39 | 3803,40 |
| PGOBOR25 | PRO GOBOARD H 25 mm - 122 cm x 244 cm - 2,98 $\mathrm{m^2}$ | 30 | 89,4 | 80,84 | 240,90 | 7227,00 |
| PGOBOR50 | PRO GOBOARD H 50 mm - 122 cm x 244 cm - 2,98 m ² | 15 | 44,70 | 125,52 | 374,05 | 5610,75 |


PROSHELF

STAINLESS STEEL AISI 316/1.4404-V4A




 Choose "PROSHELF" according to the desired shape and size. 2. apply the adhesive on the support where the shelf will be installed. 3. Press the anchoring flap into the adhesive;
 Lay the tiles taking care to align them with the shelf. Immediately remove adhesive residues from the surface of the shelf. 5. Carefully seal the joints between the shelf and tiles with PROBAND FIX to avoid water stagnation. Remove any grout residue from the shelf surface.







PANEL HIGH DENSITY POLYISOCYANURATE FOAM PANEL



PROHEATER SYSTEM


PROHEATER is a wall porcelain stone tiled design heater that warms your bathroom with elegance and style

PROHEATER - WALL PORCELAIN STONE TILED HEATING SYSTEM Article Description €/pc 🧿 РНТST... Proheater 60 x 152 cm 4955,74 * L 60 cm Available in various ceramic finishes. The code of the chosen color must be added to the article code. Ex: PHTST... (chosen color 01 - Lincoln); PHTST01. **PROHEATER TOWEL RACK - Pack. 2 Pcs** Article Description €/Pack. PHTPSB White varnished metal towel rack 556,76 * O PHTPSN Black varnished metal towel rack 556,76 * CERAMIC PROHEATER WITH TOWEL RACK CERAMIC COLOR RANGE ADHESIVE 01 - statuario 02 - Quartz **03 -** Capraia Breccia H 152 cm **PRODESO HEAT GRIP CABLE** PRODESO HEAT GRIP MEMBRANE 04 - Lincoln 05 - Calacatta 06 - Calacatta gold ADHESIVE **PROFOIL PANEL** 07 - Patagonia Gold 09 - Grey de Savoie **08 -** Patagonia Blanc









17 - Stone C

18 - Stone L

16 - Stone B

© 2028 All rights reserved by Progress Profiles. Printed in litely



= News 2023
 ***** = Production on demand. Production delay 4/5 weeks.
 Prices are referred to whole packs.

206

