





CATALOGUE 2023









Sede /Headquarter

Progress Profiles SpA

Tel. +39 0423 950398 Fax +39 0423 950979 Azienda certificata UNI EN ISO 9001:2015

www.progressprofiles.com info@progressprofiles.com

Filiale /Branch Office & Warehouse

Progress Profiles America Inc. 4 Middlebury Boulevard (Unit 14) Randolph, New Jersey 07869 U.S.A. Tel. 001 973 584 2650

usa@progressprofiles.com

Filiale /Branch Office & Warehouse

Progress Profiles Middle East LLC

Progress Profiles Middle East Li AL QUOZ INDUSTRIAL FOURTH 26th Street, Showroom No. 1 Dubai, U.A.E. Tel. 00971-04 325 1499 Fax 00971-04 325 1466

uae@progressprofiles.com

Filiale /Branch Office & Warehouse

Progress Profiles España S.L.

Elche Parque Industrial Calle German Bernacer N° 15 03203 Elche Alicante España / Spain Tel. +34 965 057 279


ppe@progressprofiles.com



2023 CATALOGUE

EVOLUTION AND DEVELOPMENT NEVER ENDS



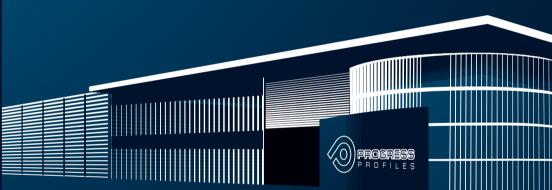



All previous price lists lose their validity on the publication of this price list. Errors, changes, and printing mistakes as well as changes necessary in the interest of product innovation or shipping reserved. For reasons of printing, colours shown in this price list may differ from actual product colours.

Company

Planning office Training

Production

Warehouse and logistics Quality

Sales network



Look into our eyes and we will tell you who we are

A story a human character and perseverance.

Bold decisions. Ours is a story of accomplishments that started in Canada in 1965 and blossomed in Italy. The extensive know-how acquired over 55 years of prior experience in the field of plastic extrusion and metal profiles brought to the company's turning point occurred during the 90s. This was a period rich in investments in additional qualified personnel, state-of-the-art machinery, and cutting edge innovations that opened the doors to internationalization and the development of innovative solutions for ceramic tiles, marble, wood/parquet, laminate and vinyl flooring, fitted carpets, resin or concrete flooring, mosaic and low thicknesses flooring and innovative fixing/ Laying Heating, Uncoupling and waterproofing membrane systems. All this took PROGRESS PROFILES® in a new trajectory, as demonstrated by the quick growth of the company which became increasingly larger and articulate, recognized as a true reference point in the market. This great success is mainly due to the team play spirit within our company. Highly dedicated, trained and skilled professionals in every single department, technical, training, design, manufacturing, sales, logistic, marketing allow us to bring constantly innovative solution to the international marketplace. In particular investments in marketing and marketing support has been clearly visible in and a wide range of technical catalogues, leaflets and marketing material, which have led the company, already having a leading position in the international market and being the undisputed leader in the Italian market, to achieve the goal of over 10000 active and satisfied clients.




The eyes are the mirror of the soul and of the company



Explore new ideas to constantly improve, by testing and challenging existing practices.


An example of cutting-edge entrepreneurship with determined goals and a forward-looking action plan aiming at capturing the latest trends in the sector. All this is proved by over 38 years of success in the International market, a steadily increasing turnover, and a solid business context, which, as of today, boasts over 130 employees and a network of over 120 high-profile national and international agents, and three headquarters located abroad, in America, Dubai and Spain, to promote Italian high quality through a bold internationalization policy. A dynamic policy that

is expressed in the participation in the most important International trade fairs, as well as in a cooperative International dialog with several of the main characters in the design and architectural spaces of today trend development. This dialog is critical and challenging but the company faces it with great enthusiasm and desire to grow through idea exchanging and learning.

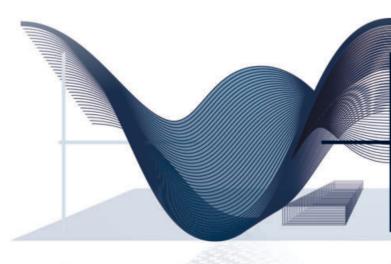






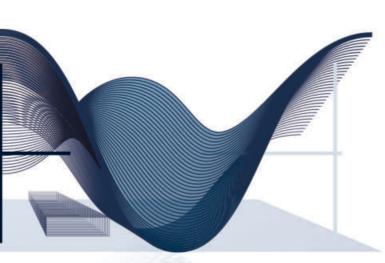

Following the entire product life cycle from idea to project and finally to finished product

The wide range of PROGRESS PROFILES® products is the result of over 38 years of research and development applied to the most advanced technologies and materials available on the market to create exclusive, functional and state-of-the-art solutions for improving the quality of the finished project, while reducing the installers efforts. These objectives have guided the company policy of important investments in enhancing the Planning Office, acquiring state-of-the-art equipment and a team of professionals that are able to seize the soul of a product and develop its full potential and performances, according to all the customer requirements and trends of the sector. A policy that has led the company to invent, design, and deposit patents and trademarks aiming at promoting and overturning established application concepts.
















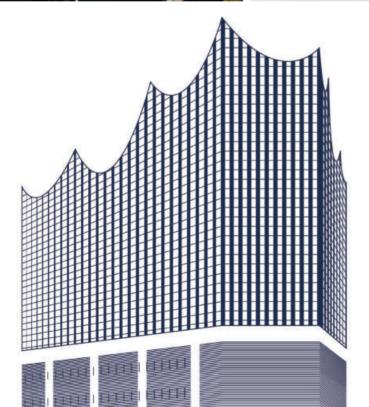

Learning and Technical Training is the most important investment for any enterprise.

PROGRESS PROFILES[®] feather in the cap is the depth of training offers reserved to employees and clients, in which the company has, since the beginning,invested a large amount of energy and resources. To confirm such focus in the recently inaugurated (2015) Headquarters in Asolo the company has set up a 200 sqm showroom and 500 sqm training facility and training center equipped with latest technologies to allow operators of the trade – Italian and foreign representatives, architects, engineers, planners, designers, building and Tile laying fixers companies to view and to acquire the technical knowledge needed to use the latest product in their trade. This is achieved through practical demonstrations, video tutorials on laying methods, technical seminars and workshops, all held by accomplished,skilled and accredited professionals. All this transfer of knowledge and information to our internal and external partners is accompanied by certifications and standards documents that further strengthens and enrich the quality of their overall training, allowing them to be always up-to-date on the latest systems and products in their field.






First of all, Made in Italy.

The new headquarters in Asolo, with an indoor area of over 16000 sqm and equipped with a photovoltaic roof system, generating 800 kWh, can boast state-of-the-art technology equipment: latest generation


machinery for processing stainless steel, aluminium, brass, PVC and real wood, as well as packaging, labelling and assembling machines. The result of all this are the over 30 million linear metres of its profiles that are laid every year. High-quality and great aesthetic impact characterise the wide range of PROGRESS PROFILES® products, which includes over 15000 technical and design solutions and system, most of which are patented ,for interior finishes, laying ceramic and wood, as well as for residential and commercial buildings. A wide range of products that has grown over the years through advanced technological processes that have led to the development of products, materials, and innovative modern finishes, such as anodized, polished and brushed titanium, copper, chrome and Gold, Tiltex, Black line , Tuscany line, Stone line and the latest heating and uncoupling membranes and shower systems. The entire production is strictly Italian made and ISO 9001:2015 certified. The excellence of the results is the proof.



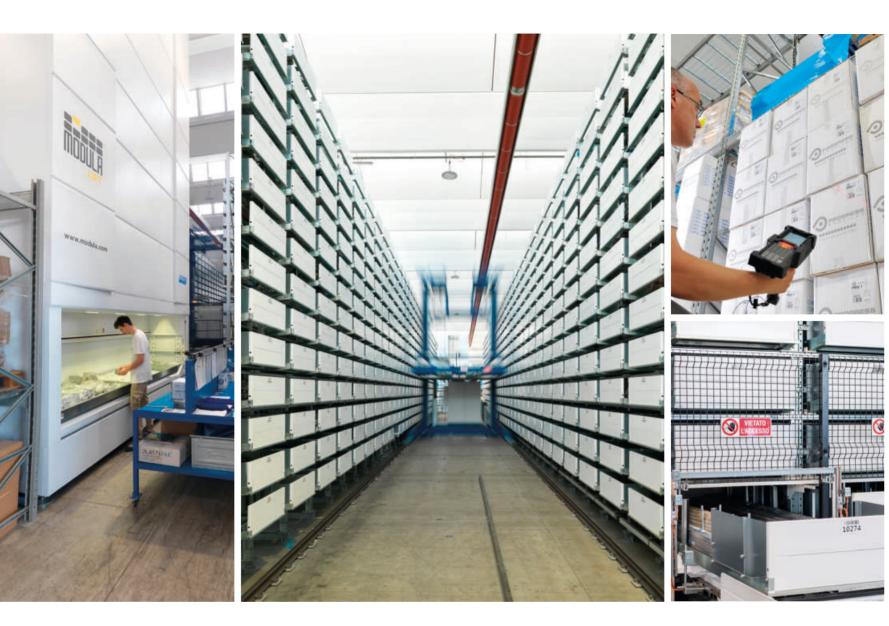

Everything at its place to guarantee efficiency and punctuality.

The logistics system devised by PROGRESS PROFILES® for the operative management of the complex warehouse is emergency proof. Studied in the slightest detail according to the most advanced methods and logics of the system, it ensures a systematic organization of the goods in a total space of 8000 sqm, which allows an efficient and punctual service and prompt delivery any time of the year. Moreover, a state of the art software management service is actively keeping direct and constant control over the entire order procedure, leaving nothing to chance and ensuring maximum reliability and accuracy.

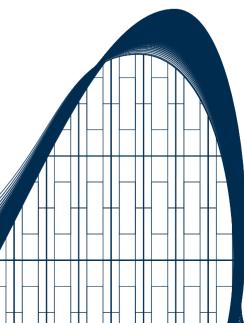



An eye for detail that make the difference



The quality can be seen, touched and is 100% guaranteed.

Every PROGRESS PROFILES® product is made and tested according to the strictest standards that allow us to guarantee their excellence from every point of view. At the forefront in the quality, the company operates with a management system certified according to UNI EN ISO 9001 since 1999, among the first in the world in its field, and it is today ISO 9001:2015 certified. An absolute certainty of reliability that is ensured also by important company choices: 100% made in Italy, the exclusive use of non-toxic materials and top quality stainless steel, aluminium and brass alloys, conforming to Italian and International standards, the choice of high quality raw materials and their use in compliance with the REACH requirements, implementing the LEED products mapping system for gaining GREENTOP credits, and more in general, by the ability to offer a service designed in the slightest detail to meet all requirements and make a difference in the market.









A courageous international growth campaign.

PROGRESS PROFILES® sales network in Italy and abroad creates a capillary knowledge and support delivery system. Even tough as today 60% our turnover is made within the Italian national territorially, there are over 80 countries accounted for worldwide were the company exports and sells its products. Apart from the main markets such as France, Austria, Greece, Portugal, Germany, Switzerland, Scandinavia, England, Ireland, Belgium India, Australia, New Zealand – the company is also present in the countries of former Yugoslavia and Eastern Europe, in particular Russia, Croatia ,Hungary Slovanja ,Cech Rep. Slovakia, Poland in all the countries of the Middle East, Africa, and Central and South America. As a demonstration of the importance of the internationalization process, the company takes part in all the most important trade fairs of the sector and has recently created headquarters in 3 major contemporary business capitals: U.S.A.: Progress Profiles America Inc., U.A.E.: Progress Profiles Middle East LLC., and SPAIN: Progress Profile España S.L












INDEX



ALPHABETICAL INDEX

	CATALOGUE SECTIONS INDEX	PG
•	PROFILES FOR WALLS	1 - 61
•	PROFILES FOR FLOORS	62 - 101
•	BENDABLE & CURVE PROFILES	102 - 111
•	STAIR NOSING PROFILES	112 - 137
•	EXPANSION JOINTS	138 - 153
•	LOW THICKNESS PROFILES	154 - 161
•	PROFILES FOR TERRACES	162 - 171
•	MEMBRANES & PANELS	172 - 189
•	SHOWER SYSTEMS	190 - 207
•	SKIRTING BOARDS	208 - 239
•	PROFILES FOR LAMINATES & LVT FLOORS	240 - 273
•	DO IT YOUR SELF	274 - 283
•	PRODUCTS FOR LAYING	284 - 301
•	BUILDING SYTEMS	302 - 321
•	MARKETING	322 - 339
\odot	News	

Α		•	ADHESIVE-LAID JOINTS	146
		•	ANCHORING CLIPS FOR WATERSTOP	307
В	0	•	BROCHURE	331
С		٠	CANAL DOUBLE U-FORM ALU.	278
		٠	CANAL U-FORM.	278
	0	٠	CATALOGUES	331
	_	•	CONTRAINBALANCE ALU.	282
	_	•	CORNER EQUAL SIDES ALU.	276
	_	•	CORNER EQUAL SIDES BRASS	276
		٠	CORNER EQUAL SIDES PVC	277
		٠	CORNER EQUAL SIDES STEEL	276
		٠	CORNER L-FORM ALU.	277
		٠	CORNER L-FORM PVC	277
		•	CORNER PVC	237
		•	COUNTER DISPLAY FOR BROCHURES	331
		•	COUNTER DISPLAY FOR FLYER	331
		•	CURVE PROFILE ALU.	281
D		٠	DISPLAYS FOR PROFILES	337
		٠	DOPPY	311
	_	٠	DRAIN REDUCTION	193
		٠	DRIP PVC	305
Е		•	EMPTY RECTANGULAR TUBE ALU.	281
		٠	EMPTY ROUND TUBE ALU.	280
		٠	EMPTY SQUARE TUBE ALU.	281
		•	END CAPS / TUBE PLUGS	131
		٠	END CAPS FOR DISTANCE TUBE	304
		•	EXIBITION BOARD	330
	_	•	EXPOSURE DISPLAY PEM	337
_		•	EXPOSURE WALL	325
F	_	•	FINNED DISTANCE TUBE PVC	304
	_	•	FIREPROOF CORD	151
	_	•	FISHBONE RIBBED JOINT PVC	306
	_	•	FLAT ALU.	279
•	0	•	FLAT BRASS	279
	_	•	FLAT SPACER	312
•	•	•	FLYER	331
	_	•	FULL ROUND TUBE ALU.	280
	_	•	FULL SQUARE TUBE ALU.	280
G	•	•	GADGETS	338
	_	•	GAP-COVERING BALLOON SHEATH	319
	_	•	GASKETS FOR PRECAST FORMS	314
	_	•	GDA 25, GDA 35, GDA 55 ALU.	150
	_	•	GNS 20, GNS 50, GNS 75 ALU.	152
		•	HINGE SUPPORT IRON	131 283
t		-		
L M		•	LVT PROFILES MAGNET KIT	271 300
171	-	•	MAGNET KIT	300
	•	•	MINICATALOGUE / BROCHURE	329
	<u> </u>	•	MODULAR ASSEMBLY KIT	193
	-	•	MODULAR ASSEMBLY KIT	332
	-	•	MODULAR DISPLAT STSTEM	148
	-		MORTAR-LAID DOUBLE JOINT	140
	-	•	MORTAR-LAID JOINTS PVC	147
		100		1.17

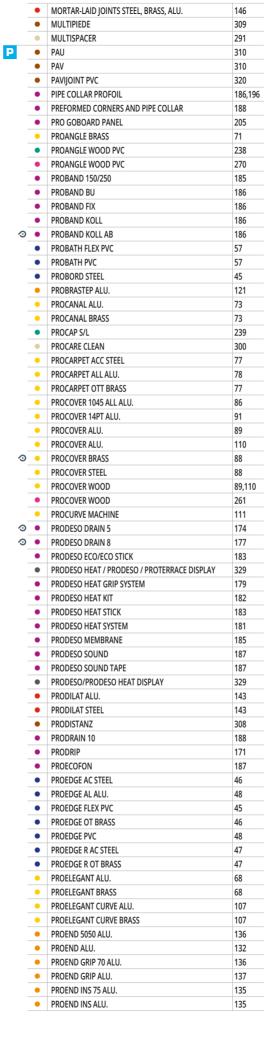

	•	PROEXPAN 115-130-190-210 ALU.	149
_	•	PROEXPAN H20-H40 ALU. PROFILE T-FORM ALU.	150
_	•	PROFILE TRIANGULAR CHAMFER	282 306
-	•	PROFILE WITH DOUBLE CHAMFER	306
_	•	PROFILES COLOUR RANGE	328
	•	PROFINAL ALU.	71
	•	PROFINAL BRASS	70
_	•	PROFINAL CURVE ALU.	108
	•	PROFINAL CURVE BRASS	108
	•	PROFINAL STEEL	70
	•	PROFINLIST 20 ALU.	44
	•	PROFIXER LINE SYSTEM ALU.	262
	•	PROFLAT STEEL-BRASS	73
_	•	PROFLEX 25 PVC	148
_	•	PROFLEX 5 PR PVC	145
_	•	PROFLEX 5 PVC	144
_	•	PROFLEX ACC PR STEEL	140
	•	PROFLEX ACC STEEL	140
	•	PROFLEX ACN STEEL PROFLEX AL ALU.	142
_		PROFLEX ALN ALU.	141
	•	PROFLEX OT BRASS	141
_	•	PROFLEX PVC	144
	•	PROFLOOR 1216 STEEL-BRASS	84
	•	PROFLOOR 24 STEEL-BRASS	85
	•	PROFLOOR 712 ALU.	83
	•	PROFLOOR 712 BRASS	83
	•	PROFLOOR 712 STEEL	83
	•	PROFOIL PANEL	189
	•	PROFOIL PANEL NICHE	203
_	•	PROFOIL PASTE	188
_	•	PROFOIL/PROFOIL PRO	188
_	•	PROGRIP	117
_	•	PROGRIP PROHEATER	137 206
_	•	PROINSERT (optional)	200
-	-	PROINSERT (top)	273
	•	PROINTER AC STEEL	30
_	•	PROINTER AL ALU.	32
	•	PROINTER KL	160
		PROINTER KL ACC STEEL	30,160
•		PROINTER KL ALL BRASS-ALU.	32,160
	•	PROINTER PVC	33
_	•	PROJOINT ALU.	72
_	•	PROJOINT BRASS	72
_	•	PROJOLLY ALU.	18
_	•	PROJOLLY ANGLE 135 STEEL	29
•	•	PROJOLLY BRASS	17
	•	PROJOLLY CURVE ALU. PROJOLLY CURVE BRASS	109
	•	PROJOLLY ECO MARBLE PVC	25
	•	PROJOLLY ECO PVC	23
	•	PROJOLLY MARBLE PVC	23
	•	PROJOLLY OPEN PVC	23
_	•	PROJOLLY PVC	22
	•	PROJOLLY QUART ALU.	11
_	•	PROJOLLY QUART PVC	14
_	•	PROJOLLY QUART STEEL	10
_	•	PROJOLLY SQUARE ALU.	6
•	•	PROJOLLY SQUARE BRASS	5
	•	PROJOLLY SQUARE PVC	9
	•	PROJOLLY SQUARE STEEL	2
	•	PROJOLLY STEEL PROJOLLY TRIANGLE ALU.	15 28
	•	PROJOLLY TRIANGLE ALU. PROJOLLY TRIANGLE BRASS	28
	•	PROJOLLY TRIANGLE BRASS	27
	•	PROJULIT TRIANGLE STEEL	156
•	••	PROKERLAM LINE	58,157
-	•	PROKERLAM LINE ALL.	157
	•	PROLEVALL 25-35-38 ALU.	99



	•	PROLEVALL 305 STEEL-BRASS	80
	•	PROLEVALL 32 ALU.	80
	•	PROLEVALL 33 BRASS	79
	•	PROLEVALL 358 BRASS	81
	•	PROLEVALL 4413 BRASS-ALU.	81
	•	PROLEVELING SYSTEM	289
	٠	PROLEVELING SYSTEM BOARD	330
	•	PROLEVELING SYSTEM DISPLAY	330
	•	PROLEVELING WEDGE SYSTEM	290
	•	PROLEVELING WEDGE SYSTEM BOARD	330
	•	PROLEVIGAL ALU.	67
0	-	PROLEVIGAL BRASS	67
	-		-
	-	PROLINOLEUM ALU.	85
	•	PROLISTEL ACC STEEL	40
	•	PROLISTEL ALL ALU.	43
	•	PROLISTEL AND SKIRTING DISPLAY	326
	••	PROLISTEL CHANNEL ALL.	34,198
	••	PROLISTEL CHANNEL STEEL	34,198
	٠	PROLISTEL LED ALU.	43
	٠	PROLISTEL P ALL ALU.	42
	•	PROLISTEL P BRASS	41
0	•	PROMEMBRANE KOLL	186
-	-	PROMOUETTE ALU.	100
	-	PROMOQUETTE FIX ALU.	100
	•	PROMOQUETTE GIN ALU.	100
	-	•	245
~	•	PROMULTIFIX SYSTEM	
0	••	PROMULTISKIRT ROUND pvc	233,267
0	••	PROMULTISKIRT SQUARE pvc	232,266
	•	PRONIVO ALU.	82
	•	PROPLATE 80 ALZ ALU.	91
	•	PROPLATE BRASS	90
	•	PROPLATE FIX ALU.	153
	•	PROPLATE FIX PVC	153
	•	PROPLATE STEEL	90
	•	PROPOLISH	300
	•	PROPRESS 712 STEEL-BRASS	84
	•	PRORAIL SYSTEM	296
	•	PROROUND STEEL	54
	•	PROSANI STRIP PVC	54
	•		-
		PROSCREW ALU. BASE + TOP	264
		PROSCREW ALU. TOP	264
	•	PROSCREW BASE ALU.	264
	•	PROSEAL 25 PVC	56
	•	PROSEAL 50 PVC	55
	•	PROSEAL FLEX PVC	56
	••	PROSEAL WOOD PVC	238,270
	٠	PROSGUSCIO DA PVC	53
0	•	PROSHELF	205
	٠	PROSHELL ALL ALU.	52
	•	PROSHELL D ALL ALU.	159
	•	PROSHELL R ALL ALU.	159
0	•	PROSHELL STEEL	50
	•	PROSHOWER BASE BASIC PVC	191
0	•	PROSHOWER BASE L PRO	194
-	•	PROSHOWER BASE L STEEL	191
	-	PROSHOWER CENTRAL PANEL	200
~	-	PROSHOWER DRAIN CENTRAL PRO	
0	•		201
	•	PROSHOWER DRAIN LATERAL KIT	201
	•	PROSHOWER LINEAR KIT SYSTEM	190
	•	PROSHOWER PANEL	190
	•	PROSHOWER PROFILE	196
	٠	PROSHOWER PROFILE FRONT	197
	٠	PROSHOWER PROFILE GLASS	196
	٠	PROSHOWER PROFILE WALL	197
	٠	PROSHOWER SYSTEM DISPLAY	329
	•	PROSHOWER TOP PRO	194
0	•	PROSHOWER TOP STEEL	192
	•	PROSIDE WALK	167
	-	PROSIDE WALK ALU.	123
	•	PROSKID BRASS-ALU.	78
	•		-
		PROSKIRTING 40 ALU.	221
	-		220
	•	PROSKIRTING ALU.	220

Ì

80	•	PROSKIRTING CHANNEL ALU.	211
80	•	PROSKIRTING FLAT ALU.	211
79	•	PROSKIRTING GILED ALU.	219
81	•	PROSKIRTING INS ALU.	212
81	•	PROSKIRTING ISP ALU.	213
289	•	PROSKIRTING LED / GILED DISPLAY	328
330	•	PROSKIRTING LED ALU.	217
330	•	PROSKIRTING LINE ALU.	212
290	•	PROSKIRTING LIST	214
330	•	PROSKIRTING SHELL ALU.	221
67	•	PROSLIDER ALU.	75
67		PROSLIDER BRASS	74
85		PROSLIDER CURVE ALU.	111
40	-		111
43	_	PROSLIDER KL ALL ALU.	86
326			75
34,198			73
34,198	_		76
43		PROSOL 18-30-35-40 BRASS	95
42			93
41	•		97
186	•	PROSQUARE BRASS	71
100	•	PROSTAIR 50 ALU.	119
100	•	PROSTAIR ACC STEEL	114
101	•	PROSTAIR ALU.	120
245	•	PROSTAIR BBRASSON / STRIP STEEL	121
233,267	•	PROSTAIR GRIP ACC STEEL	117
232,266	•		161
82	-		124
91	_	PROSTAIR WOOD	124
90	_	PROSTAIR WOOD Z	128
153	_		128
153	_		120
90	_		129
300	-	PROSTYLE 2610 STEEL	114
84	•		127
296	•	PROSTYLE BRASS	126
54	•	PROSTYLE GRIP ACC STEEL	118
54	•	PROSTYLE KL 10 ALU.	161
264	•	PROSTYLE STEEL	126
264	•	PROSTYLE WOOD	129
264	•	PROSUPPORT PROFILE A & B	295
56	•		295
55	-		298
56			330
	_		292
238,270			
53	-		312
205	-		37
52			66
159	•		37
159	-		65
50	•	PROTERMINAL CURVE ALU.	105
191	•	PROTERMINAL CURVE BRASS	105
194	•	PROTERMINAL CURVE STEEL	104
191	•	PROTERMINAL INT ALU.	35
200	•	PROTERMINAL PVC	39
201	•		16
201	•		36
190	-		122
190			59
196	_		122
197	_		122
196	•		330
197	⊘_●		164
329	•	PROTERRACE DRAIN DRIP ALU.	165
194	•	PROTERRACE DRAIN FDP ALU.	166
192	•	PROTERRACE ECO DRIP ALU.	167
167	•	PROTERRACE PC ALU.	169
123	•	PROTERRACE PC STEEL	169
78	•	PROTERRACE PCG ALU.	168
221	•		168
			170

ALPHABETICAL INDEX


	•	PROTOP ALU.	60
		PROTOP T ALU.	60
	-	PROTRANS ALU.	82
	-	PROWALK 2510 & 2520 ALU.	134
	•	PROWALK ACC STEEL	134
	-	PROWALK BRASS-ALU.	132
R	•	RAPY 100	309
		RAPY 100 ECO	309
	-	RAPY 200	309
	-	RIBBED DISTANCE TUBE PVC	305
	-	ROLLER	303
	•	ROTATING DISPLAY	326
	-	ROUNDED TRIANGULAR CHAMFER FILLET	306
C	-	SAMPLE BOARD	326
3	•	SAMPLE BOARD	328
	-	SCISSORS FOR PVC PROFILES	300
	•	SHEATH LAYING TROLLEY	321
	•	SHOWROOM SET-UP EXAMPLES	334
	•	SKIRTING 100 ALU.	231
	•	SKIRTING 100-150 STEEL	230
	•	SKIRTING 40 ALU.	225
	•	SKIRTING 40 PVC	235
	•	SKIRTING 40 PVC	269
	•	SKIRTING 40 STEEL	224
	•	SKIRTING 60 ALU.	227
	•	SKIRTING 60 STEEL	226
	•	SKIRTING 60/120 PVC	236
	•	SKIRTING 62F PVC	236
	••	SKIRTING 7011 PVC	235,269
0	••	SKIRTING 7016 PVC	234,268
	•	SKIRTING 80 ALU.	229
	•	SKIRTING 80 STEEL	228
	•	SKIRTING COVECAP PVC	239
	•	SKIRTING PVC	237
0	•	SKIRTING ROTATING DISPLAY	327
	•	SMALL EXPOSURE STAND	326
	•	SNAP-ON STRAND SHEATH PVC	304
	•	SNAP-ON STRAND TUBE PVC	304
	•	SOL 30 AUTOADESIVI ALU.	260
	•	SOL 30P LVT	258
	•	SOL 40 P ALU. (proinsert)	249
	•	SOL 40P ALU.	261
	•	SPACER FOR GLASS BRICK	311
	•	SPACER FOR VERTICAL / HORIZONTAL MESH	311
	•	SPACERS DISPLAY	330
	•	SPACERS LEVELING WEDGES	291
	•	SPACERS PAX-PAL-PAS	313
	•	SQUARE SHOW CASE	324
	•	STYLE STAIR ALU.	254
	•	STYLE STAIR L ALU.	255
	•	SUPPORT / EYELET	131
_	•	SUPPORT AND LEVELLER	299
T .	•	TERMINAL ALU.	253
	•	TERMINAL CURVE ALU.	110
	•	TERMINAL PIN ALU. (proinsert)	252
	•	TERMINAL PIN LVT	258
	٠	TROLLEY	326
	•	TROWEL	301
	•	TROWEL PVC	301
	•	TUBE FOR RUNNERS	131
	•	TUBES AND ACCESSORIES	131
<mark>W</mark> ⊘	•	WALL DRAIN BOX	195
	•	WATERSTOP	307
7	٠	ZERO CURVE ALU. (proinsert)	250
<u> </u>			200
	•	ZERO CURVE AUTOADESIVI ALU.	260



INDEX

• PROFILES FOR WALLS

	ARTICLE	CODE	PAGE
	PROJOLLY SQUARE STEEL	PJQSAC	2
0	PROJOLLY SQUARE BRASS	PJQSOS	5
	PROJOLLY SQUARE ALU.	PJQS	6
	PROJOLLY SQUARE PVC	PJQ	9
	PROJOLLY QUART STEEL	PJQTAC	10
	PROJOLLY QUART ALU.	PJQT	11
	PROJOLLY QUART PVC	PJQT	14
	PROJOLLY STEEL	PJAC	15
	PROTERMINAL STEEL	PTAC	16
	PROJOLLY BRASS	РЈО	17
	PROJOLLY ALU.	PJ	18
	PROJOLLY PVC	PJ	22
	PROJOLLY MARBLE PVC	PJ	23
	PROJOLLY OPEN PVC	PJP	23
	PROJOLLY ECO PVC	PJE	24
	PROJOLLY ECO MARBLE PVC	PJE	25
	PROJOLLY TRIANGLE STEEL	PJTRAC	26
	PROJOLLY TRIANGLE BRASS	PJTRO	27
	PROJOLLY TRIANGLE ALU.	PJTR	28
	PROJOLLY ANGLE 135 STEEL	PJTR135	29
	PROINTER AC STEEL	PIAC	30
	PROINTER KLACC STEEL	PIKLAC	30
	PROINTER AL ALU.	Pl	32
	PROINTER KLALL BRASS-ALU.	PIKL	32
	PROINTER PVC	Pl	33
	PROLISTEL CHANNEL ALU.	PLTCH	34
	PROLISTEL CHANNEL STEEL	PLTCH	34
	PROTERMINAL INT ALU.	PTI	35
	PROTERMINAL STEEL	PTAC	36
	PROTERMINAL ALU.	РТ	37
٩	PROTERMINAL BRASS	РТО	37
	PROTERMINAL PVC	PT	39
	PROLISTEL ACC STEEL	PLTAC	40
	PROLISTEL P BRASS	PLTPO	41
	PROLISTEL P ALL ALU.	PLTP	42
	PROLISTEL ALL ALU.	PLT	43
	PROLISTEL LED ALU.	PLTLED	43
	PROFINLIST 20 ALU.	PFLT	44
	PROBORD STEEL	PEDBD	45
	PROEDGE FLEX PVC	PFC40	45
	PROEDGE AC STEEL	PEGAC	46
	PROEDGE OT BRASS	PEGO	46
	PROEDGE R AC STEEL	PEGRAC	47
	PROEDGE R OT BRASS	PEGRO	47
	PROEDGE AL ALU.	PEG	48
	PROEDGE PVC	PEGA	48
	PROSHELL STEEL	PSHAC	50
	PROSHELL ALL ALU.	PSHA	52
	PROSGUSCIO DA PVC	PS	53
	PROROUND STEEL	PRDAC	54
	PROSANI STRIP PVC	PSS	54
	PROSEAL 50 PVC PROSEAL 25 PVC	PSA PSA	55 56
	PROSEAL 25 PVC	PSA PSF	50 56
	PROBATH FLEX PVC	PSF	50
	PROBATH PVC	PSB	57
	PROKERLAM LINE	PKLL	58
	PROTERMSTEP ACC STEEL	PTSPAC	59
	PROTOP ALU.	PCT	60
	PROTOP T ALU.	PCTT	60

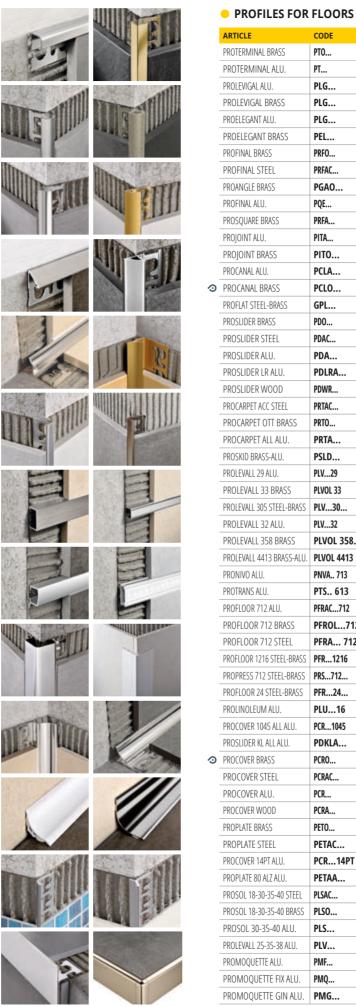

	FLOOKS	
		PAGE
PROTERMINAL BRASS	PTO	65
PROTERMINAL ALU.	PT	66
PROLEVIGAL ALU.	PLG	67
PROLEVIGAL BRASS	PLG	67
PROELEGANT ALU.	PLG	68
PROELEGANT BRASS	PEL	68
PROFINAL BRASS	PRFO	70
PROFINAL STEEL	PRFAC	70
PROANGLE BRASS	PGA0	71
PROFINAL ALU.	PQE	71
PROSQUARE BRASS	PRFA	71
PROJOINT ALU.	PITA	72
PROJOINT BRASS	PITO	72
PROCANAL ALU.	PCLA	73
PROCANAL BRASS	PCLO	73
PROFLAT STEEL-BRASS	GPL	73
PROSLIDER BRASS	PDO	74
PROSLIDER STEEL	PDAC	74
PROSLIDER ALU.	PDA	75
PROSLIDER LR ALU.	PDLRA	75
PROSLIDER WOOD	PDWR	76
PROCARPET ACC STEEL	PRTAC	77
PROCARPET OTT BRASS	PRTO	77
PROCARPET ALL ALU.	PRTA	78
PROSKID BRASS-ALU.	PSLD	78
PROLEVALL 29 ALU.	PLV29	79
PROLEVALL 33 BRASS	PLVOL 33	79
PROLEVALL 305 STEEL-BRASS	PLV30	80
PROLEVALL 32 ALU.	PLV32	80
PROLEVALL 358 BRASS	PLVOL 358	81
PROLEVALL 4413 BRASS-ALU.	PLVOL 4413	81
PRONIVO ALU.	PNVA 713	82
PROTRANS ALU.	PTS 613	82
PROFLOOR 712 ALU.	PFRAC712	83
PROFLOOR 712 BRASS	PFROL712	83
PROFLOOR 712 STEEL	PFRA 712	83
PROFLOOR 1216 STEEL-BRASS	PFR1216	84
PROPRESS 712 STEEL-BRASS	PRS712	84
PROFLOOR 24 STEEL-BRASS	PFR24	85
PROLINOLEUM ALU.	PLU16	85
PROCOVER 1045 ALL ALU.	PCR1045	86
PROSLIDER KL ALL ALU.	PDKLA	86
PROCOVER BRASS	PCRO	88
PROCOVER STEEL	PCRAC	88
PROCOVER ALU.	PCR	89
PROCOVER WOOD	PCRA	89
PROPLATE BRASS	PETO	90
PROPLATE STEEL	PETAC	90
PROCOVER 14PT ALU.	PCR14PT	91
PROPLATE 80 ALZ ALU.	PETAA	91
PROSOL 18-30-35-40 STEEL	PLSAC	93
PROSOL 18-30-35-40 BRASS	PLSO	95
PROSOL 30-35-40 ALU.	PLS	97
PROLEVALL 25-35-38 ALU.	PLV	99
PROMOQUETTE ALU.	PMF	100
PROMOQUETTE FIX ALU.	PMQ	100
PROMOQUETTE GIN ALU.	PMG	101





CURVE PROFILES

ARTICLE	CODE	PAGE
PROTERMINAL CURVE STEEL	PTACV	104
PROTERMINAL CURVE ALU.	PTANCV	105
PROTERMINAL CURVE BRASS	PTONCV	105
PROELEGANT CURVE ALU.	PELAACV	107
PROELEGANT CURVE BRASS	PELONCV	107
PROFINAL CURVE ALU.	PRFAACV	108
PROFINAL CURVE BRASS	PRFONCV	108
PROJOLLY CURVE ALU.	PJAACV	109
PROJOLLY CURVE BRASS	PJONCV	109
PROCOVER ALU.	PCR	110
PROCOVER WOOD	PCRA	110
TERMINAL CURVE ALU.	PINT	110
PROCURVE MACHINE	PCM 08	111
PROSLIDER CURVE ALU.	PDAACV	111
PROSLIDER CURVE BRASS	PDONCV	111

• STAIR NOSINGS PROFILES

ARTICLE	CODE	PAGE
PROSTAIR ACC STEEL	PSYACS 2610	114
PROSTYLE 2610 STEEL	PTRACS	114
PROGRIP	PGR	117
PROSTAIR GRIP ACC STEEL	PTRGRACS	117
PROSTYLE GRIP ACC STEEL	PSYGRACS 6020	118
PROSTAIR 50 ALU.	PTR50	119
PROSTAIR ALU.	PTP	120
PROSTEP PVC	PTR	120
PROBRASTEP ALU.	PBP	121
PROSTAIR BBRASSON / STRIP STEEL	PTRB	121
PROTERMSTEP ACC STEEL	PTSPA	122
PROTERMSTEP ACC STEEL	ptspac	122
PROTERMSTEP ALL ALU.	PTSPAC	122
PROSIDE WALK ALU.	PSDWK	123
PROSTAIR LED ALU.	PTRLEDAA	124
PROSTYLE BRASS	PSYO	126
PROSTYLE STEEL	PSYAC	126
PROSTEP INS ALU.	PTSAA	127
PROSTYLE ALU.	PSYA	127
PROSTAIR WOOD	PTRW	128
PROSTAIR WOOD Z	PTRWZ	128
PROSTEP WOOD	PSYW	129
PROSTYLE WOOD	PTPW	129
END CAPS / TUBE PLUGS	TET	131
HINGE SUPPORT	SC	131
SUPPORT / EYELET	SO	131
TUBE FOR RUNNERS	TGS	131
TUBES AND ACCESSORIES	TCT	131
PROEND ALU.	PED	132
PROWALK ACC STEEL	PWKAC	132
PROWALK BRASS-ALU.	PWK	133
PROWALK 2510 & 2520 ALU.	PWK25	134
PROEND INS 75 ALU.	PED 4528	135
PROEND INS ALU.	PED7537	135
PROEND 5050 ALU.	PEGR7032	136
PROEND GRIP 70 ALU.	PEGRAA 50	136
PROEND GRIP ALU.	PEGR 5230	137
PROGRIP	PGR	137



• EXPANSION JOINTS		
ARTICLE	CODE	PAGE
PROFLEX ACC PR STEEL	PFXACPR	140
PROFLEX ACC STEEL	PFXAC	140
PROFLEX AL ALU.	PFXAL	141
PROFLEX OT BRASS	PFXOT	141
PROFLEX ACN STEEL	PFXACN	142
PROFLEX ALN ALU.	PFXALN	142
PRODILAT ALU.	GCAN	143
PRODILAT STEEL	GCAC	143
PROFLEX 5 PVC	PFX	144
PROFLEX PVC	PFX5	144
PROFLEX 5 PR PVC	PFX5PR	145
ADHESIVE-LAID JOINTS	C51	146
MORTAR-LAID JOINTS STEEL, BRASS, ALU.	G	146
MORTAR-LAID DOUBLE JOINT	GDSP	147
MORTAR-LAID JOINTS PVC	C51	147
MORTAR LAYING FULL JOINT	GP	148
PROFLEX 25 PVC	PFX	148
PROEXPAN 115-130-190-210 ALU.	PENF	149
GDA 25, GDA 35, GDA 55 ALU.	GDA	150
PROEXPAN H20-H40 ALU.	PEN	150
FIREPROOF CORD	GDA 55	151
GNS 20, GNS 50, GNS 75 ALU.	GNS	152
PROPLATE FIX ALU.	PETFX	153
PROPLATE FIX PVC	PETFXPAA	153

• LOW THICKNESS PROFILES

ARTICLE	CODE	PAG
PROKERLAM JOLLY / SQUARE ALL.	PKL	156
PROKERLAM LINE	PKLL	157
PROKERLAM LINE ALL.	PKLL	157
PROSHELL D ALL ALU.	PSHD	159
PROSHELL R ALL ALU.	PSHR	159
PROINTER KL	PIKL	160
PROINTER KL ACC STEEL	PIKLAC	160
PROINTER KL ALL BRASS-ALU.	PIKL	160
PROSTAIR KL 20 ALU.	PSYKLAA 1045	161
PROSTYLE KL 10 ALU.	PTRKLAA 2045	161


PROFILES FOR TERRACES


	ARTICLE	CODE	PAGE
•	PROTERRACE DOUBLE DRIP ALU.	PDD	164
	PROTERRACE DRAIN DRIP ALU.	PFDPP	165
	PROTERRACE DRAIN FDP ALU.	PFDP	166
	PROSIDE WALK	PSDWK	167
	PROTERRACE ECO DRIP ALU.	PTEDP	167
	PROTERRACE PCG ALU.	PCG	168
	PROTERRACE PCG STEEL	PCG	168
	PROTERRACE PC ALU.	PC	169
	PROTERRACE PC STEEL	РС	169
0	PROTERRACE UNDER EDGE L/C	PTUE	170
	PRODRIP	PDRP	171

















INDEX

MEMBRANES & PANELS

	ARTICLE	CODE	PAGE
0	PRODESO DRAIN 5	PDDR	174
0	PRODESO DRAIN 8	PDDR	177
	PRODESO HEAT GRIP SYSTEM	PDESHG	179
	PRODESO HEAT SYSTEM	PDESH	181
	PRODESO HEAT KIT	PDESHK	182
	PRODESO ECO/ECO STICK	PDESEC	183
	PRODESO HEAT STICK	PDESHST	183
	PROBAND 150/250	PRBPE	185
	PRODESO MEMBRANE	PDES	185
	PIPE COLLAR PROFOIL	PRBT	186
	PROBAND BU	PRBBU	186
	PROBAND FIX	PRBFX	186
	PROBAND KOLL	PRBKL	186
	PROBAND KOLL AB	PRBKLAB	186
	PROMEMBRANE KOLL	PRMKL	186
	PRODESO SOUND	PDSND	187
	PRODESO SOUND TAPE	PDSNDTP	187
	PROECOFON	PEF	187
	PREFORMED CORNERS AND PIPE COLLAR	PRB	188
	PRODRAIN 10	PDRI 10	188
	PROFOIL PASTE	PFLOPST	188
	PROFOIL/PROFOIL PRO	PFLO	188
	PROFOIL PANEL	PFLPAN	189

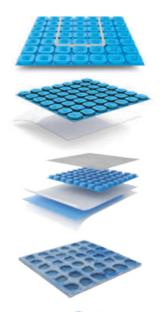




• SHOWER SYSTEMS

	ARTICLE	CODE	PAGE
	PROSHOWER LINEAR KIT SYSTEM	PSHPANEK	190
	PROSHOWER PANEL	PSHPAN	190
	PROSHOWER BASE BASIC PVC	PSHWBB	191
	PROSHOWER BASE L STEEL	PSHWDL	191
	PROSHOWER TOP STEEL	PSHWDL	192
	DRAIN REDUCTION	PSHWRD	193
	MODULAR ASSEMBLY KIT	PSHW	193
•	PROSHOWER BASE L PRO	PSHWP	194
•	PROSHOWER TOP PRO	PSHWPLT	194
•	WALL DRAIN BOX	KBPSHWPAC	195
	PIPE COLLAR PROFOIL	PRBT	196
	PROSHOWER PROFILE	PSHWPACS	196
	PROSHOWER PROFILE GLASS	PSHWPGACS	196
	PROSHOWER PROFILE FRONT	PSHWPFACS	197
	PROSHOWER PROFILE WALL	PSHWPLACS	197
	PROLISTEL CHANNEL ALL.	PLTCH	198
	PROLISTEL CHANNEL STEEL	PLTCH	198
	PROSHOWER CENTRAL PANEL	PSHPANCEK	200
•	PROSHOWER DRAIN CENTRAL PRO	PSHWCP	201
	PROSHOWER DRAIN LATERAL KIT	PSHLDK	201
	PROFOIL PANEL NICHE	PFLPANICH	203
	PRO GOBOARD PANEL	PGBORD	205
•	PROSHELF	PRSHLF	205
•	PROHEATER	PHTST	206













ARTICLE	CODE	PAGE
PROSKIRTING CHANNEL ALU.	PKCHAA	211
PROSKIRTING FLAT ALU.	PKFLAA	211
PROSKIRTING INS ALU.	PKINSAA 60	212
PROSKIRTING LINE ALU.	PKLIAA	212
PROSKIRTING ISP ALU.	PKISPAA	213
PROSKIRTING LIST	PKLT	214
PROSKIRTING LED ALU.	PKLEDAA	217
PROSKIRTING GILED ALU.	PKGLEDAA	219
PROSKIRTING ALU.	РКАА	220
PROSKIRTING 40 ALU.	PKSHAA 70	221
PROSKIRTING SHELL ALU.	PKSHAA	221
SKIRTING 40 STEEL	BTAC 40	224
SKIRTING 40 ALU.	BTA 40	225
SKIRTING 60 STEEL	BTAC 60	226
SKIRTING 60 ALU.	BTA 60	227
SKIRTING 80 STEEL	BTAC 80	228
SKIRTING 80 ALU.	BTA 80	229
SKIRTING 100-150 STEEL	BTAC	230
SKIRTING 100 ALU.	BTA100	231
PROMULTISKIRT SQUARE pvc	BTEPRS	232
PROMULTISKIRT ROUND pvc	BTEPRR	233
SKIRTING 7016 PVC	BTEPR7016	234
SKIRTING 40 PVC	BTEPR4010	235
SKIRTING 7011 PVC	BTEPR7011	235
SKIRTING 60/120 PVC	BTPV	236
SKIRTING 62F PVC	BTPF	236
CORNER PVC	AGE25	237
SKIRTING PVC	BTPR	237
PROANGLE WOOD PVC	PGAW15	238
PROSEAL WOOD PVC	PSAW20	238
PROCAP S/L	PRCPS	239
SKIRTING COVECAP PVC	PRCP	239

SKIRTING

PROFILES FOR WOOD

ARTICLE	CODE	PAGE
PROMULTIFIX SYSTEM	PMPFX	245
SOL 40 P ALU. (proinsert)	PISPC	249
ZERO CURVE ALU. (proinsert)	PINZC	250
TERMINAL PIN ALU. (proinsert)	PINTPC	252
TERMINAL ALU.	PTSAA	253
STYLE STAIR ALU.	PINYC	254
STYLE STAIR L ALU.	PINYLC	255
SOL 30P LVT	PISPC	258
TERMINAL PIN LVT	PINTPC	258
ZERO CURVE LVT	PINZC	258
SOL 30 AUTOADESIVI ALU.	PINS	260
ZERO CURVE AUTOADESIVI ALU.	PINZ	260
PROCOVER WOOD	PCRA	261
SOL 40P ALU.	PNSP	261
PROFIXER LINE SYSTEM ALU.	PINZ	262
PROSCREW ALU. BASE + TOP	PSWC	264
PROSCREW ALU. TOP	PSWC	264
PROSCREW BASE ALU.	PSWC	264
PROMULTISKIRT SQUARE pvc	BTEPRS	266
PROMULTISKIRT ROUND pvc	BTEPRR	267
SKIRTING 7016 PVC	BTEPR7016	268
SKIRTING 40 PVC	BTEPR4010	269
SKIRTING 7011 PVC	BTEPR7011	269
PROANGLE WOOD PVC	PGAW15	270
PROSEAL WOOD PVC	PSAW20	270
LVT PROFILES	PIN	271
PROINSERT (top)	PIN	272
PROINSERT (optional)	VIN	273






INDEX

DO IT YOURSELF

CORNER EQUAL SIDES ALU.AG276CORNER EQUAL SIDES BRASSAGOL276CORNER EQUAL SIDES STEELAGAC276CORNER EQUAL SIDES PVCAGP277CORNER L-FORM ALU.AL277CORNER L-FORM PVCALP277CANAL DOUBLE U-FORM ALU.CW278	
CORNER EQUAL SIDES STEELAGAC276CORNER EQUAL SIDES PVCAGP277CORNER L-FORM ALU.AL277CORNER L-FORM PVCALP277	
CORNER EQUAL SIDES PVC AGP 277 CORNER L-FORM ALU. AL 277 CORNER L-FORM PVC ALP 277	
CORNER L-FORM ALU. AL 277 CORNER L-FORM PVC ALP 277	
CORNER L-FORM PVCALP277	
CANAL DOUBLE U-FORM ALU. CW 278	
CANAL U-FORM. CU 278	
FLAT ALU. PI 279	
FLAT BRASS PI 279	
EMPTY ROUND TUBE ALU. TV 280	
FULL ROUND TUBE ALU. TP 280	
FULL SQUARE TUBE ALU. TQP 280	
CURVE PROFILE ALU. UG 281	
EMPTY RECTANGULAR TUBE ALU. TR 281	
EMPTY SQUARE TUBE ALU. TQV 281	
CONTRAINBALANCE ALU. CT 282	
PROFILE T-FORM ALU. T 282	
IRON PIF 283	







PRODUCTS FOR LAYING


PROLEVELING SYSTEM	PRS	289
PROLEVELING WEDGE SYSTEM	PRLW	290
MULTISPACER	MSP	291
SPACERS LEVELING WEDGES	R	291
PROSUPPORT TUBE SYSTEM	PST	292
PROSUPPORT PROFILE A & B	PFPSAL	295
PROSUPPORT PROFILE T & N	PSPRPT	295
PRORAIL SYSTEM	PSTRAN	296
PROSUPPORT SLIM SYSTEM	PSTSL	298
SUPPORT AND LEVELLER	SQG	299
MAGNET KIT	KMD	300
PROCARE CLEAN	PRCLEAN	300
PROPOLISH	PRLISH	300
SCISSORS FOR PVC PROFILES	FTPP	300
ROLLER	PRSPD 10	301
TROWEL	PFTT	301
TROWEL PVC	PSM	301

BUILDINGS SYSTEM

ARTICLE	CODE	PAGE
END CAPS FOR DISTANCE TUBE	PPT	304
FINNED DISTANCE TUBE PVC	TDA	304
SNAP-ON STRAND SHEATH PVC	R11	304
SNAP-ON STRAND TUBE PVC	R11	304
DRIP PVC	GCT	305
RIBBED DISTANCE TUBE PVC	PPD	305
FISHBONE RIBBED JOINT PVC	GRP	306
PROFILE TRIANGULAR CHAMFER	PST	306
PROFILE WITH DOUBLE CHAMFER	R	306
ROUNDED TRIANGULAR CHAMFER FILLET	PSD	306









ANCHORING CLIPS FOR WATERSTOP	CLPS	307
WATERSTOP	WP	307
PRODISTANZ	PDZ	308
MULTIPIEDE	DMP	309
RAPY 100	PLF	309
RAPY 100 ECO	PLFR	309
RAPY 200	PLFE	309
PAU	PPU	310
PAV	PPV	310
DOPPY	PPY	311
SPACER FOR GLASS BRICK	DSVT	311
SPACER FOR VERTICAL / HORIZONTAL MESH	DVO	311
FLAT SPACER	PPN	312
PROTECTIVE CAPS	PCPF	312
SPACERS PAX-PAL-PAS	PP	313
GASKETS FOR PRECAST FORMS	М	314
GAP-COVERING BALLOON SHEATH	C 550	319
PAVIJOINT PVC	PVJ	320
SHEATH LAYING TROLLEY	CPGC	321

MARKETING

E P R S S S T T O S	QUARE SHOW CASE XPOSURE WALL ROLISTEL AND SKIRTING DISPLAY COTATING DISPLAY COTATING DISPLAY COTATING DISPLAY COTATING ROTATING DISPLAY KIRTING ROTATING DISPLAY ROFILES COLOUR RANGE ROSKIRTING LED / GILED DISPLAY AMPLE CASES	ESPQC ESHPAN 250 ESPCLSH ESPGSM 18 PESP CURAS TRAG18 ESPGSMBT COL ESPGLED	324 325 326 326 326 326 326 326 327 328
P R S S T 3 S P	ROLISTEL AND SKIRTING DISPLAY ROTATING DISPLAY AMPLE BOARD MALL EXPOSURE STAND ROLLEY KIRTING ROTATING DISPLAY PROFILES COLOUR RANGE PROSKIRTING LED / GILED DISPLAY	ESPCLSH ESPGSM 18 PESP CURAS TRAG18 ESPGSMBT COL	326 326 326 326 326 326 326 327
R S S T 3 S P	ROTATING DISPLAY AMPLE BOARD MALL EXPOSURE STAND ROLLEY KIRTING ROTATING DISPLAY PROFILES COLOUR RANGE RROSKIRTING LED / GILED DISPLAY	ESPGSM 18 PESP CURAS TRAG18 ESPGSMBT COL	326 326 326 326 326 327
S S T S S P	AMPLE BOARD MALL EXPOSURE STAND ROLLEY KIRTING ROTATING DISPLAY ROFILES COLOUR RANGE ROSKIRTING LED / GILED DISPLAY	PESP CURAS TRAG18 ESPGSMBT COL	326 326 326 326 327
S T O S P	MALL EXPOSURE STAND ROLLEY KIRTING ROTATING DISPLAY ROFILES COLOUR RANGE ROSKIRTING LED / GILED DISPLAY	CURAS TRAG18 ESPGSMBT COL	326 326 327
T 3 9 P	ROLLEY KIRTING ROTATING DISPLAY PROFILES COLOUR RANGE PROSKIRTING LED / GILED DISPLAY	TRAG18 ESPGSMBT COL	326 327
	KIRTING ROTATING DISPLAY ROFILES COLOUR RANGE ROSKIRTING LED / GILED DISPLAY	ESPGSMBT COL	327
P	PROFILES COLOUR RANGE	COL	
_	PROSKIRTING LED / GILED DISPLAY		328
P		FCDCLED	
	AMPLE CASES	ESPGLED	328
S		COF	328
Ν	MEMBRANE CASE	COFMIE	329
Р	RODESO HEAT / PRODESO / PROTERRACE DISPLAY	ESPPDHT	329
P	RODESO/PRODESO HEAT DISPLAY	SPCPDES	329
P	PROSHOWER SYSTEM DISPLAY	ESPSHW 70	329
E	XIBITION BOARD	PNPSR	330
P	ROLEVELING SYSTEM BOARD	PNPLS	330
P	PROLEVELING SYSTEM DISPLAY	ESPPLS	330
P	PROLEVELING WEDGE SYSTEM BOARD	PNPLWS	330
P	ROSUPPORT TUBE DISPLAY	ESPPST	330
P	ROTERRACE DISPLAY	ESPFDPP	330
S	PACERS DISPLAY	ESPD	330
9 E	BROCHURE	BR	331
3	ATALOGUES	CAT	331
(OUNTER DISPLAY FOR BROCHURES	ESPB	331
(OUNTER DISPLAY FOR FLYER	PBPLS	331
3 F	LYER	FLY	331
Ν	/INICATALOGUE / BROCHURE	MCAT	331
Ν	NODULAR DISPLAY SYSTEM	-	332
S	HOWROOM SET-UP EXAMPLES	-	334
[DISPLAYS FOR PROFILES	PEP	337
E	XPOSURE DISPLAY PEM	PEM	337
3	GADGETS	-	338













ž












An interpretation of: Unicredit Tower, César Pelli & Vertical Forest, Stefano Boeri Architetti, MILAN (Italy), 2014

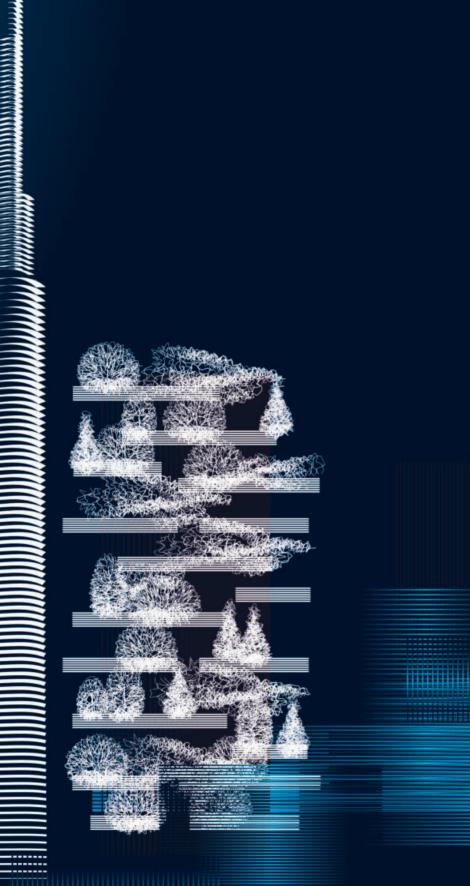




WALLS

PROFILES FOR WALLS

POLISHED, SUPER POLISHED, SANDED AND BRUSHED STAINLESS STEEL AISI 304/1.4301-V2A


PROJOLLY

SQUARE



PJQSAC/S 11 & PJQSACML 11 AVAILABLE H 11 MM PJQSAC/S 15 & PJQSACML 15 AVAILABLE H 15 MM

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS



 Choose "PROJOLLY SQUARE" according to the tile thickness and desired finish. 2. Cut "PROJOLLY SQUARE" to the desired length and apply the adhesive on the support where the profile will be laid.
 Press the anchoring flange of "PROJOLLY SQUARE" into the adhesive. 4. Lay the tiles, aligning them with the profile leaving a 2 mm joint. Remove immediately all remains of adhesive from the surface of the profile. 5. Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile.



mechanical stresses.

POLISHED STAINLESS STEEL AISI 304/1.4301-V2A with protective film bar length 2,7 lm - Pack 20 Pcs - 54 lm (H 4,5 - 108 lm) - 8/10 mm

			1 ,	
	Article	H mm	€/lm	€/Pc
	PJQSAC 045	4,5	9,58	25,87
	PJQSAC 06	6	10,08	27,22
٢	PJQSAC 07	7	10,37	28,00
0	PJQSAC 08	8	10,68	28,84
	PJQSAC 09	9	10,95	29,57
	PJQSAC 10	10	11,25	30,38
	PJQSAC 11	11	11,69	31,56
	PJQSAC 125	12,5	11,89	32,10
	PJQSAC 15	15	12,96	34,99

SUPER POLISHED STAINLESS STEEL AISI 304/1.4301-V2A thermo Packed

	bar length 2,7 lm - Pack 20	- 8/10 mm	LINE	
	Article	Hmm	€/lm	€/Pc
	PJQSACML 045	4,5	12,89	34,80
	PJQSACML 06	6	13,61	36,75
٩	PJQSACML 07	7	14,11	38,10
	PJQSACML 08	8	14,63	39,50
0	PJQSACML 09	9	15,29	41,28
	PJQSACML 10	10	15,97	43,12
	PJQSACML 11	11	16,28	43,96
	PJQSACML 125	12,5	16,54	44,66
	PJQSACML 15	15	18,59	50,19

SUITABLE FOR USE IN CONTACT WITH FOODSTUFFS.



Brushed STAINLESS ST. AISI 304/1.4301-V2A with protective film bar length 2,7 lm - Pack 20 Pcs - 54 lm (H 4,5 - 108 lm) - 8/10 mm

			,	
	Article	H mm	€/lm	€/Pc
	PJQSACS 045	4,5	11,11	30,00
	PJQSACS 06	6	11,69	31,56
\odot	PJQSACS 07	7	12,89	34,80
	PJQSACS 08	8	14,11	38,10
۲	PJQSACS 09	9	14,47	39,07
	PJQSACS 10	10	14,82	40,01
	PJQSACS 11	11	15,07	40,69
	PJQSACS 125	12,5	15,46	41,74
	PJQSACS 15	15	16,42	44,33

SANDED STAINLESS STEEL AISI 304/1.4301-V2A with protective film bar length 2,7 Im - Pack 20 Pcs - 54 Im - 8/10 mm

	0,				
	Article	Hmm	€/lm	€/Pc	
0	PJQSACSB 07	7	14,66	39,58	*
	PJQSACSB 08	8	15,09	40,74	*
\odot	PJQSACSB 09	9	15,46	41,74	*
	PJQSACSB 10	10	15,81	42,69	
	PJQSACSB 125	12,5	16,60	44,82	

COLOURS AC - Polished S.S. AKI 304/1.4301142A ACML - Super pol S.S. AKI 304/1.4301142A

ACS - Brushed s.s. AISI 304/1.4301-V2A ACSB - Sanded s.s. AISI 304/1.4301-V2A

ACSB - SPECIAL FINISH, REQUEST AVAILABILITY

CAPSULES, END CAPS and THREE-WAYS JOINTS

POLISHED, SUPER POLISHED, SATIN AND SANDED FINISH ST. STEEL AISI 304/1.4301-V2A / PLASTIC

PROJOLLY SQUARE is a square corner bead profile in polished, super polished, sanded, brushed stainless steel

AISI 304/1.4301-V2A that can be applied on external corners of coverings. It can be used to close the perimeter of coverings, like a connection profile between step tread and riser of stairs coated with ceramic and natural stone

tiles, and also as separation profile for floor and wall coverings. Its particular section, the availability in three different finishes and special pieces such as internal and external corners, end caps and joints make **PROJOLLY SQUARE** a much sought-after profile that allows a workmanlike application even in environments subject to high

 \star Capsules & end caps of the on demand profiles are also on demand

CAPSULES and END CAP	S - POLISHED STAINLESS	STEEL AISI 304	/1.4301-V2A
Article	Hmm	€/Pack 10 Pcs	€/Pack 2 Pcs
CPJQSAC/	045/06/07/08/09/ 10/11/125/15	156,20	32,85
TPJQSAC/	045/06/07/08/09/ 10/11/125/15	29,54	6,44

Choose the desired pack. & height Ex.: 4,5 mm capsule in 10 Pcs Pack - CPJQSAC 045/10

CAPSULES and END CAPS - SANDED STAINLESS STEEL AISI 304/1.4301-V2A

Article	Hmm	€/Pack 10 Pcs	€/Pack 2 Pcs
CPJQSACSB/	07/08/09 10/125	196,90	41,35
TPJQSACSB/	07/08/09 10/125	29,54	6,44

Choose the desired pack. & height Ex.: 8 mm capsule in 10 Pcs Pack - **CPJQSACSB 08/10**


CAPSULES AND END CA	PS - BRUSHED STAINLESS	5 ST. AISI 304/	1.4301-V2A
Article	H mm	€/Pack 10 Pcs	€/Pack 2 Pcs
CPJQSACS/	045/06/07/08/09/ 10/11/125/15	175,59	36,88
TPJQSACS/	045/06/07/08/09/ 10/11/125/15	29,54	6,44
Choose the desired Ex.: 4.5 mm capsule	oack. & height in 10 Pcs Pack - CPIOS	ACS 045/10	

JOINTS - PLASTIC

Article	H mm	€/Pack 10 Pcs	€/Pack 2 Pcs
GIJQ/	045/06/07/08/09/ 10/11/125/15	28,15	6,16
	red pack. & height in 10 Pcs Pack - GUO 015	/10	

CAPSULES - SUPER PO	DLISHED STAINLESS ST	EEL AISI 304	/1.4301-V2A
Article	H mm	€/Pack 10 Pcs	€/Pack 2 Pcs
CPJQSACML/	045/06/07/08/09/ 10/11/125/15	194,49	40,91
TPJQSACML/	045/06/07/08/09/ 10/11/125/15	26,86	5,86
Choose the desired p	ack. & height		

Ex.: 4,5 mm capsule in 10 Pcs Pack - CPJQSACML 045/10

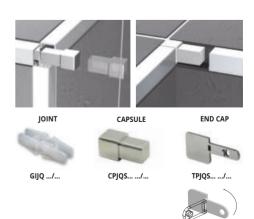

🧿 = News 2023

🖈 = Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed

PROGRESS® PROFILES

Prices are referred to whole Packs 10% increase for minimum orders of 10 Pcs 20% increase for orders of less than 10 Pcs.

PROJOLLY SQUARE is a square corner bead profile in polished stainless steel AISI 304/1.4301-V2A that can be applied on external corners of coverings. It can be used to close the perimeter of coverings, like a connection profile between step tread and riser of stairs coated with ceramic and natural stone tiles, and also as separation profile for floor and wall coverings. Its particular section and the availability of special pieces such as internal and external corners, end caps and joints make **PROJOLLY SQUARE** a much sought-after profile that allows a workmanlike application even in environments subject to high mechanical stresses.

SQUARE POLISHED, BRUSHED STAINLESS STEEL AISI 316LL/1.4404-V4A

PROJOLLY



POLISHED STAINLESS STE with protective film bar length 2,7 LM - Pack 20			AISI 316 STAINLESS STEEL
Article	Hmm	€/lm	€/Pc
PJQSACM 08	8	13,86	37,42
PJQSACM 10	10	14,61	39,45
PJQSACM 11	11	15,20	41,04
PJQSACM 125	12,5	15,45	41,72
COLOURS			




BRUSHED STAINLESS STE with protective film bar length 2,7 LM - Pack 20			AISI 316 STAINLESS STEEL
Article	Hmm	€/lm	€/Pc
PJQSACMS 10	10	18,99	51,27
PJQSACMS 11	11	19,77	53,38
PIOSACMS 125	12 5	20.08	54 22

COLOURS

SUITABLE FOR USE IN CONTACT WITH FOODSTUFFS.

ACMS - Brushed stainless st. AISI 316LL



INSTRUCTIONS FOR LAYING METHODS

* * *

INSTRUCTIONS FOR LAYING METHODS 1. Choose "PROJOLLY SQUARE" according to the tile thickness and desired finish. 2. Cut "PROJOLLY SQUARE" to the desired length and apply the adhesive on the support where the profile will be laid. 3. Press the anchoring flange of "PROJOLLY SQUARE" into the adhesive. 4. Lay the tiles, aligning them with the profile leaving a 2 mm joint. Remove immediately all remains of adhesive from the surface of the profile. 5. Fill the joints between the profile and the tiles with provid in order to avoid water stampation. Remove the tiles with grout, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile.

CAPSULES, END CAPS and THREE-WAYS JOINTS

STAINLESS STEEL AISI 316LL

ACM - Polished stainless st. AISI 316LL

CAPSULES and END CAPS - POLISHED STAINLESS STEEL AISI 316LL/1.4404

Article	H mm	€/Pack 10 Pcs	€/Pack 2 Pcs
CPJQSACM/	08/10/11/12,5	202,99	42,61
TPJQSACM/	08/10/11/12,5	38,29	7,67
Choose the desired p	ack. & height		

Ex.: 10 mm capsule in 10 Pcs PACMk - CPJQSACM 10/10

CAPSULES and END CAPS	5 - BRUSHED STAINLESS	STEEL AISI 316L	L/1.4404
Article	H mm	€/Pack 10 Pcs	€/Pack 2 Pcs
CPJQSACMS/	10/11/125	202,99	42,61
TPJQSACMS/	10/11/125	38,29	7,67
Choose the desired p	ack. & height		

Ex.: 10 mm capsule in 10 Pcs PACMk - CPJQSACMS 10/10

Capsules & end caps of the on demand profiles are also on demand 📩

Article	H mm	€/Pack 10 Pcs	€/Pacl 2 Pcs
GIJQ/	08/10/11/125	28.15	6.16

CAPSULE

1	4	
	(C)	

END CAP

TPIOSACM .../...

CPIOSACM .../..

GIIO .../...

JOINT

🖈 = Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed Prices are referred to whole Packs 10% increase for minimum orders of 10 Pcs 20% increase for orders of less than 10 Pcs.





© 2028 All rights reserved by Progress Profiles. Printed in Utaly

PROJOLLY SQUARE is a square corner bead profile in chromed brass or antique brass that can be applied on external corners of coverings. It can be used to close the perimeter of coverings, like a connection profile between step tread and riser of stairs coated with ceramic and natural stone tiles, and also as separation profile for floor and wall coverings. Its particular section and elegance and the availability of special pieces such as internal and external corners, end caps and joints make **PROJOLLY SQUARE** a much sought-after profile that allows an elegant workmanlike application.

PROJOLLY SQUARE

CHROMED BRASS, BRUSHED AND ANTIOUE BRÀSS



CHROMED BRASS thermo Packed bar length 2,7 lm - Pack 20 Pcs - 54 lm

Article	Hmm	€/Im	€/Pc	
PJQSOC 045	4,5	20,85	56,30	*
PJQSOC 06	6	23,79	64,23	
PJQSOC 08	8	28,13	75,95	
PJQSOC 10	10	30,03	81,08	
PJQSOC 125	12,5	31,13	84,05	

ANTIQUE BRASS thermo Packed bar length 2,7 Im Pack 20 Pcs - 54 Im (PJQSOB 125 - Pack 10 Pcs)

Article	H mm	€/lm	€/Pc
PJQSOB 08	8	35,52	95,90
PJQSOB 10	10	38,58	104,17
PJQSOB 125	12,5	40,71	109,92

OB - Antique brass

OS - Brushed brass




BRUSHED BRASS thermo Packed ngth 2.7 lm - Pack 20 Pcs - 54 lm har le


	bai iciigai 2,7 iiii i aca 20 i co				
	Article	Hmm	€/lm	€/Pc	
0	PJQSOS 045	4,5	13,86	37,42	*
٢	PJQSOS 06	6	16,12	43,52	*
۲	PJQSOS 08	8	16,81	45,39	*
0	PJQSOS 10	10	17,61	47,55	*
۲	PJQSOS 125	12,5	19,53	52,73	*

INSTRUCTIONS FOR LAYING

 Choose "PROJOLLY SQUARE" according to the tile thickness.
 Cut "PROJOLLY SQUARE" to the desired length and apply the adhesive on the support where the profile will be laid.
 Press the anchoring flange of "PROJOLLY SQUARE" into the adhesive.
 Lay the tiles, aligning them with the profile leaving a 2 mm joint. Remove immediately all remains of adhesive from the surface of the profile.
 Fill the joints between the profile and the tiles with grout, in order to avail unter strange of groups of the profile. avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile.

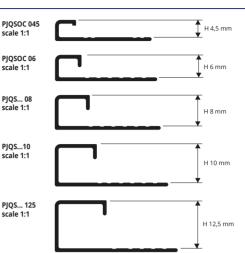

EXAMPLES OF LAYING



COLOURS

OC - Chromed brass

© 2028. All dights reserved by Progress Profiles. Printed in Italy

CAPSULES, END CAPS and THREE-WAYS JOINTS

CAPSULES and END CAPS - ANTIQUE BRASS

Article

GIIO .../...

CHROMED BRASS - PLASTIC

CAPSULES and END	CAPS - CHROMED	BRASS

Article	H mm	€/Pack 10 Pcs	€/Pack 2 Pcs
CPJQSOC/	045/06/08/ 10/125	166,83	35,05
TPJQSOC/	045/06/08/ 10/125	31,47	6,62
Choose the desired pack. & height			

Ex.: 10 mm capsule in 10 Pcs Pack - CPJQSOS 10/10

JOINTS - PLASTIC

Article	H mm	€/Pack 10 Pcs	€/Pack 2 Pcs
GIJQ/	045/06/08/ 10/125	29,56	6,47
Choose the desired n	ack & height		

Ex.: 8 mm joint in 10 Pcs Pack - GIJQ 08/10





H mm

CPIOSOC .../...

E/Pack 10 Pcs

Capsules & end caps of the on demand profiles are also on demand 😾

CAPSULES and END CAPS - BRUSHED BRASS				
Article	H mm	€/Pack 10 Pcs	€/Pack 2 Pcs	
CPJQSOS/	045/06/08/ 10/125	166,83	35,05	
💿 TPJQSOS/	045/06/08/ 10/125	31,47	6,62	
Choose the desired pack. & height Ex.: 10 mm capsule in 10 Pcs Pack - CPJQSOS 10/10				

JOINT CAPSULE



TPIOSOC .../..

2 Pcs

45,16

4,25



🖈 = Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed

Prices are referred to whole packs 10% increase for minimum orders of 10 Pcs 20% increase for orders of less than 10 Pcs.



5


WALLS


ANODIZED AND POLISHED ALUMINIUM


PROJOLLY


SQUARE

WALLS



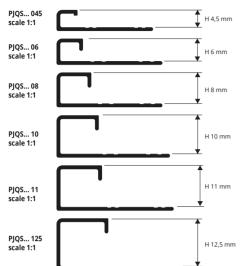





1. Choose "PROJOLLY SQUARE" according to the tile thickness and desired finish. 2. Cut "PROJOLLY SQUARE" to the desired length and apply the adhesive on the support where the profile will be laid. 3. Press the anchoring flange of "PROJOLLY SQUARE" into the adhesive. 4. Lay the tiles, aligning them with the profile leaving a 2 mm joint. Remove immediately all remains of adhesive from the surface of the profile. 5. Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile.



ANODIZED ALUMINIUM thermo Packed (silver-gold-copper-titanium-black) bar length 2,7 Im - Pack 40 Pcs - 108 Im (H 12,5 mm - Pack 20 Pcs - 54 Im)

0.	. ,		,	
Article	Hmm	€/Im	€/Pc	
PJQSAA 045	4,5	5,54	14,96	*
PJQSAA 06	6	5,64	15,23	
PJQSAA 08	8	5,68	15,34	
PJQSAA 10	10	6,10	16,47	
PJQSAA 11	11	6,59	17,79	
PJQSAA 125	12,5	6,97	18,82	
PJQSAO 08	8	6,51	17,58	*
PJQSAO 10	10	7,04	19,01	*
PJQSAO 125	12,5	7,78	21,01	*
PJQSAR 045	4,5	7,17	19,36	*
PJQSAR 06	6	7,51	20,28	
PJQSAR 08	8	7,78	21,01	
PJQSAR 10	10	8,18	22,09	
PJQSAR 125	12,5	8,73	23,57	
PJQSAT 045	4,5	5,91	15,96	*
PJQSAT 06	6	6,24	16,85	
PJQSAT 08	8	6,51	17,58	
PJQSAT 10	10	7,04	19,01	
PJQSAT 11	11	7,44	20,09	
PJQSAT 125	12,5	7,78	21,01	
PJQSNE 08	8	10,77	29,08	
PJQSNE 10	10	11,42	30,83	
PJQSNE 11	11	12,74	34,40	
PJQSNE 125	12,5	14,30	38,61	



POLISHED ALUMINIUM thermo Packed (chrome-gold -titanium-copper-black) bar length 2,7 Im - Pack 40 Pcs - 108 Im (H 12,5 mm - Pack 20 Pcs - 54 Im)

	Udi leligui 2,7 IIII - Pauk 40 PCS - 100	5 ші (п 12,5	- raux 20	PCS - 54 IIII)	
	Article	H mm	€/Im	€/Pc	
*	PJQSBC 045	4,5	9,21	24,87	*
	PJQSBC 06	6	9,31	25,14	
	PJQSBC 08	8	9,40	25,38	
	PJQSBC 10	10	10,33	27,89	
	PJQSBC 11	11	10,99	29,67	
	PJQSBC 125	12,5	11,67	31,51	
*	PJQSBO 08	8	9,40	25,38	*
*	PJQSBO 10	10	10,33	27,89	
*	PJQSBO 125	12,5	11,67	31,51	
*	PJQSBR 045	4,5	9,31	25,14	*
	PJQSBR 06	6	9,31	25,14	
	PJQSBR 08	8	9,40	25,38	*
	PJQSBR 10	10	10,33	27,89	
	PJQSBR 125	12,5	11,67	31,51	
*	PJQSBT 045	4,5	9,31	25,14	*
	PJQSBT 06	6	9,31	25,14	
	PJQSBT 08	8	9,40	25,38	
	PJQSBT 10	10	10,33	27,89	
	PJQSBT 11	11	10,99	29,67	
	PJQSBT 125	12,5	11,67	31,51	
	PJQSBN 08	8	12,09	32,64	
	PJQSBN 10	10	12,79	34,53	
	PJQSBN 11	11	13,19	35,61	
	PJQSBN 125	12,5	13,64	36,83	






CAPSULES, END CAPS and THREE-WAYS JOINTS * Capsules & end caps of the on demand profiles are also on demand ANODIZED AND POLISHED ALUMINIUM / PLASTIC

CAPSULES and END CAPS - ANODIZED ALUMINIUM				
Article	H mm	€/Pack 10 Pcs	€/Pack 2 Pcs	
CPJQSAA/	045/06/08/10/ 11/125	64,02	14,07	
TPJQSAA/	045/06/08/10/ 11/125	29,54	6,44	
CPJQSAO/	8/10/125	72,52	15,41	
TPJQSAO/	8/10/125	29,54	6,44	
CPJQSAR/	045/06/08/ 10/125	72,52	15,41	
TPJQSAR/	045/06/08/ 10/125	29,54	6,44	
CPJQSAT/	045/06/08/ 10/11/125	72,52	15,41	
TPJQSAT/	045/06/08/ 10/11/125	29,54	6,44	
CPJQSNE/	08/10/11/125	94,33	20,74	
TPJQSNE/	08/10/11/125	29,54	6,44	

Choose the desired pack. & height AA 10/10 Ex.: 10 mm capsule in 10 Pcs Pack - CPJQSBC 10/10

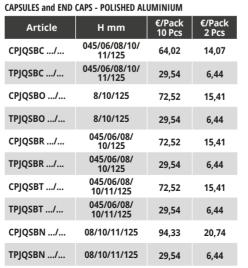

JOINTS - PLASTIC Article H mm

GIJQ/	045/06/08/ 10/11/125	28,15	6,16
Choose the desired	pack. & height		

Ex.: 8 mm joint in 10 Pcs Pack - GIJQ 08/10



Choose the desired pack. & height Ex.: 10 mm capsule in 10 Pcs Pack - **CPJQSAA 10/10**



PROJOLLY SQUARE is a square corner bead profile in brushed and tiltex aluminium that can be applied on external corners of coverings. It can be used to close the perimeter of coverings, like a connection profile between step tread and riser of stairs coated with ceramic and natural stone tiles and also as separation profile for floor and wall coverings. Its particular section and elegance, the availability in eight finishes and special pieces such as internal and external corners, end caps and joints make **PROJOLLY SQUARE** a much sought-after profile that allows an elegant workmanlike application.



BRUSHED POLISHED ALUM. thermo Packed (silver-gold-copper titanium-black) bar length 2,7 im - Pack 40 Pcs - 108 im (H 12,5 mm - Pack 20 Pcs - 54 im)

Article	Hmm	€/lm	€/Pc	
PJQSBS 045	4,5	10,12	27,32	*
PJQSBS 06	6	10,46	28,24	
PJQSBS 08	8	10,58	28,57	
PJQSBS 10	10	11,40	30,78	
PJQSBS 11	11	12,09	32,64	
PJQSBS 125	12,5	12,87	34,75	
PJQSRS 045	4,5	10,12	27,32	*
PJQSRS 06	6	10,46	28,24	
PJQSRS 08	8	10,58	28,57	
PJQSRS 10	10	11,40	30,78	
PJQSRS 125	12,5	12,87	34,75	
PJQSTS 045	4,5	10,12	27,32	*
PJQSTS 06	6	10,46	28,24	
PJQSTS 08	8	10,58	28,57	
PJQSTS 10	10	11,40	30,78	
PJQSTS 11	11	12,09	32,64	
PJQSTS 125	12,5	12,87	34,75	
PJQSBOS 08	8	10,58	28,57	
PJQSBOS 10	10	11,40	30,78	
PJQSBOS 125	12,5	12,87	34,75	
PJQSBRAS 10	10	11,40	30,78	*
PJQSBRAS 125	12,5	12,87	34,75	*
PJQSNS 08	8	13,77	37,18	
PJQSNS 10	10	14,82	40,01	
PJQSNS 11	11	15,73	42,47	
PJQSNS 125	12,5	16,74	45,20	




ANOD. BRUSHED TILTEX ALUM. thermo Packed (silver-copper-titanium) - bar length 2.7 im - Pack 40 Pcs - 108 im (H 12.5 mm - Pack 20 Pcs - 54 im)

			,
Article	Hmm	€/lm	€/Pc
PJQSBX 06	6	11,93	32,21
PJQSBX 08	8	13,36	36,07
PJQSBX 10	10	14,29	38,58
PJQSBX 11	11	15,03	40,58
PJQSBX 125	12,5	15,82	42,71
PJQSRX 06	6	11,93	32,21
PJQSRX 08	8	13,36	36,07
PJQSRX 10	10	14,29	38,58
PJQSRX 125	12,5	15,82	42,71
PJQSTX 06	6	11,93	32,21
PJQSTX 08	8	13,36	36,07
PJQSTX 10	10	14,29	38,58
PJQSTX 11	11	15,03	40,58
PJQSTX 125	12,5	15,82	42,71

COLOURS

COLOURS						
BI	BRUSHED POLISHED					
BS - Br. polish. silver alum.	BOS - Br. polish. gold alum.	RS - Br. polish. copper alum.				
		ON DEMAND				
TS - Br. polish. titanium alum.	NS - Br. polish. black alum.	BRAS - Br. polish. antique bronze alum.				
A N 0	D. BRUSHED TI	LTEX				
	N.					
BX - Silver TILTEX	RX - Copper TILTEX	TX - Titanium TILTEX				

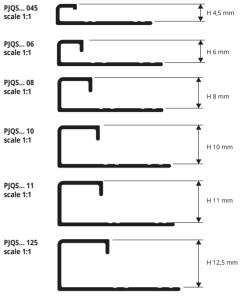


PROJOLLY

SQUARE

BRUSHED POLISHED AND

ANODIZED BRUSHED TILTEX ALUMINIUM

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS



1. Choose "PROJOLLY SQUARE" according to the tile thickness and desired finish. 2. Cut "PROJOLLY SQUARE" to the desired length and apply the adhesive on the support where the profile will be laid. 3. Press the anchoring flange of "PROJOLLY SQUARE" into the adhesive. **4.** Lay the tiles, aligning them with the profile leaving a 2 mm joint. Remove immediately all remains of adhesive from the surface of the profile. **5.** Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile.

CAPSULES, END CAPS and THREE-WAYS JOINTS

ANODIZED BRUSHED POLISHED ALUMINIUM, TILTEX / PLASTIC

CAPSULES and END CAPS - BRUSHED POLISHED ALUMINIUM				
Article	H mm	€/Pack 10 Pcs	€/Pack 2 Pcs	
CPJQSBS/	045/06/08/10/ 11/125	72,52	15,41	
TPJQSBS/	045/06/08/10/ 11/125	29,54	6,44	
CPJQSRS/	045/06/08/ 10/125	72,52	15,41	
TPJQSRS/	045/06/08/ 10/125	29,54	6,44	
CPJQTS/	045/06/08/ 10/11/125	72,52	15,41	
TPJQSTS/	045/06/08/ 10/11/125	29,54	6,44	
CPJQSBOS/	08/10/125	72,52	15,41	
TPJQSBOS/	08/10/125	29,54	6,44	
CPJQSBRAS/	10/125	72,52	15,41	
TPJQSBRAS/	10/125	29,54	6,44	
CPJQSNS/	08/10/11/125	72,52	15,41	
TPJQSNS/	08/10/11/125	29,54	6,44	

Choose the desired pack, & height

Ex.: 10 mm capsule in 10 Pcs Pack - CPJQSBS 10/10

CAPSULES and END CAPS - ANODIZED BRUSHED TILTEX ALUMINIUM				
Article	H mm	€/Pack 10 Pcs	€/Pack 2 Pcs	
CPJQSBX/	06/08/10/ 11/125	95,21	19,98	
TPJQSBX/	06/08/10/ 11/125	29,54	6,44	
CPJQSRX/	06/08/10/125	95,21	19,98	
TPJQSRX/	06/08/10/125	29,54	6,44	
CPJQSTX/	06/08/10/11/125	95,21	19,98	
TPJQSTX/	06/08/10/11/125	29,54	6,44	
Choose the desired pack. & height				

Ex.: 10 mm capsule in 10 Pcs Pack - CPJQSBX 10/10

Capsules & end caps of the on demand profiles are also on demand 📩

JOINTS - PLASTIC			
Article	H mm	€/Pack 10 Pcs	€/Pack 2 Pcs
GIJQ/	045/06/08/ 10/11/125	28,15	6,16

Choose the desired pack. & height Ex.: 8 mm joint in 10 Pcs Pack - GIJQ 08/10






Prices are referred to whole packs 10% increase for minimum orders of 10 Pcs 20% increase for orders of less than 10 Pcs.

PROJOLLY SQUARE ALUMINIUM STONE LINE, VARNISHED

ALUMINIUM AND TUSCANY LINE

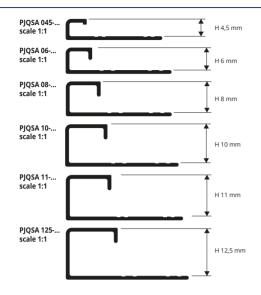

SQUARE an elegant and much-sought after profile. workmanlike application.

STONE LINE thermo Packed h 2 7 lm Dack 20 Dec 54 lm

Article	Hmm	€/Im	€/Pc		
PJQSA 06-SL	6	9,13	24,65		
PJQSA 08-SL	8	9,47	25,57		
PJQSA 10-SL	10	9,80	26,46		
PJQSA 11-SL	11	10,12	27,32		
PJQSA 125-SL	12,5	10,45	28,21		
	CL 0.2 CL	00 0104			

Available in the colours: SL01 - SL02 - SL03 - SL04 - SL05 - SL06 - SL07 - SL08 - SL09 - SL10 - SL11 - SL12 - SL13.

WHITE VARNISHED ALUMINIUM thermo Packed

b	bar length 2,7 Im - Pack 20 Pcs - 54 Im (white colour 40 Pcs-108 Im)					
	Article	H mm	€/lm	€/Pc		
	PJQSA 045-01	4,5	6,63	17,90	*	
	PJQSA 08-01	8	6,85	18,50		
	PJQSA 10	10	7,37	19,90		
	PJQSA 11-01	11	7,71	20,82	*	
	PJQSA 125-01	12,5	8,03	21,68		

Available in the colours: 01 - 0106 - 02 - 11. Available on demand 010 - 03 - 0211 - 0311 - 06 - 10 - 17 with a minimum quantity order of 100 pcs.





TUSCANY LINE thermo Packed

PROJOLLY SQUARE is a corner bead profile in powder coated aluminum that can be applied on external corners

of coverings. It can be used to close the perimeter of coverings. Its particular section and the availability of several finishes and special pieces such as internal and external corners, junctions and end caps make **PROJOLLY**

bar length 2,7 lm - Pack 40 Pcs- 108 lm (H 12,5 mm - Pack 20 Pcs)

*				_
Article	H mm	€/Im	€/Pc	
PJQSA 08	8	9,47	25,57	*
PJQSA 10	10	9,80	26,46	
PJQSA 125	12,5	10,45	28,21	
Available in the colours: 02TU 05TU 20TU				

The code of the selected colour must be added to the article code. E.g.: PJQA 08-... (chosen colour tuscany grey) PJQA 08-03TU.



CAPSULES, END CAPS and THREE-WAYS JOINTS ALUMINIUM STONE LINE, TUSCANY LINE AND VARNISHED ALUMINIUM / PLASTIC

* Capsules & end caps of the on demand profiles are also on demand

CAPSULES and END CAPS - STONE LINE					
Article	H mm	€/Pack 10 Pcs	€/Pack 2 Pcs		
CPJQSASL/	06/08/10/ 11/12,5	75,05	16,52		
TPJQSASL/	06/08/10/ 11/12,5	48,30	10,63		

Choose the desired pack. & height

Ex.: 10 mm capsule in 10 Pcs Pack - CPJQSA 10-SL01/10



PROGRESS®

FILE

CAPSULES and END CAPS - VARNISHED					
Article	H mm	€/Pack 10 Pcs	€/Pack 2 Pcs		
CPJQSA/	045/08/10 11/125	65,43	14,38		
TPJQSA/	045/08/10 11/125	29,54	6,44		
Characterized and a later					

CAPSULES and END CAPS - TUSCANY LINE

Article	H mm	€/Pack 10 Pcs	€/Pack 2 Pcs
CPJQSATU/	08/10/125	101,18	22,26
Choose the desired pa Ex.: 10 mm capsule in		A 10-03/10	

Choose the desired pack. & height Ex.: 10 mm capsule in 10 Pcs Pack - **CPJQSA 10-03/**10

IOINTS - PLASTIC


,			
Article	H mm	€/Pack 10 Pcs	€/Pack 2 Pcs
GIJQ/	045/06/08/ 10/11/125	28,15	6,16

Choose the desired pack. & height Ex.: 8 mm joint in 10 Pcs Pack - GIJQ 08/10

★ = Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed

Prices are referred to whole packs 10% increase for minimum orders of 10 Pcs 20% increase for orders of less than 10 Pcs.

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS



1. Choose "PROJOLLY SQUARE" according to the tile thickness and desired finish. 2. Cut "PROJOLLY SQUARE" to the desired length and apply the adhesive on the support where the profile will be laid. 3. Press the anchoring flange of "PROJOLLY SQUARE" into the adhesive. 4. Lay the tiles, aligning them with the profile leaving a 2 mm joint. Remove immediately all remains of adhesive from the surface of the profile. **5.** Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile.

	SLO8 - Stone antradark	SL09 - Stone bronze	SL10 - Stone corten	SL11 - Stone brown	SL12 - Stone black	SL13 - Stone oyster grey	
		VARNISHED				TUSCANY LINE	
	ON DEMAND						
d	010 - White Matt varnished aluminium (9016)	0106 - White ivory varnished aluminium (9001)	02 - Light grey varnished aluminium (7035)	11 - Black varnished aluminium (9005)	03TU - Tuscany grey	05TU - Tuscany beige	20TU - Tuscany bronze
	AVAILABLE MINIMU	M QUANTITY 100 P	CS by colour and he	ight (Price to be agr	eed. Production del	ay 4/5 weeks)	
	03 - Stone grey varnished alum. (7030)	0211 - Varnished quartz grey alum. (7039)	0311 - Varnished asphalt grey alum. (7043)	06 - Varnished ivory alum. (1015)	10 - Klinker red varnished alum. (8004)	17 - Varnished bahama beige alum.	

PROJOLLY SQUARE is a square corner bead profile in shockproof non - toxic colored vinyl resin that can be applied on external corners of coverings. It can be used to close the perimeter of coverings. Its particular section, the availability in different colours also on demand and special pieces such as internal and external corners make **PROJOLLY SQUARE** a much sought-after profile. It can be easily matched with the wall covering and that allows an elegant workmanlike application.

SHOCKPROOF NON - TOXIC COLORED VINYL RESIN

PROJOLLY

SQUARE








NON-TOXIC SHOCKPROOF VINYL RESIN


bar length 2,7 Im - Pack 20 Pcs - 54 Im (white colour 40 Pcs-108 Im)					
Article	Hmm	€/lm	€/Pc		
PJQ 06	6	1,32	3,56		
PJQ 08	8	1,38	3,73		
PJQ 10	10	1,50	4,05		
PJQ 125	12,5	1,63	4,40		

H 6 mm available the colours 01, other colours on demand. Available in the colours: 00-01-0106-03-06-12-17. On demand 02-04-05-07-08-09-10-11-13-14-15-16-18-19-20-21-22-23-24-25-26-27-28-29 with a minimum quantity order of 800 pcs. The code of the selected colour must be added to the article code. E.g.: PJQ 08-... (chosen colour white) PJQ 08-01.


WHITE NOT FOR SALE SINGLY



EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS



1. Choose "PROJOLLY SQUARE" according to the tile thickness and desired colour. 2. Cut "PROJOLLY SQUARE" to the desired length and apply the adhesive on the support where the profile will be laid. 3. Press the anchoring flange of "PROJOLLY SQUARE" into the adhesive. 4. Lay the tiles, aligning them with the profile leaving a 2 mm joint. Remove immediately all remains of adhesive from the surface of the profile. 5. Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile.

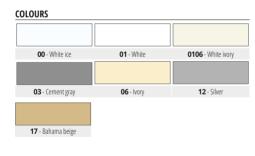


AVAILABLE MINIMUM QUANTITY 800 PCS by colour and height (Price to be agreed. Production delay 4/5 weeks)

-		,		-	
02 - Light grey	04 - Light beige	05 - Dark beige	07 - Pink	08 - Sky blue	09 - Yellow
10 - Red	11 - Black	13 - Gold	14 - Green	15 - Brown	16 - Blue
18 - Grey	19 - Beige	20 - Dark ivory	21 - Light pink	22 - Dark pink	23 - Dark antique pink
24 - Dark sky blue	25 - Brick red	26 - Turquoise green	27 - Dark green	28 - Hazel brown	29 - Dak browrn

CAPSULES and **THREE-WAYS** JOINTS

POLYPROPYLENE / POLYETYLENE UV RESISTANT



INTERNAL CAPSULES POLYPROPYLENE/POLYETYLENE

Article	H mm	€/Pack 20 Pcs	€/Pack 5 Pcs
IPJQ 06/	6	22,12	6,63
IPJQ 08/	8	22,59	6,75
IPJQ 10/	10	23,11	6,91
IPJQ 125/	12,5	23,86	7,78

EXTERNAL CAPSULES POLYPROPYLENE/POLYETYLENE

Article	H mm	€/Pack 20 Pcs	€/Pack 5 Pcs
CPJQ 06/	6	22,12	6,63
CPJQ 08/	8	22,59	6,75
CPJQ 10/	10	23,11	6,91
CPJQ 125/	12,5	23,86	7,78

H 6 mm available the colours 01, other colours on demand. Available in the colours: 00-01-0106-03-06-12-17. On demand 02-04-05-07-08-09-10-11-13-14-15-16-18-19-20-21-22-23-24-25-26-27-28-29

E.g.: CPJQ 08-.../... (chosen colour white) CPJQ 08-01/20.
 IPJQ 08-.../... (chosen colour white) IPJQ 08-01/20.



IPIO ...-.../...





WALLS

PROJOLLY QUART

POLISHED, SUPER POLISHED AND BRUSHED STAINLESS STEEL AISI 304/1.4301-V2A

PJQTAC/S 045 H 4,5 mm scale 1:1 PIOTAC/S 06 H6mm scale 1:1 PIOTAC/S 07 scale 1:1 H7r PJQTAC/S 08 scale 1:1 H 8 mn PJQTAC/S 09 scale 1:1 H 9 mm PJQTAC/S 10 scale 1:1 H 10 mm PJQTAC/S 11 scale 1:1 H 11 mm PIOTAC/S 125 scale 1:1 H 12.5 mm **EXAMPLES FOR LAYING METHODS**





POLISHED STAINLESS STEEL AISI 304/1.4301-V2A with protective film bar length 2,7 lm - pack. 20 Pcs - 54 lm (H 4,5 mm - 108 lm) - 10/10 mm

	Article	H mm	€/lm	€/Pc
	PJQTAC 045	4,5	10,61	28,65
	PJQTAC 06	6	11,56	31,21
0	PJQTAC 07	7	11,95	32,27
	PJQTAC 08	8	12,33	33,29
0	PJQTAC 09	9	12,80	34,56
	PJQTAC 10	10	13,28	35,86
	PJQTAC 11	11	13,80	37,26
	PJQTAC 125	12,5	14,24	38,45

SUPER POLISHED STAINLESS STEEL AISI 304/1,4301-V2A thermo packed

bar length 2,7 im - pack. 20 Pcs 54 im (H 4,5 mm - 108 mi) - 10/10 m

	Article	Hmm	€/lm	€/Pc	
	PJQTACML 045	4,5	12,89	34,80	*
	PJQTACML 06	6	14,44	38,99	*
0	PJQTACML 07	7	14,85	40,09	*
	PJQTACML 08	8	15,20	41,04	*
٩	PJQTACML 09	9	15,70	42,39	*
	PJQTACML 10	10	16,16	43,63	
	PJQTACML 11	11	16,66	44,98	*
	PJQTACML 125	12,5	17,05	46,04	*



Brushed STAINLESS ST. AISI 304/1.4301-V2A with protective film bar length 2,7 lm - pack. 20 Pcs - 54 lm (H 4,5 mm - 108 lm) - 10/10 mm

	Article	H mm	€/lm	€/Pc
	PJQTACS 045	4,5	13,35	36,05
	PJQTACS 06	6	13,85	37,40
٢	PJQTACS 07	7	14,31	38,64
	PJQTACS 08	8	14,68	39,64
٢	PJQTACS 09	9	15,21	41,07
	PJQTACS 10	10	15,71	42,42
	PJQTACS 11	11	16,17	43,66
	PJQTACS 125	12,5	16,54	44,66

COLOURS

PROJOLLY QUART is a quarter-circle rounded bead profile in polished, super polished and brushed stainless steel

AISI 304/1.4301-V2A that can be applied on external corners of coverings. It can be used to close the perimeter of coverings and like a connection profile between step tread and riser of stairs coated with ceramic or natural stone tiles. Its particular section, the availability in three different finishes and special pieces such as internal

and external corners, end caps and joints make **PROJOLLY QUART** a much sought-after profile that allows a workmanlike application even in environments subject to high mechanical stresses.

AC - Polished stainless st. AISI 304/1.4301-V2A stainless st. AISI 304/1.4301-V2A 304/1.4301-V2A

SUITABLE FOR USE IN CONTACT WITH FOODSTUFFS.

INSTRUCTIONS FOR LAYING METHODS

 Choose "PROJOLLY QUART" according to the tile thickness and desired finish. 2. Cut "PROJOLLY QUART to the desired length and apply the adhesive on the support where the profile will be laid. 3. Press the anchoring flange of "PROJOLLY QUART" into the adhesive.
 Lay the tiles, aligning them with the profile leaving a 2 mm joint. Remove immediately all remains of adhesive from the surface of the profile. 5 full the just the profile value that profile with the profile. **5**. Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile.

CAPSULES - SUPER POLISHED STAINLESS ST. AISI 304/1.4301-V2A

in liely

CAPSULES, END CAPS and THREE-WAYS JOINTS POLISHED, SUPER POLISHED AND BRUSHED STAINLESS ST. AISI 304/1.4301-V2A / PLASTIC

* Capsules & end caps of the on demand profiles are also on demand

CAPSULES and END CAPS - POLISHED STAINLESS ST. AISI 304/1.4301-V2A					
Article	e Hmm	€/Pack 10 Pcs	€/Pack 2 Pcs		
CPJQTAC 045/	4,5	142,88	31,51		
IPJQTAC 045/	4,5	142,88	31,51		
CPJQTAC 06/	6	148,85	33,54		
IPJQTAC 06/	6	148,85	33,54		
💿 СРЈQТАС 07/	7	152,78	33,84		
🗿 IPJQTAC 07/	7	152,78	33,84		
CPJQTAC 08/	8	155,57	34,14		
IPJQTAC 08/	8	155,57	34,14		
🗿 СРЈQТАС 09/	9	161,02	34,49		
💿 IPJQTAC 09/	9	161,02	34,49		
CPJQTAC 10/	10	166,22	34,86		
IPJQTAC 10/	10	166,22	34,86		
CPJQTAC 11/	11	174,34	36,20		
IPJQTAC 11/	11	174,34	36,20		
CPJQTAC 125/	12,5	181,05	37,55		
IPJQTAC 125/	12,5	181,05	37,55		
TPJQTAC 045-06	-08-10-11-125/	29,54	6,44		


Choose the desired packaging: E.g.: CPJQTAC .../10 (Pack. 10 Pcs) CPJQTAC .../2 (Pack. 2 Pcs)



€/Pack 10 Pcs €/Pack Article H mm 2 Pcs CPJQTACS 045/... 4,5 166,22 36,20 IPJQTACS 045/... 4,5 166,22 36,20 CPJQTACS 06/... 167,75 36.88 6 IPJQTACS 06/... 6 167,75 36,88 CPJQTACS 07/... 168,38 37,27 7 IPJQTACS 07/... 168.38 7 37.27 CPJQTACS 08/... 169,00 37,55 8 IPJQTACS 08/... 8 169,00 37,55 CPJQTACS 09/... 9 174.34 37.91 IPJQTACS 09/... 174,34 37,91 9 CPJQTACS 10/... 10 179,66 38,22 IPJQTACS 10/... 10 179.66 38 22 CPJQTACS 11/... 186,12 39,23 11 IPJQTACS 11/... 11 186,12 39,23 CPJQTACS 125/... 12.5 191,84 40,23 IPJQTACS 125/... 12,5 191,84 40,23 TPJQTACS 045-06-08-10-11-125-.../... 29,54 6,44 Choose the desired packaging: E.g.: CPJQTACS .../10 (Pack. 10 Pcs)

CAPSULES and END CAPS - BRUSHED STAINLESS ST. AISI 304/1.4301-V2A

CPJQTACS .../2 (Pack. 2 Pcs)



I = News 2023

Article	Hmm	€/Pack 10 Pcs	€/Pack 2 Pcs
CPJQTACML 045/	4,5	166,22	36,20
IPJQTACML 045/	4,5	166,22	36,20
CPJQTACML 06/	6	167,75	36,88
IPJQTACML 06/	6	167,75	36,88
OCPJQTACML 07/	7	168,38	37,27
OIPJQTACML 07/	7	168,38	37,27
CPJQTACML 08/	8	169,00	37,55
IPJQTACML 08/	8	169,00	37,55
OCPJQTACML 09/	9	174,34	37,91
OIPJQTACML 09/	9	174,34	37,91
CPJQTACML 10/	10	179,66	38,22
IPJQTACML 10/	10	179,66	38,22
CPJQTACML 11/	11	186,12	39,23
IPJQTACML 11/	11	186,12	39,23
CPJQTACML 125/	12,5	191,84	40,23
IPJQTACML 125/	12,5	191,84	40,23
Choose the desired package	ging: E.g.: CPIO	ACML/10 (Pa	ack. 10 Pcs)

CPJQTACML .../2 (Pack. 2 Pcs)

JOINTS - PLASTIC

Article	Hmm	€/Pack 10 Pcs	€/Pack 2 Pcs
GIJQT 045/	4,5	28,15	6,16
GIJQT 06/	6	28,15	6,16
🗿 GIJQT 07/	7	28,15	6,16
GIJQT 08/	8	28,15	6,16
🗿 GIJQT 09/	9	28,15	6,16
GIJQT 10/	10	28,15	6,16
GIJQT 11/	11	28,15	6,16
GIJQT 125/	12,5	28,15	6,16
Choose the desired pac	kaging: E.g.: GIJ	QT/10 (Pack.	10 Pcs)

GIJOT .../2 (Pack. 2 Pcs) ★ = Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed

WALLS

PROJOLLY QUART is a quarter-circle rounded bead profile in anodized and polished aluminium that can be applied on external corners of coverings. It can be used to close the perimeter of coverings and like a connection profile between step tread and riser of stairs coated with ceramic and natural stone tiles. Its particular section and elegance, the availability in four finishes and special pieces such as internal and external corners, end caps and joints make PROJOLLY QUART a much sought-after profile that allows an elegant workmanlike application.

PROJOLLY QUART

H 6 mm

WALLS

ANODIZED AND POLISHED ALUMINIUM



ANODIZED ALUMINIUM (silver-titanium-gold-antique bronze) thermo packed bar length 2,7 lm - pack. 40 Pcs - 108 lm (H 12,5 mm,15 mm - pack. 20 Pcs)

Article	Hmm	€/Im	€/Pc	
PJQTAA 06	6	5,24	14,15	
PJQTAA 08	8	5,57	15,04	
PJQTAA 10	10	6,01	16,23	
PJQTAA 11	11	6,68	18,04	
PJQTAA 125	12,5	6,78	18,31	
PJQTAA 15	15	7,57	20,44	
PJQTAO 06	6	5,24	14,15	*
PJQTAO 08	8	5,57	15,04	*
PJQTAO 10	10	6,01	16,23	
PJQTAO 11	11	6,68	18,04	*
PJQTAO 125	12,5	6,78	18,31	*
PJQTAT 08	8	6,15	16,61	*
PJQTAT 10	10	6,68	18,04	
PJQTAT 11	11	7,05	19,04	*
PJQTAT 125	12,5	7,52	20,30	*
PJQTBRA 10	10	10,67	28,81	
PJQTBRA 125	12,5	11,61	31,35	

ANODIZED

BRA - Anod. antique bronze

AO - Anod. gold alum.




POLISHED ALUMINIUM (chrome-titanium-gold) thermo packed - bar length 2,7 lm - pack. 40 Pcs - 108 lm (H 15 mm - 54 lm) - (H 12,5 mm,15 mm - pack. 20 Pcs)

Article	Hmm	€/lm	€/Pc	
PJQTBC 06	6	8,53	23,03	
PJQTBC 08	8	9,19	24,81	
PJQTBC 10	10	10,20	27,54	
PJQTBC 11	11	10,84	29,27	
PJQTBC 125	12,5	11,52	31,10	
PJQTBC 15	15	11,98	32,35	
PJQTBO 06	6	8,53	23,03	*
PJQTBO 08	8	9,19	24,81	
PJQTBO 10	10	10,20	27,54	
PJQTBO 11	11	10,84	29,27	*
PJQTBO 125	12,5	11,52	31,10	
PJQTBT 08	8	9,19	24,81	
PJQTBT 10	10	10,20	27,54	
PJQTBT 11	11	10,84	29,27	
PJQTBT 125	12,5	11,52	31,10	


POLISHED

BC - Polished chrome alum. BO - Polished gold alum. BT - Polished titanium alum.

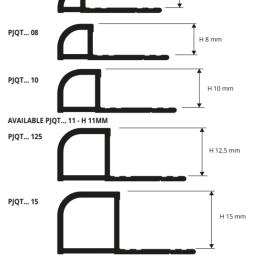

PJQT... 06

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS



 Choose "PROJOLLY QUART" according to the tile thickness and desired finish. 2. Cut "PROJOLLY QUART" to the desired length and apply the adhesive on the support where the profile will be laid.
 Press the anchoring flange of "PROJOLLY QUART" into the adhesive. 4. Lay the tiles, aligning them with the profile leaving constitute profile leaving for the profile leaving for the support. a 2 mm joint. Remove immediately all remains of adhesive from the surface of the profile. **5.** Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile.

AT - Anod, titanium alum.

AA - Anodized silver alum.

COLOURS

ON DEMAND MAY BE REALISED IN OTHER FINISHES OF THE COLOUR CHART. CONTACT OUR CUSTOMER SERVICE FOR MINIMUM QUANTITY, TIMING AND PRICE.

CAPSULES, END CAPS and THREE-WAYS JOINTS

ANODIZED, POLISHED ALUMINIUM / PLASTIC


CAPSULES and END CAPS - ANODIZED ALUMINIUM					
Article	H mm	€/Pack 10 Pcs	€/Pack 2 Pcs		
CPJQTAA/	06/08/10/ 11/125/15	62,24	13,69		
IPJQTAA/	06/08/10/ 11/125/15	62,24	13,69		
TPJQTAA/	06/08/10/ 11/125/15	29,54	6,44		
CPJQTAO/	06/08/10/ 11/125	62,24	13,69		
IPJQTAO/	06/08/10/ 11/125	62,24	13,69		
TPJQTAO/	06/08/10/ 11/125	29,54	6,44		
CPJQTAT/	08/10/11/125	64,41	14,76		
IPJQTAT/	08/10/11/125	64,41	14,76		
TPJQTAT/	08/10/11/125	29,54	14,76		
CPJQTBRA/	10/125	64,41	14,76		
IPJQTBRA/	10/125	64,41	14,76		
TPJQTBRA/	10/125	29,54	14,76		

Article	H mm	€/Pack 10 Pcs	€/Pack 2 Pcs
СРЈQТВС/	06/08/10/ 11/125/15	62,24	13,69
IPJQTBC/	06/08/10/ 11/125/15	62,24	13,69
ТРЈQТВС/	06/08/10/ 11/125/15	29,54	6,10
СРЈQТВО/	06/08/10/ 11/125	62,24	13,69
IPJQTBO/	06/08/10/ 11/125	62,24	13,69
ТРЈQТВО/	06/08/10/ 11/125	29,54	6,44
СРЈQТВТ/	08/10/11/125	64,41	14,76
IPJQTBT/	08/10/11/125	64,41	14,76
TPJQTBT/	08/10/11/125	29,54	6,44

Capsules & end caps of the on demand profiles are also on demand 🜟

JOINTS - PLASTIC			
Article	H mm	€/Pack 10 Pcs	€/Pack 2 Pcs
GIJQT/	06/08/10/ 11/125/15	28,15	6,16

Choose the desired pack. & height Ex.: 10 mm joint in 10 Pcs Pack - GIJQT 10/10

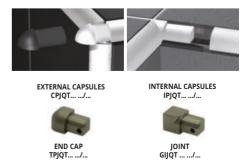

Choose the desired pack. & height Ex.: 4,5 mm capsule in 10 Pcs Pack - **CPJQTAA 10/10**





PROGRESS® PROFILES

GUART BRUSHED POLISHED, BRUSHED


AND VARNISHED ALUMINIUM

PROJOLLY



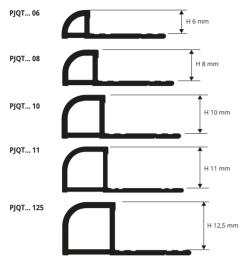

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS



 Choose "PROJOLLY QUART" according to the tile thickness and desired finish. 2. Cut "PROJOLLY QUART" to the desired length and apply the adhesive on the support where the profile will be laid.
 Press the anchoring flange of "PROJOLLY QUART" into the adhesive. 4. Lay the tiles, aligning them with the profile leaving a 2 mm joint. Remove immediately all remains of adhesive from the surface of the profile. 5. Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile.



BRUSHED POLISHED ALUMINIUM thermo packed bar length 2,7 lm - pack. 40 Pcs - 108 lm (H 12,5 mm,15 mm - pack. 20 Pcs)

bar lenger - , pack		•, .•	pacia 	,
Article	Hmm	€/lm	€/Pc	
PJQTBS 08	8	10,58	28,57	
PJQTBS 10	10	11,52	31,10	
PJQTBS 11	11	12,15	32,80	*
PJQTBS 125	12,5	12,87	34,75	
PJQTBOS 08	8	10,58	28,57	*
PJQTBOS 10	10	11,52	31,10	*
PJQTBOS 11	11	12,15	32,80	*
PJQTBOS 125	12,5	12,87	34,75	*

BRUSHED ANTIQUE BRONZE ALUMINIUM thermo packed bar length 2,7 Im - pack. 40 Pc - 108 Im (H 12,5 mm,15 mm - pack. 20 Pcs)

Article	H mm	€/Im	€/Pc
PJQTBRAS 10	10	10,67	28,81
PJQTBRAS 125	12,5	11,61	31,35
COLOURS			

BS - Brushed polished silver aluminium bronze alum

ON DEMAND MINIMUM QUANTITY 100 PCS

the second second

BOS - Brushed gold alum. (Price to be agreed. Production delay 4/5 weeks)

CAPSULES & CAP - VARNISHED ALUMINIUM

ON DEMAND MAY BE REALISED IN OTHER FINISHES OF THE COLOUR CHART. CONTACT OUR CUSTOMER SERVICE FOR MINIMUM QUANTITY, TIMING AND PRICE.



VARNISHED ALUMINIUM thermo packed - bar length 2,7 M pack. 20 Pcs - 54 Im (white colour 40 Pcs - 108 Im)

Article	Hmm	€/lm	€/Pc	
PJQTA 06-01	6	6,03	16,28	
PJQTA 08-01	8	6,71	18,12	
PJQTA 08	8	6,71	18,12	*
PJQTA 10-01	10	7,26	19,60	
PJQTA 10	10	7,26	19,60	*
PJQTA 11-01	11	7,52	20,30	
PJQTA 125-01	12,5	7,78	21,01	

Available in the colours: 01. Available on demand 010 - 0106 - 02 - 03 - 11 - 17. The code of the selected colour must be added to the article code. E.g.: PJQTA 08... (chosen colour White) PJQTA 08-01.

COLOURS

1 - Varnished white aluminium	For other colors than white in sizes 06, 11, 125, contact the sales office for quantities and prices	
(9016)		

ON DEMAND MINIMUM QUANTITY 100 PCS

0106 - Varnished white ivory	02 - Varnished light grey alum.	03 - Varnished dark grey alum.
alum. (9001)	(7035)	(7030)
11 - Varnished black aluminium	17 - Varnished bahama	010 - White Matt varnished
(9005)	beige alum.	aluminium (9016)

(Price to be agreed. Production delay 4/5 weeks)

POLISHED BRUSHED, VARNISHED ALUMINIUM/ PLASTIC

CAPSULES, END CAPS and THREE-WAYS JOINTS

★ Capsules & end caps of the on demand profiles are also on demand

CAPSULES & CAPS - POLISHED BRUSHED ALUMINIUM					
cle	Hmm	€/Pack 10 Pcs	€/Pack 2 Pcs		
/	08/10/11/125	72,52	15,41		
/	08/10/11/125	72,52	15,41		
/	08/10/11/125	29,54	6,44		
os/	08/10/11/125	72,52	15,41		
s/	08/10/11/125	72,52	15,41		
S/	08/10/11/125	29,54	6,44		
AS/	10/125	72,52	15,41		
AS/	10/125	72,52	15,41		
AS/	10/125	29,54	14,76		
	cle / / DS/ S/ DS/ AS/ AS/	H H Mm 08/10/11/125 08/10/11/125 / 08/10/11/125 05 08/10/11/125 05 08/10/11/125 05 08/10/11/125 05 08/10/11/125 04/10/11/125 08/10/11/125 05 08/10/11/125 045 08/10/11/125	Cle H mm €/Pack 10 PCs a/ 08/10/11/125 72,52 a/ 08/10/11/125 72,52 a/ 08/10/11/125 29,54 a.s/ 08/10/11/125 72,52 b.s/ 10/125 72,52 b.s/ 10/125 72,52 b.s/ 10/125 72,52		

Choose the desired pack. & height Ex.: 4,5 mm capsule in 10 Pcs Pack - CPJQTBS 10/10



Choose the desired pack. & height Ex.: 4,5 mm capsule in 10 Pcs Pack - **CPJQTA 02-10/10**

JOINTS - PLASTIC			
Article	Hmm	€/Pack 10 Pcs	€/Pack 2 Pcs
GIJQT/	06/08/10/ 11/125	28,15	6,16

Choose the desired pack. & height Ex.: 10 mm joint in 10 Pcs Pack - GIJQT 10/10





WALLS

* = Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed

PROJOLLY QUART is a quarter-circle rounded bead profile in powder coated aluminum that can be applied on external corners of coverings. It can be used to close the perimeter of coverings. Its particular section and the availability of thirteen finishes and special pieces such as internal and external corners, junctions and end caps make **PROJOLLY QUART** an elegant and much-sought after profile.

STONE LINE ALUMINIUM

QUART

PROJOLLY

WALLS




STONE LINE ALUMIN	IUM the	rmo packe	d
bar length 2,7 M - pack	. 20 Pcs -	54 lm	
A stiele			61

Article	H mm	€/lm	€/Pc	
PJQTA 06-SL	6	8,49	22,92	*
PJQTA 08-SL	8	8,81	23,79	
PJQTA 10-SL	10	9,13	24,65	
PJQTA 11-SL	11	9,47	25,57	*
PJQTA 125-SL	12,5	9,80	26,46	


Available in the colours: SL01 - SL02 - SL03 - SL04 - SL05 - SL06 - SL07 - SL08 - SL09 - SL10 - SL11 - SL12 - SL13. The code of the selected colour must be added to the article code. E.g.: PJQTA 08... (chosen colour stone white) PJQTA 08-SL01.





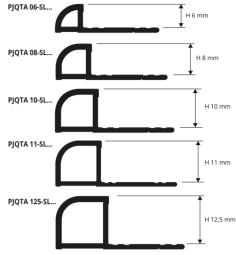

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS



 Choose "PROJOLLY QUART" according to the tile thickness and desired finish. 2. Cut "PROJOLLY QUART" to the desired length and apply the adhesive on the support where the profile will be laid.
 Press the anchoring flange of "PROJOLLY QUART" into the adhesive. 4. Lay the tiles, aligning them with the profile leaving a 2 mm joint. Remove immediately all remains of adhesive from the surface of the profile. 5. Fill the joints between the profile and the tile with struct in order to avoid whete transition. the tiles with grout, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile.

CAPSULES, END CAPS and THREE-WAYS JOINTS Capsules & end caps of the on demand profiles are also on demand 📩

STONE LINE ALUMINIUM / PLASTIC

© 2028. All depts reserved by Progress Profiles. Printed in Italy

OINTS - PLASTIC			
Article	Hmm	€/Pack 10 Pcs	€/Pack 2 Pcs
GIJQT/	06/08/10/ 11/125	28,15	6,16

Ex.: 10 mm joint in 10 Pcs Pack - GIJQT 10/10

END CAP GIIOT .../...

Article	H mm	€/Pack 10 Pcs	€/Pack 2 Pcs
CPJQTASL/	06/08/10/ 11/125	75,05	16,52
IPJQTASL/	06/08/10/ 11/125	75,05	16,52
TPJQTASL/	06/08/10/ 11/125	48,30	10,63

Choose the desired pack. & height Ex.: 4,5 mm capsule in 10 Pcs Pack - **CPJQTA 10-SL06/10**



EXTERNAL CAPSULES



IPIOTA ...-.../...

PROGRESS® PROFILES








INTERNAL CAPSULES

SHOCKPROOF NON - TOXIC COLORED VINYL RESIN

PROJOLLY

QUART

PROJOLLY QUART is a quarter-circle rounded bead profile in shockproof non - toxic colored vinyl resin that can be applied on external corners of coverings. It can be used to close the perimeter of coverings. Its particular section, the availability in different colours also on demand and special pieces such as internal and external corners make **PROJOLLY QUART** a much sought-after profile. It can be easily matched with the wall covering and allows an elegant workmanlike application.



EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS



NON-TOXIC SHOCKPROOF VINYL RESIN bar length 2,7 Im - pack. 54 Im (white colour pack. 108 Im)

Article	Hmm	€/Im	€/Pc
PJQT 08	8	1,38	3,73
PJQT 10	10	1,50	4,05
PJQT 125	12,5	1,63	4,40



Available in the colours: 00-01-02-03-05-06-11-17-18. Available on demand 0106 - 04 - 07 - 08 - 09 - 10-12-13-14-15-16-19-20-21-22-23-24-25-26-27-28-29 with a minimum quantity order of 800 pcs. The code of the selected colour must be added to the article code. E.g.: PJQT 08-... (chosen colour white) PJQT 08-01.

WHITE NOT FOR SALE SINGLY


COLOURS



ON DEMAND - MINIMUM QUANTITY 800 PCS by colour and height (Price to be agreed. Production delay 4/5 weeks)



CAPSULES and THREE-WAYS JOINTS POLYPROPYLENE/POLYETYLENE UV RESISTANT

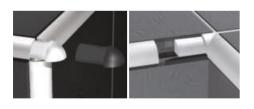

 Choose "PROJOLLY QUART" according to the tile thickness and desired colour. 2. Cut "PROJOLLY QUART to the desired length and apply the adhesive on the support where the profile will be laid.
 Press the anchoring flange of "PROJOLLY QUART" into the adhesive. 4. Lay the tiles, aligning them with the profile leaving a 2 mm joint. 5. Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation.

POLYPROPYLENE/POLYETYLENE UV RESISTANT Article H mm €/Pack. €/Pack. 20 Pcs 5 Pcs					
CPJQT 08 /	8	22,59	6,57		
IPJQT 08/	8	22,59	6,57		
CPJQT 10/	10	23,11	6,71		
IPJQT 10/	10	23,11	6,71		
CPJQT 125/	12,5	23,86	6,96		
IPJQT 125/	12,5	23,86	6,96		

Available in the colours: 01-02-03-05-06-11-17-18 (available on demand 0106-04-07-08-09-10-12-13-14-15-16-19-20-21-22-23-24-25-26-27-28-29). The code of the selected colour must be added to the article code. Eg.: CPJQT 08-.../... (chosen colour white) CPJQT 08-01/20.

EXTERNAL CAPSULES INTERNAL CAPSULES

СРЈОТ ...-.../...



IPJQT ...-.../...



14

PROJOLLY is a rounded bead profile in polished, super polished, sanded and brushed stainless steel AISI 304/1.4301-V2A that can be applied on external corners of coverings. It can be used to close the perimeter of coverings and like a connection profile between step tread and riser of stairs coated with ceramic or natural stone tiles. Its particular section, the availability in three different finishes and special pieces such as internal and external corners, end caps and joints make **PROJOLLY** a much sought-after profile that allows a workmanlike application even in environments subject to high mechanical stresses.



POLISHED STAINLESS STEEL AISI 304/1.4301-V2A with protective film bar length 2,7 Im - pack. 20 Pcs - 54 Im - 10/10 mm

Article	H mm	€/lm	€/Pc
PJAC 06	6	11,50	31,05
PJAC 08	8	12,26	33,10
PJAC 10	10	13,22	35,69
PJAC 11	11	13,78	37,21
PJAC 125	12,5	14,18	38,29
PJAC 15	15	15,83	42,74

SUPER POLISHED STAINLESS ST. AISI 304/1.4301-V2A thermo packed - bar length 2,7 Im - pack. 20 Pcs

J4 III 10/ 10 IIIII				
Article	Hmm	€/Im	€/Pc	
PJACML 06	6	14,31	38,64	*
PJACML 08	8	15,07	40,69	
PJACML 10	10	16,10	43,47	
PJACML 11	11	16,54	44,66	*
PJACML 125	12,5	16,93	45,71	
PJACML 15	15	18,52	50,00	*

SUITABLE FOR USE IN CONTACT WITH FOODSTUFFS.



BRUSHED STAINLESS ST. AISI 304/1.4301-V2A with protective film bar length 2,7 Im - pack. 20 Pcs - 54 Im - 10/10 mm

Article	Hmm	€/lm	€/Pc
PJACS 06	6	13,79	37,23
PJACS 08	8	14,56	39,31
PJACS 10	10	15,59	42,09
PJACS 11	11	16,11	43,50
PJACS 125	12,5	16,48	44,50
PJACS 15	15	18,13	48,95

SANDED STAINLESS INOX AISI 304/1.4301-V2A with protective film bar length 2,7 ml - pack. 20 Pcs 54 lm - 10/10 mm


Article	Hmm	€/lm	€/Pc	
PJACSB 08	8	15,57	42,04	*
PJACSB 10	10	16,60	44,82	
PJACSB 125	12,5	17,57	47,44	

COLOURS

AC - Polished stainless st. AISI 304/1.4301-V2A	ACML - Super polished stainless st. AISI 304/1.4301-V2A	ACS - Brushed stainless st. AISI 304/1.4301-V2A

ACSB - Sanded stainless st. AISI 304/1.4301-V2A

ACSB - SPECIAL FINISH, REQUEST AVAILABILITY

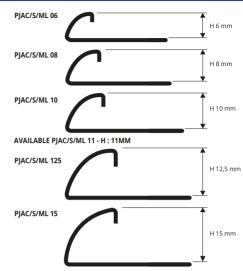


PROJOLLY

POLISHED, SUPER POLISHED, SANDED AND

BRUSHED STAINLESS STEEL AISI 304/1.4301-

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS



1. Choose "PROJOLLY" according to the tile thickness and desired finish. 2. Cut "PROJOLLY" to the desired length and apply the adhesive on the support where the profile will be laid. 3. Press the anchoring flange of "PROJOLLY" into the adhesive. 4. Lay the tiles, aligning them with the profile leaving a 2 mm joint. Remove immediately all remains of adhesive from the surface of the profile. 5. Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile.

Capsules & end caps of the on demand profiles are also on demand 📩

- SPECIAL FINISH, REQUEST AVAILABILITY

CAPSULES, END CAPS and THREE-WAYS JOINTS

POLISHED, SUPER POLISHED AND BRUSHED STAINLESS ST. AISI 304/1.4301-V2A / PLASTIC

CAPSULES and END CAPS - POLISHED STAINLESS ST. AISI 304/1.4301-V2A €/Pack 10 Pcs €/Pack 2 Pcs Article H mm CPJAC 06/... 147,20 32,19 6 IPJAC 06/... 147,20 32.19 6 CPJAC 08/... 154,17 8 33,54 IPJAC 08/... 8 154,17 33,54 CPJAC 10/... 10 165.59 34.86 IPJAC 10/... 10 165,59 34,86 CPJAC 11/... 11 173,06 36,20 IPIAC 11/... 11 173.06 36.20 CPJAC 125/... 12.5 179,66 37,55 IPJAC 125/... 12.5 179.66 37.55 CPJAC 15/... 15 194,49 40,91 IPJAC 15/... 15 194,49 40,91 TPJAC 06-08-10-11-125-15-.../... 29,54 6,44

Choose the desired packaging: E.g.: CPJAC .../10 (Pack 10 Pcs) CPJAC .../2 (Pack 2 Pcs)

JOINTS - PLASTIC

Article	Hmm	€/Pack 10 Pcs	€/Pack 2 Pcs
GIJAC 06/	6	28,15	6,16
GIJAC 08/	8	28,15	6,16
GIJAC 10/	10	28,15	6,16
GIJAC 11/	11	28,15	6,16
GIJAC 125/	12,5	28,15	6,16
GIJAC 15/	15	28,15	6,16
Change the desired pad	aging Eg. Cll	AC /10 (Dack	10 Dec)

Choose the desired packaging: E.g.: GIJAC .../10 (Pack. 10 Pcs) GIJAC .../2 (Pack. 2 Pcs)

CAPSULES and END CAPS - BRUSHED STAINLESS ST. AISI 304/1.4301-V2A				
Article	H mm	€/Pack 10 Pcs	€/Pack 2 Pcs	
CPJACS 06/	6	162,29	33,54	
IPJACS 06/	6	162,29	33,54	
CPJACS 08/	8	167,75	34,86	
IPJACS 08/	8	167,75	34,86	
CPJACS 10/	10	178,38	36,88	
IPJACS 10/	10	178,38	36,88	
CPJACS 11/	11	184,73	38,57	
IPJACS 11/	11	184,73	38,57	
CPJACS 125/	12,5	190,44	40,23	
IPJACS 125/	12,5	190,44	40,23	
CPJACS 15/	15	207,80	43,60	
IPJACS 15/	15	207,80	43,60	
TPJACS 06-08-10-11-12	25-15/	29,54	6,44	

Choose the desired packaging: E.g.: CPJACS .../10 (Pack. 10 Pcs) CPJACS .../2 (Pack. 2 Pcs)

CAPSULES - SANDED STAINLESS INOX AISI 304/1.4301-V2A				
Article	H mm	€/Pack 10 Pcs	€/Pack 2 Pcs	
CPJACSB 08/	8	186,26	39,11	
IPJACSB 08/	8	186,26	39,11	
CPJACSB 10/	10	196,90	41,35	
IPJACSB 10/	10	196,90	41,35	
CPJACSB 125/	12,5	214,90	45,14	
IPJACSB 125/	12,5	214,90	45,14	


CAPSULES - SUPER POLISHED STAINLESS ST. AISI 304/1.4301-V2A €/Pack 10 Pcs €/Pack Article H mm 2 Pcs CPJACML 06/... 6 162,29 33,54 IPJACML 06/... 6 162.29 33.54 CPJACML 08/... 167,75 8 34,86 IPJACML 08/... 8 167,75 34,86 CPJACML 10/... 10 178,38 36.88 IPJACML 10/... 10 178,38 36,88 CPJACML 11/... 11 184,73 38,57 IPJACML 11/... 11 184.73 38 57 CPJACML 125/... 12,5 190,44 40,23 IPJACML 125/... 12.5 190,44 40,23 CPJACML 15/... 15 207.80 43.60 IPJACML 15/... 15 207.80 43.60

Choose the desired packaging: E.g.: CPJACML .../10 (Pack. 10 Pcs) CPJACML .../2 (Pack. 2 Pcs)



END CAP EXTERNAL CAPSULES INTERNAL CAPSULES JOINT TPJ...../... CPJ...../... IPJ...../... GIJAC .../..

V2A






PROJOLLY

WALLS

POLISHED STAINLESS STEEL INOX AISI 316LL/1.4404-V4A

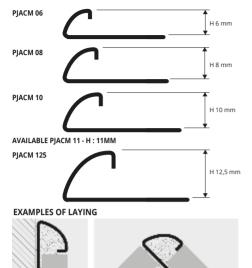



POLISHED STAINLESS STEEL AISI 316LL/1.4404-V4A with protective film th 2 7 lm - nack 20 Pcs - 54 lm - 10/10 mm

to high mechanical and chemical stresses.

Article	H mm	€/Im	€/Pc		
PJACM 06	6	14,44	38,99		
PJACM 08	8	15,52	41,90		
PJACM 10	10	16,66	44,98		
PJACM 11	11	17,36	46,87		
PJACM 125	12,5	17,77	47,98		

SUITABLE FOR USE IN CONTACT WITH FOODSTUFFS.



COLOURS

PROJOLLY is a rounded bead profile in polished stainless steel INOX AISI 316LL/1.4404-V4A that can be applied


on external corners of coverings. It can be used to close the perimeter of coverings and like a connection profile between step tread and riser of stairs coated with ceramic or natural stone tiles. Its particular section, the availability in three different finishes and special pieces such as internal and external corners, end caps and joints

make PRÓJOLLY a much sought-after profile that allows a workmanlike application even in environments súbject



ACM - Polished stainless st. AISI 316LL

1. Choose "PROJOLLY" according to the tile thickness. 2. Cut "PROJOLLY" to the desired length and apply the adhesive on the support where the profile will be laid. **3.** Press the anchoring flange of "PROJOLLY" into the adhesive. **4.** Lay the tiles, aligning them with the profile leaving a 2 mm joint. Remove immediately all remains of adhesive from the surface of the profile. **5.** Fill the joints between in the profile and the tiles with grout, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile.

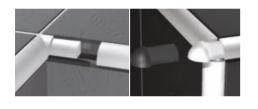

POLISHED STAINLESS STEEL AISI 316LL/1.4404-V4A				
Article	H mm	€/Pack 10 Pcs	€/Pack 2 Pcs	
CPJACM 06/	6	175,59	36,88	
IPJACM 06/	6	175,59	36,88	
CPJACM 08/	8	182,44	38,22	
IPJACM 08/	8	182,44	38,22	
CPJACM 10/	10	190,44	40,23	
IPJACM 10/	10	190,44	40,23	
CPJACM 11/	11	197,15	41,59	
IPJACM 11/	11	197,15	41,59	
CPJACM 125/	12,5	203,88	42,92	
IPJACM 125/	12,5	203,88	42,92	
Choose the desired packaging: E.g.: CPJACM/10 (Pack. 10 Pcs) CPJACM/2 (Pack. 2 Pcs)				

CAPSULES and THREE-WAYS JOINTS POLISHED STAINLESS STEEL AISI 316LL/1.4404-V4A



PROTERMINAL is a "L-shaped" profile in polished stainless steel INOX AISI 316LL/1.4404-V4A that can be applied on

external corners of coverings. It can be used to close the perimeter of coverings, like a connection profile between step tread and riser of stairs coated with ceramic and natural stone tiles, and also as separation profile for floor coverings. Its particular section and the availability in three different heights make **PROTERMINAL** a much sought-after profile that allows a workmanlike application even in environments subject to high mechanical and chemical stresses.



INTERNAL CAPSULES

316

PROTERMINAL

POLISHED STAINLESS STEEL INOX AISI 316LL/1.4404-V4A

PTACM 06 H 6 mn PTACM 08 H 8 mm **PTACM 10** H 10 mr **PTACM 125** H 12,5 mm

EXAMPLES OF LAYING



COLOURS



1. Choose "PROTERMINAL" according to the tile thickness. 2. Cut "PROTERMINAL" to the desired length and apply the adhesis of the term support where the profile will be laid. **3**. Press the anchoring flange of "PROTERMINAL" into the adhesive. **4**. Lay the tiles, aligning them with the profile leaving a 2 mm joint. Remove immediately all remains of adhesive from the surface of the profile. 5. Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile.

POLISHED STAINLESS STEEL AISI 316LL/1.4404-V4A bar length 2,7 lm - pack. 40 Pcs - 108 lm - 10/10 mm

Article	H mm	€/lm	€/Pc
PTACM 06	6	12,38	33,43
PTACM 08	8	12,80	34,56
PTACM 10	10	13,46	36,34
PTACM 125	12,5	13,94	37,64

SUITABLE FOR USE IN CONTACT WITH FOODSTUFFS.

16

PROJOLLY is a rounded bead profile in natural, antique brass, polished varnished and chromed brass that can be applied on external corners of coverings. It can be used to close the perimeter of coverings and like (only natural and chromed version) a connection profile between step tread and riser of stairs coated with ceramic or natural stone tiles. Its particular section, the availability in three different finishes and special pieces such as internal and external corners, end caps and joints make PROJOLLY a much sought-after and elegant profile that allows a workmanlike application.

PROJOLLY

NALLS

NATURAL, POLISHED VARNISHED. CHROMED AND ANTIQUE BRASS





NATURAL BRASS thermo packed bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	H mm	€/Im	€/Pc	
PJON 08	8	16,58	44,77	¥
PJON 10	10	17,61	47,55	
PJON 125	12,5	19,58	52,87	¥
SUPER POLISHED VARNIS thermo packed bar length 2,	7 lm - pack. 20) Pcs - 54 lm	MIRROR	
Article	H mm	€/Im	€/Pc	
PJOC 06	6	22,81	61,59	*
PJOC 08	8	25,64	69,23	
PJOC 10	10	26,92	72,68	
PJOC 125	12,5	28,01	75,63	

COLOURS

OB - Antique brass








POLISHED VARNISHED BRASS thermo packed bar length 2,7 lm - pack. 20 Pcs - 54 lm

0 1				
Article	Hmm	€/lm	€/Pc	
PJOL 06	6	20,85	56,30	*
PJOL 08	8	21,66	58,48	
PJOL 10	10	23,85	64,40	
PJOL 125	12,5	27,20	73,44	


Polished varnished brass is not suitable for frequent pedestrian traffic places and/or scratching.

ANTIQUE BRASS thermo packed

bar length 2,7 lm - pack. 2	0 Pcs - 54 lm	1		
Article	Hmm	€/lm	€/Pc	
PJOB 08	8	33,50	90,45	*
PJOB 10	10	36,55	98,69	
PJOB 125	12,5	39,79	107,43	

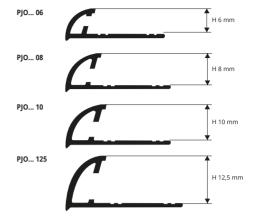

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS



1. Choose "PROJOLLY" according to the tile thickness and desired In choise PROJOLLY activity to the desired length and apply the adhesive on the support where the profile will be laid. **3.** Press the anchoring flange of "PROJOLLY" into the adhesive. **4.** Lay the tiles, aligning them with the profile leaving a 2 mm joint. Remove immediately all remains of adhesive from the surface of the profile. **5.** Fill the joints between the profile and the tiles with grout, in order to avoid water standards. Particular the surface of the profile. to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile.

H mm

8

8

10

10

12.5

12,5

Choose the desired packaging: E.g.: CPJOB.../10 (Pack. 10 Pcs)

CAPSULES, END CAPS and THREE-WAYS JOINTS Capsules & end caps of the on demand profiles are also on demand 🖈

VARNISHED POLISHED BRASS AND CHROMED BRASS EFFECT / PLASTIC

APS and JOINTS - CHRO	MED BRASS /	PLASTIC		
Article	Hmm	€/Pack 10 Pcs	€/Pack 2 Pcs	
TPJOC 06-08-10-125/	6-8-10-12,5	30,15	6,74	
GIJA 06-08-10-125/	6-8-10-12,5	28,15	6,16	
Choose the desired packa		/2 (Pack. 2 P	cs)	
END CAP		JOINT	ſ	
- HE		9		
трјос/		GIJA	/	

LEFT CAPSULES - POLISHED VARNISHED/CHROMED BRASS				
Article	H mm	€/Pack 10 Pcs	€/Pack 2 Pcs	
CPJOL/OC 06/	6	202,30	44,97	
IPJOL/OC 06/	6	231,91	50,58	
CPJOL/OC 08/	8	205,88	45,67	
IPJOL/OC 08/	8	235,37	51,28	
CPJOL/OC 10/	10	209,33	46,38	
IPJOL/OC 10/	10	238,15	51,99	
CPJOL/OL 125/	12,5	214,26	47,78	
IPJOL/OC 125/	12,5	243,07	52,69	
Choose the desired nackaging.		/10 (Pack 1	() Pcs)	

kaging: E.g. CPIOL .../2 (Pack. 2 Pcs)

The right capsules are available on demand and must be used only in the following cases: A) when you are laying the cut base of the profile B) as an alternative to end-caps (right side).







LEFT CAPSULES - ANTIOUE BRASS

Article

📀 СРЈОВ 08/...

IPJOB 08/...

📀 СРЈОВ 10/...

IPJOB 10/...

CPJOB 125/...

IPJOB 125/...

Add "D" to the article code. For example: CPIDOL 06.

Add "D" to the article code. For example: IPIDOL 06.

LEFT CAPSULES RIGHT CAPSULES Add "D" to the article code. For example: CPJDOC 06.



€/Pacl 2 Pcs

61,75

69.73

63,09

70,40

64,55

71,19

€/Раск 10 Pcs

277,99

317.85

272,15

321,56

278.53

328,21


CPJOB .../2 (Pack. 2 Pcs)

PROJOLLY

WALLS

PROJOLLY is a rounded bead profile in anodized aluminium that can be applied on external corners of coverings. It can be used to close the perimeter of coverings and like a connection profile between step tread and riser of stairs coated with ceramic or natural stone tiles. Its particular section and elegance, the availability in five different finishes and special pieces such as internal and external corners, end caps and joints make **PROJOLLY** a much sought-after and elegant profile that allows a workmanlike application.

ANODIZED ALUMINIUM SILVER, COPPER, TITANIUM, GOLD AND BLACK

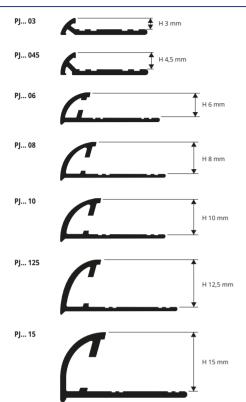



EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS



 Choose "PROJOLLY" according to the tile thickness and desired finish. 2. Cut "PROJOLLY" to the desired length and apply the adhesive on the support where the profile will be laid. 3. Press the anchoring flange of "PROJOLLY" into the adhesive. 4. Lay the tiles, aligning them with the profile leaving a 2 mm joint. Remove immediately all remains of adhesive from the surface of the profile. 5. Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile.





ANODIZED ALUM. (silver-copper-gold-titanium-black) thermo packed bar length 2,7 lm - pack. 40 Pcs - 108 lm (for H 15 anodized silver alum. pack. 20 Pcs - 54 Im)

		•••••		_
Article	Hmm	€/lm	€/Pc	
PJAA 03	3	4,63	12,50	*
PJAA 045	4,5	4,89	13,20	*
PJAA 06	6	5,24	14,15	
PJAA 08	8	5,57	15,04	
PJAA 10	10	6,01	16,23	
PJAA 125	12,5	6,78	18,31	
PJAA 15	15	7,57	20,44	
PJAO 03	3	4,63	12,50	*
PJAO 045	4,5	4,89	13,20	*
PJAO 06	6	5,24	14,15	*
PJAO 08	8	5,57	15,04	
PJAO 10	10	6,01	16,23	
PJAO 125	12,5	6,78	18,31	
PJAO 15	15	7,57	20,44	*
PJAR 08	8	6,01	16,23	
PJAR 10	10	6,68	18,04	
PJAR 125	12,5	7,52	20,30	*
PJAT 08	8	6,01	16,23	
PJAT 10	10	6,68	18,04	
PJAT 125	12,5	7,52	20,30	
PJNE 08	8	7,98	21,55	
PJNE 10	10	8,69	23,46	
PJNE 125	12,5	9,78	26,41	

CAPSULES, END CAPS and THREE-WAYS JOINTS

* Capsules & end caps of the on demand profiles are also on demand

LEFT CAPSULES ANODIZED ALUMINIUM (silver, copper, titanium and gold)

(silver, copper, utaniur	n and gold)		
Article	H mm	€/Pack 10 Pcs	€/Pack 2 Pcs
CPJAA/	06/08/10/125	62,24	13,69
CPJAA 15/	15	69,09	15,20
IPJAA/	06/08/10/125	62,24	13,69
IPJAA 15/	15	72,39	15,92
TPJAA/	06/08/10/125/15	29,54	6,44
СРЈАО/	06/08/10	62,24	13,69
CPJAO 15/	15	69,09	15,20
IPJAO/	06/08/10	62,24	13,69
IPJAO 15/	15	72,39	15,92
TPJAO/	06/08/10/15	29,54	6,44
CPJAR/	08/10/125	64,41	14,76
IPJAR/	08/10/125	64,41	14,76
TPJAR/	08/10/125	29,54	6,44
CPJAT/	08/10/125	64,41	14,76
IPJAT/	08/10/125	64,41	14,76
TPJAT/	08/10/125	29,54	6,44
CPJNE/	08/10/125	83,69	18,42
IPJNE/	08/10/125	83,69	18,42
TPJNE/	08/10/125	29,54	6,44
Choose the desired	pack. & height		

Ex.: 4,5 mm capsule in 10 Pcs Pack - CPJAA 10/10

JOINTS - PLASTIC			
Article	H mm	€/Pack 10 Pcs	€/Pack 2 Pcs
GIJA/	06/08/10/ 125/15	28,15	6,16
Choose the desired p Ex.: 10 mm joint in 10)	
EXTERNAL CAPSULES	СРЈ/.	СРЈД/.	
INTERNAL CAPSULES	IPj/	IPJD/.	
CAPS		JOINTS	
4			Þ
ТРЈ/		GIJA/	

The right capsules are available on demand and must be used only in the following cases:

A) when you are laying the cut base of the profile perpendicularly on the floor;



example: IPJDAA 06.

Add "D" to the article code. For example: CPJDAA 06.

Anodized ALUMINIUM (silver, copper, titanium, gold and black) / PLASTIC

B) as an alternative to end-caps (right side).



Add "D" to the article code. For example: CPJDAA 06.

🛪 = Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed **PROGRESS®** ILES

It can be used to close the perimeter of coverings and like a connection profile between step tread and riser of stairs coated with ceramic or natural stone tiles. Its particular section and elegance, the availability in five different finishes and special pieces such as internal and external corners, end caps and joints make PROJOLLY a much sought-after and elegant profile that allows a workmanlike application. POLISHED ALUMINIUM PJ... 03 🕈 H 3 mm Pl... 045 H 4.5 mm PJ... 06 H 6 mm PJ... 08 H 8 mm EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS POLISHED ALUMINIUM (chrome-copper-titanium-gold-black) thermo packed - bar length 2,7 lm - pack. 40 Pcs - 108 lm (H 15 mm - 54 lm) PJ... 10 Hmm Article €/Im €/Pc PJBC 03 H 10 mm 8,09 21,84 3 PIBC 045 45 8 32 22 46 PJBC 06 6 8,53 23,03 PJBC 08 8 9,19 24,81 PJ... 125 PJBC 10 10 27,54 10,20 PJBC 125 12.5 11,52 31,10 H 12,5 mm PJBC 15 15 12,55 33,89 Choose "PROJOLLY" according to the tile thickness and desired finish. 2. Cut "PROJOLLY" to the desired length and apply the adhesive on the support where the profile will be laid. 3. Press the anchoring flange of "PROJOLLY" into the adhesive. 4. Lay the tiles, aligning them with the profile leaving a 2 mm joint. Remove immediately all remains of adhesive from the surface of the profile. 5. Fill the joints between PIBO 03 * 21.84 3 8.09 PJBO 045 4,5 8,32 22,46 PJBO 06 8,53 23,03 * 6 PIRC 15 PJBO 08 24,81 8 9,19 PIBO 10 10 10,20 27.54 the profile and the tiles with grout, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the H 15 mm **PJBO 125** 12,5 11,52 31,10 profile PJBR 08 * 8 9.19 24.81 PJBR 10 10 10,20 27,54 PJBR 125 12,5 11,52 31,10 * PIBT 08 9.19 24 81 COLOURS 8 PJBT 10 10 10,20 27,54 POLISHED **PJBT 125** 12,5 11,52 31,10 PIBN 08 11.93 32.21 * 8

BC - Polished chrome alum. BR - Polished copper alum. BT - Polished titanium alum. BO - Polished gold alum. BN - Polished black alum

PJBN 10

PJBN 125

CAPSULES, END CAPS and THREE-WAYS JOINTS

PROJOLLY is a rounded bead profile in polished aluminium that can be applied on external corners of coverings.

POLISHED ALUMINIUM (chrome, copper, titanium, gold, black) / PLASTIC

33,86

36,15

6.16

*

12.54

13,39

JOINTS - PLASTIC Article Hmm 06/08/10/ 28,15 GIIA .../... 125/15

10

12,5

Choose the desired pack. & height Ex.: 10 mm joint in 10 Pcs Pack - GIJA 10/10




LEFT CAPSULES POL	ISHED ALUMINIUM chrome	e, copper, titaniu	m and gold
Article	H mm	€/Pack 10 Pcs	€/Pack 2 Pcs
CPJBC/	06/08/10/125	62,24	13,69
CPJBC 15/	15	69,09	15,20
IPJBC/	06/08/10/125	62,24	12,87
IPJBC 15/	15	72,39	15,92
TPJBC/	06/08/10/125/15	29,54	6,44
СРЈВО/	06/08/10/125	62,24	13,69
IPJBO/	06/08/10/125	62,24	12,87
трјво/	06/08/10/15	29,54	6,44
CPJBR/	08/10/125	91,16	24,68
IPJBR/	08/10/125	91,16	24,68
TPJBR/	08/10/125	29,54	6,44
CPJBT/	08/10/125	64,41	14,76
IPJBT/	08/10/125	64,41	14,76
TPJBT/	08/10/125	29,54	6,44
CPJBN/	08/10/125	118,42	26,05
IPJBN/	08/10/125	118,42	26,05
TPJBN/	08/10/125	29,54	6,44

Ex.: 4,5 mm capsule in 10 Pcs Pack - CPJBC 10/10

(*) 12,5/15 mm NOT SUITABLE FOR THREE-WAYS CORNER

Capsules & end caps of the on demand profiles are also on demand 🚼

The right capsules are available on demand and must be used only in the following cases: A) when you are laying the cut base of the profile perpendicularly on the floor;



Add "D" to the article code. For example: CPJDBC 06.

Add "D" to the article code For example: IPJDBC 06.

B) as an alternative to end-caps (right side).




LEFT CAPSULES RIGHT CAPSULES Add "D" to the article code. For example: CPJDBC 06.

PROJOLLY

WALLS

CHROME, COPPER, TITANIUM, GOLD AND BLACK







PROJOLLY

WALLS

BRUSHED ALUMINIUM



EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS



 Choose "PROJOLLY" according to the tile thickness and desired finish.
 Cut "PROJOLLY" to the desired length and apply the adhesive on the support where the profile will be laid.
 Press the anchoring flange of "PROJOLLY" into the adhesive.
 Lay the tiles, aligning them with the profile leaving a 2 mm joint. Remove immediately all remains of adhesive from the surface of the profile.
 E fill the birth the profile and the birth with remove into each the adhesive the provide the profile. Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile.



sought-after and elegant profile that allows a workmanlike application.

BRUSHED POLISHED ALUMINIUM (silver-gold-copper-titanium-black) thermo packed - bar length 2,7 lm - pack. 40 Pcs - 108 lm

•	• •			_
Article	Hmm	€/lm	€/Pc	
PJBS 03	3	9,52	25,70	
PJBS 045	4,5	9,87	26,65	
PJBS 08	8	10,58	28,57	
PJBS 10	10	11,52	31,10	
PJBS 125	12,5	12,87	34,75	
PJRS 03	3	9,52	25,70	*
PJRS 045	4,5	9,87	26,65	*
PJRS 08	8	10,58	28,57	*
PJRS 10	10	11,52	31,10	
PJRS 125	12,5	12,87	34,75	_
PJBOS 03	3	9,52	25,70	*
PJBOS 045	4,5	9,87	26,65	_*
PJBOS 08	8	10,58	28,57	*
PJBOS 10	10	11,52	31,10	*
PJBOS 125	12,5	12,87	34,75	*
PJTS 03	3	9,52	25,70	_
PJTS 045	4,5	9,87	26,65	
PJTS 08	8	10,58	28,57	
PJTS 10	10	11,52	31,10	
PJTS 125	12,5	12,87	34,75	_
PJNS 08	8	13,45	36,31	
PJNS 10	10	14,63	39,50	_
PJNS 125	12,5	16,58	44,77	

COLOURS

PROJOLLY is a rounded bead profile in brushed aluminium that can be applied on external corners of coverings. It

can be used to close the perimeter of coverings and like a connection profile between step tread and riser of stairs coated with ceramic or natural stone tiles. Its particular section and elegance, the availability in four different finishes and special pieces such as internal and external corners, end caps and joints make **PROJOLLY** a much



NS - Brushed polished black alum

AVAILABLE MINIMUM QUANTITY 100 PCS by colour and height



© 2022 All dights reserved by Progress Profiles. Pdnted in Italy

CAPSULES, END CAPS and THREE-WAYS JOINTS BRUSHED POLISHED ALUMINIUM (silver, copper, titanium, black) / PLASTIC

★ Capsules & end caps of the on demand profiles are also on demand

LEFT CAPSULES - BRUSHED POLISHED ALUMINIUM r-gold-conner-titanium-black

silver-gold-copper-utar	IIUITI-DIdCK		
Article	Hmm	€/Pack 10 Pcs	€/Pack 2 Pcs
CPJBS/	08/10/125	72,52	15,41
IPJBS/	08/10/125	72,52	15,41
TPJBS/	08/10/125	29,54	6,44
CPJBOS/	08/10/125	72,52	15,41
IPJBOS/	08/10/125	72,52	15,41
TPJBOS/	08/10/125	29,54	6,44
CPJRS/	08/10/125	72,52	15,41
IPJRS/	08/10/125	72,52	15,41
TPJRS/	08/10/125	29,54	6,44
CPJTS/	08/10/125	72,52	15,41
IPJTS/	08/10/125	72,52	15,41
TPJTS/	08/10/125	29,54	6,44
CPJNS/	08/10/125	93,31	20,54
IPJNS/	08/10/125	93,31	20,54
TPJNS/	08/10/125	29,54	6,44

Choose the desired pack, & height Ex.: 4,5 mm capsule in 10 Pcs Pack - CPJBS 10/10

OFILES







INTERNAL CAPSULES



IPJD

A) when you are laying the cut base of the profile perpendicularly on the floor;

The right capsules are available on demand and must be used only in the following cases:





Add "D" to the article code. For example: CPJDBS 08

Add "D" to the article code. For example: IPJDBS 08.

B) as an alternative to end-caps (right side).



LEFT CAPSULES Add "D" to the article code. For example: CPJDBS 08





GIJA .../...



PROJOLLY is a rounded bead profile in varnished aluminium that can be applied on external corners of coverings. It can be used to close the perimeter of coverings. Its particular section and elegance, the availability in five different colours and special pieces such as internal and external corners, end caps and joints make **PROJOLLY** a much sought-after and elegant profile that allows a workmanlike application.

VARNISHED ALUMINIUM

PROJOLLY




VARNISHED ALUMINIUM (HOT-WORKED 200°) thermo packed bar length 2,7 lm - pack. 20 Pcs-54 lm (colour white 40 Pcs - 108 lm)

Article	H mm	€/lm	€/Pc
PJA 06-01	6	6,03	16,28
PJA 08	8	6,71	18,12
PJA 10	10	7,26	19,60
PJA 125-01	12,5	7,78	21,01

With H 8 and 10 mm available in the colours: 01 - 0106 - 0311 - 06 - 11 Available on demand: 010 - 02-03-0211-10-17. The code of the selected colour must be added to the article code. E.g.: PJA 08... (chosen colour white) PJA 08-01.



On demand may be realised in other finishes of the colour chart. Contact our customer service for minimal quantity, timing and price.



EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS



 Choose "PROJOLLY" according to the tile thickness and desired colour.
 Cut "PROJOLLY" to the desired length and apply the adhesive on the support where the profile will be laid.
 Press the anchoring flange of "PROJOLLY" into the adhesive.
 Lay the tiles, aligning them with the profile leaving a 2 mm joint. Remove immediately all remains of adhesive from the surface of the profile.
 Fill the joints between the profile and the tiles with grout, in order to avoid under champion of the profile. to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile.

0

COLOURS 01 - Varnished white alum. (9016) 0106 - Varnished white Ivory alum. (9001) 0311 - Varnished asphalt grey alum. (7043) 06 - Varnished ivory alum. (1015) 11 - Varnished black alum. (9005)

AVAILABLE MINIMUM QUANTITY 100 PCS by colour and height	
(Price to be agreed, Production delay 4/5 weeks)	

010 - Varnished white matt	02 - Varnished light grey alum.	03 - Varnished stone grey alum.
alum. (9016)	(7035)	(7030)
0211 - Varnished quartz grey	10 - Varnished klinker red alum.	17 - Varnished bahama
alum. (7039)	(8004)	beige alum.

CAPSULES, END	DCAPS and	THREE-WAYS	JOINTS
---------------	-----------	------------	--------

VARNISHED ALUMINIUM / PLASTIC

LEFT CAPSULES VAR	NISHED ALUMINIUN	I (HOT-WORK	(ED 200°)
Article	H mm	€/Pack 10 Pcs	€/Pack 2 Pcs
СРЈА/	08/10/125	63,77	14,03
IPJA/	08/10/125	63,77	14,03
TPJA/	08/10/125	29,54	6,44

Choose the desired pack. & height Ex.: 4,5 mm capsule in 10 Pcs Pack - **CPJA 10-06/10 10/10**



Article	Hmm	€/Pack 10 Pcs	€/Pack 2 Pcs
GIJA/	08/10/125	28,15	6,16
Choose the desired Ex.: 10 mm joint in 1	pack. & height 0 Pcs Pack - GIJA 10/ 1	10	
END CAP		JOINT	

Capsules & end caps of the on demand profiles are also on demand


The right capsules are available on demand and must be used only in the following cases A) when you are laying the cut base of the profile perpendicularly on the floor; Add "D" to the article code. For example: CPJDA 06-01. Add "D" to the article code. For example: IPJDA 06-01. B) as an alternative to end-caps (right side). LEFT CAPSULES RIGHT CAPSULES

Add "D" to the article code. For example: CPJDA 06-01.




PROJOLLY

SHOCKPROOF NON - TOXIC COLORED VINYL RESIN



EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS



 Choose "PROJOLLY" according to the tile thickness and desired colour.
 Cut "PROJOLLY" to the desired length and apply the adhesive on the support where the profile will be laid.
 Press the anchoring flange of "PROJOLLY" into the adhesive.
 Lay the tiles, aligning them with the profile leaving a 2 mm joint.
 Fill the joints between the profile and the tiles with grout, in order to avoid water transition. stagnation.



NON-TOXIC SHOCKPROOF VINYL RESIN

application.

bar length 2,7 Im - pack. 54 Im (colour white pack. 108 Im)

		•	
Article	Hmm	€/lm	€/Pc
РЈ 06	6	1,24	3,35
PJ 08	8	1,38	3,73
РЈ 10	10	1,50	4,05
PJ 125	12,5	1,63	4,40

Available in the colours: 00 - 01 - 02 - 03 - 04 - 05 - 06 - 07 - 08 - 09 -11-12 - 13 - 14 - 15 - 17 - 18 - 0106. Available on demand 10 -16 -19 - 20 - 21 - 22 - 23 - 24 - 25 - 26 - 27

28 - 29 with a minimum quantity order of 800 pcs. The code of the selected colour must be added to the article code. E.g.: PJ 06... (chosen colour white) PJ 06-01.

WHITE NOT FOR SALE SINGLY



NON-TOXIC SHOCKPROOF VINYL RESIN MIRROR LINE EXTRA POLISHED - bar length 2,7 Im

PROJOLLY is a rounded bead profile in shockproof non - toxic colored vinyl resin that can be applied on external

corners of coverings. It can be used to close the perimeter of coverings. Its particular section, the availability in different colours also on demand and special pieces such as internal and external corners make **PROJOLLY** a much sought-after profile. It can be easily matched with the wall covering and allows an elegant workmanlike

pack. 54 Im (colour white p	ack. 108 lm)	. 0. 1	LINE	P
Article	Hmm	€/lm	€/Pc	Γ
PJML 06-00/01	6	1,53	4,13	
PJML 06	6	1,53	4,13	*
PJML 08-00/01	8	1,67	4,51	
PJML 08	8	1,67	4,51	*
PJML 10-00/01	10	1,80	4,86	
PJML 10	10	1,80	4,86	*
PJML 125-00/01	12,5	1,94	5,24	
PJML 125	12,5	1,94	5,24	*


avaiable in the color: 01 - 00 (Available on demand 0106-02-03-04-05-07-08-09-10-11-14-15-16-17-0106-19-20-21-22-23-24-25-26-27-28-29 with a minimum quantity order of 800 pcs.) The code of the selected colour must be added to the article code. E.g.: PJ 06... (chosen colour white) PJ 06-01.

Prices per metre are approximate. Articles not for sale singly.

WHITE NOT FOR SALE SINGLY

AVAILABLE MINIMUM QUANTITY 800 PCS by colour and height (Price to be agreed. Production delay 4/5 w



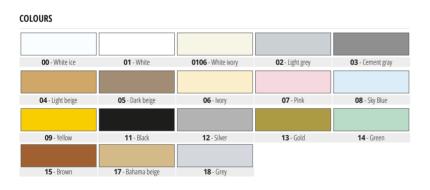

CAPSULES for three-ways joints

POLYPROPYLENE/POLYETYLENE UV RESISTANT

* Capsules & end caps of the on demand profiles are also on demand

POLYPROPYLENE / POLYETYLENE UV RESISTANT				
Article	Hmm	€/Pack. 20 pcs	€/Pack. 5 pcs	
СРЈ 06/	6	22,08	6,62	
IPJ 06/	6	22,08	6,62	
СРЈ 08/	8	22,56	6,71	
IPJ 08/	8	22,56	6,71	
СРЈ 10/	10	23,08	6,90	
IPJ 10/	10	23,08	6,90	
СРЈ 125/	12,5	23,84	7,12	
IPJ 125/	12,5	23,84	7,12	

OFILES

Available in the colours: 01-02-03-04-05-06-07-08-09-10-11-12-13-14-15-16-17-18-0106 (not available 19-20-21-22-23-24-25-26-27-28-29). The code of the selected colour must be added to the article code E.g.: CPJ 06-.../... (chosen colour white) CPJ 06-01/20.

22




CPI ...-.../..









PROJOLLY MARBLE is a rounded bead profile in shockproof non - toxic marbled vinyl resin that can be applied on external corners of coverings. It can be used to close the perimeter of coverings. Its particular section, the availability of different marble effect finishes also on demand and special pieces such as internal and external corners make **PROJOLLY MARBLE** a much sought-after profile. it can be easily matched with the wall covering and allows an elegant workmanlike application.

WALLS



H mm

6

8

10

12,5

Available on demand MC - MB - MR - MA - MV - MVA - MAS - MBS - MRS - MVAS - MTC - MTS (MAB - MBC - MBO - MAM - MBD - MCRI -MCRC - MBDX - MGV - MGVC - MNA - MBPS - MVBL with a minimum

quantity order of 800 pcs). The code of the selected colour must be added to the article code.

€/lm

2,30

2,64

2,86

3,11

€/Pc

6,21

7,13

7,72

8,40

MARBLED NON-TOXIC VYNIL RESIN

Article

PJ... 06

PJ... 08

PJ... 10

PJ... 125

bar length 2,7 lm - pack. 40 Pcs - 108 lm

E.g.: PJ... 10 (chosen colour carrara) PJMC 10

* INSTRUCTIONS FOR LAYING

 Choose "PROJOLLY MARBLE" according to the tile thickness and desired colour. 2. Cut "PROJOLLY MARBLE" to the desired length and apply the adhesive on the support where the profile will be laid. **3**. Press the anchoring flange of "PROJOLLY MARBLE" into the adhesive. **4**. Lay the tiles, aligning them with the profile leaving a 2 mm joint. **5**. Fill the joints between the profile and the tiles with grout, in order to avoid water starsastion stagnation.

H 6 mm PJ...08 H 8 mm PJ...10 H 10 mm Pl...125 H 12,5 mm

EXAMPLES OF LAYING

PJ...06



with a			6.60		1 States	745		
MC - White carrara	MB - Real yellow beige	MA - Sky blue	MR - Pink portugal	MV - Green guatemalan	MVA - Green aquamarine	MAS - Soft blue	MRS - Soft pink	MBS - Soft beige
A.L.	A BAR							
MVAS - Soft green	MTC - Travertino light	MTS - Travertino dark						



PROJOLLY OPEN is a rounded bead profile in shockproof non - toxic marbled vinyl resin that can be applied on external corners of coverings. It can be used to close the perimeter of coverings. Its particular open section and the availability in white colour make **PROJOLLY OPEN** a practical and economic profile. It can be used where low cost and workmanlike application are required.



H 6 mm

H 9 mm

23



COLOURS



OTHER COLOURS ON DEMAND FOR A **MINIMUM OF 800 pcs**

WHITE VINYL RESIN bar length 2,7 lm - pack. 8	0 Pcs - 216 l	m			PJP 06-01
Article	Hmm	€/lm	€/Pc		
PJP 06-01	6	1,28	3,46	*	PIP 09-01
PJP 09-01	9	1,41	3,81	*	.,
ARTICL	ES NOT FOR	SALE SINGLY			

INSTRUCTIONS FOR LAYING

Choose "PROJOLLY OPEN" according to the tile thickness.
 Cut "PROJOLLY OPEN" to the desired length and apply the adhesive on the support where the profile will be laid.
 Press the anchoring flange of "PROJOLLY OPEN" into the adhesive. 4. Lay the tiles, aligning them with the profile leaving a 2 mm joint. 5. Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation.






PROGRESS® OFILE S

PROJOLLY ECO

PROJOLLY ECO is a rounded bead profile in shockproof non - toxic colored vinyl resin that can be applied on external corners of coverings. It can be used to close the perimeter of coverings. Its particular section, the availability of different colours also on demand and special pieces such as internal and external corners make **PROJOLLY ECO** a practical and economic profile. It can be easily matched with the wall covering and allows an elegant workmanlike application.

SHOCKPROOF NON - TOXIC COLORED VINYL RESIN

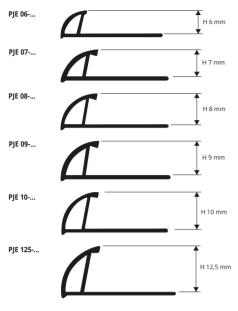



COLOURED VINYL RESIN bar length 2.7 im - pack. 80 Pcs - 216 in

Dai length 2,7 mi - patk. OU	-12 - 2 10 111			
Article	H mm	€/Im	€/Pc	
PJE 06-01/06/18	6	0,88	2,38	*
PJE 08	8	1,02	2,75	
PJE 10	10	1,16	3,13	
PJE 125	12,5	1,44	3,89	

ARTICLES NOT FOR SALE SINGLY

H 6 mm available the colours 01 - 06 - 18, other colours on demand. Available on demand in the colours 01 - 02 - 03 - 04 - 05 - 06 - 07 - 08 -09 - 10 - 11 - 12 - 13 - 14 - 15 - 16 - 17 - 18 (0106 - 19 - 20 - 21 - 22 - 23 - 24 - 25 - 26 - 27 - 28 - 29 with a minimum quantity order of 800 pcs. The code of the selected colour must be added to the article code. E.g.: PJE 08... (chosen colour white) PJE 08-01.



COLOURED VINYL RESIN

bar length **2,7 lm** - pack. **80 Pcs** - **216 lm**

Article	Hmm	€/lm	€/Pc		
PJE 07	7	0,95	2,56	*	
PJE 09	9	1,08	2,92	*	

ARTICLES NOT FOR SALE SINGLY

PRODUCTION ON DEMAND MINIMUM QUANTITY 800 PCS BY COLOUR AND HEIGH (Production delay 4/5 weeks)

(Froduction delay 4/5 weeks)

Available on demand in the colours: 01 - 02 - 03 - 04 - 05 - 06 - 07 - 08 - 09 - 10 - 11 - 12 - 13 - 14 - 15 - 16 - 17 - 18 - 19 - 20 - 21 - 22 - 23 - 24 -25 - 26 - 27 - 28 - 29 - 0106 with a minimum quantity order of 800 pcs. The code of the selected colour must be added to the article code. E.g. PJE 07... (chosen colour white) PJE 07-01.

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS



1. Choose "PROJOLLY ECO" according to the tile thickness and desired colour. 2. Cut "PROJOLLY ECO" to the desired length and apply the adhesive on the support where the profile will be laid. 3. Press the anchoring flange of "PROJOLLY ECO" into the adhesive. 4. Lay the tiles, aligning them with the profile leaving a 2 mm joint. 5. Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation.

COLOURS

01 - White	02 - Light grey	03 - Cement gray	04 - Light beige	05 - Dark beige	06 - Ivory
07 - Pink	08 - Sky blue	09 - Yellow	10 - Red	11 - Black	12 - Silver
13 - Gold	14 - Green	15 - Brown	16 - Blue	17 - Bahama beige	18 - Grey

AVAILABLE MINIMUM QUANTITY 800 PCS by colour and height

(Price to be agreed. Pro	(Price to be agreed. Production delay 4/5 weeks)					
0106 - White ivory	19 - Beige	20 - Dark ivory				
21 - Light pink	22 - Dark pink	23 - Dark antique pink				
24 - Dark sky blue	25 - Brick red	26 - Turquoise green				
27 - Dark green	28 - Hazel brown	29 - Dak browrn				

CAPSULES for three-ways joints

* Capsules & end caps of the on demand profiles are also on demand



EXTERNAL CAPSULES
1
CPJE/

COLOURED PLASTIC			
Article	Hmm	€/Pack. 20 pcs	€/Pack. 5 pcs
CPJE 06-01/06/18/	6	19,78	5,22
CPJE 08/	8	21,04	5,55
CPJE 10/	10	22,56	5,91
CPJE 125/	12,5	25,86	6,79

ARTICLES NOT FOR SALE SINGLY

H 6 mm available the colours 01 - 06 - 18, other colours on demand. Available in the colours: 01 - 02 - 03 - 04 - 05 - 06 - 07 - 08 - 09 - 10 - 11 - 12 - 13 - 14 - 15 - 16 - 17 - 18 (not available 0106 - 19-20-21-22-23-24-25-26-27-28-29). The code of the selected colour must be added to the article code

COLOURED PLASTIC

The code of the selected colour must be added to the article code. E.g.: CPJE 08-.../... (chosen colour white) CPJE 08-01/20.

24

WALLS

PROJOLLY ECO MARBLE is a rounded bead profile in shockproof non - toxic marbled vinyl resin that can be applied on external corners of coverings. It can be used to close the perimeter of coverings. Its particular section and the availability of different marble effect finishes, also on demand, and special pieces such as internal and external corners make **PROJOLLY ECO MARBLE** a much sought-after profile. it can be easily matched with the wall covering and allows an elegant workmanlike application.

PROJOLLY ECO MARBLE SHOCKPROOF NON - TOXIC MARBLED VINYL RESIN WALLS



SHOCKPROOF MARBLED VINYL RESIN har length 2 7 lm - nack 80 Pcs - 216 lm

burrengen z,, im pack oo res zro im				
Article	Hmm	€/lm	€/Pc	
PJE 06	6	1,61	4,35	*
PJE 08	8	1,71	4,62	
PJE 10	10	1,83	4,94	

ARTICLES NOT FOR SALE SINGLY

PJE... 125 available on demand.

PIE... 125 available on demand. Available in the colours: MC - MB - MR - MA - MV - MVA - MAS - MBS - MRS - MVAS - MTC - MTS (on demand MAB - MBC - MBO - MAM -MBD - MCRI - MCRC - MBDX - MGV - MGVC - MNA - MBPS - MVBL with a minimum quantity order of 800 pcs).

The code of the selected colour must be added to the article code. E.g.: PJE... 06 (chosen colour carrara) PJEMC 06.



SHOCKPROOF MARBLED VINYL RESIN . OO D

Dar length 2,7 mi - pack. 80 PCS - 216 mi					
Article	Hmm	€/lm	€/Pc		
PJE 07	7	1,71	4,62	*	
PJE 09	9	1,83	4,94	*	


ARTICLES NOT FOR SALE SINGLY

PRODUCTION ON DEMAND MINIMUM QUANTITY 800 PCS BY COLOUR AND HEIGH

(Production delay 4/5 weeks)

Available on demand in the colours: MC - MB - MR - MA - MV - MVA - MAS - MBS - MRS - MVAS - MTC - MTS - MAB - MBC - MBO - MAM -MBD - MCRI - MCRC - MBDX - MGV - MGVC - MNA - MBPS - MVBL with a minimum quantity order of 800 pcs.

The code of the selected colour must be added to the article code. E.g.: PJE... 06 (chosen colour carrara) PJEMC 06.

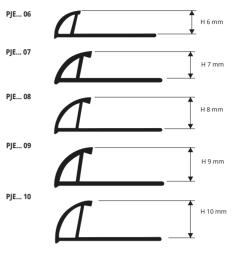

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS



1. Choose "PROJOLLY ECO MARBLE" according to the tile thickness and desired finish. 2. Cut "PROJOLLY ECO MARBLE" to the desired length and apply the adhesive on the support where the profile will be laid. 3. Press the anchoring flange of "PROJOLLY ECO MARBLE" into the adhesive. 4. Lay the tiles, aligning them with the profile leaving a 2 mm joint. 5. Fill the joints between the profile and the tiles with grout, in order to avoid water steamofile. in order to avoid water stagnation.

COLOURS

1 AL	Car H		1.1.1		640	- Le		1049
MC - White carrara	MB - Real yellow beige	MA - Sky blue	MR - Pink portugal	MV - Green guatemalan	MVA - Green aquamarine	MAS - Soft blue	MRS - Soft pink	MBS - Soft beige
1.2.7								
MVAS - Soft green	MTC - Travertino light	MTS - Travertino dark						

AVAILABLE MINIMUM QUANTITY 800 PCS by colour and height (Price to be agreed. Production delay 4/5 weeks)


1		PR 41	A PARTICIPAL	AN DE		the state		
MNA - Navona	MBC - Polished chrome	MBD - Bardiglio	MGV - Veined grey	MGVC - Light veined grey	MBPS - Salt-and-pepper beige	MVBL - Brazil green	MCRI - Ivory cream	MCRC - Light cream
			2 water					
MBO - Polished gold	MAM - Macauba blue	MAB - Blue	MBDX - Burgundy					

25

🖈 = Production on demand with minimum quantity of 800 pcs. Production delay 4/5 weeks. Price to be agreed

PROJOLLY TRIANGLE

POLISHED, SUPER POLISHED AND BRUSHED STAINLESS STEEL AISI 304/1.4301-V2A

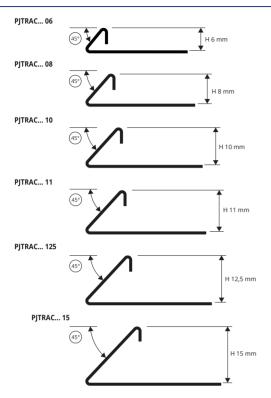

POLISHED STAINLESS STEEL AISI 304/1.4301-V2A with protective film bar length 2,7 lm - pack. 20 Pcs - 54 lm - 8/10 mm

Article	Hmm	€/lm	€/Pc
PJTRAC 06	6	9,58	25,87
PJTRAC 08	8	10,07	27,19
PJTRAC 10	10	10,57	28,54
PJTRAC 11	11	10,88	29,38
PJTRAC 125	12,5	11,32	30,56
PITRAC 15	15	11,82	31,91

SUPER POLISHED STAINLESS STEEL AISI 304/1.4301-V2A -

bar length 2,7 lm - pack. 20 Pcs -	LINE		
Article	Hmm	€/Im	€/Pc
PJTRACML 06	6	12,94	34,94
PJTRACML 08	8	13,62	36,77
PJTRACML 10	10	14,31	38,64
PJTRACML 11	11	14,74	39,80
PJTRACML 125	12,5	15,30	41,31
PJTRACML 15	15	15,99	43,17

 Choose "PROJOLLY TRIANGLE" according to the tile thickness and desired finish.
 Cut "PROJOLLY TRIANGLE" to the desired length and apply the adhesive on the support where the profile will be laid.
 Press the anchoring flange of "PROJOLLY TRIANGLE" into the adhesive.
 Lay the tiles, aligning them with the profile leaving a 2 mm joint. Remove immediately all remains of adhesive from the surface of the profile.
 Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile.



BRUSHED STAINLESS STEEL AISI 304/1.4301-V2A

PROJOLLY TRIANGLE is a triangle-shaped bead profile polished, super polished and brushed stainless steel AISI

304/1.4301-V2A that can be applied on external corners of coverings. It can be used to close the perimeter of coverings and like a connection profile between step tread and riser of stairs coated with ceramic or natural stone tiles. Its particular section, the availability in three different finishes and special pieces such as internal and external corners, end caps and joints make **PROJOLLY TRIANGLE** a much sought-after profile that allows a workmanlike application even in environments subject to high mechanical stresses.

bar length 2,7 lm - pack. 20 Pcs - 54 lm - 8/10 mm				
H mm	€/lm	€/Pc		
6	11,08	29,92		
8	11,69	31,56		
10	12,18	32,89		
11	12,56	33,91		
12,5	13,06	35,26		
15	13,68	36,94		
	H mm 6 8 10 11 12,5	H mm €/Im 6 11,08 8 11,69 10 12,18 11 12,56 12,5 13,06		

COLOURS	
AC - Polished stainless steel	ACML - Super polished stainless ACS - Brushed stainless steel AISI

304/1.4301-V2A AISI 304/1.4301-V2A steel AISI 304/1.4301-V2A

SUITABLE FOR USE IN CONTACT WITH FOODSTUFFS.

CAPSULES, END CAPS, THREE-WAYS JOINTS and JOINTS

POLISHED, SUPER POLISHED AND BRUSHED STAINLESS STEEL AISI 304/1.4301-V2A / PLASTIC

EXTERNAL / INTERNAL / THREE-WAYS CAPSULES and END CAPS - POLISHED STAINLESS STEEL					
Article	H mm	€/Pack. 10 pcs	€/Pack. 2 pcs		
CPJTRAC/	06-08-10-11-12,5-15	147,58	31,02		
IPJTRAC/	06-08-10-11-12,5-15	147,58	31,02		
CTPJTRAC/	06-08-10-11-12,5-15	191,96	40,32		
TPJTRAC/	06-08-10-11-12,5-15	45,78	9,80		
Chaosa the desired packaging: E.g. (DITDAC (10 (Dack 10 Dec)				

ITRAC-.../10 (Pack. 10 Pcs) oose the desired packaging: E.g.: CPITRAC-.../2 (Pack. 2 Pcs)

ARTICLES NOT FOR SALE SINGLY

EXTERNAL / INTERNAL / THREE-WAYS CAPSULES and END CAPS - SUPER POLISHED STAINLESS STEEL

Article	H mm	€/Pack. 10 pcs	€/Pack. 2 pcs
CPJTRACML/	06-08-10-11-12,5-15	184,73	38,85
IPJTRACML/	06-08-10-11-12,5-15	184,73	38,85
CTPJTRACML/	06-08-10-11-12,5-15	240,26	50,46
TPJTRACML/	06-08-10-11-12,5-15	58,83	12,41

Choose the desired packaging: E.g.: CPJTRACML -.../10 (Pack. 10 Pcs) CPITRACML -.../2 (Pack. 2 Pcs)

ARTICLES NOT FOR SALE SINGLY

EXTERNAL / INTERNAL / THREE-WAYS CAPSULES AND and CAPS - BRUSHED STAINLESS STEEL				
Article	H mm	€/Pack. 10 pcs	€/Pack. 2 pcs	
CPJTRACS/	06-08-10-11-12,5-15	168,50	35,40	
IPJTRACS/	06-08-10-11-12,5-15	168,50	35,40	
CTPJTRACS/	06-08-10-11-12,5-15	219,35	46,07	
TPJTRACS/	06-08-10-11-12,5-15	52,24	11,10	
Choose the desired packaging: E.g.: C	PITRACS/10 (Pack. 10 Pcs)			

CPJTRACS-.../2 (Pack. 2 Pcs)

ARTICLES NOT FOR SALE SINGLY

JOINTS - PLASTIC

Arti	cle	Hmm	€/Pack. 10 pcs	€/Pack. 2 pcs			
GIJTRA/	GIJTRA/ 06-08-10-11-12,5-15		26,08	5,60			
Choose the desired		8A/10 (Pack. 10 Pcs) 8A/2 (Pack. 2 Pcs)					
	ARTICLES NOT FOR SALE SINGLY						
EXTERNAL CAPSULE	INTERNAL CAPSULE	THREE-WAYS CAPSULE	END CAPS	JOINTS			
I	10	10)		6			
CPJTR/	IPJTR/	CTPJTR/	TPJTR/	GIJTRA/			



WALLS

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS



PROJOLLY TRIANGLE is a triangle-shaped bead profile in brass that can be applied on external corners of coverings. It can be used to close the perimeter of coverings and like a connection profile between step tread and riser of stairs coated with ceramic or natural stone tiles. Its particular section, the availability in different finishes make **PROJOLLY TRIANGLE** a much sought-after profile that allows an elegant workmanlike application.

TRIANGLE NATURAL, POLISHED VARNISHED, CHROMED AND ANTIQUE BRASS

PROJOLLY



NATURAL BRASS thermo packed

PJTROC 125

COLOURS

bar length 2,7 lm - pack. 20 Pcs - 54 lm						
Article	Hm	m €/	lm	€/Pc		
PJTRON 10	10	22	,28	60,16		
PJTRON 125	12,	5 24	,48	66,10		
SUPER POLISHED CHROMED BRASS thermo packed bar length 2,7 Im - pack. 20 Pcs - 54 Im						
Article	H mm	€/Im		€/Pc		
PJTROC 10	10	31,54	ļ	85,16		

12,5

34,24

92,45



POLISHED VARNISHED BRASS thermo packed bar length 2,7 Im - pack. 20 Pcs - 54 Im

 Article
 H mm
 €/lm

 PJTROL 10
 10
 26,92

 PJTROL 125
 12,5
 29,62


ANTIQUE BRASS thermo packed

bar length 2,7 lm - pack. 20 Pcs - 54 lm				
	Article	Hmm	€/Im	€/Pc
	PJTROB 10	10	39,73	107,27
	PJTROB 125	12,5	42,68	115,24

€/Pc

72,68


79,97



EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS



1. Choose "PROJOLLY TRIANGLE" according to the tile thickness and desired finish. 2. Cut "PROJOLLY TRIANGLE" to the desired length and apply the adhesive on the support where the profile will be laid. 3. Press the anchoring flange of "PROJOLLY TRIANGLE" into the adhesive. 4. Lay the tiles, aligning them with the profile leaving a 2 mm joint. Remove immediately all remains of adhesive from the surface of the profile. 5. Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile.

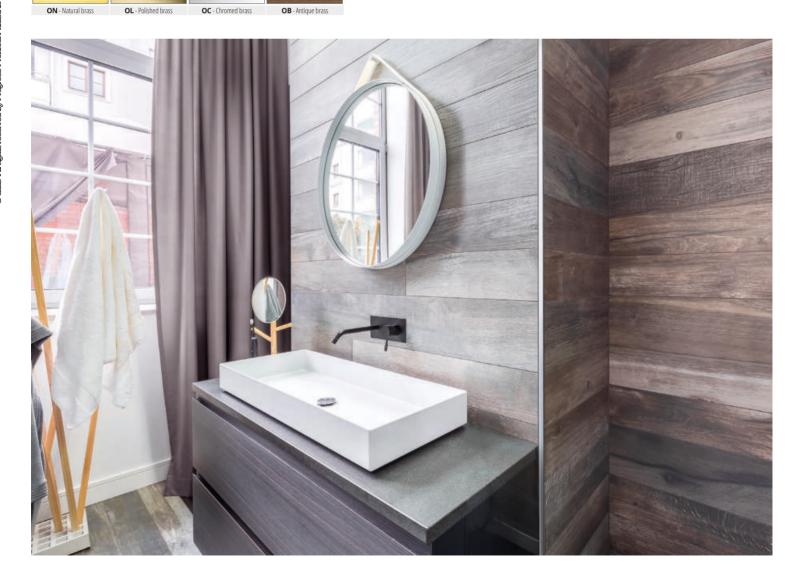




WALLS

PROJOLLY TRIANGLE

ANODIZED, POLISHED AND BRUSHED ALUMINIUM

PROJOLLY TRIANGLE is a triangle-shaped bead profile in anodized, polished and brushed aluminium that can be applied on external corners of coverings. It can be used to close the perimeter of coverings and like a connection profile between step tread and riser of stairs coated with ceramic or natural stone tiles. Its particular section, the availability in seven different finishes and special pieces such as internal and external corners, end caps and joints make PRÓJOLLY TRIANGLE a much sought-after profile that allows an elegant workmanlike application.

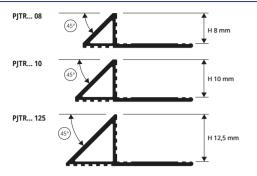

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS



 Choose "PROJOLLY TRIANGLE" according to the tile thickness and desired finish. 2. Cut "PROJOLLY TRIANGLE" to the desired length and apply the adhesive on the support where the profile will be laid.
 Press the anchoring flange of "PROJOLLY TRIANGLE" into the adhesive. 4. Lay the tiles, aligning them with the profile leaving a 2 mm joint. Remove immediately all remains of adhesive from the surface of the profile. 5. Fill the joints between the profile among the build provide more incredia to provide worther transmission. the tiles with grout, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile.



ANODIZED ALUMINIUM (silver - titanium - gold) thermo packed bar length 2,7 lm - pack. 40 Pcs - 108 lm

0 - 1			
Article	Hmm	€/lm	€/Pc
PJTRAA 08	8	5,55	14,99
PJTRAA 10	10	6,08	16,42
PJTRAA 125	12,5	6,86	18,52
PJTRAT 08	8	6,01	16,23
PJTRAT 10	10	6,66	17,98
PJTRAT 125	12,5	7,32	19,76
PJTRAO 08	8	5,68	15,34
PJTRAO 10	10	6,26	16,90
PJTRAO 125	12,5	6,99	18,87

BRUSHED POLISHED ALUMINIUM (silver - gold) thermo packed bar length 2.7 lm - pack. 40 Pcs - 108 lm

bai iengai =, , iiii paela ie ieb	a lengu -				
Article	Hmm	€/lm	€/Pc		
PJTRBS 08	8	10,06	27,16		
PJTRBS 10	10	10,84	29,27		
PJTRBS 125	12,5	12,27	33,13		
PJTRBOS 08	8	10,06	27,16	*	
PJTRBOS 10	10	10,84	29,27	*	
PJTRBOS 125	12,5	12,27	33,13	*	



POLISHED ALUMINIUM (chrome - titanium - gold) thermo packed bar length 2,7 lm - pack. 40 Pcs - 108 lm

sarrengar - , in paca is is in					
Article	Hmm	€/Im	€/Pc		
PJTRBC 08	8	9,32	25,16		
PJTRBC 10	10	9,80	26,46		
PJTRBC 125	12,5	11,10	29,97		
PJTRBT 08	8	9,32	25,16		
PJTRBT 10	10	9,80	26,46		
PJTRBT 125	12,5	11,10	29,97		
PJTRBO 08	8	9,32	25,16		
PJTRBO 10	10	9,80	26,46		
PJTRBO 125	12,5	11,10	29,97		

ON DEMAND MAY BE REALISED IN OTHER FINISHES OF THE COLOUR CHART.

CONTACT OUR CUSTOMER SERVICE FOR MINIMAL QUANTITY, TIMING AND PRICE.

COLOURS							
	ANODIZED			POLISHED		BRUSHED	POLISHED
1000							ON DEMAND
AA - Anodized silver alum.	AT - Anodized titanium alum.	AO - Anodized gold alum.	BC - Polished chrome alum.	BT - Polished titanium alum.	BO - Polished gold alum.	BS - Brushed pol. silver alum.	BOS - Brushed pol. gold alun

CAPSULES, END CAPS, THREE-WAYS JOINTS and JOINTS ANODIZED, POLISHED, BRUSHED POLISHED ALUMINIUM

* Capsules & end caps of the on demand profiles are also on demand CARCINES END CARS THREE WAYS ANODIZED ALUMINUUM CAPSULES. END CAPS. THREE-WAYS - POLISHED ALUM.

Article	H mm	€/Pack 10 Pcs	€/Pack 2 Pcs
CPJTRAA/	08/10/125	94,08	20,70
IPJTRAA/	08/10/125	94,08	20,70
TPJTRAA/	08/10/125	45,78	9,80
CPJTRAT/	08/10/125	94,08	20,70
IPJTRAT/	08/10/125	94,08	20,70
TPJTRAT/	08/10/125	45,78	9,80
CPJTRAO/	08/10/125	94,08	20,70
IPJTRAO/	08/10/125	94,08	20,70
TPJTRAO/	08/10/125	45,78	9,80

Article	H mm	€/Pack 10 Pcs	€/Pack 2 Pcs
CPJTRBC/	08/10/125	107,77	23,69
IPJTRBC/	08/10/125	107,77	23,69
TPJTRBC/	08/10/125	52,24	11,10
CPJTRBT/	08/10/125	107,77	23,69
IPJTRBT/	08/10/125	107,77	23,69
TPJTRBT/	08/10/125	52,24	11,10
CPJTRBO/	08/10/125	107,77	23,69
IPJTRBO/	08/10/125	107,77	23,69
TPJTRBO/	08/10/125	52,24	11,10

Choose the desired pack. & height Ex.: 4,5 mm capsule in 10 Pcs Pack - CPJTRBC 10/10

JOINTS

U

GIJTRA .../..

CAPSULES, END CAPS, THREE-WAYS - BRUSHED POLISHED ALUM.				
Article	H mm	€/Pack 10 Pcs	€/Pack 2 Pcs	
CPJTRBS/	08/10/125	122,73	27,00	
IPJTRBS/	08/10/125	122,73	27,00	
TPJTRBS/	08/10/125	58,83	12,41	
CPJTRBOS/	08/10/125	122,73	27,00	
IPJTRBOS/	08/10/125	122,73	27,00	
TPJTRBOS/	08/10/125	58,83	12,41	

Choose the desired pack. & height Ex.: 4,5 mm capsule in 10 Pcs Pack - **CPJTRBS 10/10**

JOINTS - PLASTIC

Article	Hmm	€/Pack 10 Pcs	€/Pack 2 Pcs
GIJTRA/	08/10/125	27,38	5,89
Chaosa the desired p	ack & boight		

Choose the desired pack. & height Ex.: 10 mm joint in 10 Pcs Pack - GIJTRA 10/10

EXTERNAL CAPSULE INTERNAL CAPSULE

Choose the desired pack. & height Ex.: 4,5 mm capsule in 10 Pcs Pack - **CPJTRAA 10/10**





THREE-WAYS CAPSULE



END CAPS

PROGRESS® OFILES



CPITR

PROJOLLY ANGLE 135 is a polished and satin stainless steel profile that can be use as protection for the 135° corners of coverings. Its particular section, the availability in two different finishes make **PROJOLLY ANGLE 135** a much sought-after profile that allows an elegant workmanlike application.



POLISHED STAINLESS STEEL AISI 304/1.4301-V2A with protective film oth 2 7 lm - nack 20 Prs - 54 lm - 10/10 m

Dai lengui 2,7 mii - paul. 20 FCS - 34 mii - 10/10 mini					
Article	Hmm	€/lm	€/Pc		
PJTR135AC 08	8	15,63	42,20		
PJTR135AC 10	10	16,24	43,85		
PJTR135AC 11	11	16,60	44,82		
PJTR135AC 125	12,5	17,02	45,95		

COLOURS







BRUSHED STAINLESS STEEL AISI 304/1.4301-V2A with protective film bar length 2,7 lm - pack. 20 Pcs - 54 lm - 10/10 mm

bui iciigui 2,7 iii puck. 20			
Article	Hmm	€/lm	€/Pc
PJTR135ACS 08	8	18,47	49,87
PJTR135ACS 10	10	19,08	51,52
PJTR135ACS 11	11	19,56	52,81
PJTR135ACS 125	12,5	19,92	53,78

SUITABLE FOR USE IN CONTACT WITH FOODSTUFFS

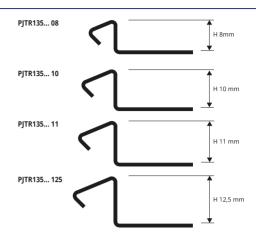

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS



1. Choose "PROJOLLY ANGLE 135" according to the tile thickness and desired finish. 2. Cut "PROJOLLY ANGLE 135" to the desired length and apply the adhesive on the support where the profile will be laid. 3. Press the anchoring flange of "PROJOLLY ANGLE 135" into the adhesive. 4. Lay the tiles, aligning them with the profile leaving a 2 mm joint. Remove immediately all remains of adhesive from the surface of the profile. 5. Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile.









PROINTER AC

POLISHED, SUPER POLISHED AND BRUSHED STAINLESS STEEL AISI 304/1.4301-V2A

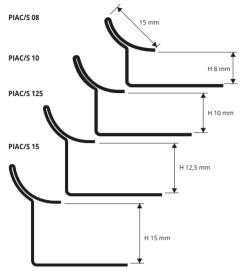

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS



 Choose "PROINTER AC" according to the tile thickness and desired finish.
 Cut "PROINTER AC" to the desired length and apply the adhesive on the support where the profile will be laid. 3. Press the anchoring flange of "PROINTER AC" into the adhesive. **4.** Lay the tiles, aligning them with the profile leaving a 2 mm joint. Remove immediately all remains of adhesive from the surface of the profile. **5.** Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile.



high mechanical stresses.

POLISHED STAINLESS STEEL AISI 304/1.4301 V2A with protective film ngth 2.7 lm - nack 20 Pcs - 54 lm - 10/10 mm

Article	H mm	€/lm	€/Pc		
PIAC 08	8	14,56	39,31		
PIAC 10	10	15,39	41,55		
PIAC 125	12,5	19,62	52,97		
PIAC 15	15	21.81	58.89	*	

SUPER POLISHED STAINLESS STEEL AISI 304/1.4301-V2A

thermo packed bar length 2,7 lm - pack. 20	MIRROF			
Article	Hmm	€/lm	€/Pc	ſ
PIACML 08	8	18,91	51,06	*
PIACML 10	10	21,79	58,83	*
PIACML 125	12,5	24,53	66,23	*
PIACML 15	15	27,22	73,49	*

COLOURS

AC - Polished stainless steel AISI ACML - Super polished stainless ACS - Brushed stainless steel AISI 304/1.4301-VZA steel AISI 304/1.4301-VZA 304/1.4301-VZA

SUITABLE FOR USE IN CONTACT WITH FOODSTUFFS.

Corners of the on demand profiles are also on demand 📩



BRUSHED STAINLESS STEEL AISI 304/1.4301 V2A with protective film bar length 2,7 Im - pack. 20 Pcs - 54 Im - 10/10 mm

Article	Hmm	€/lm	€/Pc	
PIACS 08	8	18,26	49,30	
PIACS 10	10	20,93	56,51	
PIACS 125	12,5	23,57	63,64	*
PIACS 15	15	26,16	70,63	*

Pack, 2 Pcs

Pack. 2 Pcs

INTERNAL, EXTERNAL, THREE-WAYS PROINTER CORNER JOINTS POLISHED STAINLESS STEEL AISL 316/1 4404-V4A - pack 2 Pcs

Article

Article

INTERNAL, EXTERNAL, THREE-WAYS PROINTER CORNER JOINTS
BRUSHED STAINLESS STEEL AISI 316/1.4404-V4A - pack. 2 Pcs

PROINTER KL ACC

STAINLESS STEEL AISI 304/1.4301-V2A

PROINTER KL ACC is a cove-shaped profile in stainless steel AISI 304/1.4301-V2A. The profile allows to connect the floor and wall coverings in ceramic and mosaic also with low thickness. It is particularly suitable to ensure cleanliness and hygiene in every kind of environment where good resistance to mechanical and chemical stresses are required. Its particular section makes **PROSHELL KL ALL** a much sought after profile.

-

PROINTER AC is a cove-shaped profile in polished, super polished and brushed stainless steel AISI 304 / 1.4301

V2A. It is particularly suitable to ensure cleanliness and hygiene in every kind of environment where high resistance to mechanical and chemical stresses are required. Its particular section and the availability in three finishes and special pieces, such as internal and external corners, make **PROINTER AC** a much sought after profile. The profile

is easy to match with the wall covering and allows a workmanlike application even in environments subject to

PIKL... 15 15 mm

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS



1. Choose "PROINTER KL ACC" according to the desired finish. 2. Cut "PROINTER KL ACC" to the desired length. 3. Apply the silicone along the floor-wall connection. 4. Press the arrowhead of "PROIN-TER KL ACC" into the silicone evenly untilit is completely adherent to the floor and wall

SUITABLE FOR USE IN CONTACT WITH FOODSTUFFS



30



POLISHED STAINLESS ST. AISI 304/1.4301-V2A with protective film bar length 2,7 lm - pack. 40 Pcs - 108 lm - 10/10mm

Article	Hmm	€/lm	€/Pc
PIKLAC 15	15	12,62	34.07

BRUSHED STAINLESS ST. AISI 304/1.4301-V2A with protective film bar length 2,7 lm - pack.. 40 Pcs - 108 lm - 8/10mm

Article	Hmm	€/lm	€/Pc
PIKLACS 15	15	15,94	43,04

COLOURS





SANDED STAINLESS ST. AISI 304/1.4301-V2A with protective film bar length 2,7 lm - pack. 40 Pcs - 108 lm - 10/10mm

Article	H mm	€/Im	€/Pc	
PIKLACSB 15	40,50	17,32	46,76	*

SUPER POLISHED ST. AISI 304/1.4301-V2A with protective film bar length 2,7 lm - pack.. 40 Pcs - 108 lm - 10/10mm

0 1				
Article	H mm	€/lm	€/Pc	
PIKLACML 15	15	16,54	44,66	*

AVAILABLE MINIMUM QUANTITY 100 PCS



ACSB - SPECIAL FINISH, REQUEST AVAILABILITY

***** = Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed

WALLS

PROINTER AC 316 is a cove-shaped profile in polished, super polished and brushed stainless steel AISI 316 / 1.404 - V4A. It is particularly suitable to ensure cleanliness and hygiene in every kind of environment where high resistance to mechanical and chemical stresses are required. Its particular section and the availability in three finishes and special pieces, such as internal and external corners, make **PROINTER AC 316** a much sought after profile. The profile is easy to match with the wall covering and allows a workmanlike application even in environments subject to high mechanical stresses.

PROINTER AC

POLISHED AND BRUSHED STAINLESS STEEL AISI 316/1.4401-V4A



POLISHED STAINLESS STEEL AISI 316/1.4404-V4A bar length 2,7 lm - pack. 20 Pcs - 54 lm - 10/10 mm



BRUSHED STAINLESS STEEL AISI 316/1.4404-V4A bar length 2,7 lm - pack. 20 Pcs - 54 lm - 10/10 mm

	Article	Hmm	€/lm	€/Pc		Article	Hmm	€/lm	€/Pc	
٢	PIACM 08	8	18,93	51,11	* 🧿	PIACMS 08	8	23,74	64,10	*
۲	PIACM 10	10	20,02	54,05	* 🧿	PIACMS 10	10	27,21	73,47	*
٢	PIACM 125	12,5	25,52	68,90	* 🧿	PIACMS 125	12,5	28,22	76,19	*
٢	PIACM 15	15	28,35	76,55	* 📀	PIACMS 15	15	34,00	91,80	*



SUITABLE FOR USE IN CONTACT WITH FOODSTUFFS.


Corners of the on demand profiles are also on demand 🜟


PIAC 125 scale 1:1 H 10 mm PIAC 15 scale 1:1 H 12.5 mm H 15 mm * * *

scale 1:1

PIAC 10 scale 1:1

316 STAINLES





1. Choose "PROINTERAC 316" according to the tile thickness and desired finish 2. Cut "PROINTER AC 316" to the desired length and apply the adhesive on the support where the profile will be laid. **3.** Press the anchoring flange of "PROINTER AC 316" into the adhesive. **4.** Lay the tiles, aligning them with the profile leaving a 2 mm joint. Remove immediately all remains of adhesive from the surface of the profile. **5.** Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile.

PROINTER KL ACC 316 is a cove-shaped profile in stainless steel AISI 316/1.4404-V4A. The profile allows to connect the floor and wall coverings in ceramic and mosaic also with low thickness. It is particularly suitable to ensure cleanliness and hygiene in every kind of environment where good resistance to mechanical and chemical stresses are required. Its particular section makes **PROSHELL KL ALL 316** a much sought after profile.

PROINTER KL ACC

STAINLESS STEEL AISI 316/1.4401-V4A



H 8 mr

WALLS

PROGRESS® OFILES


SUITABLE FOR USE IN CONTACT WITH FOODSTUFFS

WALLS


PROINTER AL

PROINTER AL is a cove-shaped profile in anodized and polished aluminium. It is particularly suitable to ensure cleanliness and hygiene is suitable in indoors environment where good resistance to mechanical and chemical stresses are required. Its particular section and the availability in four finishes and special pieces, such as internal and external corners, make **PROINTER AL** a much sought after profile. The profile is easy to match with the wall covering and allows a workmanlike application.

ANODIZED AND POLISHED ALUMINIUM

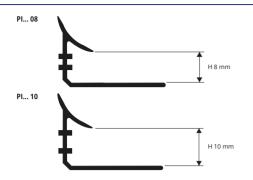

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS



1. Choose "PROINTER AL" according to the tile thickness and desired finish 2. Cut "PROINTER AL" to the desired length and apply the adhesive on the support where the profile will be laid. 3. Press the anchoring flange of PROINTER ALT into the adhesive. 4. Lay the tile, aligning them with the profile leaving a 2 mm joint. Remove immediately all remains of adhesive from the surface of the profile. **5.** Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile.

PROINTER KL ALL

POLISHED AND CHROMED BRASS AND ANODIZED AND POLISHED ALUMINIUM



ANODIZED GOLD OR SILVER ALUMINIUM thermo packed bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	Hmm	€/lm	€/Pc	
PIAA 08	8	6,97	18,82	
PIAA 10	10	7,44	20,09	
PIAO 08	8	6,97	18,82	*
PIAO 10	10	7,44	20,09	*

INTERNAL. EXTERNAL, THREE-WAYS PROINTER CORNER JOINTS ANODIZED GOLD (AO) or SILVER ALUMINIUM (AA) - pack. 2 Pcs

Article	Pack. 2 Pcs
REPI/2	27,90
RIPI/2	29,16
RITPI/2	27 90

Corners of the on demand profiles are also on demand 📩






POLISHED GOLD OR CHROMED ALUMINIUM thermo packed bar length 2,7 lm - pack. 40 Pcs - 108 lm


Article	Hmm	€/Im	€/Pc	
PIBC 08	8	10,73	28,97	-
PIBC 10	10	12,56	33,91	
PIBO 08	8	10,73	28,97	*
PIBO 10	10	12,56	33,91	*

INTERNAL, EXTERNAL, THREE-WAYS PROINTER CORNER JOINTS POLISHED GOLD (BO) or CHROMED ALUMINIUM (BC) - pack. 2 Pcs


Article	Pack. 2 Pcs
REPI/2	33,59
RIPI/2	34,86
RITPI/2	33,59
RITPI RIF	א



PROSHELL KL ALL is a cove-shaped profile in polished and chromed brass and anodized and polished aluminium. The profile allows to connect the floor and wall coverings in ceramic and mosaic also with low thickness. It is particularly suitable to ensure cleanliness and hygiene in every kind of environment where good resistance to mechanical and chemical stresses are required. Its particular section and availability in five different finishes, make profile and chemical stresses are required. make PROSHELL KL ALL a much sought after profile



EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS



1. Choose "PROINTER KL ALL" according to the desired finish. 2. Cut "PROINTER KL ALL" to the desired length. 3. Apply the silicone along the floor-wall connection. 4. Press the arrowhead of "PROINTER KL ALL" into the silicone evenly untili t is completely adherent to the floor and wall

Corners of the on demand profiles are also on demand 📩

ILES



POLISHED / CHROMED BRASS thermo packed bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	Hmm	€/lm	€/Pc		
PIKLOL 045	4,5	15,24	41,15		
PIKLOC 045	4,5	23,82	64,31	1	
CAPS - VARNISHED PLASTIC					
Article	Pack. 2 Po	s Pac	:k. 10 Pcs		
TPIKL/	3,28		16,33		



POLISHED CHROME ALUMINIUM / GOLD thermo packed bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	Hmm	€/lm	€/Pc	
PIKLBC 045	4,5	8,44	22,79	
PIKLBO 045	4,5	8,44	22,79	
ANODIZED SILVER ALUMINIUM thermo packed bar length 2,7 Im - pack. 40 Pcs - 108 Im				
Article	Hmm	€/lm	€/Pc	
PIKLAA 045	4,5	5,91	15,96	
CAPS - VARNISHED PL	ASTIC			
Article	Pack. 2 Po	s Pac	:k. 10 Pcs	
TPTPIKL/	3,28		16,33	
COLOURS				
-				
AA Apodizad silver alum	PC Dolichod chrome	alum PO D	olichod gold olum	

COLOURS OL - Polished brass OC - Chromed brass

AA - Anodized silver alum. BC - Polished chrome alum. BO - Polished gold alum. 🜟 = Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed




PROINTER is a cove-shaped profile in shockproof non - toxic colored vinyl resin. It is particularly suitable to ensure cleanliness and hygiene in public and industrial environments. Its particular section and the availability in twelve colours and special pieces, such as internal and external corners, make **PROINTER** a much sought after profile. It can be easily matched with the wall covering and allows an elegant workmanilke application.

SHOCKPROOF NON - TOXIC COLORED VINYL RESIN

PROINTER



EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS



1. Choose "PROINTER" according to the tile thickness and desired colour. 2. Cut "PROINTER" to the desired length and apply the adhesive on the support where the profile will be laid. 3. Press the anchoring flange of "PROINTER" into the adhesive. 4. Lay the tiles, aligning them with the profile leaving a 2 mm joint. 5. Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation.

0106 - White ivory

06 - Ivory

15 - Brown

02 - Light grev

10 - Red

17 - Bahama beige

03 - Cement grav

11 - Black

18 - Grey




NON-TOXIC SHOCKPROOF VINYL RESIN

bar length 2,7 im - pack. 20 Pcs - 54 im (white 108 im)					
	Article	H mm	€/lm	€/Pc	
	PI 06-01	6	1,41	3,81	*
	PI 07-01	7	1,51	4,08	*
	PI 08	8	1,62	4,37	
	PI 09-01	9	1,72	4,64	*
	PI 10	10	1.84	4.97	

H 6 mm available in white. Other colours on demand. Available on demand in the colours 01-02-03-05-06-10-11-12-15-17-18-0106 (04-07-08-09-13-14-19-20-21-22-23-24-25-26-27-28-29

with a minimum quantity order of 800 pcs. The code of the selected colour must be added to the article code. Eg: PI 06-... (chosen colour white) PI 06-01.

WHITE NOT FOR SALE SINGLY

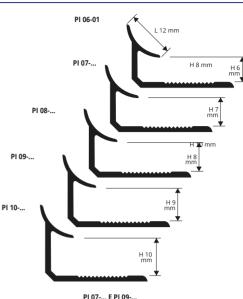

PRODUCTION ON DEMAND MINIMUM QUANTITY 800 PCS BY COLOUR AND HEIGHT (PRODUCTION DELAY 4/5 WEEKS)

AVAILABLE MINIMUM QUANTITY 800 PCS by colour and height (Price to be agreed. Production delay 4/5 weeks)



COLOURS



Article	€/Pack.
REPI/	52,35
RIPI/	52,35
RITPI/	52,35

Available in the colours: 01-02-03-05-06-10-11-12-15-17-18-0106. Available on demand 04-07-08-09-13-14-19-20-21-22-23-24-25-26-27-28-29.

27-28-29. The code of the selected colour must be added to the article code. E.g.: RIPI... (Chosen colour lvory 06) RIPI 06. PLEASE CHOOSE THE DESIRED COLOUR CODE FROM OUR COLOUR CHART. SPECIFICATION OF THE HEIGHT IS NOT REQUIRED.


01 - White	0106 - White ivory	02 - Light grey	03 - Cement gray	05 - Dark beige	06 - Ivory
10 - Red	11 - Black	12 - Silver	15 - Brown	17 - Bahama beige	18 - Grey

Corners of the on demand profiles are also on demand 🜟

🧿 = News 2023

COLOURS

🜟 = Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed

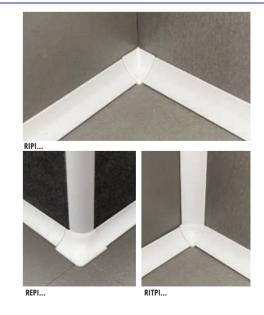



COLOURS

01 - White

05 - Dark beig

12 - Silver


PROGRESS® PROFILES

33


WALLS

PROLISTEL CHANNEL STAINLESS STEEL AISI 304/1.4301-V2A

PLTCH... 08 - 10 - 11 -12.5



EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS



 Choose "PROLISTEL CHANNEL" according to the visible surface and desired finish. 2. Cut "PROLISTEL CHANNEL" to the desired length and apply the adhesive on the surface where the profile will be laid. 3. Press "PROLISTEL CHANNEL" into the adhesive, aligning it with the tiles leaving a 2 mm. joint. Remove immediately all remains of adhesive from the surface of the profile. A "fill the joint between the profile and the with grout" profile. **4.** Fill the joint between the profile and tiles with grout in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile.

COLOURS





POLISHED STAINLESS STEEL AISI 304/1.4301-V2A bar length 2,7 lm - pack. 1 Pc

an easy workmanlike application.

0				
Article	H mm	L mm	€/Im	€/Pc
PLTCHAC 0812	8	12	43,47	117,37
PLTCHAC 1012	10	12	45,89	123,90
PLTCHAC 1112	11	12	48,30	130,41
PLTCHAC 12512	12,5	12	50,71	136,92

POLISHED STAINLESS STEEL AISI 304/1.4301-V2A bar length 2,7 lm - pack. 1 Pc

	Article	Hmm	Lmm	€/Im	€/Pc	
0	PLTCHAC 0808	8	08	43,47	117,37	-
\odot	PLTCHAC 1008	10	08	45,89	123,90	1
۲	PLTCHAC 1108	11	08	48,30	130,41	
\bigcirc	PLTCHAC 12508	12,5	08	50.71	136.92	

POLISHED STAINLESS STEEL AISI 304/1.4301-V2A

bar length 2,7 lm - pa	ack. 1 Pc					bar length 2,7 lm - pa	ack. 1 Pc	
Article	H mm	L mm	€/Im	€/Pc		Article	H mm	L mm
PLTCHAC 0810	8	10	43,47	117,37	*0	PLTCHACS 0810	8	10
PLTCHAC 1010	10	10	45,89			PLTCHACS 1010	10	10
PLTCHAC 1110	11	10	48,30	130,41	*0	PLTCHACS 1110	11	10
PLTCHAC 12510	12,5	10	50,71	136,92	*)	PLTCHACS 12510	12,5	10



SATIN-FINISH STAINLESS STEEL AISI 304/1.4301-V2A bar length 2,7 lm - pack. 1 Pc

	Article	Hmm	Lmm	€/lm	€/Pc
\odot	PLTCHACS 0812	8	12	47,09	127,14
\odot	PLTCHACS 1012	10	12	49,51	133,68
\odot	PLTCHACS 1112	11	12	51,92	140,18
\odot	PLTCHACS 12512	12,5	12	54,34	146,72

SATIN-FINISH STAINLESS STEEL AISI 304/1.4301-V2A bar length 2.7 lm - pack. 1 Pc

SATIN-FINISH STAINLESS STEEL AISI 304/1.4301-V2A

	Article	H mm	L mm	€/Im	€/Pc	
*0	PLTCHACS 0808	8	08	47,09	127,14	*
*0	PLTCHACS 1008	10	08	49,51	133,68	*
*0	PLTCHACS 1108	11	08	51,92	140,18	*
*0	PLTCHACS 12508	12,5	08	54,34	146,72	*

€/lm

47.09

49,51

51.92

54,34

€/Pc

127.14

133.68

140.18

146,72 *

*

*

*




PROLISTEL CHANNEL is a F-shaped strip in anodized and polished aluminum suitable to decorate the wall coverings in ceramic tiles and natural stones. Its section allows the realization of a decorative joint which can also be used as a guide for the fixing of sheets of glass on floors and walls. Its particular section and the availability in two different finishes make PROLISTEL CHANNEL a much sought-after profile that allows an easy workmanlike application.

PROLISTEL CHANNEL is a F-shaped strip in polished an satin-finish stainless steel AISI 304/1.4301-V2A suitable

to decorate the wall coverings in ceramic tiles and natural stones. Its section allows the realization of a decorative joint which can also be used as a guide for the fixing of sheets of glass on floors and walls. Its particular section and the availability in two different finishes make **PROLISTEL CHANNEL** a much sought-after profile that allows

PLTCH... 08 - 10 - 11 -12,5



EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS



 Scegliere "PROLISTEL CHANNEL" in funzione della superficie a vista e della finitura desiderata. 2. Tagliare "PROLISTEL CHANNEL" della lunghezza desiderata ed applicare l'adesivo sul supporto dove sarà applicato il listello. 3. Premere "PROLISTEL CHANNEL" nell'adesivo avendo cura di allinearne i bordi con la superficie del rivestimento e di lasciare una fuga di circa 2 mm. Rimuovere immediatamente residui di adesivo dalla superfice del profilo. 4. Stuccare accuratamente le fughe tra profilo e piastrella onde evitare il ristagno di eventuale acqua. iovere immediatamente residui di stucco dalla superfice del profilo.



ANODIZED SILVER ALUMINIUM 40 Dcc - 109 lm

Dai length 2,7 mi - patk. 40 PCS - 100 mi						
Article	Hmm	€/lm	€/Pc			
PLTCHAA 08	8	15,03	40,58			
PLTCHAA 10	10	16,33	44,09			
PLTCHAA 11	11	17,30	46,71			
PLTCHAA 125	12,5	18,28	49,36			

COLOURS

010010				
ANODIZED	POLISHED			
ΔΔ - Anodized silver alum	BC - Poliched chrome alum			



POLISHED CHROME ALUMINIUM 7 Im nack 40 Pcc 109 Im

Dai lengui 2,7 mi - pack. 40 PCS - 100 mi				
Article	Hmm	€/lm	€/Pc	
PLTCHBC 08	8	17,64	47,63	
PLTCHBC 10	10	18,94	51,14	
PLTCHBC 11	11	19,92	53,78	
PLTCHBC 125	12,5	20,89	56,40	

34

🧿 = News 2023 ***** = Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed **PROTERMINAL INT** is a profile in anodized and polished aluminium that can be applied on external corners of coverings. It can be used to close the perimeter of coverings and like a connection profile between step tread and riser of stairs coated with ceramic or natural stone tiles. Its particular section and the availability in four different finishes make **PROTERMINAL INT** a much sought-after profile that allows an elegant workmanlike application.

PROTERMINAL

WALLS

ANODIZED AND POLISHED ALUMINIUM



ANODIZED ALUMINIUM (silver - titanium) thermo packed bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	Hmm	€/lm	€/Pc
PTIAA 08	8	8,87	23,95
PTIAA 10	10	9,41	25,41
PTIAA 125	12,5	11,42	30,83
PTIAT 08	8	10,10	27,27
PTIAT 10	10	10,64	28,73
PTIAT 125	12,5	12,79	34,53

INTERNAL, EXTERNAL, THREE-WAYS JOINTS ANIODIZED DOLICHED ALLIMINIUM 2

ANODIZED TOLISTIED ALONITATION - pack, ST CS				
Article	€/Pack.			
RIPTI 08 - 10 - 125/3	19,59			
REPTI 08 - 10 - 125/3	19,59			
RTPIT 08 - 10 - 125/3	19,59			

COLOURS





POLISHED ALUMINIUM (chrome - titanium) thermo packed bar length 2 7 Im - pack 40 Pcs - 108 Im

Dar length 2,7 im - pack. 40 PCS - 108 im					
Article	Hmm	€/lm	€/Pc		
PTIBC 08	8	12,79	34,53		
PTIBC 10	10	13,32	35,96		
PTIBC 125	12,5	15,35	41,45		
PTIBT 08	8	14,04	37,91		
PTIBT 10	10	14,55	39,29		
PTIBT 125	12,5	16,72	45,14		



quantity, timing and price.

On demand may be realised in other finishes of the colour chart. Contact our customer service for minimal



EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS



1. Choose "PROTERMINAL INT" according to the tile thickness and desired finish. 2. Cut "PROTERMINAL INT" to the desired length and apply the adhesive on the support where the profile will be laid. 3. Press the anchoring flange of "PROTERMINAL INT" into the adhesive. 4. Lay the tiles, aligning them with the profile leaving a 2 mm joint. Remove immediately all remains of adhesive from the surface of the profile. 5. Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile.






OFILES

PROTERMINAL

WALLS

PROTERMINAL is a L-shaped profile in polished and brushed stainless steel AISI 304/1.4301-V2A that can be applied on external corners of coverings. It can be used to close the perimeter of coverings, like a connection profile between step tread and riser of stairs coated with ceramic and natural stone tiles, and also as separation profile for floor coverings. Its particular section and the availability in two different finishes make **PROTERMINAL** a much sought-after profile that allows a workmanlike application even in environments subject to high mechanical stresses.

POLISHED AND BRUSHED STAINLESS STEEL AISI 304/1.4301-V2A

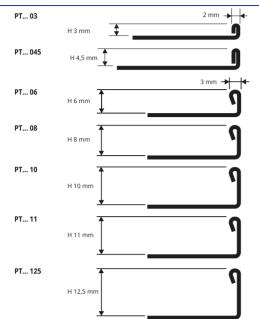

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS






 Choose "PROTERMINAL" according to the tile thickness and desired finish. 2. Cut "PROTERMINAL" to the desired length and apply the adhesive on the support where the profile will be laid. 3. Press the anchoring flange of "PROTERMINAL" into the adhesive. 4. Lay the tiles, aligning them with the profile leaving a 2 mm joint. Remove immediately all remains of adhesive from the surface of the profile. 5. Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile.

PROTERMINAL

POLISHED STAINLESS STEEL AISI 316L/1.4404-V4A



1. Choose "PROTERMINAL" according to the tile thickness. 2. Cut "PROTERMINAL" to the desired length and apply the adhesive on the support where the profile will be laid. 3. Press the anchoring flange of "PROTERMINAL" into the adhesive. 4. Lay the tiles, aligning them with the profile leaving a 2 mm joint. Remove immediately all remains of adhesive from the surface of the profile. 5. Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile.

PROGRESS®

OFILES



POLISHED STAINLESS ST. AISI 304/1.4301-V2A with protective film bar length 2,7 Im - pack. 40 Pcs - 108 Im - 10/10 mm

Article	Hmm	€/lm	€/Pc
PTAC 03	3	8,95	24,16
PTAC 045	4,5	9,12	24,62
PTAC 06	6	9,51	25,68
PTAC 08	8	9,84	26,57
PTAC 10	10	10,35	27,95
PTAC 11	11	10,53	28,43
PTAC 125	12,5	10,73	28,97

BRUSHED STAINLESS STEEL AISI 304/1.4301-V2A with protective film bar length 2,7 Im - pack. 40 Pcs - 108 Im - 10/10 mm

bar lengur 2,7 mi - pack. 40 r c3 - 100 mi - 107 t0 min			
Article	Hmm	€/lm	€/Pc
PTACS 03	3	10,41	28,11
PTACS 045	4,5	11,36	30,67
PTACS 06	6	11,75	31,73
PTACS 08	8	12,14	32,78
PTACS 10	10	12,58	33,97
PTACS 11	11	12,78	34,51
PTACS 125	12,5	13,03	35,18

SUITABLE FOR USE IN CONTACT WITH FOODSTUFFS.









PROTERMINAL is a L-shaped profile in polished stainless steel AISI 304/1.4301-V2A that can be applied on external corners of coverings. It can be used to close the perimeter of coverings, like a connection profile between step tread and riser of stairs coated with ceramic and natural stone tiles and also as separation profile for floor and wall coverings. Its particular section and the availability in two different finishes make **PROTERMINAL** a much sought-after profile that allows a workmanlike application even in environments subject to high mechanical and chemical stresses.



with protective film bar length 2,7 lm - pack. 40	316 STAINLES		
Article	Hmm	€/lm	€/Pc
PTACM 06	6	12,38	33,43
PTACM 08	8	12,80	34,56
PTACM 10	10	13,46	36,34
PTACM 125	12,5	13,94	37,64



COLOURS

ACM - Polished stainless steel AISI 316L

SUITABLE FOR USE IN CONTACT WITH FOODSTUFFS.

🛪 = Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed



PROTERMINAL is a L-shaped profile in chromed and antique brass that can be applied on external corners of coverings. It can be used to close the perimeter of coverings, like a connection profile between step tread and riser of stairs coated with ceramic or natural stone tiles and also as separation profile for floor and wall coverings. Its particular section and elegance make PROJOLLY a much sought-after profile that allows a workmanlike application.



CHROMED BRASS thermo packed

bar length 2,7 lm - pack. 20 Pcs - 54 lm				
Article	Hmm	€/lm	€/Pc	
PTOC 06	6	20,50	55,35	
PTOC 08	8	21,37	57,70	
PTOC 10	10	21,77	58,78	
PTOC 125	12,5	22,46	60,64	

COLOURS



BRUSHED BRASS thermo packed th 2 7 lm - nack 20 Pcs - 54 lm


	bui iciigui 2,7 iii puck. 20	103 34111				
	Article	Hmm	€/lm	€/Pc		PTOC 06
٩	PTOS 06	6	11,96	32,29	*	
٩	PTOS 08	8	12,65	34,16	*	PT 08
_		10	13,63	36,80	*	
\odot	PTOS 125	12,5	14,73	39,77	*	

	ANTIQUE BRASS thermo packed bar length 2,7 lm - pack. 20 Pcs - 54 lm				
	Article	Hmm	€/Im	€/Pc	
0	PTOB 06	6	29,28	79,06	
	PTOB 08	8	30,55	82,49	
	PTOB 10	10	33,32	89,96	
	PTOB 125	12,5	35,93	97,01	

INSTRUCTIONS FOR LAYING METHODS

1. Choose "PROTERMINAL" according to the tile thickness. 2. Cut "PROTERMINAL" to the desired length and apply the adhesive on the support where the profile will be laid. 3. Press the anchoring flange of "PROTERMINAL" into the adhesive. 4. Lay the tiles, aligning them with the profile leaving a 2 mm joint. Remove immediately all remains of adhesive from the surface of the profile. 5. Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile.

PROTERMINAL is a L-shaped profile in natural and anodized aluminium that can be applied on external corners of coverings. It can be used to close the perimeter of coverings, like a connection profile between step tread and riser of stairs coated with ceramic or natural stone tiles and also as separation profile for floor and wall coverings. Its particular section and the availability in six different finishes make PROTERMINAL a much sought-after profile that allows a workmanlike application.



PT... 10

PT... 125

PT... 03

PT... 06

PT... 08


PT... 10

PT... 11

PROTERMINAL

CHROMED BRASS, BRUSHED BRASS AND

ANTIQUE BRASS



PROTERMINAL

NATURAL AND ANODIZED ALUMINIUM



ANODIZED ALUMINIUM (gold - silver) thermo packed bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	H mm	€/lm	€/Pc	
PTAA 03	3	3,90	10,53	
PTAA 045	4,5	4,08	11,02	
PTAA 06	6	4,23	11,42	
PTAA 08	8	4,29	11,58	
PTAA 10	10	4,56	12,31	
PTAA 11	11	4,97	13,42	
PTAA 125	12,5	5,24	14,15	
PTAA 15	15	5,57	15,04	
PTAA 20	20	6,51	17,58	
PTAO 03	3	3,90	10,53	*
PTAO 045	4,5	4,08	11,02	*
PTAO 06	6	4,23	11,42	
PTAO 08	8	4,29	11,58	
PTAO 10	10	4,56	12,31	
PTAO 11	11	4,97	13,42	
PTAO 125	12,5	5,24	14,15	

COLOURS



ANODIZED ALUMINIUM (black-titanium-copper-bronze- antique bronze) thermo packed - bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	Hmm	€/lm	€/Pc	
PTNE 08	8	5,89	15,90	
PTNE 10	10	6,14	16,58	
PTNE 125	12,5	6,46	17,44	
PTAT 08	8	5,89	15,90	
PTAT 10	10	6,14	16,58	
PTAT 11	11	6,26	16,90	
PTAT 125	12,5	6,46	17,44	
PTAR 08	8	5,89	15,90	*
PTAR 10	10	6,14	16,58	
PTAR 125	12,5	6,46	17,44	
PTAB 08	8	5,89	15,90	*
PTAB 10	10	6,14	16,58	*
PTAB 125	12,5	6,46	17,44	*
PTBRA 10	10	8,85	23,89	
PTBRA 125	12,5	9,31	25,14	


NATURAL ALUMINIUM

bar length 2,7 lm - pack. 40 Pcs - 108 lm					
Article	H mm	€/lm	€/Pc		
PTAN 03	3	3,21	8,67		
PTAN 045	4,5	3,30	8,91		
601 011PC					


COLOURS

AN - Natural aluminium On demand may be realised in other finishes of the colour chart.

Contact our customer service for minimal guantity, timing and price.

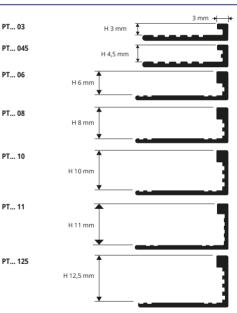

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS



 Choose "PROTERMINAL" according to the tile thickness and desired finish.
 Cut "PROTERMINAL" to the desired length and apply the adhesive on the support where the profile will be laid.
 Press the anchoring flange of "PROTERMINAL" into the adhesive.
 Lay the tiles, aligning them with the profile leaving a 2 mm joint. Remove immediately all remains of adhesive from the surface of the profile leaving a 2 mm joint. the profile. 5. Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile.

All dights reserved by Progress Profiles. Printed in Italy 2028

I = News 2023


🖈 = Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed



PROTERMINAL

PROTERMINAL is a L-shaped profile in polished, brushed and varnished aluminium that can be applied on external corners of coverings. It can be used to close the perimeter of coverings, like a connection profile between step tread and riser of stairs coated with ceramic or natural stone tiles and also as separation profile for floor and wall coverings (the varnished only for wall application). Its particular section and the availability in different finishes make PROTERMINAL a much sought-after profile that allows a workmanlike application.

POLISHED, BRUSHED AND VARNISHED ALUMINIUM

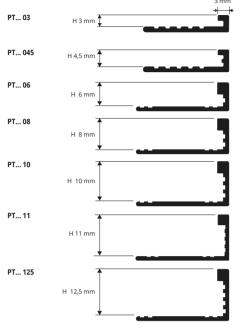

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS



1. Choose "PROTERMINAL" according to the tile thickness and desired finish (color). 2. Cut "PROTERMINAL" to the desired length and apply the adhesive on the support where the profile will be laid. **3.** Press the anchoring flange of "PROTERMINAL" into the adhesive. 4. Lay the tiles, aligning them with the profile leaving a 2 mm joint. Remove immediately all remains of adhesive from the surface of the profile. 5. Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile.

	1	
The		
I E	in the	

POLISHED ALUMINIUM (chrome, gold, copper, titanium, black) thermo packed - bar length 2,7 lm - pack. 40 Pcs - 108 lm

	perein			
Article	Hmm	€/lm	€/Pc	
PTBC 03	3	8,02	21,65	
PTBC 045	4,5	8,44	22,79	
PTBC 06	6	8,64	23,33	
PTBC 08	8	8,99	24,27	
PTBC 10	10	9,19	24,81	
PTBC 11	11	9,41	25,41	
PTBC 125	12,5	9,65	26,06	
PTBO 03	3	8,02	21,65	
PTBO 045	4,5	8,44	22,79	
PTBO 06	6	8,64	23,33	
PTBO 08	8	8,99	24,27	
PTBO 10	10	9,19	24,81	
PTBO 11	11	9,41	25,41	
PTBO 125	12,5	9,65	26,06	
PTBT 08	8	9,80	26,46	
PTBT 10	10	10,17	27,46	
PTBT 11	11	10,45	28,21	*
PTBT 125	12,5	10,84	29,27	
PTBR 08	8	9,80	26,46	*
PTBR 10	10	10,17	27,46	
PTBR 125	12,5	10,84	29,27	*
PTBN 06	6	9,51	25,68	
PTBN 08	8	9,80	26,46	*
PTBN 10	10	10,17	27,46	
PTBN 125	12,5	10,84	29,27	

BRUSHED ALUMINIUM (silver, titanium, black, copper, antique bronze) thermo packed - bar length 2,7 lm - pack. 40 Pcs - 108 lm


Article	Hmm	€/lm	€/Pc
PTBS 045	4,5	9,30	25,11
PTBS 08	8	9,41	25,41
PTBS 10	10	9,99	26,97
PTBS 11	11	10,32	27,86
PTBS 125	12,5	10,72	28,94
PTRS 045	4,5	10,27	27,73
PTRS 08	8	10,57	28,54
PTRS 10	10	10,97	29,62
PTRS 125	12,5	11,89	32,10
PTTS 045	4,5	10,27	27,73
PTTS 08	8	10,57	28,54
PTTS 10	10	10,97	29,62
PTTS 11	11	11,42	30,83
PTTS 125	12,5	11,89	32,10
PTBOS 08	8	9,41	25,41
PTBOS 10	10	9,99	26,97
PTBOS 125	12,5	10,72	28,94
PTNS 08	8	10,57	28,54
PTNS 10	10	10,97	29,62
PTNS 125	12,5	11,89	32,10
PTBRAS 10	10	10,97	29,62
PTBRAS 125	12,5	11,89	32,10

bar length 2,7 lm - pack. 20 Pc - 54 lm (colour white 40 Pcs - 108 lm) Article H mm €/lm €/Pc PTA 06-01 5 35 14,45 6

PTA 08-01	8	5,50	14,85
PTA 10	10	5,97	16,12
PTA 11-01	11	6,20	16,74
PTA 125-01	12,5	6,44	17,39

H 10 available in the colours: 01 - 0106 - 11. The code of the selected colour must be added to the article code.

E.g.: PTA 10-... (chosen colour white ivory varnished alum.) PTA 10-0106.

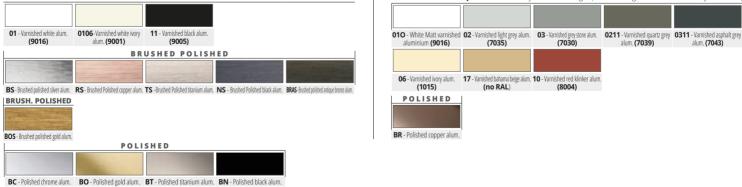

AVAILABLE MINIMUM QUANTITY 100 PCS by colour and height (Price to be agreed. Production delay 4/5 weeks)

PTA 06-... & PTA 125-... For other colours different from white, please contact our company for quantity and price. Production on demand, production delay 4/5 weeks. (minimum quantity order of 100 pcs).



COLOURS

PROTERMINAL is a L-shaper profile in powder coated aluminum that can be applied on external corners of coverings. It can be used to close the perimeter of coverings. Its particular section and the availability in different finishes make **PROTERMINAL** an elegant and much-sought after profile.

PROTERMINAL



STONE	LINE therr	no pac	ked	
. I I	(b. 0. 7 Jac		0 D	

bar length 2,7 lm - pack. 20 Pcs - 54 lm				
Article	€/Pc			
PTA 06-SL	6	7,84	21,17	
PTA 08-SL	8	8,17	22,06	
PTA 10-SL	10	8,49	22,92	
PTA 11-SL	11	8,81	23,79	
PTA 125-SL	12,5	9,13	24,65	

The code of the selected colour must be added to the article code. E.g.: PTA 08... (chosen colour Stone white) PTA 08-SL01

TUSCANY LINE thermo packed bar length 2.7 lm - pack. 40 Pcs - 108 lm

bai iengai _,			
Article	Hmm	€/lm	€/Pc
PTA 08	8	8,49	22,92
PTA 10	10	9,02	24,35
PTA 125	12,5	9,80	26,46

The code of the selected colour must be added to the article code. E.g.: PTA 08-... (chosen colour tuscany grey) PTA 08-03TU.



corners of coverings. It can be used to close the perimeter of coverings. Its particular section and the availability in different colours also on demand make **PROTERMINAL** a much sought-after profile. It can be easily matched

3 mm PTA 06-.. H6mn PTA 08-.. PTA 10-.. H 10 mn PTA 11-... H 11 mm PTA 125-...

EXAMPLES FOR LAYING METHODS

H 12,5 mm

PROTERMINAL

SHOCKPROOF NON - TOXIC COLORED VINYL RESIN

NON-TOXIC SHOCKPROOF COLOURED VINYL RESIN bar length 2,7 lm - pack. 54 lm (white 108 lm)

Article	H mm	€/lm	€/Pc
РТ 06	6	1,20	3,24
PT 08	8	1,34	3,62
PT 10	10	1,47	3,97
PT 125	12,5	1,75	4,73


with the wall covering and allows an elegant workmanlike application.


Available in the colours: 01-0106-02-03-04-05-06-11-12-17-18 Available on demand 19-20-21-22-23-24-25-26-27-28-29-07-08-09-10-13-14-15-16 with a minimum quantity order of 800 pcs. The code of the selected colour must be added to the article code. E.g.: PT 06-... (chosen colour white) PT 06-01

WHITE NOT FOR SALE SINGLY



1. Choose "PROTERMINAL" according to the tile thickness and desired colour. 2. Cut "PROTERMINAL" to the desired length and apply the adhesive on the support where the profile will be laid. **3.** Press the anchoring flange of "PROTERMINAL" into the adhesive. **4.** Lay the tiles, aligning them with the profile leaving a 2 mm joint. 5. Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation.



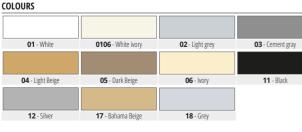

AVAILABLE MINIMUM QUANTITY 800 PCS by colour and height (Price to be agreed. Production delay 4/5 weeks)

			_	
19 - Beige	20 - Dark ivory	21 - Light pink	22 - Dark pink	23 - Dark antique pink
24 - Dark sky blue	25 - Brick red	26 - Turquoise green	27 - Dark green	28 - Hazel brown
29 - Dak browrn	07 - Pink	08 - Sky blue	09 - Yellow	10 - Red
13 - Gold	14 - Green	15 - Brown	16 - Blue	


STONE LINE ALUMINIUM AND TUSCANY LINE



PROLISTEL ACC


PROLISTEL ACC is a listel in polished, brushed, sanded stainless steel AISI 304/1.4301-V2A with a flat and U-shaped (internal use) visible surface, suitable to decorate the wall coverings in ceramic, mosaic and natural stone. Its particular section and availability in different finishes, make **PROLISTEL ACC** a much sought after profile. It can be used with the range of PROJOLLY profiles to decorate the wall coverings and to allow an elegant workmanlike application.



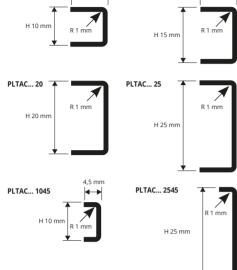

10 mm

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS



1. Choose "PROLISTEL ACC" according to the width and desired finish. 2. Cut "PROLISTEL ACC" to the desired length and apply the adhesive on the support where the profile will be laid. 3. Press "PROLISTEL ACC" into the adhesive. 4. Lay the tiles, aligning them with the profile leaving a 2 mm joint. Remove immediately all remains of adhesive from the surface of the profile. 5. Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile.





POLISHED STAINLESS ST. AISI 304/1.4301-V2A with protective film bar length 2,7 Im - pack. 40 Pcs - 108 Im - 8/10mm

Article	HxL mm	€/lm	€/Pc
PLTAC 10	10 x 10	7,22	19,49
PLTAC 1045	10 x 4,5	6,91	18,66
PLTAC 15	15 x 10	9,61	25,95
PLTAC 20	20 x 10	12,82	34,61
PLTAC 25	25 x 10	16,03	43,28
PLTAC 2545	25 x 4,5	15,71	42,42

POLISHED STAINLESS STEEL AISI 304/1.4301-V2A - INTERNAL USE with protective film - bar length 2,7 Im pack. 40 Pcs 108 Im - 8/10mm

Article	HxL mm	€/lm	€/Pc	
PLTACI 10	10 x 10	7,22	19,49	*
PLTACI 1045	10 x 4,5	6,91	18,66	*
PLTACI 15	15 x 10	9,61	25,95	*
PLTACI 20	20 x 10	12,82	34,61	*
PLTACI 25	25 x 10	16,03	43,28	*
PLTACI 2545	25 x 4,5	15,71	42,42	*





Brushed STAINLESS ST. AISI 304/1.4301-V2A with protective film bar length 2,7 lm - pack. 40 Pcs - 108 lm - 8/10mm

, i i i i i i i i i i i i i i i i i i i				
Article	HxL mm	€/lm	€/Pc	
PLTACS 10	10 x 10	8,66	23,38	
PLTACS 1045	10 x 4,5	8,81	23,79	
PLTACS 15	15 x 10	12,50	33,75	
PLTACS 20	20 x 10	16,65	44,95	
PLTACS 25	25 x 10	18,46	49,84	
PLTACS 2545	25 x 4,5	18,13	48,95	_

Brushed STAINLESS STEEL AISI 304/1.4301-V2A - INTERNAL USE with protective film - bar length 2,7 Im pack. 40 Pcs 108 Im - 8/10mm

PLTACSI 1045 10 x 4,5 8,81 23,79 x PLTACSI 15 15 x 10 12,50 33,75 x PLTACSI 20 20 x 10 16,65 44,95 x PLTACSI 25 25 x 10 18,46 49,84 x					
PLTACSI 1045 10 x 4,5 8,81 23,79 x PLTACSI 15 15 x 10 12,50 33,75 x PLTACSI 20 20 x 10 16,65 44,95 x PLTACSI 25 25 x 10 18,46 49,84 x	Article	HxL mm	€/lm	€/Pc	
PLTACSI 15 15 x 10 12,50 33,75 x PLTACSI 20 20 x 10 16,65 44,95 x PLTACSI 25 25 x 10 18,46 49,84 x	PLTACSI 10	10 x 10	8,66	23,38	*
PLTACSI 20 20 x 10 16,65 44,95 * PLTACSI 25 25 x 10 18,46 49,84 *	PLTACSI 1045	10 x 4,5	8,81	23,79	*
PLTACSI 25 25 x 10 18,46 49,84 🗙	PLTACSI 15	15 x 10	12,50	33,75	*
	PLTACSI 20	20 x 10	16,65	44,95	*
PLTACSI 2545 25 x 4,5 18,13 48,95 📩	PLTACSI 25	25 x 10	18,46	49,84	*
	PLTACSI 2545	25 x 4,5	18,13	48,95	*

SANDED STAINLESS ST. AISI 304/1.4301-V2A with protective film bar length 2,7 Im - pack. 40 Pcs 108 Im - 8/10mm

Article	HxL mm	€/lm	€/Pc	
PLTACSB 10	10 x 10	9,60	25,92	*

ACSB - SPECIAL FINISH, REQUEST AVAILABILITY

SUITABLE FOR USE IN CONTACT WITH FOODSTUFFS.





🛪 = Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed

PROLISTEL ACC is a range of decorative profiles/strips that are ideal for easily creating chromatic effects on ceramic tile/marble/mosaic coverings or, in the stainless steel AISI 316LL/1.4301-V4A range, for creating separations and decorations between floors in the same or differing material. Thanks to their design, shape and thickness of 4.5 and 10 mm, may be laid using the same adhesive to create horizontal and vertical lines, on the wall or on the floor, irrespective of the thickness of the covering. Various widths available in stainless steel AISI 04/1.4301-V2A, polished. Match with the same basic colours in the PROJOLLY, PROTERMINAL and PROJOLLY SQUARE and the new PROKERLAM SQUARE-LINE-JOLLY range.

316

PROLISTEL ACC

PLTACM.. 15

PLTACM.. 25

PLTACM., 2545

H 15 n

H 25 mm

H 25 mm

10 mm

POLISHED STAINLESS STEEL AISI 316L/1.4404 - V4A

10 mm


WALLS



POLISHED STAINLESS STEEL AISI 316LL/1.4404-V4A with protective film - bar length 2,7 lm

pack. 40 Pcs - 108 Im - 8/10mm					
Article	HxL mm	€/lm	€/Pc		
PLTACM 10	10 X 10	9,40	25,38	*	
PLTACM 1045	10 X 4,5	8,97	24,22	*	
PLTACM 15	15 X 10	12,50	33,75	*	
PLTACM 20	20 X 10	16,66	44,98	*	
PLTACM 25	25 X 10	20,84	56,27	*	
PLTACM 2545	25 X 4,5	20,42	55,13	*	

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS





POLISHED STAINLESS STEEL AISI 316LL/1.4404-V4A -INTERNAL USE with protective film - bar length 2,7 Im pack 40 Pcc 100 lm 9/10mm

Article HxL mm €/lm €/Pc PLTACMI 10 10 X 10 9,40 25,38 * PLTACMI 1045 10 X 4,5 8,97 24,22 * PLTACMI 1045 10 X 4,5 8,97 24,22 * PLTACMI 15 15 X 10 12,50 33,75 * PLTACMI 20 20 X 10 16,66 44,98 * PLTACMI 25 25 X 10 20,84 56,27 * PLTACMI 2545 25 X 4,5 20,42 55,13 *	pack. 40 PCS - 108 IIII - 8				
PLTACMI 1045 10 X 4,5 8,97 24,22 * PLTACMI 15 15 X 10 12,50 33,75 * PLTACMI 20 20 X 10 16,66 44,98 * PLTACMI 25 25 X 10 20,84 56,27 *	Article	HxL mm	€/lm	€/Pc	
PLTACMI 15 15 X 10 12,50 33,75 * PLTACMI 20 20 X 10 16,66 44,98 * PLTACMI 25 25 X 10 20,84 56,27 *	PLTACMI 10	10 X 10	9,40	25,38	*
PLTACMI 20 20 X 10 16,66 44,98 * PLTACMI 25 25 X 10 20,84 56,27 *	PLTACMI 1045	10 X 4,5	8,97	24,22	*
PLTACMI 25 25 X 10 20,84 56,27 📩	PLTACMI 15	15 X 10	12,50	33,75	*
	PLTACMI 20	20 X 10	16,66	44,98	*
PLTACMI 2545 25 X 4,5 20,42 55,13 📩	PLTACMI 25	25 X 10	20,84	56,27	*
	PLTACMI 2545	25 X 4,5	20,42	55,13	*

INTERNAL

COLOURS

PLTACM.. 10

PLTACM.. 20

H 20

PLTACM., 1045

ACM - Polished stainless steel AISI 316LL

1. Choose the PROLISTEL ACC in the required width. 2. Apply the adhesive onto the area of application of the profile. 3. Lay and align the profile, cut to the necessary length, pressing it into the adhesive. 4. Lay the tiles, aligning them so that the top edge of the profile is flush with the tile. 5. Fill the profile/tile area of contact with adhesive to prevent the accumulation of water in any voids. Pay attention to the external edges of the PROLISTEL ACC. They must be protected against agents such as adhesives and sealants and against grinding or scraping actions.

SUITABLE FOR USE IN CONTACT WITH FOODSTUFFS.

PROLISTEL P OTT is a decorative listel in polished, chromed and antique brass with a flat visible surface. The profile is suitable to decorate the wall coverings in ceramic, mosaic and natural stone. Its particular section and availability in different finishes and two widths, make **PROLISTEL P OTT** a much sought after profile. It could be matched with PROJOLLY, PROJOLLY SQUARE e PROTERMINAL profiles to decorate the wall coverings and to allow an elegant workmanlike application.

PROLISTEL P OTT

PLTP... 25 scale 1:1

POLISHED, CHROMED, ANTIQUE BRASS

7 mn

H 25 mm




POLISHED, CHROMED AND ANTIQUE BRASS thermo packed - Bar lenght 2,7 lm - pack 40 PCS - 108 lm

					_
	Article	Hmm	€/lm	€/Pc	
0	PLTPOL 25	25	28,23	76,22	*
0	PLTPOC 25	25	41,84	112,97	*
0	PLTPOB 25	25	61.49	166.02	*



COLOURS

OL - Polished brass	OC - Chromed brass	OB - Antique brass




PROGRESS® PROGRESS®

PROLISTEL P ALL

ANODIZED, POLISHED, STONE LINE, BRUSHED, TUSCANY AND TILTEX ALUMINIUM

PLTP... 10 10 mr H 25 mm PLTP... 25

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS



 Choose "PROLISTEL P ALL" according to the width and desired finish. 2. Cut "PROLISTEL P ALL" to the desired length and apply the adhesive on the support where the profile will be laid. 3. Press The adnessive on the support where the profile will be Iald. **3**. Press "PROLISTE P ALL" into the adhesive. **4**. Lay the tiles, aligning them with the profile leaving a 2 mm joint. Remove immediately all remains of adhesive from the surface of the profile. **5**. Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile.

ALUMINIUM TUSCANY LINE

thermo packe	ed - bar length 2,7	7 lm - pack. 40 Pcs - 108 lm			
Ar	ticle	H mm	€/lm	€/Pc	
PLTPA 10	TU	10	10,38	28,03	*
PLTPA 25	.TU	25	12.74	34.40	*

STONE LINE ALUMINIUM

COLOURS

aluminium

aluminium

thermo packed - bar length 2,7 lm - pack. 40 Pcs - 108 lm						
	Article	H mm	€/lm	€/Pc		
	PLTPA 10-SL01	10	7,77	20,98		
	PLTPA 10-SL08	10	7,77	20,98		
	PLTPA 10-SL12	10	7,77	20,98		
	PLTPA 10	10	7,77	20,98	*	
	PLTPA 25-SL01	25	12,46	33,64		
	PLTPA 25-SL08	25	12,46	33,64		
	PLTPA 25-SL12	25	12,46	33,64		
	PLTPA 25	25	12,46	33,64	*	

PROGRESS®

OFILES



to decorate the wall coverings and to allow an elegant workmanlike application.

PROLISTEL P ALL is a decorative listel in anodized, polished, brushed, tiltex aluminium and varnished tuscany and stone aluminium with a flat visible surface. The profile is suitable to decorate the wall coverings in ceramic, mosaic and natural stone. Its particular section and availability in different finishes and two widths, make **PROLISTEL P ALL** a much sought after profile. It could be matched with PROJOLLY, PROJOLLY SQUARE e PROTERMINAL profiles



ANODIZED ALUMINIUM

thermo packed - bar length 2,7 lm - pack. 40 Pcs - 108 lm

pack is is in the second						
	Article	H mm	€/Im	€/Pc		
	PLTPAA 10	10	5,09	13,74		
	PLTPAO 10	10	5,39	14,55	*	
	PLTPAR 10	10	7,04	19,01		
	PLTPAT 10	10	7,04	19,01		
	PLTPNE 10	10	7,12	19,22		
	PLTPAA 25	25	8,18	22,09		
	PLTPAO 25	25	8,56	23,11	*	
	PLTPAR 25	25	10,87	29,35	*	
	PLTPAT 25	25	10,87	29,35		
	PLTPNE 25	25	11,10	29,97		

POLISHED BRUSHED ALUMINIUM

thermo packed - bar length 2,7 lm - pack. 40 Pcs - 108 lm						
	Article	H mm	€/Im	€/Pc		
	PLTPBS 10	10	7,37	19,90		
	PLTPBOS 10	10	7,74	20,90		
	PLTPRS 10	10	9,80	26,46	*	
ł	PLTPTS 10	10	9,80	26,46		
	PLTPNS 10	10	9,91	26,76	*	
	PLTPBS 25	25	10,58	28,57		
	PLTPBOS 25	25	11,09	29,94		
ł	PLTPRS 25	25	12,87	34,75	*	
	PLTPTS 25	25	12,87	34,75		
	PLTPNS 25	25	13,16	35,53	*	





POLISHED ALUMINIUM thermo packed - bar length 2,7 lm - pack. 40 Pcs - 108 lm


•				
Article	H mm	€/Im	€/Pc	
PLTPBC 10	10	7,32	19,76	
PLTPBO 10	10	7,68	20,74	
PLTPBR 10	10	9,46	25,54	
PLTPBT 10	10	9,46	25,54	
PLTPBN 10	10	9,57	25,84	
PLTPBC 25	25	10,58	28,57	
PLTPBO 25	25	11,09	29,94	
PLTPBR 25	25	11,93	32,21	*
PLTPBT 25	25	11,93	32,21	
PLTPBN 25	25	12,20	32,94	*


ANODIZED BRUSHED ALUMINIUM TILTEX

thermo packed - bar length 2,7 lm - pack. 40 Pcs - 108 lm					
	Article	H mm	€/lm	€/Pc	
	PLTPBX 10	10	11,40	30,78	
	PLTPRX 10	10	11,40	30,78	*
	PLTPTX 10	10	11,40	30,78	
	PLTPBX 25	25	15,03	40,58	
	PLTPRX 25	25	15,03	40,58	*
	PLTPTX 25	25	15,03	40,58	

.....

ANODIZED POLISHED **BLACK LINE ON DEMAND ON DEMAND** NS - Polished brushed AO - Anodized gold BC - Polished chrome BO - Polished gold BR - Polished bronze BT - Polished titanium NE - Anodized black AA - Anodized silver AR - Anodized copper AT - Anodized titanium BN - Polished black aluminiun luminium aluminium black aluminium aluminiur uminiun POLISHED BRUSHED BRUSHED TILTEX TUSCANY ON DEMAND **ON DEMAND** ON DEMAND **ON DEMAND ON DEMAND** BS - Polished brushed BOS - Polished brushed TS - Polished brushed RS - Polished brushed BX - Tiltex silver TX - Tiltex titanium RX - Tiltex coppe O3TU - Tuscany grey 05TU - Tuscany Beige 20TU - Tuscany Bronze titanium aluminium copper aluminium gold aluminium aluminium **STONE LINE** SL01 - Stone white SL08 - Antradark SL12 - Stone black AVAILABLE MINIMUM QUANTITY 100 PCS by colour and height (Price to be agreed. Production delay 4/5 weeks) STONE LINE





** = Production on demand with minimum quantity of 80 pcs. Production delay 4/5 weeks. Price to be agreed

WALLS

PROLISTEL ALL is a listel in anodized, polished and brushed aluminium with a rounded visible surface, suitable to decorate the wall coverings in ceramic, mosaic and natural stone. Its particular section and availability in different finishes, make **PROLISTEL P ALL** a much sought after profile. It can be used with the range of PROJOLLY profiles to decorate the wall coverings and to allow an elegant workmanlike application.

ANODIZED, POLISHED AND BRUSHED ALUMINIUM

PROLISTEL ALL




POLISHED ALUMINIUM (chrome-gold-copper-titanium-black) thermo packed - bar length 2,7 Im - pack. 40 Pcs - 108 Im

• • • •				
Article	Hmm	€/lm	€/Pc	
PLTBC 15	15	7,37	19,90	
PLTBR 15	15	9,11	24,60	*
PLTBT 15	15	9,11	24,60	
PLTBO 15	15	7,37	19,90	*
PLTBN 15	15	9,22	24,89	*
PLTBC 25	25	10,06	27,16	
PLTBR 25	25	11,81	31,89	*
PLTBT 25	25	11,81	31,89	
PLTBO 25	25	10,06	27,16	*
PLTBN 25	25	11,94	32,24	*

ANODIZED ALUMINIUM (silver-gold-copper-titanium-black) thermo packed - bar length 2,7 Im - pack. 40 Pcs - 108 Im					
Article	Hmm	€/lm	€/Pc		
PLTAA 15	15	6,02	16,25		
PLTAR 15	15	7,36	19,87	*	
PLTAT 15	15	7,36	19,87		
PLTAO 15	15	6,02	16,25	*	
PLTNE 15	15	7,46	20,14		
PLTAA 25	25	7,51	20,28		
PLTAR 25	25	9,58	25,87	*	
PLTAT 25	25	9,58	25,87		
PLTAO 25	25	7,51	20,28	*	
PLTNE 25	25	9 71	26 22		

BRUSHED POLISHED ALUMINIUM (silver-gold-copper-titanium-black) thermo packed - bar length 2,7 Im - pack. 40 Pcs - 108 Im

• • • •				
Article	Hmm	€/lm	€/Pc	
PLTBS 15	15	9,65	26,06	
PLTRS 15	15	11,81	31,89	*
PLTTS 15	15	11,81	31,89	
PLTBOS 15	15	9,65	26,06	*
PLTNS 15	15	11,94	32,24	*
PLTBS 25	25	10,65	28,76	
PLTRS 25	25	12,68	34,24	*
PLTTS 25	25	12,68	34,24	
PLTBOS 25	25	10,65	28,76	*
PLTNS 25	25	12,82	34,61	*



5

1. Choose "PROLISTEL ALL" according to the width and desired finish. 2. Cut "PROLISTEL ALL" to the desired length and apply the adhesive on the support where the profile will be laid. 3. Press "PROLISTEL ALL" into the adhesive. 4. Lay the tiles, aligning them with the profile leaving a 2 mm joint. Remove immediately all remains of adhesive from the surface of the profile. 5. Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile.

	ANODIZED			POLISHED		BRUSHED POLISHE	
AA - Anodized silver alum.	AT - Anodized titanium alum.	NE - Anodized black alum.	BC - Polished chrome alum.	BT - Polished titanium alum.		BS - Brushed polished silver alum. TS - Brushed Polished titanium alum	
AVAILABLE MINIMUM QUANTITY 100 PCS by colour and height (Price to be agreed. Production delay 4/5 weeks)							
ANODIZED		POLISHED			RUSHED POLISHED		
AO - Anodized Gold alum.	AR - Anodized copper alum.	BO - Polished Gold alum.	BR - Polished copper alum.	BN - Polished black alum.	BOS - Brushed Gold alum.	RS - Brushed Polished copper alum. NS - Brushed Polished black alum.	

On demand may be realised in other finishes of the colour chart. Contact our customer service for minimal quantity, timing and price.

PROLISTEL LED is a listel in anodized and polished aluminium equipped with an integrated LED lighting system that can generate a cold, hot and neutral suffused light. It is suitable to decorate the wall coverings in ceramic, mosaic and natural stone. Its particular section and availability in different finishes, make **PROLISTEL LED** a much sought after profile that decorates the wall coverings.

PROLISTEL LED

ANODIZED AND POLISHED ALUMINIUM



ANODIZED ALUM. SILVER, POLISHED CHROME ALUMINIUM thermo packed - bar length 2,7 Im - pack. 40 Pcs - 108 Im ADAPTOR LED, LED & FLAT NOT INCLUDED

Article	Hmm	€/lm	€/Pc	
PLTLEDAA 20	20	12,41	33,51	
PLTLEDBC 20	20	14,04	37,91	
ADHESIVE FLEXIBLE LED COIL length 5 Im - pack. 1 ROLL				
Article	€/lm		€/Pack	
LEDN	22,47	7	112,35	
LEDF	22,47	,	112,35	


	22,77	112,35
LEDC	22,47	112,35
COLOURS		

AA - Anodized silver alum. BC - Polished chrome alum.



POLYCARBONATE FLAT bar length 2,7 lm - pack. 20 Pc - 54 lm (AL = transparent / AO = matt)


(AL = transparent / AO	= matt)				
Article	€	/lm	€/Pc		
PIAL 17	5	,16	13,93		
PIAO 17	5	,16	13,93	<u> </u>	
END CAPS - R/L (3 right	& 3 left)				
Article	Hmm			1	
TPLTLEDAA 20	20		21,90		
TPLTLEDBC 20	20		21,90		
LED ADAPTOR AC/DC 7	5W - 12V (15 li	m)			
Article			€/Pc		
ALL 7512			82,27		
LED ADAPTOR AC/DC 25W - 12V (5 lm)					
Article			€/Pc		
ALL 2512			56,42		



PLTLED... 20

Ч

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS



1. Choose "PROLISTEL LED" according to the width and desired finish. 2. Cut "PROLISTEL LED" to the desired length and apply the adhesive on the support where the profile will be laid. 3. Press "PROLISTEL LED" into the adhesive. 4. Lay the tiles, aligning them with the profile leaving a 2 mm joint. Remove immediately all remains of adhesive from the surface of the profile. 5. Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile.

COLOURS


苯 = Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed



PROFINLIST 20

PROFINLIST 20 is a listel in anodized, polished, brushed and tiltex aluminium with a flat visible surface, suitable to decorate the wall coverings in ceramic, mosaic and natural stone. Its particular section and availability in different finishes, make **PROFINLIST 20** a much sought after profile. It can be used with the range of PROJOLLY profiles to decorate the wall coverings and to allow an elegant workmanlike application.


ANODIZED, POLISHED, BRUSHED AND TILTEX ALUMINIUM

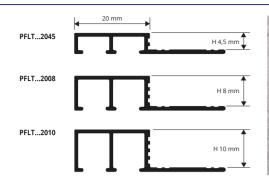

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS



 Choose "PROFINLIST 20" according to the width and desired finish. 2. Cut "PROFINLIST 20" to the desired length and apply the adhesive on the support where the profile will be laid. 3. Press the anchoring flange of "PROFINLIST 20" into the adhesive. 4. Lay the tiles, aligning them with the profile leaving a 2 mm joint. Remove immediately all remains of adhesive from the surface of the profile.
 5. Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile.

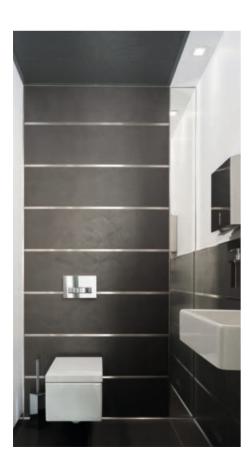

PROGRESS®

OFILES





ANODIZED ALUMINIUM thermo packed bar length 2.7 lm - pack. 40 Pcs - 108 lm

bar ieligar = /· inter pacial to the first						
Article	Hmm	€/lm	€/Pc			
PFLTAA 2045	4,5	8,12	21,92	*		
PFLTAA 2008	8	8,18	22,09			
PFLTAR 2008	8	9,72	26,24	*		
PFLTAT 2008	8	9,72	26,24	*		
PFLTAA 2010	10	8,38	22,63			
PFLTAR 2010	10	9,99	26,97	*		
PFLTAT 2010	10	9,99	26,97	*		

BRUSHED POLISHED ALUMINIUM thermo packed bar length 2,7 Im - pack. 40 Pcs - 108 Im

Article	Hmm	€/lm	€/Pc	
PFLTBS 2045	4,5	11,27	30,43	*
PFLTBS 2008	8	11,74	31,70	
PFLTRS 2008	8	14,42	38,93	*
PFLTTS 2008	8	14,42	38,93	*
PFLTBS 2010	10	12,00	32,40	
PFLTRS 2010	10	14,70	39,69	*
PFLTTS 2010	10	14,70	39,69	*
PFLTBOS 2010	10	14,70	39,69	







POLISHED ALUMINIUM thermo packed bar length 2,7 lm - pack. 40 Pcs - 108 lm

	Article	Hmm	€/Im	€/Pc	
Ρ	FLTBC 2045	4,5	9,46	25,54	*
Ρ	FLTBO 2045	4,5	9,84	26,57	
Ρ	FLTBC 2008	8	10,06	27,16	
Ρ	FLTBR 2008	8	11,74	31,70	*
Ρ	FLTBT 2008	8	10,06	27,16	*
Ρ	FLTBC 2010	10	10,28	27,76	
Ρ	FLTBO 2010	10	10,46	28,24	
Ρ	FLTBR 2010	10	12,00	32,40	*
Ρ	FLTBT 2010	10	10,28	27,76	*

BRUSHED TILTEX ALUMINIUM thermo packed bar length 2,7 Im - pack. 40 Pcs - 108 Im

bar length 2,7 im - pack. 40 PCS - 108 im					
	Article	H mm	€/lm	€/Pc	
	PFLTBX 2008	8	12,95	34,97	*
	PFLTRX 2008	8	15,82	42,71	*
	PFLTTX 2008	8	15,82	42,71	
	PFLTBX 2010	10	13,14	35,48	*
	PFLTRX 2010	10	16,16	43,63	*
	PFLTTX 2010	10	16,16	43,63	

AVAILABLE MINIMUM QUANTITY 100 PCS

by colour and height (Price to be agreed. Production delay 4/5 weeks)



WALLS

* = Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed

PROBORD is a round corner bead profile in polished and brushed stainless steel AISI 304/1.4301-V2A suitable to protect the external corner of wall coverings in ceramic. Its particular section and availability in different finishes, make **PROBORD** a much sought after profile. It can be used with the range of PROLISTEL and PROSHELL profiles to obtain an elegant workmanlike application even in environments subject to high mechanical stresses.

POLISHED AND BRUSHED STAINLESS STEEL AISI 304/1.4301-V2A

PROBORD



POLISHED STAINLESS ST. AISI 304/1.4301-V2A with protective film bar length 2,7 lm - pack. 15 Pcs - 40,5 lm - 10/10mm

Article	H mm	€/lm	€/Pc
PEBDAC 08	08	19,80	53,46
PEBDAC 10	10	20,56	55,51
PEBDAC 125	12,5	21,08	56,92

COLOURS

AC - Polished stainless steel ACS - Brushed stainless steel AISI 304/1.4301-V2A 304/1.4301-V2A

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS



1. Choose "PROBORD" according to the tile thickness and desired finish. 2. Cut "PROBORD" to the desired length and apply the adhesive on the support where the profile will be laid. 3. Press the anchoring flange of "PROBORD" into the adhesive. 4. Lay the tiles, aligning them with the profile leaving a 2 mm joint. Remove immediately all remains of adhesive from the surface of the profile. Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile.

BRUSHED STAINLESS ST. AISI 304/1.4301-V2A with protective film

€/lm

23,18

23,81

24,58

€/Pc

62,59

64,29

66,37

Hmm

08

10

12,5

bar length 2,7 lm - pack. 15 Pcs - 40,5 lm - 10/10mm

SUITABLE FOR USE IN CONTACT WITH FOODSTUFFS.


Article

PEBDACS 08


PEBDACS 10

PEBDACS 125


PROEDGE FLEX is a corner bead profile in shockproof non-toxic co-extruded colored vinyl resin composed by an internal rigid structure and by a soft external one. The profile is suitably shaped to protect the external corner of wall coverings. Its particular section and the availability in different colours make **PROEDGE FLEX** a much sought after and easy to lay profile that allows a workmanlike application.

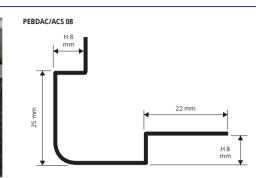









PROEDGE FLEX



CO-EXTRUDED PVC - L 40 X 40 mm bar length 2,7 lm - pack. 15 Pcs - 40,5 lm

COLOURS

Article	Hmm	€/lm	€/Pc	Article	
PFC40	40	8,32	22,46	PFC40A	





100	

CO-EXTRUDED PVC WITH ADHESIVE - L 40 X 40 mm bar length 2,7 lm - pack. 15 Pcs - 40,5 lm

Article	Hmm	€/lm	€/Pc
PFC40A	40	11,14	30,08

16 - Blue



11 - Black



45

SHOCKPROOF NON - TOXIC CO-EXTRUDED COLORED VINYL RESIN

PFC... 40/40A TWO-SIDED ADHESIVE H 40 mm L 40 mm

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS




be laid. **4.** When the surface is perfectly dry, remove the protective film (version with adhesive), place correctly the profile and press it without hitting / apply the silicone on the surface where the profile will be laid (version without adhesive) and press it without hitting.

PROEDGE AC

PROEDGE AC is a corner bead profile in polished and brushed stainless steel AISI 304/1.4301-V2A, with a radius of curvature of 1.5 mm, suitably shaped to protect the external corner of wall coverings. Its particular section, the availability in two finishes and different widths make **PROEDGE AC** a much sought-after profile that allows a workmanlike application even in environments subject to high mechanical stresses.

POLISHED AND BRUSHED STAINLESS STEEL AISI 304/1.4301-V2A

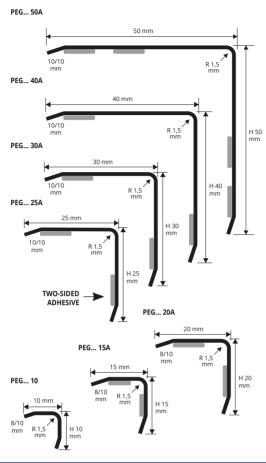



POLISHED AND BRUSHED STAINLESS STEEL

with protective film - bar length 2,7 lm - pack. 81 lm - 8/10 mm				
Article	LxH mm	€/lm	€/Pc	
PEGAC 10	10 x 10	6,50	17,55	
PEGACS 10	10 x 10	8,34	22,52	

POLISHED AND BRUSHED STAINLESS STEEL WITH ADHESIVE

with protective film - bar length 2, / Im - pack. 81 Im - 8/10 mm					
Article	LxH mm	€/lm	€/Pc		
PEGAC 15A	15 x 15	9,58	25,87		
PEGACS 15A	15 x 15	11,43	30,86		
PEGAC 20A	20 x 20	10,86	29,32		
PEGACS 20A	20 x 20	12,72	34,34		

For items without adhesive, write the item without the last A. E.g.: PEGAC 15 $\,$

COLOURS



POLISHED AND BRUSHED STAINLESS STEEL WITH ADHESIVE with protective film - bar length 2,7 lm - pack. 40,5 lm -10/10 mm

			-
Article	LxH mm	€/lm	€/Pc
PEGAC 25A	25 x 25	12,14	32,78
PEGACS 25A	25 x 25	14,04	37,91
PEGAC 30A	30 x 30	17,24	46,55
PEGACS 30A	30 x 30	19,50	52,65

For items without adhesive write the item without the last A. E.g.: PEGAC 10 $\,$

POLISHED AND BRUSHED STAINLESS STEEL WITH ADHESIVE

with protective film - bar length 2,7 lm - pack. 27 lm - 10/10 mm					
Article	LxH mm	€/lm	€/Pc		
PEGAC 40A	40 x 40	21,84	58,97		
PEGACS 40A	40 x 40	24,74	66,80		
PEGAC 50A	50 x 50	25,41	68,61		
PEGACS 50A	50 x 50	27,46	74,14		
For items without adhesive, write the item without the last A.					

E.g.: PEGAC 40

PEG... 40A / 50A on demand with thickness 12/10 Quantity, timing and prices to be agreed.

PROEDGE OT

PROEDGE OT is a corner bead profile in polished and chromed brass, with a radius of curvature of 1.5 mm, suitably shaped to protect the external corner of wall coverings. Its particular section, the availability in two finishes and different widths make **PROEDGE OT** a much sought-after profile that allows an elegant workmanlike application.

€/Pc

30.73

POLISHED AND CHROMED BRASS

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

1. Choose "PROEDGE OT" according to the desired finish and width 2. Cut "PROEDGE OT" to the desired length. 3. Remove carefully any remains of oil, fat and dirt from the surface where the profile will be laid. 4. When the surface is perfectly dry, remove the protective film, place correctly the profile and press it without hitting / apply the silicone on the surface where the profile will be laid (version without adhesive) and press it without hitting.





POLISHED AND CHROMED BRASS ar length 2,7 lm - pack. 54 lm - 8/10 mm

bui lengui 2,7 mi puel. 34 mi or to min						
Article	LxH mm	€/lm				
PEGOL 10	10 x 10	11,38				

PEGOC 10	10 x 10	16,15	43,60
POLISHED AND CHROME bar length 2,7 lm - pack. 54	MIRR LIN		
Article	LxH mm	€/lm	€/Pc
PEGOL 15A	15 x 15	13,00	35,10
PEGOC 15A	15 x 15	19,32	52,16

PEGOL 15A	15 x 15	13,00	35,10	*
PEGOC 15A	15 x 15	19,32	52,16	
PEGOL 20A	20 x 20	16,65	44,95	*
PEGOC 20A	20 x 20	23,82	64,31	
PEGOC 25A	25 x 25	27,17	73,36	
PEGOC 30A	30 x 30	31,67	85,51	_

For items without adhesive, write the item without the last A. E.g.: PEGOL 15





POLISHED BRASS WITH ADHESIVE bar length 2,7 lm - pack. 27 lm - 10/10 mm				MIRROR	
	Article	LxH mm	€/Im	€/Pc	
	PEGOL 25A	25 x 25	17,57	17,57	*
	PEGOL 30A	30 x 30	23,88	64,48	*

POLISHED BRASS WITH ADHESIVE bar length 2,7 lm - pack. 27 lm - 12/10 mm			MIRROR		
Article	LxH mm	€/lm	€/Pc	ſ	
PEGOL 40A	40 x 40	30,21	81,57	*	
PEGOL 50A	50 x 50	38,63	104,30	*	
PEG 40A / 50A on demand w Quantity, timing and prices to		/10.			

For items without adhesive, write the item without the last A. E.g.: PEGOL 40

★ = Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed

WALLS

PROEDGE R AC is a corner bead profile in polished and brushed stainless steel AISI 304/1.4301-V2A, with a radius of curvature of 5 mm, suitably shaped to protect the external corner of wall coverings. Its particular section, the availability in two finishes and different widths make **PROEDGE R AC** a much sought-after profile that allows a workmanlike application even in environments subject to high mechanical stresses.

PROEDGE R AC

POLISHED AND BRUSHED STAINLESS STEEL AISI 304/1.4301-V2A WALLS



POLISHED AND BRUSHED STAINLESS STEEL WITH ADHESIVE with protective film - bar length 2,7 lm - pack. 81 lm - 8/10 mm

Article	LxH mm	€/Im	€/Pc	
PEGRAC 15A	15 x 15	9,58	25,87	*
PEGRACS 15A	15 x 15	11,43	30,86	*
PEGRAC 20A	20 x 20	10,86	29,32	*
PEGRACS 20A	20 x 20	12,72	34,34	*

POLISHED AND BRUSHED STAINLESS STEEL WITH ADHESIVE with protective film - bar length 2,7 lm - pack. 40,5 lm -10/10 mm

Article LxHmm €/Im €/Pc PEGRAC 25A 25 x 25 12.14 32.78 * PEGRACS 25A 25 x 25 14.04 37,91 📩 PEGRAC 30A 30 x 30 17,24 46,55 * PEGRACS 30A 30 x 30 19,50 52,65 📩

For items without adhesive write the item without the last A.

Suitable for use in contact with foodstuffs.



POLISHED AND BRUSHED STAINLESS STEEL WITH ADHESIVE with protective film - bar length 2,7 lm - pack. 27 lm - 10/10 mm

with protective min buriengur	-, m puck.	27 1111 10	/ 10 11111	
Article	LxH mm	€/lm	€/Pc	
PEGRAC 40A	40 x 40	21,84	58,97	*
PEGRACS 40A	40 x 40	24,74	66,80	*
PEGRAC 50A	50 x 50	25,41	68,61	*
PEGRACS 50A	50 x 50	27,46	74,14	*

PEGR... 40A / 50A on demand with thickness 12/10.

Quantity, timing and prices to be agreed.

For items without adhesive, write the item without the last A. E.g.: PEGRAC 40

COLOURS


PROEDGE R OT is a corner bead profile in polished and chromed brass, with a radius of curvature of 5 mm, suitably shaped to protect the external corner of wall coverings. Its particular section, the availability in

two finishes and different widths make PROEDGE R OT a much sought-after profile that allows an elegant

MIRROR

***** = Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed



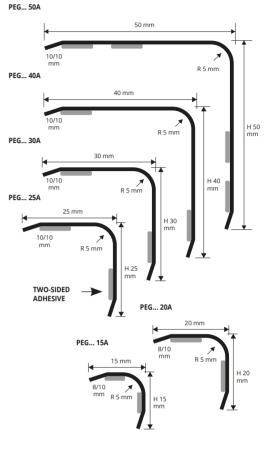

PROEDGE R OT

POLISHED AND CHROMED BRASS



CHROMED BRASS WITH ADHESIVE	
thermo packed - bar length 2.7 lm - pack. 54 ln	n

workmanlike application.


Article	LxH mm	€/Im	€/Pc	
PEGROC 15A	15 x 15	19,32	52,16	*
PEGROC 20A	20 x 20	23,82	64,31	*
PEGROC 25A	25 x 25	27,17	73,36	*
PEGROC 30A	30 x 30	31,67	85,51	*

POLISHED BRASS WITH ADHESIVE bar length 2,7 lm - pack. 54 lm - 8/10 mm				
Article	LxH mm	€/Im	€/Pc	
PEGROL 15A	15 x 15	13,00	35,10	*
PEGROL 20A	20 x 20	16,65	44,95	*
For items without adhesive, write the item without the last A				

E.g.: PEGROL 15



that a	POLISHED BRASS WITH A bar length 2,7 lm - pack. 27		mm	MIRROR	
	Article	LxH mm	€/lm	€/Pc	
	PEGROL 25A	25 x 25	16,78	45,31	*
	PEGROL 30A	30 x 30	22,79	61,53	*




PEGR... 40A / 50A on demand with thickness 12/10. Quantity, timing and prices to be agreed.

For items without adhesive, write the item without the last A

E.g.: PEGROL 25

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS



1. Choose "PROEDGE R OT" according to the desired finish and width. 2. Cut "PROEDGE R OT" to the desired length. 3. Remove carefully any remains of oil, fat and dirt from the surface where the profile will be laid. 4. When the surface is perfectly dry, remove the protective film, place correctly the profile and press it without hitting / apply the silicone on the surface where the profile will be laid (version without adhesive) and press it without hitting.

COLOURS

OC - Chromed brass	OL - Polished Brass



47

© 2028. All dights reserved by Progress Profiles. Printed in Italy


E.g.: PEGRAC 15

WALLS

PROEDGE AL

PROEDGE AL is a corner bead profile in anodized and varnished aluminim suitably shaped to protect the external corner of wall coverings. Its particular section and the availability in four different finishes make **PROEDGE AL** a much sought-after profile that allows a workmanlike application.

ANODIZED AND VARNISHED ALUMINIUM



EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS




 Choose "PROEDGE AL" according to the desired finish and width.
 Cut "PROEDGE AL" to the desired length. 3. Remove carefully any remains of oil, fat and dirt from the surface where the profile will be laid. 4. When the surface is perfectly dry, remove the protective film, place correctly the profile and press it without hitting / apply the silicone on the surface where the profile will be laid (version without adout the surface where the profile will be laid (version without adhesive) and press it without hitting.

PROEDGE PVC

PROEDGE PVC is a corner bead profile in shockproof non-toxic co-extruded white vinyl resin suitably shaped to protect the external corner of wall coverings. Its particular section and the availability in four different widths make **PROEDGE PVC** a much sought-after profile that allows a workmanlike application.

SHOCKPROOF NON - TOXIC CO-EXTRUDED WHITE VINYL RESIN

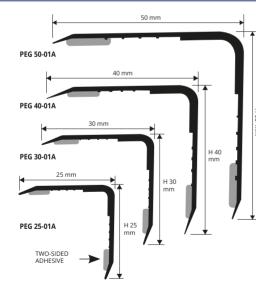

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS



PROGRESS[®]

OFILES



SHOCKPROOF VINYL RESIN WITH ADHESIVE length 2 7 lm - nack 30 Pcs - 81 lm

bar lenger 2,7 mil pack. Se	105 01111		
Article	LxH mm	€/lm	€/Pc
PEG 25-01A	25 x 25	6,00	16,20
PEG 30-01A	30 x 30	6,79	18,33

SHOCKPROOF VINYL RESIN WITHOUT ADHESIVE bar length 2,7 lm - pack. 30 Pcs - 81 lm

Article	LxH mm	€/lm	€/Pc
PEG 25-01	25 x 25	4,09	11,04
PEG 30-01	30 x 30	4,89	13,20

1. Choose "PROEDGE PVC" according to the desired width. 2. Cut "PROEDGE PVCL" to the desired length. 3. Remove carefully any remains of oil, fat and dirt from the surface where the profile will be laid. 4. When the surface is perfectly dry, remove the protective film, place correctly the profile and press it without hitting / apply the silicone on the surface where the profile will be laid (version without adhesive) and press it without hitting.



SHOCKPROOF VINYL RESIN WITH ADHESIVE bar length 2,7 lm - pack. 15 Pcs - 40,5 lm

0 1			
Article	LxH mm	€/lm	€/Pc
PEG 40-01A	40 x 40	7,58	20,47
PEG 50-01A	50 x 50	8,39	22,65

SHOCKPROOF VINYL RESIN WITHOUT ADHESIVE bar length 2,7 lm - pack. 15 Pcs - 40,5 lm

Article	LxH mm	€/lm	€/Pc
PEG 40-01	40 x 40	5,68	15,34
PEG 50-01	50 x 50	6,49	17,52

COLOURS

	FOR OTHER COLORS MINIMUM ORDER 400 pcs
01 - White	·



ANODIZED ALUM. (gold, silver and bronze) WITH ADHESIVE thermo packed - bar length 2,7 Im - pack. 30 Pcs - 81 Im

Article	LxH mm	€/lm	€/Pc
PEGAO 25A	25 x 25	7,10	19,17
PEGAA 25A	25 x 25	7,10	19,17
PEGAB 25A	25 x 25	7,10	19,17

For items without adhesive, write the article without the last A. E.g.: PEGAO 25

WHITE VARNISHED ALUMINIUM - WITH ADHESIVE thermo packed - bar length 2,7 lm - pack. 30 Pcs - 81 lm


Article	LxH mm	€/lm	€/Pc
PEGA 25-01A	25 x 25	8,85	23,89








01 - White varnished alum.

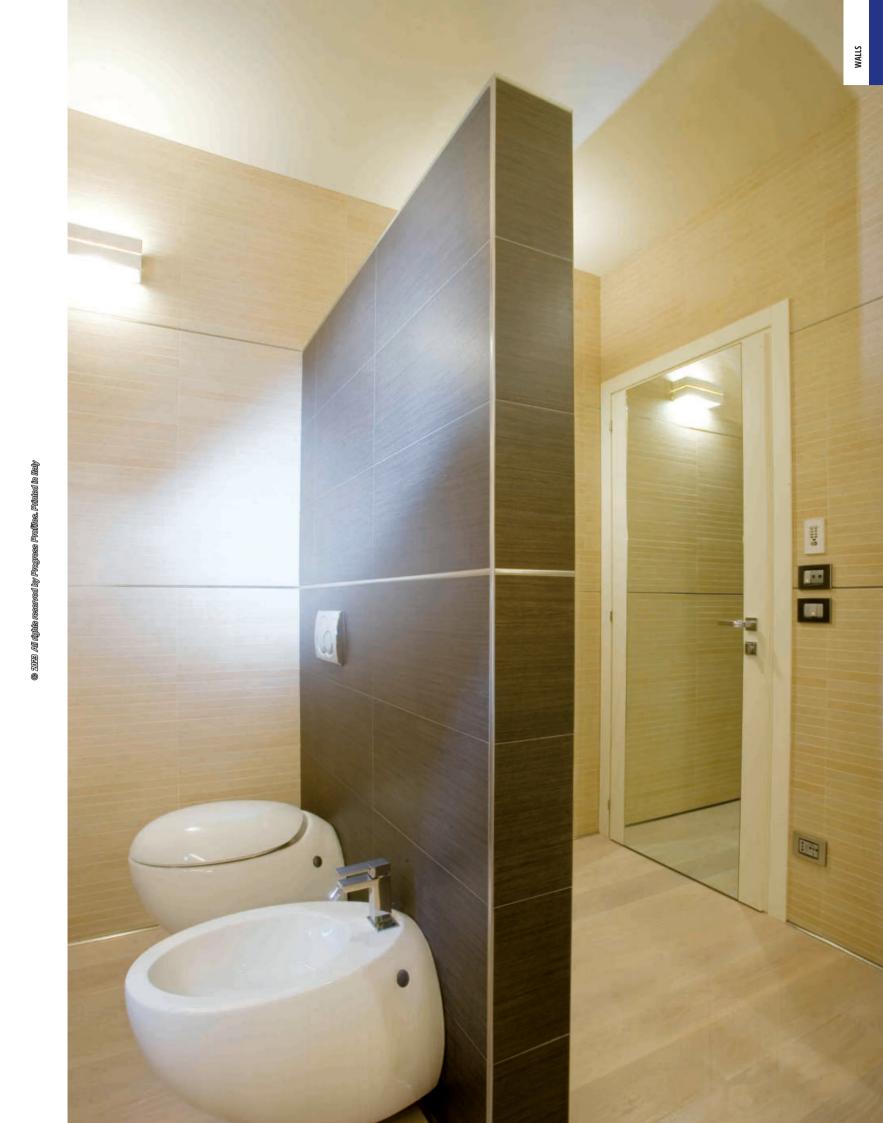


PROSHELL


WALLS

POLISHED AND BRUSHED STAINLESS STEEL AISI 304/1.4301-V2A

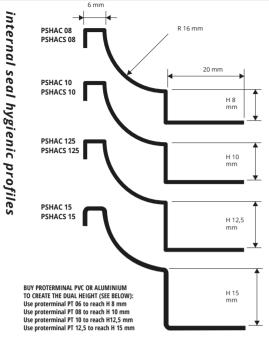

EXAMPLES FOR LAYING







POLISHED STAINLESS STEEL AISI 304/1.4301-V2A with protective film - bar length 2,7 lm - pack. 20 Pcs - 54 lm - 10/10 mm

÷ .			
Article	Hmm	€/Im	€/Pc
PSHAC 08	8	17,24	46,55
PSHAC 10	10	18,13	48,95
PSHAC 125	12,5	19,30	52,11
PSHAC 15	15	20,31	54,84

1. Choose "PROSHELL" according to the tile thickness and desired finish. (*) 2. Cut "PROSHELL" to the desired length and apply the finish. (*) 2. Cut "PROSHELL" to the desired length and apply the adhesive on the support where the profile will be laid. 3. Press the anchoring flange of "PROSHELL" into the adhesive. 4. Lay the tiles on floor and wall aligning them with the profile leaving a 2 mm joint. Remove immediately all remains of adhesive from the surface of the profile. 5. Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile. (*) to obtain double height, use the joint of the came size as the scheder arching and charge the PROFENIA. same size as the selected profile and choose the PROTERMINAL PVC or ALUMINIUM according to the required thickness, see INSTRUCTIONS FOR LAYING.



BRUSHED STAINLESS STEEL AISI 304/1.4301-V2A with protective film - bar length 2,7 lm - pack. 20 Pcs- 54 lm - 10/10 mm

Article	Hmm	€/lm	€/Pc
PSHACS 08	8	19,16	51,73
PSHACS 10	10	20,13	54,35
PSHACS 125	12,5	20,56	55,51
PSHACS 15	15	21,84	58,97

Suitable for use in contact with foodstuffs.


COLOURS

INSTRUCTIONS FOR LAYING


 Polished stainless steel AISI 304/1.4301-V2A
 ACS - Brushed stainless steel AISI 304/1.4301-V2A AC -


PREWELDED CORNER, CAPS and THREE-WAYS JOINTS

POLISHED AND BRUSHED STAINLESS STEEL

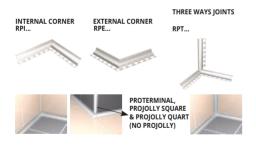

RPSTAC. TPSAC RPESAC






Article	H mm	€/Pc.	€/Pack		
RPI/10	08/10/125	21,86	218,60		
RPI 15/10	15	23,19	231,90		
RPE/10	08/10/125	21,86	218,60		
RPE 15/10	15	23,19	231,90		
RPT/10	08/10/125	28,97	289,70		
RPT 15/10 15 30,18 301,80					
Specify height of joint: E.g.: RPI 8 for H 8 mm					

cify height of joint: E.g.: RPI 8 for H 8 mm

OVERLAPPING JOINTS

POLISHED	AISI 316/.4404	V4A STAINLESS	STEEL - pack	10 Pcs	STAINLESS

	Article	€/Pc.	€/Pack
0	RPSIACM/10	8,81	88,10
0	RPSEACM/10	8,81	88,10
0	RPSTACM/10	8,81	88,10
0	GPSACM/10	4,05	40,50
0	TPSACM/10	4,05	40,50

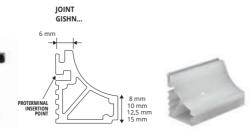

PREWELDED CORNER - BRUSHED STAINLESS STEEL

L TOU MM - PACK. TO PCS				
Article	H mm	€/Pc.	€/Pack	
RPIS/10	08/10/125	23,47	234,70	
RPIS 15/10	15	24,69	246,90	
RPES/10	08/10/125	23,47	234,70	
RPES 15/10	15	24,69	246,90	
RPTS/10	08/10/125	30,18	301,80	
RPTS 15/10	15	31,92	319,20	

Specify height of joint: E.g.: RPIS 8 for H 8 mm.

OVERIAPPING IOINTS 316 BRUSHED AISI 316/.4404 V4A STAINLESS STEEL - pack. 10 Pcs Article €/Pc. €/Pack

0	RPSIACMS/10	9,25	92,50
0	RPSEACMS/10	9,25	92,50
0	RPSTACMS/10	9,25	92,50
0	GPSACMS/10	4,24	42,40
0	TPSACMS/10	4,24	42,40

CAPS AND JOINTS IN RIGID GREY PLASTIC


pack. IU PCS				
€/Pc.	€/Pack			
4,70	47,00			
4,70	47,00			
4,03	40,30			
4,42	44,20			
4,84	48,40			
5,31	53,10			
	4,70 4,70 4,03 4,42 4,84			



PROSHELL is a cove-shaped profile in polished and brushed stainless steel AISI 316L/1.4404-V4A particularly suitable to ensure cleanliness and hygiene in every kind of environment where high resistance to mechanical and chemical stresses are required. Its particular section and the availability in two finishes, four heights and special pieces, such as internal and external corners, end caps and junctions, make **PROSHELL** a much sought-after profile that allows a workmanlike application even in environments subject to high mechanical stresses.

POLISHED AND BRUSHED

PROSHELL





POLISHED STAINLESS STEEL AISI 316L/1.4404-V4A with protective film ----

- bar length 2,7 Im - pack. 20 Pcs - 54 Im - 10/10 mm			STEEL	
Article	Hmm	€/lm	€/Pc	
PSHACM 08	8	22,41	60,51	*
O PSHACM 10	10	23,58	63,67	*
O PSHACM 125	12,5	25,08	67,72	*
PSHACM 15	15	26,41	71,31	*

Suitable for use in contact with foodstuffs




BRUSHED STAINLESS STEEL AISI 316L/1.4404-V4A


316 with protective film - bar length 2,7 lm - pack. 20 Pcs- 54 lm - 10/10 mm Hmm Article €/lm €/Pc PSHACMS 08 24,91 67,26 8 O PSHACMS 10 10 26.17 70,66 PSHACMS 125 12,5 26,73 72,17 O PSHACMS 15 15 28.40 76.68



EXAMPLES AND INSTRUCTIONS FOR LAYING 1. Choose "PROSHELL" according to the tile thickness and desired finish. (*) 2. Cut "PROSHELL" to the desired length and apply the adhesive on the support where the profile will be laid. 3. Press the anchoring flange of "PROSHELL" into the adhesive. **4**. Lay the tiles on floor and wall aligning them with the profile leaving a 2 mm joint. Remove immediately all remains them with the profile leaving a 2 mm joint, kernove immediately all remains of adhesive from the surface of the profile. **5**, Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile. (*) to obtain double height, use the joint of the same size as the selected profile and choose the PROTERMINAL PVC or ALUMINIUM according to the required thickness, see INSTRUCTIONS FOR LAYING.

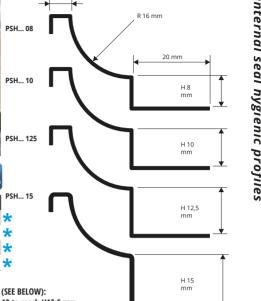

internal seal hygienic profiles

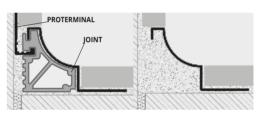

PREWELDED CORNER, CAPS and THREE-WAYS JOINTS

POLISHED AND BRUSHED STAINLESS STEEL

PREWELDED CORNE L 100 mm - pack. 10		AINLESS STEEL		PREWELDED CORNER - L 100 mm - pack. 10 Pcs		LESS STEEL		INTERNAL CORNER	EXTERNAL CORNER RPE	THREE WAYS CORNER
Article	Hmm	€/Pc.	€/Pack	Article	Hmm	€/Pc.	€/Pack	1 miles		
RPIACM/10	08/10/125	28,42	284,20	** 🔿 RPIACMS/10	08/10/125	30,50	305,00	** 💿	Annana .	3
RPIACM 15/10	15	30,17	301,70	** 🔿 RPISACMS 15/10	15	32,10	321,00	**		
RPEACM/10	08/10/125	28,42	284,20	🗙 🖈 🧑 RPESACMS/10	08/10/125	30,50	305,00	**		187 1
RPEACM 15/10	15	30,17	301,70	🗙 🖈 🧿 RPESACMS 15/10	15	32,10	321,00	**	PROTERMINA PROJOLLY SQ	JARE
RPTACM/10	08/10/125	37,72	377,20	** 🛪 💿 RPTSACMS/10	08/10/125	39,23	392,30	**	& PROJOLLY C	
RPTACM 15/10	15	39,23	392,30	🗙 📩 🧿 RPTSACMS 15/10	15	41,49	414,90	**	(NOT NOJOLL	
Specify height of join	t: E.g.: RPI 8 for H	1 8 mm.		Specify height of joint: E.	g.: RPIS 8 for H 8	mm.			RPSIAC	


OVERLAPPING JOINTS POLISHED AISI 316/.4404 V4A STAINL	.ESS STEEL - pack	10 Pcs
Article	€/Pc.	€/Pack
RPSIACM/10	8,81	88,10
RPSEACM/10	8,81	88,10
RPSTACM/10	8,81	88,10
GPSACM/10	4,05	40,50
TPSACM/10	4,05	40,50

OVERLAPPING JOINTS 316 BRUSHED AISI 316/.4404 V4A STAINLESS STEEL - pack. 10 Pcs Article €/Pc. €/Pack RPSIACMS/10 9,25 92,50 RPSEACMS/10 9.25 92.50 RPSTACMS/10 9,25 92,50 O GPSACMS/10 42,40 4,24 TPSACMS/10 4.24 42,40





GPSAC.

51



	Article	€/Pc.	€/Pack
	TPSHAC/10	4,70	47,00
	TPSHACS/10	4,70	47,00
0	GISHN 08/10	4,03	40,30
0	GISHN 10/10	4,42	44,20
0	GISHN 125/10	4,84	48,40
0	GISHN 15/10	5,31	53,10



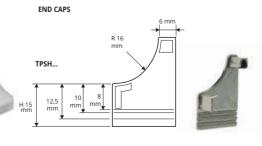

** = Production on demand with minimum quantity of 20 pcs. Production delay 4/5 weeks. Price to be agreed

🛠 = Production on demand with minimum quantity of 200 pcs. Production delay 4/5 weeks. Price to be agreed 🧿 = News 2023




PROSHELL ALL

PROSHELL ALL is a cove-shaped profile in anodized, polished and varnished aluminium particularly suitable to ensure cleanliness and hygiene in indoors environment where good resistance to mechanical and chemical stresses are required. Its particular section and the availability in three finishes, three heights and special pieces, such as internal and external corners, end caps and junctions, make **PROSHELL ALL** a much sought-after profile that allows a workmanlike application.

ANODIZED, POLISHED AND VARNISHED ALUMINIUM

WALLS

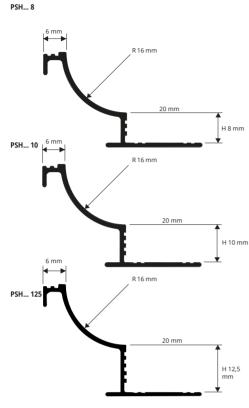

BUY PROTERMINAL PVC OR ALUMINIUM TO CREATE THE DUAL HEIGHT (SEE NEXT PIC): Use proterminal PT 108 to reach H 10 mm Use proterminal PT 102,5 to reach H 12,5 mm Use proterminal PT 12,5 to reach H 15 mm




ANODIZED SILVER ALUMINIUM thermo packed bar length 2.7 Im - pack. 20 Pcs - 54 Im

Article	H mm	€/Im	€/Pc				
PSHAA 08	8	10,72	28,94				
PSHAA 10	10	10,84	29,27				
PSHAA 125	12,5	11,03	29,78				
	Article PSHAA 08 PSHAA 10	Article H mm PSHAA 08 8 PSHAA 10 10	Article H mm €/Im PSHAA 08 8 10,72 PSHAA 10 10 10,84				

VARNISHED WHITE ALUMINIUM thermo packed bar length 2,7 lm - pack. 20 Pcs- 54 lm

Article	Hmm	€/Im	€/Pc
PSHA 08-01	8	12,66	34,18
PSHA 10-01	10	12,79	34,53
PSHA 125-01	12,5	14,90	40,23

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

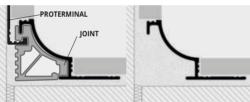

POLISHED CHROME ALUMINIUM thermo packed bar length 2,7 Im - pack. 20 Pcs - 54 Im

Article	Hmm	€/Im	€/Pc	
PSHBC 08	8	14,89	40,20	
PSHBC 10	10	15,15	40,91	
PSHBC 125	12,5	15,48	41,80	*

COLOURS

AA - Anod. Silver alum.	BC - Polished chrome alum.	01 - White varnished alum.

1. Choose "PROSHELL ALL" according to the tile thickness and desired finish. 2. Cut "PROSHELL ALL" to the desired length and apply the adhesive on the support where the profile will be laid. 3. Press the anchoring flange of "PROSHELL ALL" into the adhesive. 4. Lay the tiles on floor and wall aligning them with the profile leaving a 2 mm joint. Remove immediately all remains of adhesive from the surface of the profile. 5. Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile. (*) to obtain double height, use the joint of the same size as the selected profile and choose the PROTERVINGLA PVC or ALUMINIUM according to the required thickness, see INSTRUCTIONS FOR LAYING.

* accesories of the on demand profiles are also on demand



INTERNAL CORNER RPSHI.../... EXTERNAL CORNER RPSHE.../...





END CAP TPSH.../...



PROGRESS®

ILES



CORNERS, END CAPS and JOINTS

SILVER ANODIZED, POLISHED CHROME AND VARNISHED WHITE ALUMINIUM / PLASTIC

EXTERNAL/INTERNAL CORNER - ANODIZED SILVER ALUMINIUM				
Article	Hmm	€/Pack 10 Pcs	€/Pack 2 Pcs	
RPSHIAA/	08/10/125	188,02	41,37	
RPSHEAA/	08/10/125	188,02	41,37	

EXTERNAL/INTERNAL CORNER VARNISHED WHITE ALUMINIUM

cs
72
72

JOINTS IN RIGID GREY PLASTIC - pack. 10 Pcs

Article	H mm	€/Pack
GISHN 08/	8	40,18
GISHN 10/	10	44,25
GISHN 125/	12,5	48,30

EXTERNAL/INTERNAL CORNER POLISHED CHROME ALUMINIUM

Article	H mm	€/Pack 10 Pcs	€/Pack 2 Pcs
RPSHIBC/	08/10/125	224,67	49,42
RPSHEBC/	08/10/125	224,67	49,42

CAPS - ANODIZED SILVER ALUMINIUM/POLISHED CHROME/VARNISHED WHITE ALUM. pack. **10** Pcs (5 right and 5 left) - pack. **2** Pcs (1 right and 1 left)

Article	Hmm	€/Pack 10 Pcs	€/Pack 2 Pcs		
TPSHAA 08/	8	117,02	25,74		
TPSHBC 08/	8	146,32	32,18		
TPSHA 08/	8	154,05	33,90		
TPSHAA 10/	10	117,02	25,74		
TPSHBC 10/	10	146,32	32,18		
TPSHA 10/	10	154,05	33,90		
TPSHAA 125/	12,5	117,02	25,74		
TPSHBC 125/	12,5	146,32	32,18		
TPSHA 125/	12,5	147,05	32,37		

Choose the desired packaging. E.g.: TPSH... ...-01/5 (Pack 10 Pcs) TPSH... ...-01/1 (Pack 2 Pcs)

* = Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed


PROSGUSCIO DA is a cove-shaped profile in shockproof non - toxic coloured vinyl resin particularly suitable to ensure cleanliness and hygiene in in public and industrial environments. Its particular section, the availability in three finishes, four heights and special pieces, such as internal and external corners, end caps and junctions, make **PROSGUSCIO DA** a much sought-after profile that allows a workmanlike application.

PROSGUSCIO DA

SHOCKPROOF NON - TOXIC COLOURED VINYL RESIN



EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

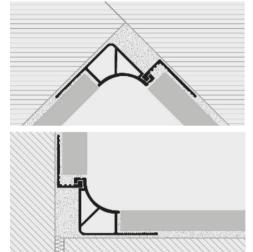

1. Choose "PROSGUSCIO DA" according to the tile thickness and desired colour. 2. Cut "PROSGUSCIO DA" to the desired length and apply the adhesive on the support where the profile will be laid. 3. Press the anchoring flange of "PROSGUSCIO DA" into the adhesive. 4. Lay the tiles on floor and wall aligning them with the profile leaving a 2 mm joint. 5. Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation.



NON-TOXIC SHOCKPROOF VINYL RESIN bar length 2,5 lm - pack. 20 Pc - 50 lm


•			
Article	Hmm	€/Im	€/Pc
PS 06	6	4,02	10,05
PS 08	8	4,37	10,93
PS 10	10	4,56	11,40
PS 125	12,5	5,04	12,60

H 06 available in the colours: 01-04. H 08, H 10 and H 125 available in the colours: 01-03-04.

The code of the selected colour must be added to the article code. E.g.: PS 06... (chosen colour white) PS 06-01. The interchangeable flange corresponds to white Proterminal pvc H 6-8-10 mm

COLOURS



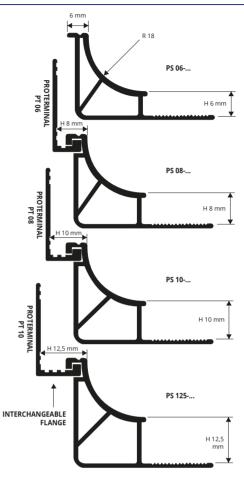

BUY WHITE PROTERMINAL TO CREATE THE DUAL HEIGHT: Use proterminal PT 06 to reach H 8 mm Use proterminal PT 08 to reach H 10 mm lise roterminal PT 10 to reach H 12,5 mm

CORNERS, END CAPS and JOINTS

ck 10 cs

NON- TOXIC VINYL RESIN - 3 COLOURS

EXTERNAL / INTERNAL CORNER - RVA COLOURED

Article	Hmm	€/Pack 2 Pcs	€/Pack 1 Pcs
RAI/	06/08/10/125	5,34	25,36
RAE/	06/08/10/125	5,34	25,36

Available in the colours: 01 - 03 - 04. The code of the selected colour must be added to the article code.

E.g.: RAI 06-... (chosen colour white) RAI 06-01. Choose the desired packaging. Ex. RAI 06-01/10 (pack. 10 Pcs) RAI 06-01/2 (pack. 2 Pcs)

END CAP RT / LF - RVA COLOURED

pack. 10 Pcs (5 right and 5 left) - pack. 2 Pcs (1 right and 1 left)				
Article	Hmm	€/Pack 2 Pcs	€/Pack 10 Pcs	
TCE 06/	06/08/10/125	4,83	22,98	
Available in the col	ours: 01 - 03 - 04			

The code of the selected colour must be added to the article code. Eg: TCE 08-... (chosen colour white) TCE 08-01. Choose the desired packaging. Ex. TCE 08-01/5 (pack. 10 Pcs)

TCE 08-01/1 (pack. 2 Pcs)

JOINTS - RVA COLOURED

pack. 10 Pcs - pack. 2 Pcs					
Article	Hmm	€/Pack 2 Pcs	€/Pack 10 Pcs		
GIN/	06/08/10/125	4,83	22,98		

Available in the colours: 01 - 03 - 04. The code of the selected colour must be added to the article code. E.g.: GIN 08-... (chosen colour white) GIN 08-01.

Ex. GIN 08-01/10 (pack. 10 Pcs) Choose the desired packaging. GIN 08-01/2 (pack. 2 Pcs)



TCE...-.../.



GIN...-

WALLS


ROGRESS® OFILES

PROROUND

WALLS

POLISHED AND BRUSHED STAINLESS STEEL AISI 304/1.4301-V2A

PROROUND is a cove-shaped profile in polished and brushed stainless steel AISI 304/1.4301-V2A particularly suitable to ensure cleanliness and hygiene in every kind of environment where high resistance to mechanical and chemical stresses are required. Its particular section and the availability in two finishes and special pieces, such as internal and external corners, make **PROROUND** a much sought-after profile that allows a workmanlike application even in environments subject to high mechanical stresses.

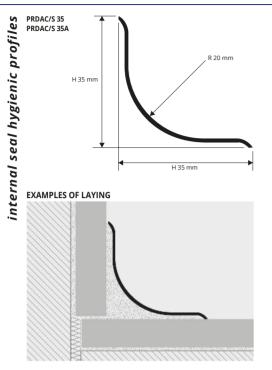



POLISHED STAINLESS ST. AISI 304/1.4301-V2A with protective film 35 x 35 mm - bar length 2,7 lm - pack. 20 Pcs - 54 lm - 10/10 mm

Article	Hmm	€/lm	€/Pc
PRDAC 35	35	14,55	39,29
PRDAC 35A	35	18,06	48,76

1. Choose "PROROUND" according to the desired finish and width. 2. Cut "PROROUND" to the desired length. 3. Remove carefully any remains of oil, fat and dirt from the surface where the profile will be laid. 4. When the surface is perfectly dry, remove the protective film, place correctly the profile and press it without hitting / apply the silicone on the surface where the profile will be laid (version without adhesive) and press it without hitting



BRUSHED STAINLESS ST. AISI 304/1.4301-V2A with protective film 35 x 35 mm - bar length 2,7 lm - pack. 20 Pcs - 54 lm - 10/10 mm

	h	• • • • • • •	
Article	H mm	€/Im	€/Pc
PRDACS 35	35	17,65	47,66
PRDACS 35A	35	21,17	57,16

COLOURS



AC - Polished stainless steel AISI 304/1.4301-V2A ACS - Brushed stainless steel AISI 304/1.4301-V2A

Suitable for use in contact with foodstuffs.

PREWELDED CORNERS and THREE-WAYS JOINTS without gaps POLISHED AND BRUSHED STAINLESS STEEL



INTERNAL CORNER PRDI/DIS

EXTERNAL CORNER PRDE/DES THREE WAYS JOINTS PRTE/TES

PROSANI STRIP & PROSANI STRIP KIT


NON-TOXIC FLEXIBLE WHITE VINYL RESIN

POLISHED STAINLESS STEEL AISI 304/1.4301-V2A - pack. 10 Pcs Article L mm €/Pack PRDI/10 100 218.58

Article L mm PRDIS/10 100 232.02 100 218,58 PRDES/10 100 232.02 80 327,74 PRTES/10 80 354,62

Brushed STAINLESS STEEL AISI 304/1.4301-V2A - pack. 10 Pcs €/Pack

PROSANI STRIP and PROSANI STRIP KIT are profiles in non-toxic flexible white vinyl resin particularly suitable to ensure cleanliness and hygiene along the connection beetwen the wall tile coverings and sinks, bathtubs and shower trays. PROSANI STRIP KIT is provided with a double-sided butyl tape while PROSANI STRIP can be applied with silicone. Their particular section and ease of application, and make PROSANI STRIP KIT and PROSANI STRIP a much sought after profiles that allow a workmanlike application.

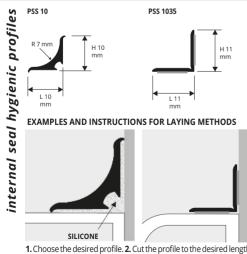

 Choose the desired profile. 2. Cut the profile to the desired length.
 Remove carefully any remains of oil, fat and dirt from the surface where the profile will be laid. 4. When the surface is perfectly dry, remove the protective film (PROSANI STRIP KIT), place correctly the profile and press it without hitting / apply the equipment double-sided butyl tape on the back of the profile (PROSANI STRIP), apply the silicone along the floor-wall joint and place the profile.



FLEXIBLE WHITE VINYL RESIN roll 25 lm

PRDE/10

PRTE/10

Article	LxH mm	€/lm	
PSS 10	10 X 10	4,23	105,75


PROSANI STRIP KIT ROLL - WHITE roll 3,5 lm

Article	LxH mm	€/lm	
PSS 1035	11 X 11	0,93	3,26



COLOURS

01 - White





PROSEAL 50 is a cove-shaped profile in shockproof non - toxic coextruded coloured vinyl resin particularly suitable to ensure cleanliness and hygiene in public and industrial environments. Its particular section and the availability in two different colours and special pieces, such as internal and external corners, end caps and joints, make **PROSEAL 50** a much sought-after profile that allows a workmanlike application.

PROSEAL 50

SHOCKPROOF NON - TOXIC COEXTRUDED COLORED VINYL RESIN



COEXTRUDED VINYL RESIN NON-TOXIC SHOCKPROOF bar length 2.5 lm - Pack, 40 LM

Article	€/lm	€/Pc
PSA 50	9,31	23,28

The code of the selected colour must be added to the article code. E.g.: PSA 50... (chosen colour white) PSA 50-01.

COEXTRUDED VINYL RESIN NON-TOXIC SHOCKPROOF - ADHESIVE bar length 2,5 lm - Pack. 30 LM

Article	€/Im	€/Pc
PSAA 50	12,87	32,17
Available in the colours: 01 - 03 (on dema		


The code of the selected colour must be added to the article code. E.g.: PSAA 50... (chosen colour white) PSAA 50-01.

03 - Cement Grev





AVAIABLE MINIMUM QUANTITY 100 PCS By colour and height (Price and delivery time to be agreed)

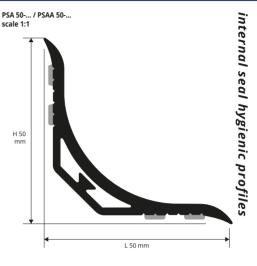

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS



1. Choose "PROSEAL 50" according to the tile thickness and desired finish. 2. Cut "PROSEAL 50" to the desired length. 3. Remove carefully any remains of oil, fat and dirt from the surface where the profile will be laid. 4. When the surface is perfectly dry, remove the protective film (version with adhesive), place the profile and press it without hitting / apply the double-sided butyl tape on the back of the profile (version without adhesive), apply the silicone along the floor-wall joint and place the profile.

CORNERS and END CAPS

NON - TOXIC VINYL RESIN

COLOURS

01 - White

INTERNAL / EXTERNAL CORNER AND END CAPS (for PROSEAL 50) €/Pack 2 Pcs €/Pack 10 Pcs Article TRI 50-.../... 9,41 44,43 TRE 50-.../... 9,41 44,43 TRT 50-.../... 9,41 44,43 TRC 50-.../... 9,41 44,43

TGN 50-.../... 9,41 44,43 . Binaidatalehie drasicedbpasskaging03 - ୦.୫.x. TRI 50-01/10 (pack. 10 Pcs) The code of the selected colour must ଫିଝାରଣିଥିଏ/ଥିଏ/daelaପିiଥିକ୍ରୋ:ode. E.g.: TRI 50-... (chosen colour white) TRI 50-01.





04 - Light Beige



TRT 50-.../..







TRI 50-.../..

TGN 50-.../...



Prices are referred to whole packs, 10% increase for minimum orders of 10 Pcs, 20% increase for orders of less than 10 Pcs.


NON-TOXIC FLEXIBLE VINYL RESIN

INTERNAL CORNER

TRI ...-.../...

END CAP

TRC ...-.../..




PROGRESS®

OFILES

INSTRUCTIONS FOR LAYING

PSA 25-... PSAA 25-... scale 1:1

COLORED VINYL RESIN

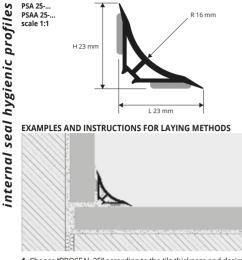

1. Choose "PROSEAL 25" according to the tile thickness and desired finish. 2. Cut "PROSEAL 25" to the desired length. 3. Remove carefully any remains of oil, fat and dirt from the surface where the profile will be laid. 4. When the surface is perfectly dry, remove the protective film (version with adhesive), place the profile and press it without hitting / apply the double-sided butyl tape on the back of the profile (version without adhesive), apply the silicone along the floor-wall joint and place the profile.

THREE WAYS

TRT ...-.../...

JOINTS

PROSEAL FLEX

TGN ...-.../..

EXTERNAL CORNER

TRE ...-.../..



COEXTRUDED VINYL RESIN NON-TOXIC SHOCKPROOF bar length 2,5 Im - pack. 50 LM

Article	€/lm	€/Pc
PSA 25	4,29	10,72
Available in the colours: 01 - 03 - 04.		

The code of the selected colour must be added to the article code. E.g.: PSA 25-... (chosen colour white) PSA 25-01.

COEXTRUDED VINYL RESIN NON-TOXIC SHOCKPROOF ADHESIVE bar length 2,5 lm - pack. 50 LM

Article	€/Im	€/Pc
PSAA 25	6.85	17.13

Available in the colours: 01 - 03 - 04. E.g.: PSAA 25-... (chosen colour white) PSAA 25-01..

COLOURS






PROSEAL KIT 25 (1 Pc of 1,80 LM + 2 Pcs of 0,90 lm + 2 INTERNAL CORNERS and 2 END CAPS 1 R and 1 L)

Description	Article	€/KIT
Kit PROSEAL 25	KTPSA 25-01	35,26
1 Pc PROSEAL 25 of 1,80 lm	PSA 25-01	
2 Pcs PROSEAL 25 of 0,90 lm	PSA 25-01	
2 Internal corner	TRI 25-01	
2 End caps	TRC 2501	

CORNERS, END CAPS and THREE-WAYS JOINTS NON - TOXIC VINYL RESIN

INTERNAL / EXTERNAL CORNERS AND END CAPS (for PROSEAL 25)				
Article €/Pack. €/Pack. 2 Pcs 10 Pcs				
TRI 25/	5,74	27,30		
TRE 25/	5,74	27,30		
TRT 25/	5,74	27,30		
TRC 25/	5,23	26,11		
TGN 25/	5,23	26,11		

Available in the colours: 01 - 03 - 04 The code of the selected colour must be added to the article code E.g.: TRI 25-... (chosen colour white) TRI 25-01. Choose the desired packaging. Ex. TRI 25-01/10 (pack. 10 Pcs) TRI 25-01/2 (pack. 2 Pcs)

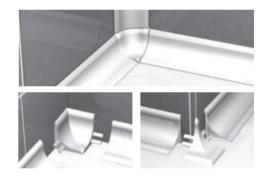

PROSEAL FLEX is a flexible non-toxic vinyl resin profile suitable to realize cove-shaped connection with resilient flooring in public and industrial environments. Its particular section makes **PROSEAL FLEX** a very sought after profile that allows that allows a workmanlike application.

FLEXIBLE BLACK NON-TOXIC VYNIL RESIN bar length 2,5 Im - pack. 40 Pcs - 100 Im

Article	L x H mm	€/lm	€/Pc
PSF 15-11	15x15	1,30	3,25
PSF 20-11	20x20	1,58	3,95
PSF 25-11	25x25	1,96	4,90

COLOURS

11 - Black

SHOCKPROOF NON - TOXIC COEXTRUDED

WALLS

PROSEAL 25 is a cove-shaped profile in shockproof non - toxic coextruded coloured vinyl resin particularly suitable to ensure cleanliness and hygiene in public and industrial environments. Its particular section and the availability in three different colours and special pieces, such as internal and external corners, end caps and joints, make PROSEAL 25 a much sought-after profile that allows a workmanlike application.

PROBATH is a cove-shaped profile in shockproof non - toxic coextruded white vinyl resin particularly suitable to ensure cleanliness and hygiene along the connection beetwen the wall tile coverings and sinks, bathtubs and shower trays. Its particular section and the availability in two different height and special pieces, such as internal and external corners, (only for PSB-20) end caps and joints, make **PROBATH** a much sought-after and easy to lay profile that allows a workmanlike application.

SHOCKPROOF NON - TOXIC COEXTRUDED VINYL RESIN

PROBATH



CO-EXTRUDED VINYL RESIN NON - TOXIC IMPACT - RESISTANT bar length 2,5 lm - pack. 40 Pcs - 100 lm

€/lm

€/Pc

11.45

14,72

PROBATH FLEX is a cove-shaped profile in shockproof non - toxic flexible white vinyl resin particularly suitable to ensure cleanliness and hygiene along the connection beetwen the wall tile coverings and sinks, bathtubs and shower trays. Its particular section and the availability in two different height and special pieces, such as internal and external corners, (only for PSB-20) end caps and joints, make **PROBATH FLEX** a much sought-after and easy to lay profile that allows a workmanlike

Article Hmm PSB 15-01 4.58 15 PSB 20-01 20 5,89

AVAILABLE ONLY IN WHITE






FOR OTHER COLORS MINIMUM ORDER 400 pcs



PROBATH KIT (1 PC of 1,80 LM + 2 PCS of 0,90 LM + 2 INTERNAL CORNERS and 2 END (APS 1 R and 1 L)

,		
Description	Article	€/KIT
Kit PROBATH	KTPSB 20-01	34,61
1 Pc PROBATH of 1,80 lm	PSB 20-01	
2 Pc PROBATH of 0,90 lm	PSB 20-01	
2 Internal Corner	TRI 25-01	
2 End caps	TRC 25-01	

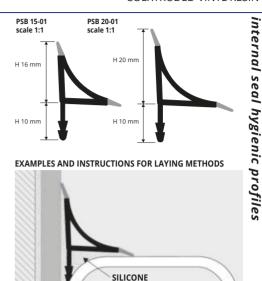

1. Choose "PROBATH" according to the desired height. 2. Cut "PROBATH" to the desired length. 3. Remove carefully any remains of oil, fat and dirt from the surface where the profile will be laid. 4. When the surface is perfectly dry apply the silicone on the back of the profile and place it without hitting.

PROBATH FLEX

© 2028. All dights reserved by Progress Profiles. Printed in Italy



FLEXIBLE WHITE VYNIL RESIN bar length 2,5 lm - pack. 40 Pcs - 100 lm


0,1				
Article	Hmm	€/Im	€/Pc	
PSBF 15-01	15	5,34	13,35	
PSBF 20-01	20	6,66	16,65	*

AVAILABLE ONLY IN WHITE





SHOCKPROOF NON - TOXIC FLEXIBLE **VINYL RESIN**

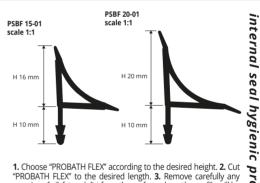

profiles "PROBATH FLEX" to the desired length. **3.** Remove carefully any remains of oil, fat and dirt from the surface where the profile will be laid. **4.** When the surface is perfectly dry apply the silicone on the back of the profile and place it without hitting.

CORNERS, END CAPS and THREE-WAYS JOINTS

NON-TOXIC VINYL RESIN

CORNERS INTERNAL / EXTERNAL, THR	E-WAYS, JOINTS	AND END CAP
Article	€/Pack. 2 Pcs	€/Pack. 10 Pcs
TRI 25-01/	5,74	27,30
TRE 25-01/	5,74	27,30
TRT 25-01/	5,74	27,30
TRC 25-01/	5,23	26,11
TGN 25-01/	5,23	26,11
Choose the desired packaging.	κ. TRI 25-01/10 (p TRI 25-01/2 (p	

CORNERS INTERNAL / EXTERNA	AL AND END C	AP - (for PSB	15 - PSBF 15)	
Article		/Pack. 2 Pcs	€/Pack. 10 Pcs	
TPSB 15-01/		5,23	26,11	
RIPSB 15-01/		5,74	27,30	
REPSB 15-01/		5,74	27,30	
	TPS	B 15-01/2 (pack. 2 Pcs)	
	A.L.	1	Lek	
	Par -			1
EXTERNAL END CAP CORNER	INTERNAL CORNER	INTERNA CORNER	L EXTERN CORNEI	
REPSB 15-01 TPSB 15-01	RIPSB 15-01	TRI 25-01	TRE 25-	01




57



🖈 = Production on demand with minimum quantity of 400 pcs. Production delay 4/5 weeks. Price to be agreed

PROKERLAM LINE

POLISHED AND BRUSHED STAINLESS STEEL AISI 304/1.4301-V2A




LAYING INSTRUCTIONS



PROKERLAM LINE

ANODIZED, VARNISHED AND STONE LINE ALUMINIUM

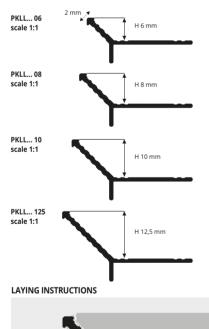



1. Choose "PROKERLAM LINE" according to the desired finish. 2. Cut "PROKERLAM LINE to the desired length and apply the adhesive on the support where the profile will be laid. 3. Press the anchoring flange of "PROKERLAM LINE" into the adhesive. 4. Lay the tiles, aligning them with the profile leaving a 2 mm joint. Remove immediately all remains of adhesive from the surface of the profile. 5. Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile

OFILES



coverings.

POLISHED STAINLESS ST. AISI 304/1.4301-V2A with protective film Bar lenght 2,7 lm - Pack 40 PCS - 108 lm

Article	Hmm	€/lm	€/Pc
PKLLAC 06	6	8,21	22,17
PKLLAC 08	8	8,57	23,14
PKLLAC 10	10	9,00	24,30
PKLLAC 125	12,5	9,53	25,73

1. Choose "PROKERLAM LINE" according to the desired finish. 2. Cut "PROKERLAM LINE to the desired length and apply the 2. CUT "PROKENZAM LINE to the desired length and apply the adhesive on the support where the profile will be laid. 3. Press the anchoring flange of "PROKERLAM LINE" into the adhesive. 4. Lay the tiles, aligning them with the profile leaving a 2 mm joint. Remove immediately all remains of adhesive from the surface of the profile. Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile.



BRUSHED STAINLESS ST. AISI 304/1.4301-V2A with protective film Bar lenght 2,7 lm - Pack 40 PCS - 108 lm

	Article	Hmm	€/lm	€/Pc		
3	PKLLACS 06	6	10,26	27,70		
۲	PKLLACS 08	8	10,74	29,00		
3	PKLLACS 10	10	11,23	30,32		
3	PKLLACS 125	12,5	11,95	32,27		

COLOURS



304/1.4301-V2A 304/1.4301-V2A

PROKERLAM LINE is a Y-shaped profile in anodized and polished aluminium suitable to protect the external corners of coverings in low thickness. It can be used like connection profile between step tread and riser of stairs coated with ceramic and mosaic with low thickness. Its particular section and the availability in three different heights and finishes and special pieces such as internal and external corners, end caps and joints make PROKER-**LAM LINE** a much sought-after profile that allows a workmanlike application even with low thickness coverings.

PROKERLAM LINE is a profile in polished and brushed stainless steel AISI 304/1.4301-V2A suitable to protect

the external corners of coverings in low thickness. It can be used like connection profile between step tread and riser of stairs coated with ceramic and mosaic with low thickness. Its particular section and the availability in three different heights and finishes and special pieces such as internal and external corners, end caps and joints make

PROKERLAM LINE a much sought-after profile that allows a workmanlike application even with low thickness



ANODISED SILVER ALUMINIUM thermo packed Bar lenght 2,7 lm - Pack 40 PCS - 108 lm

	Article	H mm	€/lm	€/Pc
3	PKLLAA 06	6	5,71	15,42
3	PKLLAA 08	8	6,09	16,44
3	PKLLAA 10	10	6,47	17,47
3	PKLLAA 125	12,5	6,98	18,85

POLISHED CHROME ALUMINIUM thermo packed Bar lenght 2,7 lm - Pack 40 PCS - 108 lm

	Article	H mm	€/lm	€/Pc
۲	PKLLBC 10	10	10,96	29,59
۲	PKLLBC 125	125	11,67	31,51



01 - White Varnished Alu. 11 - Black Varnished Alu.



VARNISHED ALUMINIUM (White-Black) thermo packed Bar lenght 2,7 Im - Pack 40 PCS - 108 Im

	Bai lengit _,.			
	Article	H mm	€/Im	€/Pc
0	PKLLA 06-01	6	6,90	18,63
3	PKLLA 06-11	6	6,90	18,63
3	PKLLA 08-01	8	7,36	19,87
3	PKLLA 08-11	8	7,36	19,87
3	PKLLA 10-01	10	7,83	21,14
3	PKLLA 10-11	10	7,83	21,14
3	PKLLA 125-01	12,5	8,31	22,44
3	PKLLA 125-11	12.5	8.31	22.44

STONE LINE ALUMINIUM thermo packed Bar lenght 2,7 Im - Pack 40 PCS - 108 Im

Article	Hmm	€/Im	€/Pc
PKLLA 06-SL	6	9,17	24,76
PKLLA 08-SL	8	9,78	26,41
PKLLA 10-SL	10	10,40	28,08
PKLLA 125-SL	12,5	11,21	30,27

The code of the selected colour must be added to the article code. E.g.: PKLLA 06-... (chosen colour stone cream) PKLLA 06-SL02.

STONE LINE SL03 - Stone greyvory SLO2 - Stone crean SL04 - Stone sand SL05 - Stone grey SL08 - Stone antradark

PROGRESS®

PROTERMSTEP ACC is a profile for stair in polished and brushed stainless steel AISI 304/1.4301-V2A. The profile protects the tread and cover the joint betwen the tread and the riser of the step. It can also be used overturned and for this reason it is suitable for two different tile thickness. Its particular geometry and the availability of two finishes and different heights make **PROTERMSTEP ACC** suitable for every kind of stair with ceramic, terracotta floorings, wood and natural stone coverings.

PROTERMSTEP POLISHED AND BRUSHED STAINLESS STEEL AISI 304/1.4301-V2A



POLISHED STAINLESS ST. AISI 304/1.4301-V2A with protective film bar length 2,7 lm - pack. 15 Pcs - 40,5 lm

Article	h / H mm	€/lm	€/Pc
PTSPAC 0815	08 / 15	17,88	48,28
PTSPAC 10125	10 / 12,5	17,88	48,28
PTSPAC 1530	15 / 30	34,23	92,42
PTSPAC 2025	20 / 25	34,23	92,42

COLOURS







BRUSHED STAINLESS STEEL AISI 304/1.4301-V2A bar length 2,7 lm - pack. 15 Pcs - 40,5 lm

Article	h / H mm	€/lm	€/Pc	
PTSPACS 0815	08 / 15	23,25	62,78	*
PTSPACS 10125	10 / 12,5	23,25	62,78	*
PTSPACS 1530	15 / 30	44,50	120,15	*
PTSPACS 2025	20 / 25	44,50	120,15	*

ON DEMAND



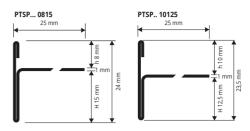



INSTRUCTIONS FOR LAYING METHODS


INSTRUCTIONS FOR LAYING METHODS 1. Choose "PROTERMSTEP ACC" according to the tile thickness and desired finish. 2. Cut "PROTERMSTEP ACC" to the desired length. 3. Lay the raiser of the step and apply the adhesive on the support where the profile will be laid. 4. Press the anchoring flange of "PROTERMSTEP ACC" into the adhesive. 5. Lay the tiles aligning them with the profile leaving a 2 mm joint. Remove immediately all remains of adhesive from the surface of the profile. 6. Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile. surface of the profile.

ANGLE AND JOINT

CORNER - pack. 10 Pcs

Article	h / H mm	€/Pc	€/pack
REPTSAC 0815/10	08 / 15	43,92	439,20
REPTSAC 10125/10	10 / 12,5	43,92	439,20
REPTSAC 1530/10	15 / 30	43,92	439,20
REPTSAC 2025/10	20 / 25	43,92	439,20

JOINT - pack. 10 Pcs			
Article	h / H mm	€/Pc	€/pack
GIPTSAC 0815/10	08 / 15	8,03	80,30
GIPTSAC 10125/10	10 / 12,5	8,03	80,30
GIPTSAC 1530/10	15 / 30	8,03	80,30
GIPTSAC 2025/10	20 / 25	8,03	80,30








59

WALLS

PROTOP

WALLS

ANODIZED AND POLISHED ALUMINIUM

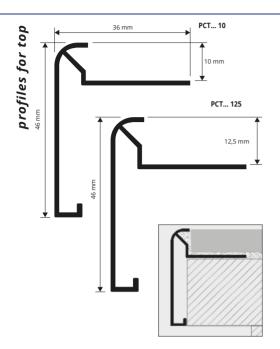



ANODIZED SILVER ALUMINIUM bar length 2.7 lm - pack. 10 Pcs - 27 lm

but tengen poeta te			
Article	Hmm	€/lm	€/Pc
PCTAA 10	10	13,53	36,53
PCTAA 125	12,5	13,88	37,48

much sought-after profile that allows an elegant workmanlike application.

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS 1. Choose "PROTOP" according to the tile thickness and desired finish. 2. Cut "PROTOP" to the desired length and apply the adhesive on the support where the profile will be laid. 3. Press the anchoring flange of "PROTOP" into the adhesive. 4. Lay the tiles, aligning them with the profile leaving a 2 mm joint. Remove immediately all remains of adhesive from the surface of the profile. 5. Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile. profile



POLISHED TITANIUM ALUMINIUM bar length 2,7 lm - pack. 10 Pcs - 27 lm

Article	Hmm	€/lm	€/Pc
PCTBT 10	10	22,59	60,99
PCTBT 125	12,5	22,93	61,91

POLISHED CHROME ALUMINIUM 7 lm - nack 10 Pcs - 27 lm

Dai leligui 2,7 IIII - pack. 10	rG-2/ III		
Article	H mm	€/Im	€/Pc
PCTBC 10	10	22,59	60,99
PCTBC 125	12,5	22,93	61,91

COLOURS

pack. 10 Pcs

EPCTBC 90/10 (90°)

IPCTBC 90/10 (90°)

EPCTBC 135/10 (135°)

IPCTBC 135/10 (135°)

PROTOP is a rounded profile in anodized and polished aluminium. The profile protects the tile edges and

decorates the countertops of kitckens realized with ceramic. Its particular section and elegance, the availability of three different finishes and special pieces such as internal and external corner at 90° and 135°, make **PROTOP** a

AA - Anodized silver alum. BT - Polished titanium alum. BC - Polished chrome alum.

INTERNAL / EXTERNAL CORNERS POLISHED CHROME ALUMINIUM

Article

CORNERS

INTERNAL / EXTERNAL CORNERS ANODIZED SILVER ALUMINIUM pack. 10 Pcs

Article	€/pack
EPCTAA 90/10 (90°)	198,54
IPCTAA 90/10 (90°)	198,54
EPCTAA 135/10 (135°)	198,54
IPCTAA 135/10 (135°)	198,54



INTERNAL / EXTERNAL CORNERS POLISHED TITANIUM ALUMINIUM pack. 10 Pcs

Article	€/pack
EPCTBT 90/10 (90°)	234,68
IPCTBT 90/10 (90°)	234,68
EPCTBT 135/10 (135°)	234,68
IPCTBT 135/10 (135°)	234,68

much sought-after profile that allows an elegant workmanlike application.





€/Pc 36,53

37,48

PROTOP T is a square profile in anodized and polished aluminium. The profile protects the tile edges and


decorates the countertops of kitchens realized with ceramic. Its particular section and elegance, the availability of two different finishes and special pieces such as internal and external corner at 90° and 135°, make **PROTOP T** a



INTERNAL CORNER IPCT...135

PROTOP T

ANODIZED AND POLISHED ALUMINIUM



EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

EXAMPLES AND INSTRUCTIONS FOR LAVING MELHOUS 1. Choose "PROTOP T" according to the tile thickness and desired finish. 2. Cut "PROTOP T" to the desired length and apply the adhesive on the support where the profile will be laid. 3. Press the anchoring flange of "PROTOP T" into the adhesive. 4. Lay the tiles, aligning them with the profile leaving a 2 mm joint. Remove immediately all remains of adhesive from the surface of the profile. 5. Fill the joints between the profile and the tiles with grout, in order the surface the profile and the tiles with grout, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile.

ANODIZED SILVER ALUMINIUM

bar length 2,7 im - pack. 10 PCS - 27 im				
Article	H mm	€/lm		
PCTAA 10T	10	13,53		
PCTAA 125T	12,5	13,88		

INTERNAL / EXTERNAL CORNER ANODIZED SILVER ALUMINIUM pack. 10 Pcs

Article	€/pack
IEPCTAA 12590T/10 (90°)	198,54
IEPCTAA 1090T/10 (90°)	198,54
IEPCTAA 10135T/10 (135°)	198,54
IEPCTAA 125135T/10 (135°)	198,54



POLISHED CHROME ALUMINIUM bar length 2,7 lm - pack. 10 Pcs - 27 lm

Article	H mm	€/Im	€/Pc
PCTBC 10T	10	22,59	60,99
PCTBC 125T	12,5	22,93	61,91

INTERNAL / EXTERNAL CORNER ANODIZED CHROME ALUMINIUM pack. 10 Pcs

Article	€/pack
IEPCTBC 12590T/10 (90°)	198,54
IEPCTBC 1090T/10 (90°)	198,54
IEPCTBC 10135T/10 (135°)	198,54
IEPCTBC 125135T/10 (135°)	198,54

COLOURS

BC - Polished chrome alum. AA - Anodized silver alum.

€/pack

234 68

234.68

234 68

234 68










PROTERMINAL

PROTERMINAL is a professional edging profile used mainly to join similar or different floor materials (e.g. tiles/ tiles – tiles/parquet/marble/laminates/carpeting/linoleum, etc.) of differing thickness. **PROTERMINAL** in stainless steel is also used to protect steps and decking, as a floor edging profile and skirting covering. Match with PROLISTEL strips in stainless steel AISI 304/1.4301-V2A with polished or brushed and in aluminium with anodized or polished chrome finish.

POLISHED AND BRUSHED STAINLESS STEEL AISI 304/1.4301-V2A

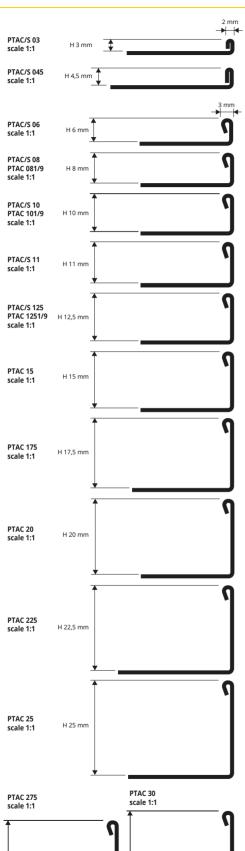





POLISHED STAINLESS ST. AISI 304/1.4301-V2A with protective film bar length **2,7 lm** - pack. **40 Pcs** - **108 lm** - **10/10 mm** (H 15 to H 30 mm - pack. **20 Pcs - 54 lm**)

	0100 01111)		
Article	Hmm	€/lm	€/Pc	
PTAC 03	3	8,95	24,16	
PTAC 045	4,5	9,12	24,62	
PTAC 06	6	9,51	25,68	
PTAC 08	8	9,84	26,57	
PTAC 10	10	10,35	27,95	
PTAC 11	11	10,53	28,43	
PTAC 125	12,5	10,73	28,97	
PTAC 15	15	11,25	30,38	
PTAC 175	17,5	11,89	32,10	
PTAC 20	20	12,19	32,91	
PTAC 225	22,5	12,96	34,99	
PTAC 25	25	13,79	37,23	
PTAC 275	27,5	14,31	38,64	*
PTAC 30	30	14,82	40,01	

POLISHED STAINLESS ST. AISI 304/1.4301-V2A with protective film bar length 1 lm - pack. 40 Pcs - 40 lm - 10/10 mm

Article	Hmm	€/lm	€/Pc	
PTAC 081	8	1	10,35	*
PTAC 101	10	1	10,79	*
PTAC 1251	12,5	/	11,25	*

POLISHED STAINLESS ST. AISI 304/1.4301-V2A with protective film bar length 0,9 lm - pack. 40 Pcs - 36 lm - 10/10 mm

Article	Hmm	€/lm	€/Pc	
PTAC 089	8	/	9,33	*
PTAC 109	10	/	9,71	*
PTAC 1259	12,5	/	10,08	*






BRUSHED STAINLESS ST. AISI 304/1.4301-V2A with protective film bar length 2,7 lm - pack. 40 Pcs - 108 lm - 10/10 mm (H 15 to H 30 mm - pack. 20 Pcs - 54 lm)

Article	Hmm	€/lm	€/Pc
PTACS 03	3	10,41	28,11
PTACS 045	4,5	11,36	30,67
PTACS 06	6	11,75	31,73
PTACS 08	8	12,14	32,78
PTACS 10	10	12,58	33,97
PTACS 11	11	12,78	34,51
PTACS 125	12,5	13,03	35,18
PTACS 15	15	14,24	38,45
PTACS 20	20	14,56	39,31

COLOURS

AC - Polished stainless steel AISI 304/1.4301-V2A 304/1.4301-V2A



1. Choose the PROTERMINAL with the same height as the thickness of the covering. 2. Apply the adhesive onto the area of application of the profile. **3.** Lay and align the profile pressing the perforated flange into the adhesive. **4.** Lay the tiles, aligning them so that the top edge of the profile is "flush" with the tile. **5.** Use the adhesive to seal any empty interstices.



H 30 mm H 27,5 mm

PROGRESS[®] PROFILES

SUITABLE FOR USE IN CONTACT WITH FOODSTUFFS.





COLOURS

ACM - Polished stainless steel AISI 316L

PROTERMINAL are manufactured with the same forms and sections, as well as in the very resistant material, the stainless shiny steel 316/1.4401-V4A, suitable for outdoors and marine environment with much presence of saltiness and considerable atmospheric agents. They are used as protection for the external angles of tiles, in order to separate or to create the separating joints in the pavements, to terminate the finishing of wall coverings, for platforms, stair steps, bathtubs, etc. They guarantee the impeccable work, ensuring considerable aesthetic effect as well. They strengthen the tile edge and prevents from chipping and breakages. Required by new European regulations on safety and accident prevention in public and private places.

PROTERMINAL

POLISHED STAINLESS STEEL AISI 316/1.4404-V4A



9/P	PTACM 125
MATTER	EXAMPLES OF LAYING
	ſ

SUITABLE FOR USE IN CONTACT WITH FOODSTUFFS.

PROTERMINAL is a professional edging profile used mainly to join similar or different floor materials (e.g. tiles/tiles – tiles/parquet/marble/granite, etc.) of differing thickness. **PROTERMINAL** in brass is also used to protect steps and decking, as a floor edging profile, to cover skirting, decking and worktops and to frame doormats.



NATURAL BRASS thermo packed

bar length 2,70 lm pack. 20 Pcs 54 lm (H 6 mm - 40 Pcs 108 lm)

Article	Hmm	€/lm	€/Pc
PTON 06	6	9,19	24,81
PTON 08	8	9,76	26,35
PTON 10	10	10,45	28,21
PTON 125	12,5	11,32	30,56
PTON 15	15	12,13	32,75
PTON 20	20	14,27	38,53
PTON 25	25	16,46	44,44


NATURAL BRASS thermo packed

ar length 1 Im - pack. 40 Pcs - 40 Im						
	€/Pc	€/Im	H mm	Article		
*	9,70	/	6	PTON 061		
*	10,26	/	8	PTON 081		
*	10,99	/	10	PTON 101		
*	11,75	/	12,5	PTON 1251		

NATURAL BRASS thermo packed



Curve version is also available



POLISHED STAINLESS ST. AISI 316L/1.4404-V4A

bar length 2,7 lm - pack. 40 Pcs - 108 lm - 10/10 mm

Hmm

6

8

10

12.5

€/lm

12.38

12.80

13.46

13.94

with protective film

PTACM 06

PTACM 08

PTACM 10

Article

316

€/Pc

33 43

34 56

36.34

37,64

€/Pc

22.20

~	1102.00	•	11,50	52,25	
	PTOL 08	8	12,65	34,16	
	PTOL 10	10	13,63	36,80	
	PTOL 125	12,5	14,73	39,77	
0	PTOL 15	15	15,82	42,71	*
0	PTOL 20	20	18,66	50,38	*
0	PTOL 25	25	23 74	64 10	*


ANTIQUE BRASS thermo packed 2 70 lm nack 20 Prs - 54 Im

	Dar length 2,70 ml - pack. 20 PCS - 54 ml					
	Article	Hmm	€/lm	€/Pc		
0	PTOB 06	6	29,28	79,06		
	PTOB 08	8	30,55	82,49		
	PTOB 10	10	33,32	89,96		
	PTOB 125	12,5	35,93	97,01		
۲	PTOB 15	15	41,00	110,70	*	
۲	PTOB 20	20	47,64	128,63	*	
\bigcirc	PTOB 25	25	55.26	149.20	*	

BRUSHED BRASS thermo packed 2 70 lm - 54 Im


	Jai lengui 2,70 iiii - pack. 2	U PCS - 54 II			
	Article	H mm	€/lm	€/Pc	
*0	PTOS 06	6	11,96	32,29	*
* 🧿	PTOS 08	8	12,65	34,16	*
*0	PTOS 10	10	13,63	36,80	*
* 🧿	PTOS 125	12,5	14,73	39,77	*
0	PTOS 15	15	15,82	42,71	*
\odot	PTOS 20	20	18,66	50,38	*
0	PTOS 25	25	23,74	64,10	*






PROTERMINAL

POLISHED, NATURAL, ANTIQUE BRASS and BRUSHED

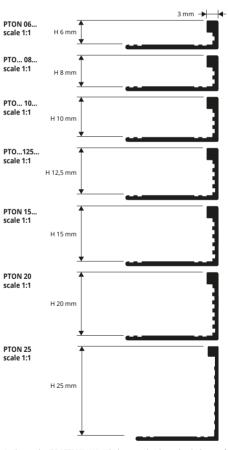

1. Choose the "PROTERMINAL" with the same height as the thickness of the floor/wall covering. 2. Apply the adhesive onto the area of application of the profile. 3. Lay and align the profile pressing the perforated flange into the adhesive. **4.** Lay the tiles, aligning them so that the top edge of the profile is "flush" with the tile. Use the adhesive to seal any empty interstices. Oxidation marks may be easily removed by polishing the profiles with specific products to be found on sale such as Sidol, Smac and similar

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS



PROGRESS[®] PROFILES

FLOORSFLOORS

PROTERMINAL

PROTERMINAL is a professional edging profile designed to protect and decorate the outside corners of tile, mosaic and marble coverings of differing thickness. **PROTERMINAL** in aluminium is also used to join different floor materials and to protect steps and decking. Excellent as the edging trim skirtings and for bathroom and kitchen wall coverings. Match with PROLISTEL ALL strips in anodized aluminium with silver and polished chrome finish and with PROLISTEL ACC strips in AISI 304-1.4301 stainless steel with polished or brushed.

PT... 03 scale 1:1 H 3 mm details at page 35 🕈 H 3 m PT 045 H 4.5 mm details **]**H 4,5 mm scale 1:1 at page 35 PT... 06 scale 1:1 H 6 mm PT... 08 scale 1:1 H 8 mm PT... 10 scale 1:1 H 10 mn PT... 11 scale 1:1 H 11 mn PT... 125 scale 1:1 H 12,5 mm PT... 15 scale 1:1 H 15 mm PT... 20 scale 1:1 H 20 mm PTAN 25 scale 1:1 H 25 mm



NATURAL ALUMINIUM thermo packed 10 Pcs bar length 2,70 lm - pack. 40 Pcs - 108 lm

Article	Hmm	€/lm	€/Pc	
PTAN 03	3	3,00	8,10	
PTAN 045	4,5	3,05	8,24	
PTAN 06	6	3,08	8,32	
PTAN 08	8	3,21	8,67	
PTAN 10	10	3,36	9,07	
PTAN 11	11	3,46	9,34	
PTAN 125	12,5	3,55	9,59	
PTAN 15	15	3,90	10,53	
PTAN 20	20	4,56	12,31	
PTAN 25	25	5,34	14,42	


NATURAL ALUMINIUM thermo packed 10 Pcs

ł	bar length 0,90 lm - pack. 40 Pcs - 36 lm					
	Article	H mm	€/lm	€/Pc		
	PTAN 069	6	/	3,21	*	
	PTAN 089	8	/	5,22	*	
	PTAN 109	10	/	3,49	*	
	PTAN 1259	12,5	/	3,61	*	

COLOURS



EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS





ANODIZED SILVER ALUMINIUM thermo packed 2 70 lm ock 10 Dec 109 lm

Article	H mm	€/Im	€/Pc
PTAA 03	3	3,90	10,53
PTAA 045	4,5	4,08	11,02
PTAA 06	6	4,23	11,42
PTAA 08	8	4,29	11,58
PTAA 10	10	4,56	12,31
PTAA 11	11	4,97	13,42
PTAA 125	12,5	5,24	14,15
PTAA 15	15	5,57	15,04
PTAA 20	20	6,51	17,58

NATURAL ALUMINIUM thermo packed 10 Pcs th 1 Im - nack 40 Prs 40

	bar length 1 im - pack. 40 P				
	Article	H mm	€/lm	€/Pc	
•	PTAN 061	6	/	3,96	*
	PTAN 081	8	/	4,08	*
	PTAN 101	10	/	4,23	*
	PTAN 1251	12,5	/	4,48	*

Also available Polished version and curve version

1. Choose the "PROTERMINAL" with the same height as the thickness of the covering. **2.** Apply the adhesive onto the area of application of the profile. **3.** Lay and align the profile profile pressing the perforated flange into the adhesive. **4.** Lay the tiles, aligning them so that the top edge of the profile is "flush" with the tile. **5.** Use the adhesive to seal any empty interstices.





PROGRESS

66

🧿 = News 2023 🖈 = Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed Prices are referred to whole packs 10% increase for minimum orders of 10 Pcs 20% increase for orders of less than 10 Pcs.

FLOORSFLOORS

NATURAL ALUMINIUM AND ANODIZED SILVER ALUMINIUM



PROLEVIGAL are separating profiles used to create the technical joint in the special types of pavements such as marble- Venice- palladium ones, that must be smoothed after their laying process. The particular "L" shape with the cut/drilled base and 2,5 mm thick vertical edge consent the perfect smoothing and constant thickness as well. Available in natural aluminium and natural brass, various thickness, as well in outlined/bent **PROLEVIGAL** CURVES BRASS versions.

PROLEVIGAL

NATURAL BRASS

FLOORSFLOORS



PROLEVIGAL are separating profiles used to create the technical joint in the special types of pavements such as marble- Venice- palladium ones, that must be smoothed after their laying process. The particular "L" shape with the cut/drilled base and 2,5 mm thick vertical edge consent the perfect smoothing and constant thickness as well. Available in natural aluminium and natural brass, various thickness, as well in outlined/bent **PROLEVIGAL** CURVE AL versions.

PROLEVIGAL

NATURAL ALUMINIUM




A CONTRACTOR OF A CONTRACTOR O

Anternet

Curve available

+30 % ON GROSS PRICES FOR CURVE VERSION. ADD **CV** AFTER THE ARTICLE CODE. E.g.: PLGAN 08 (CURVES) PLGAN**CV** 08

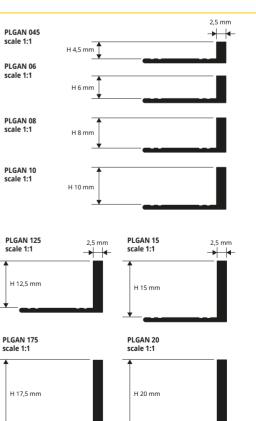

NATURAL ALUMINIUM thermo packed 10 Pcs bar length 2,7 Im - pack. 40 Pcs - 108 Im

bui iengai z, , ini paea.	1001		
Article	Hmm	€/Im	€/Pc
PLGAN 045	4,5	2,69	7,26
PLGAN 06	6	2,94	7,94
PLGAN 08	8	3,28	8,86
PLGAN 10	10	3,34	9,02
PLGAN 125	12,5	3,66	9,88
PLGAN 15	15	4,04	10,91
PLGAN 175	17,5	4,48	12,10
PLGAN 20	20	4,68	12,64

🖈 = Production on demand with minimum quantity of 200 pcs. Production delay 4/5 weeks. Price to be agreed

Prices are referred to whole packs 10% increase for minimum orders of 10 Pcs 20% increase for orders of less than 10 Pcs.

COLOURS

AN - Natural alum.



PROELEGANT


PROELEGANT is a refined profile, with 6 mm visible surface, designed to cover the joint between two types of floor covering, tiles - parquet, marble or granite, bestowing a prestige aesthetic effect that is ideal for indoor and outdoor finishes, even when subject to considerable loads. **PROELEGANT** is available in polished, natural and chromed brass. It is available in various heights in order to satisfy all technical, practical and, in particular, decorative requirements. The chromed version may be used as a decorative strip in the wall covering.


PROELEGANT is a refined profile, with 6 mm visible surface, designed to cover the joint between two types of floor covering, tiles - parquet, marble or granite, bestowing a prestige aesthetic effect that is ideal for indoor and outdoor finishes, even when subject to considerable loads. **PROELEGANT** is available in natural and anodized

silver aluminium. It is available in various heights in order to satisfy all technical, practical and, in particular, decorative requirements. The anodized version may be used as a decorative strip in the wall covering.

NATURAL, POLISHED AND CHROMED BRASS

FLOORSFLOORS

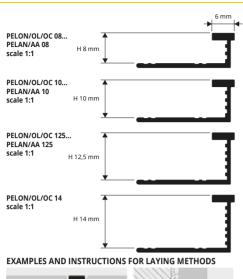



1. Choose the "PROELEGANT" with the same height as the thickness of the wall covering/floor. 2. Apply the adhesive onto the area of application of the profile. 3. Lay and align the profile pressing the perforated flange into the adhesive. 4. Lay the tiles, aligning them so that the top edge of the profile is "flush" with the tile. 5. Use the adhesive to seal any empty interstices. Oxidation marks may be easily removed by polishing the profiles with specific products to be found on sale such as Sidol, Smac and similar.



POLISHED BRASS thermo packed

Dai length 2,7 mi - pack. 20 PCS - 34 mi					
	Article	H mm	€/lm	€/Pc	
	PELOL 08	8	17,56	47,41	*
	PELOL 10	10	18,02	48,65	
	PELOL 125	12,5	18,71	50,52	
	PELOL 14	14	19,35	52,25	*

NATURAL BRASS thermo packed 10 Pcs

bar length 2,7 lm - pack. 20 Pcs - 54 lm				
Article	H mm	€/lm	€/Pc	
PELON 08	8	13,45	36,31	*
PELON 10	10	14,61	39,45	
PELON 125	12,5	14,84	40,07	
PELON 14	14	16,06	43,36	*

COLOURS

OC - Chromed brass	OL - Polished brass	ON - Natural brass



CHROMED BRASS thermo packed


bar length 2,7 lm - pack. 20 Pcs - 54 lm					
	Article	H mm	€/lm	€/Pc	
	PELOC 08	8	22,12	59,72	*
	PELOC 10	10	22,58	60,97	
	PELOC 125	12,5	23,22	62,69	
	PELOC 14	14	23,79	64,23	*

NATURAL BRASS thermo packed 5 Pcs bar length 0.90 lm - pack. 40 Pcs - 36 lm

Article	Hmm	€/Im	€/Pc	
PELON 089	8	/	12,90	*
PELON 109	10	/	13,98	*
PELON 1259	12,5	/	14,55	*

PROELEGANT

NATURAL ALUMINIUM AND ANODIZED SILVER ALUMINIUM





Curve available, see page 103



NATURAL ALUMINIUM thermo packed 10 Pcs

bar length 2,7 lm - pack.	40 Pcs - 108 lr	n		
Article	Hmm	€/Im	€/Pc	
PELAN 08	8	5,24	14,15	*
PELAN 10	10	5,57	15,04	
PELAN 125	12,5	5,91	15,96	
COLOURS				
Tel .				
AN - Natural alum.	AA - Anodized silv	er alum.		




ANODIZED SILVER ALUMINIUM thermo packed bar length 2,7 Im - pack. 40 Pcs - 108 Im

	0 - 1				_
	Article	H mm	€/lm	€/Pc	
•	PELAA 08	8	6,57	17,74	*
	PELAA 10	10	6,91	18,66	
	PELAA 125	12,5	7,26	19,60	

*= Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed


Prices are referred to whole packs 10% increase for minimum orders of 10 Pcs 20% increase for orders of less than 10 Pcs.

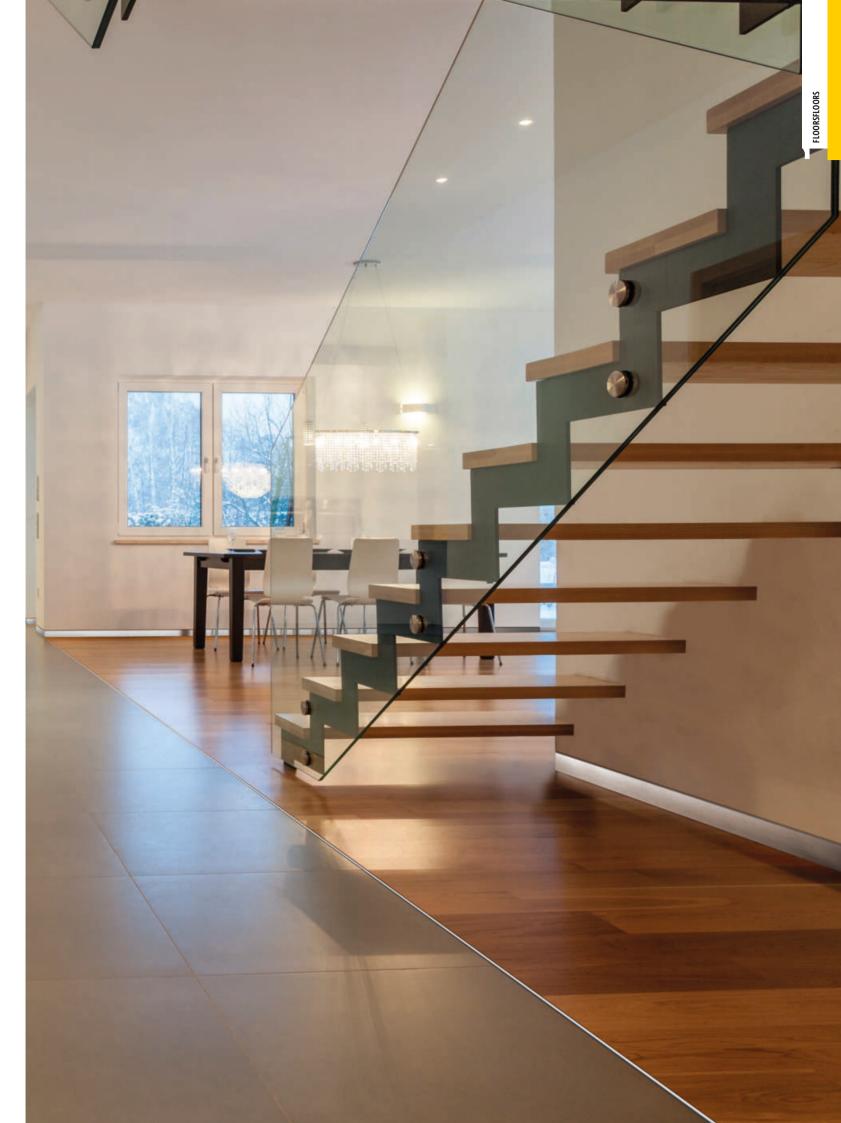


PROFINAL

PROFINAL is a profile in stainless steel AISI 304/1.4301-V2A polished, brushed and sanded. It is available in three widths 8, 10 and 12.5 mm. Ideal for joining two types of floor on the same level (e.g. tile/tile or tile/wood), creating a decorative separating profile. It is also suitable as a step nosing or to create a decorative strip in the covering. It protects the edge and withstands high loads and frequent traffic.

POLISHED, BRUSHED AND SANDED STAINLESS STEEL AISI 304/1.4301-V2A

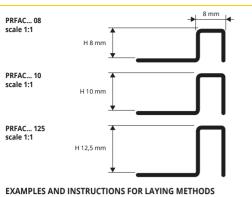




1. Choose the "PROFINAL" with the same height as the thickness of the covering. 2. Apply the adhesive onto the area of application of the profile. 3. Lay and align the profile pressing the perforated flange into the adhesive. 4. Lay the tiles, aligning them so that the top edge of the profile is "flush" with the tile. 5. Use the adhesive to seal any empty interstices.

PROFINAL

NATURAL, POLISHED, CHROMED AND ANTIQUE BRASS

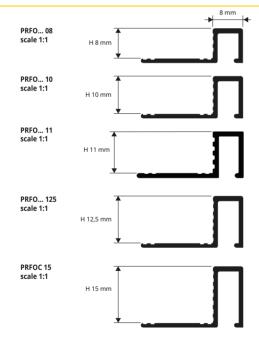

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS



PROGRESS[®] PROFILES

70



POLISHED STAINLESS ST. AISI 304/1.4301-V2A with protective film bar length 2,7 lm - pack. 20 Pcs - 54 lm - 10/10 mm

Article	Hmm	€/lm	€/Pc
PRFAC 08	8	13,33	35,99
PRFAC 10	10	14,02	37,85
PRFAC 125	12,5	15,19	41,01

COLOURS

		and the second second
AC - Polished stainless steel	ACS - Brushed stainless steel AISI	ACSB - Sanded stainless steel



BRUSHED STAINLESS ST. AISI 304/1.4301-V2A with protective film bar length 2,7 Im - pack. 20 Pcs - 54 Im - 10/10 mm

Article	Hmm	€/lm	€/Pc
PRFACS 08	8	14,56	39,31
PRFACS 10	10	15,20	41,04
PRFACS 125	12,5	16,03	43,28

SANDED STAINLESS STEEL AISI 304/1.4301-V2A with protective film bar length 2,7 Im - pack. 20 Pcs - 54 Im - 10/10 mm

0 - 1					
Article	Hmm	€/lm	€/Pc		
PRFACSB 08	8	15,57	42,04	*	
PRFACSB 10	10	16,24	43,85		
PRFACSB 125	12,5	17,08	46,12		
ACSB - SPECIAL FINISH, REQUEST AVAILABILITY					

SUITABLE FOR USE IN CONTACT WITH FOODSTUFFS.

PROFINAL is a profile in natural, polished, chromed and antique brass. It is available in three widths 8, 10 and 12.5 mm. Ideal for joining two types of floor on the same level (e.g. tile/tile or tile/wood), creating a decorative separating profile. It is also suitable as a step nosing or to create a decorative strip in the covering. It protects the edge and withstands high loads and frequent traffic.



NATURAL BRASS thermo packed 5 Pcs

uai ieligili 2,7 mi - pack. 2	sui 2,7 mii - pack. 20 FCS - 34 mii					
Article	Hmm	€/lm	€/Pc			
PRFON 08	8	14,50	39,15			
PRFON 10	10	16,86	45,52			
PRFON 125	12,5	18,60	50,22			



1. Choose the "PROFINAL" with the same height as the thickness of the covering. 2. Apply the adhesive onto the area of application of the profile. 3. Lay and align the profile pressing the perforated flange into the adhesive. 4. Lay the tiles, aligning them so that the top edge of the profile is "flush" with the tile. 5. Use the adhesive to seal any empty interstices. Oxidation marks may be easily removed by polishing the profiles with specific products to be found on sale such as Sidol, Smac and similar.



POLISHED BRASS thermo packed bar length 2.7 Im - pack. 20 Pcs - 54 Im

our rengar 2,7 m puerer	20105 51111		
Article	H mm	€/Im	€/Pc
PRFOL 08	8	18,30	49,41
PRFOL 10	10	19,53	52,73
PRFOL 125	12,5	20,79	56,13

CHROMED	BRASS thermo packed
har length 2	7 im - nack 20 Pcs - 54 im (H 15 mm - 40

Dai lengui 2,7 mi - pack. 20 PCS - 34 mi (11 13 mini - 40,3 mi)							
Article	H mm	€/lm	€/Pc				
PRFOC 08	8	23,33	62,99				
PRFOC 10	10	25,70	69,39				
PRFOC 11	11	26,97	72,82				
PRFOC 125	12,5	27,84	75,17				
PRFOC 15	15	29,39	79,35				

ANTIQUE BRASS thermo packed

bar length 2,7 lm - pack. 20 Pcs - 54 lm							
	Article	H mm	€/lm	€/Pc			
	PRFOB 08	8	38,70	104,49	*		
	PRFOB 10	10	42,04	113,51			
	PRFOB 125	12,5	45,05	121,64			



PROFINAL is a profile in natural and anodized silver aluminium. It is available in three widths 8, 10 and 12.5 mm. Ideal for joining two types of floor on the same level (e.g. tile/tile or tile/wood), creating a decorative separating profile. It is also suitable as a step nosing or to create a decorative strip in the covering. It protects the edge and withstands high loads and frequent traffic.

PROFINAL

NATURAL ALUMINIUM AND ANODIZED SILVER ALUMINIUM

FLOORSFLOORS



NATURAL ALUMINIUM thermo packed 10 Pcs bar length 2,7 lm - pack. 40 Pcs - 108 lm

nm €/lm	€/Pc	
8 5,35	14,45	*
0 5,76	15,55	
2,5 6,10	16,47	
	8 5,35 10 5,76	8 5,35 14,45 0 5,76 15,55









ANODIZED SILVER ALUMINIUM thermo packed

L	bar length 2,7 lm - pack. 40 Pcs - 108 lm					
	Article	Hmm	€/lm	€/Pc		
	PRFAA 08	8	7,10	19,17		
	PRFAA 10	10	7,44	20,09		
	PRFAA 125	12.5	7,78	21.01		



EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS



1. Choose the "PROFINAL" with the same height as the thickness Choose the "PKOFINAL" with the same neight as the thickness of the covering.
 Apply the adhesive onto the area of application of the profile.
 Lay and align the profile pressing the perforated flange into the adhesive.
 Lay the tiles, aligning them so that the top edge of the profile is "flush" with the tile.
 Use the adhesive to seal any empty interstices. Oxidation marks may be easily removed by polishing the profiles with specific products to be found on sale such as Sidol, Smac and similar.

PROSQUARE

NATURAL BRASS

© 2028. All dights reserved by Progress Profiles. Printed in Italy



Article	L x H mm	€/Im	€/Pc
QEON 108	10 X 8	23,61	70,83

ON - Natural brass

8 mm






CHROMED, POLISHED BRASS




CHROMED, POLISHED BRASS thermo packed bar length 2,7 Im - pack. 20 Pcs - 54 Im (PGAOC 10 : 27 Im)						
Article	L x H mm	€/lm	€/Pc			
PGAOC 10	10 X 10	28,34	76,52			
PGAOL 10	10 X 10	22,77	61,48	*		





PGAOL/OC 10 scale 1:1

PQEON 108 scale 1:1







PROJOINT

FLOORSFLOORS

PROJOINT is a brass profile for joining two floors at the same level. It can be laid with mortar or glue/adhesive The head thickness allows perfect smoothing and sanding of over 3 mm. It is usually used for tile-wood-marble-Venetian-Palladian floors. Available in various heights and widths. The vertical arrowhead in the PIT 510 and PIT 514 version allows excellent anchorage with the adhesive.

NATURAL AND POLISHED BRASS

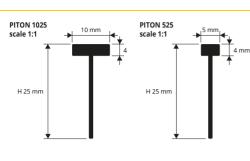





POLISHABLE NATURAL BRASS


bar length 2,7 lm - pack. 2	r length 2,7 lm - pack. 20 Pcs - 54 lm					
Article	L x H mm	€/lm	€/Pc			
PITON 1025	10 X 25	17,83	48,14			
PITON 525	5 X 25	9,55	25,79			
PITON 514	5 X 14	9,14	24,68			
PITON 510	5 X 10	8,09	21,84			

POLISHED BRASS

ar	length	2,7	lm	-	pack.	20	Pcs	-	54	lm	
----	--------	-----	----	---	-------	----	-----	---	----	----	--

Article	L x H mm	€/Im	€/Pc	
PITOL 1025	10 X 25	24,08	65,02	*
PITOL 525	5 X 25	12,90	34,83	*
PITOL 514	5 X 14	12,33	33,29	*
PITOL 510	5 X 10	10,91	29,46	*

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS



Choose "PROJOINT" according to the desired height.
 Cut "PROJOINT" to the desired length.
 Mortar laying
 Cut with a trowel the fresh screed following the floor edges.
 Apoly the profile inside the fresh screed taking care to align it with the surface of the floor. After laying the joint should be 0.5 mm below the floor covering surface.
 Fill the joint should be 0.5 mm below the floor edges.
 Apoly the grout, in order to avoid water stagnation. Remove immediately all grout remains from the profile surface.
 Adhesive laying
 Apply the adhesive on the support where the profile will be laid. After laying the joint should be 0.5 mm below the floor covering surface.
 Lay the tiles aligning them with the profile leaving a 2 mm joint. Remove immediately all the remains of adhesive from the profile floor covering surface.
 I mode to avoid water stagnation. Remove immediately all grout remains from the profile adhesive from the profile surface.

and PIT 514 version allows excellent anchorage with the adhesive.



POLISHABLE NATURAL BRASS bar length 0,90 lm - pack. 40 Pcs			ECO BLISTER
Article	L x H mm	€/lm	€/Pc
PITON 5109	5 X 10	1	17,57

CONSISTING OF 1 ECOBLISTER WITH 2 PCS. OF 0.90 LM

POLISHED BRASS bar length 0,90 lm - pack	-	ECO BLISTER		
Article	L x H mm	€/Im	€/Pc	
PITOL 5109	5 X 10	/	23,73	*

CONSISTING OF 1 ECOBLISTER WITH 2 PCS. OF 0.90 LM

COLOURS


PROJOINT is a natural aluminium profile for joining two floors at the same level. It can be laid with mortar or glue/

adhesive. The head thickness allows perfect smoothing and sanding of over 3 mm. It is usually used for tile-wood-marble-Venetian-Palladian floors. Available in various heights and widths. The vertical arrowhead in the PIT 510


ON DEMAND ON - Natural brass OL - Polished brass

PROJOINT

NATURAL ALUMINIUM



EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS





1. Choose "PROJOINT" according to the desired height. Cut "PROJOINT" to the desired length. Mortar laying

 Cut with a trowel the fresh screed following the floor edges.
 Apply the profile inside the fresh screed taking care to align it with the surface of the floor. After laying the joint should be 0,5 mm below the floor covering surface.
 Fill the joints between the profile the profile between the profile. and the tiles with grout, in order to avoid water stagnation. Remove immediately all grout remains from the profile surface.

Adhesive laying 3. Apply the adhesive on the support where the profile will be laid. After laying the joint should be 0,5 mm below the floor covering surface. A. Lay the tiles aligning them with the profile leaving a 2 mm joint. Remove immediately all the remains of adhesive from the profile surface. 5. Fill the joints between the profile and the tile with grout, in order to avoid water stagnation. Remove immediately all grout remains from the profile surface.



NATURAL ALUMINIUM

bar length 2,70 lm - pack.			
Article	L x H mm	€/Im	€/Pc
PITAN 525	5 X 25	3,68	9,94
PITAN 514	5 X 14	3,36	9,07
PITAN 510	5 X 10	2,76	7,45

COLOURS

AN - Natural alum.

PROGRESS® PROFILES

🖈 = Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed



PROCANAL is a channel for joining floors and also for use as strips in wall coverings. This profile is made in natural, polished and chromed brass as well as natural or anodized silver aluminium. It is also used as a cable channel for the insertion of wires and conduits in all types of floor.

PROCANAL



NATURAL BRASS thermo packed 10 Pcs - POLISHED, CHROMED, NATURAL, ANTIQUE AND BRUSHED BRASS thermo packed bar length 2,7 lm - pack. 40 Pcs - 108 lm (PCLOC 10 - 81 lm)

Article	L x H mm	€/Im	€/Pc	
PCLON 10	10 X 10	13,86	37,42	
PCLOL 10	10 X 10	15,71	42,42	
PCLOC 10	10 X 10	22,35	60,35	
PCLOB 10	10 X 10	37,19	100,41	
PCLOS 10	10 X 10	15,71	42,42	








NATURAL ALUMINIUM thermo packed 10 Pcs ANODIZED SILVER ALUMINIUM thermo packed bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	L x H mm	€/lm	€/Pc	
PCLAN 10	10 X 10	3,04	8,21	
PCLAA 10	10 X 10	4,05	10,94	
Available Stainless steel, AISI 204/4 4204 V2A				

Available Stainless steel AISI 304/1.4301-V2A "PROLISTEL" 10x10 PLTAC 10 / PLTACS 10

COLOURS






PCL... 10 scale 1:1

NATURAL, POLISHED, CHROMED, ANTIQUE AND BRUSHED BRASS NATURAL AND ANODIZED SILVER ALUMINIUM

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS





 Choose the profile in the required material and finish. 2. Apply the adhesive onto the area of application. 3. Lay the "PROCANAL".
 Continue laying by aligning it "flush" with the covering. 5. Use the adhesive to seal any empty interstices. Oxidation marks may be easily removed by polishing the profiles with specific products to be found on sale such as Sidol, Smac and similar.

PROFLAT is a range of 20 and 40 mm natural brass or steel strips 3 mm thick. Ideal for dividing up flooring on the same level, they may be polished in situ and also curved/shaped to create decorative patterns that are particularly recommended for marble, Palladian, Venetian and cement or resin-based floors



STAINLESS STEEL AISI 304/1.4301-V2A NATURAL BRASS

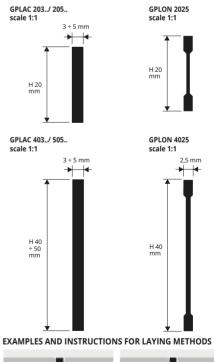



© 2028. All dights reserved by Progress Profiles. Printed in Italy

STAINLESS STEEL AISI 304/1.4301-V2A

bar length 3	lm - pack. 5 P	cs - 15 lm	
۸	ida		6

€/Im **GPLAC 2033** 3 X 20 11,58 **GPLAC 4033** 3 X 40 18,90

STAINLESS	 	204/4	4204 1/24	

har length 3 lm - nack 5 Prs - 15 lm

Article	L x H mm	€/Im	€/Pc		
GPLAC 2053	5 X 20	18,52	55,56	*	
GPLAC 5053	5 X 50	38,96	116,88	*	

SUITABLE FOR USE IN CONTACT WITH FOODSTUFFS. Available ON REQUEST IN Brushed Stainless steel



POLISHABLE NATURAL BRASS

bar length Z,7 Im - pack. 5 P			
Article	L x H mm	€/lm	€/Pc
GPLON 2025	2,5 X 20	14,81	39,99
GPLON 4025	2,5 X 40	19,67	53,11

COLOURS

AC - Stainless steel AISI 304/1.4301-V2A	ON - Natural brass

1. Choose "PROFLAT" according to the desired height and visible surface. 2. Cut "PROFLAT" to the desired length. 3. Cut with a trowel the fresh screed following the floor edges. 4. Apply the profile inside the rest screed taking are to all goint with the surface of the floor. After laying the joint should be 0,5 mm below the floor covering surface. **5.** Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation. Remove immediately all grout remains from the profile surface.

Sews 2023

🖈 = Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed

€/Pc

34,74

56,70


Prices are referred to whole packs 10% increase for minimum orders of 10 Pcs 20% increase for orders of less than 10 Pcs.

PROGRESS® PROFILES

PROSLIDER

FLOORSFLOORS

POLISHED AND BRUSHED STAINLESS STEEL AISI 304/1.4301-V2A

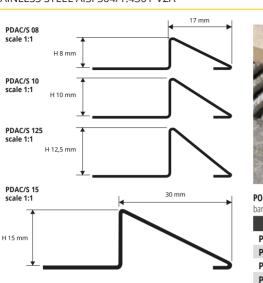

PROSLIDER is a sloping terminal transition profile in stainless steel AISI 304/1.4301-V2A designed to join different height floors in a perfect, stepless way. This particularly sturdy profile with the bent base sloping inwards withstands and supports high loads and frequent passage of manual trolleys and vehicles in addition to protecting the edge of the higher floor. **PROSLIDER** is used in particular to join tile or wood to an existing floor. Available in AISI 304/1.4301-V2A stainless steel in various heights to accommodate all differences in level.



Dar lengul 2,7 mil - pack. 20 PCS - 34 mil - 10/ 10 mm				
	Article	Hmm	€/lm	€/Pc
	PDAC 08	8	13,39	36,15
	PDAC 10	10	14,48	39,10
	PDAC 125	12,5	16,56	44,71
	PDAC 15	15	20,70	55,89
	PDAC 20	20	25,91	69,96

1. Choose the profile with the required height and finish. 2. Fill the profile cavity with adhesive and apply the adhesive onto the area of application. **3.** Lay the "PROSLIDER". **4.** Align it "flush" with the floor/

covering. 5. Use the adhesive to seal any empty interstices.



BRUSHED STAINLESS ST. AISI 304/1.4301-V2A with protective film eth 2.7 lm - pack. 20 Pcs - 54 lm - 10/10 mm


Article	H mm	€/lm	€/Pc	
PDACS 08	8	16,66	44,98	
PDACS 10	10	17,63	47,60	
PDACS 125	12,5	21,01	56,73	
PDACS 15	15	22,33	60,29	
PDACS 20	20	28,01	75,63	

SUITABLE FOR USE IN CONTACT WITH FOODSTUFFS.

COLOURS




EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS




PROSLIDER

POLISHED AND NATURAL BRASS

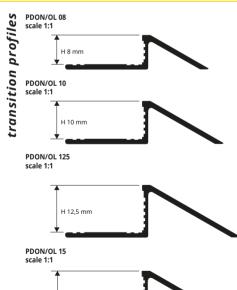



EXAMPLES OF LAYING




PROGRESS[®] PROFILES

NATURAL BRASS thermo packed 5 Pcs bar length 2.7 lm - pack. 20 Pcs - 54 lm

Article	H mm	€/lm	€/Pc			
PDON 08	8	14,96	40,39	*		
PDON 10	10	17,17	46,36			
PDON 125	12,5	21,45	57,91	*		
PDON 15	15	26,20	70,74	*		

INSTRUCTIONS FOR LAYING

 INSTRUCTIONS FOR LAYING
 Choose the profile with the required height H, material and finish.
 Fill the profile cavity with adhesive and apply the adhesive onto the area of application. 3. Lay the "PROSLIDER". 4. Align it "flush" with the floor/covering. 5. Use the adhesive to seal any empty interstices. Oxidation marks on profiles in natural and polished brass may be active and by application to profile with profile profile profile profile to the profile profile to the profile profile profile to the profile profile profile to the profile profile profile profile to the profile pr easily removed by polishing the profiles with specific products to be found on sale such as Sidol, Smac and similar.

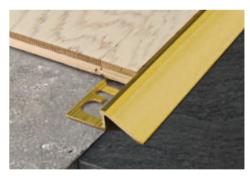

POLISHED BRASS thermo packed

Dar length 2,7 mi - pack. 20 PCS - 54 mi				
Article	H mm	€/lm	€/Pc	
PDOL 08	8	19,07	51,49	*
PDOL 10	10	21,29	57,48	
PDOL 125	12,5	25,56	69,01	*
PDOL 15	15	29,94	80,84	*



PROSLIDER is a sloping terminal transition profile designed to join different height floors in a perfect, stepless way. This particularly sturdy profile withstands and supports high loads and frequent passage of manual trolleys and vehicles in addition to protecting the edge of the higher floor. **PROSLIDER** is used in particular to join tile or wood to an existing floor. Available in natural and polished brass in various heights to accommodate all difference in level. differences in level.



PROSLIDER is a sloping terminal transition profile designed to join different height floors in a perfect, stepless way. This particularly sturdy profile withstands and supports high loads and frequent passage of manual trolleys and vehicles in addition to protecting the edge of the higher floor. **PROSLIDER** is used in particular to join tile or wood to an existing floor.

Available in natural and anodized silver aluminium in various heights to accommodate all differences in level.

PROSLIDER

NATURAL ALUMINIUM AND ANODIZED SILVER ALUMINIUM



NATURAL ALUMINIUM thermo packed 5 Pcs bar length 2,7 Im - pack. 40 Pcs - 108 Im


Article	Hmm	€/Im	€/Pc
PDAN 08	8	4,68	12,64
PDAN 10	10	5,30	14,31
PDAN 125	12,5	6,16	16,63






ANODIZED SILVER ALUMINIUM thermo packed bar length 2,7 Im - pack. 40 Pcs - 108 Im

bar lengar - , - - - - - - - - - -			
Article	Hmm	€/lm	€/Pc
PDAA 08	8	6,78	18,31
PDAA 10	10	7,26	19,60
PDAA 125	12,5	7,92	21,38

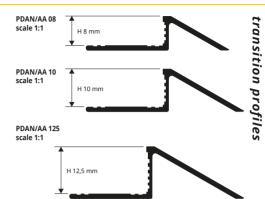

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS



1. Choose the profile with the required height H, material and finish. 2. Fill the profile cavity with adhesive and apply the adhesive onto the area of application. 3. Lay the "PROSLIDER". 4. Align it "flush" with the floor/covering. 5. Use the adhesive to seal any empty interstices.

PROSLIDER LR is a sloping terminal transition profile designed to join different height floors in a perfect, stepless way. This particularly sturdy profile withstands and supports high loads and frequent passage of manual trolleys and vehicles in addition to protecting the edge of the higher floor. **PROSLIDER LR** is used in particular to join tile or wood to an existing floor.

Available in natural and anodized silver aluminium in various heights to accommodate all differences in level.



NATURAL ALUMINIUM thermo packed 5 Pcs bar length 2,7 Im - pack. 20 Pcs - 54 Im

Article	Hmm	€/lm	€/Pc
PDLRAN 10	10	13,47	36,37
PDLRAN 125	12,5	16,77	45,28
PDLRAN 15	15	19,25	51,98
PDLRAN 20	20	24,41	65,91

COLOURS

© 2028. All depts reserved by Progress Profiles. Printed in Italy





ANODIZED SILVER ALUMINIUM thermo packed bar length 2.7 Im - pack. 20 Pcs - 54 Im


bar length 2,7 im - pack. 20 PCS - 54 im				
Article	e Hmm	€/lm	€/Pc	
PDLRAA 10	10	17,57	47,44	
PDLRAA 125	12,5	19,78	53,41	
PDLRAA 15	15	22,73	61,37	
PDLRAA 20	20	27,18	73,39	


INSTRUCTIONS FOR LAYING

Choose the profile with the required height H, material and finish.
 Fill the profile cavity with adhesive and apply the adhesive onto the area of application.
 Lay the "PROSLIDER LR".
 Align it "flush" with the floor/covering.
 Use the adhesive to seal any empty interstices.


PROSLIDER LR

NATURAL ALUMINIUM AND ANODIZED SILVER ALUMINIUM






EXAMPLES OF LAYING



PROSLIDER WOOD is a sloping terminal transition profile in real natural oak with glued-on, punched aluminium base, designed to join different height floors in a perfect, stepless way. This particularly sturdy profile withstands and supports high loads and frequent passage of manual trolleys and vehicles in addition to protecting the edge of the higher floor. Available in various heights to accommodate all differences in level.

PROSLIDER WOOD

NATURAL OAK WITH ALUMINIUM BASE





NATURAL OAK with ALUMINIUM BASE 10 Dec 27 1

Article	Hmm	€/lm	€/Pc			
PDWR 10	10	23,77	64,18	*		
PDWR 125	12,5	27,76	74,95	*		
PDWR 15	15	33,25	89,78	*		

INSTRUCTIONS FOR LAYING 1. Choose the "PROSLIDER WOOD" with the required height. 2. Apply the adhesive onto the area of application of the profile. 3. Lay and align the profile pressing the perforated flange into the adhesive. 4. Align it "flush" with the floor/covering. 5. Use the adhesive to seal any empty interstices.




NATURAL OAK with ALUMINIUM BASE th 1 35 lm - nack 20 Pcs - 27 lm

bar lengur 1,55 mi - pack. 201 CS - 27 mi					
A	rticle	H mm	€/lm	€/Pc	
PDWR 1	013	10	/	35,27	*
PDWR 1	2513	12,5	/	41,23	*
PDWR 1	513	15	/	44,92	*

COLOURS



EXAMPLES OF LAYING







★ = Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed Prices are referred to whole packs 10% increase for minimum orders of 10 Pcs 20% increase for orders of less than 10 Pcs.



PROCARPET ACC is a profile in stainless steel 304/1.4301-V2A used for joining two floors of differing thickness and in particular for joining a tiled or parquet floor to wall-to-wall carpeting, making a perfect join thanks to the vertical part of less than 4 mm. In addition to completely protecting the edge of the higher floor, this particularly sturdy profile withstands high loads and supports the frequent passage of manual trolleys, vehicles and intense pedestrian traffic.

PROCARPET ACC

STAINLESS STEEL AISI 304/1.4301-V2A

FLOORSFLOORS



POLISHED STAINLESS ST. AISI 304/1.4301-V2A with protective film bar length 2.7 lm - pack. 20 Pcs - 54 lm - 10/10 mm

Article	Hmm	€/Im	€/Pc	
PRTAC 08	8	10,94	29,54	*
PRTAC 10	10	12,01	32,43	
RTAC 125	12,5	15,46	41,74	*








BRUSHED STAINLESS ST. AISI 304/1.4301-V2A with protective film har length 2 7 lm - nack 20 Pcs - 54 lm - 10/10 mn

bui icligati 2,7 mi pack. 20	103 34111	10/10 11111		
Article	Hmm	€/lm	€/Pc	
PRTACS 08	8	13,67	36,91	*
PRTACS 10	10	15,00	40,50	
PRTACS 125	12,5	19,30	52,11	*

INSTRUCTIONS FOR LAYING

1. Choose the "PROCARPET ACC" taking into consideration the exact height of the floor. 2. Using a notched spreader apply the adhesive onto the area of application of the profile. 3. Lay and align the profile, cut to the accessary length, pressing the perforated flange into the adhesive. **4.** Lay the tiles, aligning them so that the top edge of the profile is "flush" with the tile. **5.** Fill the profile/tile area of contact with adhesive to prevent the accumulation of water in any voids.

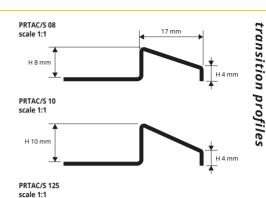



EXAMPLES OF LAYING



PROCARPET OTT


SUITABLE FOR USE IN CONTACT WITH FOODSTUFFS.

PROCARPET OTT is a profile in brass (natural or polished) used for joining two floors of differing thickness and in particular for joining a tiled or parquet floor to wall-to-wall carpeting, making a perfect join thanks to the vertical part of less than 4 mm. In addition to completely protecting the edge of the higher floor, this particularly sturdy profile withstands high loads and supports the frequent passage of manual trolleys, vehicles and intense pedestrian traffic.

NATURAL BRASS thermo packed 5 Pcs bar length 2,7 lm - pack. 20 Pcs - 54 lm

barrengar - p rest - e - - - - - - - - - -					
Ar	ticle	H mm	€/Im	€/Pc	
PRTON ()8	8	16,37	44,20	*
PRTON 1	10	10	18,58	50,17	*

COLOURS






POLISHED BRASS thermo packed

Dar length Z,7 Im - pack. Zu				
Article	Hmm	€/lm	€/Pc	
PRTOL 08	8	20,46	55,24	*
PRTOL 10	10	22,68	61,24	*

INSTRUCTIONS FOR LAYING 1. Choose the "PROCARPET OTT" taking into consideration the exact height of the floor. **2.** Using a notched spreader apply the adhesive onto the area of application of the profile. **3.** Lay and align the profile, cut to the necessary length, pressing the perforated flange into the adhesive. **4.** Lay the tiles, aligning them so that the top edge of the profile is "flush" with the tile. **5.** Fill the profile/tile area of contact with adhesive to prevent the accumulation of water in any work. adhesive to prevent the accumulation of water in any voids. Profiles in natural or polished brass may be subject to oxidation in environments with high degrees of humidity. Resulting marks may be easily removed by polishing the profiles with specific products to be found on sale such as Sidol, Smac and.

EXAMPLES OF LAYING






77

© 2028. All dights reserved by Progress Profiles. Printed in Italy


POLISHED AND NATURAL BRASS

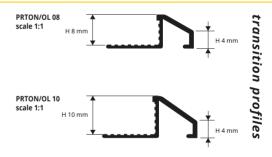



PROCARPET ALL

NATURAL AND ANODIZED SILVER ALUMINIUM

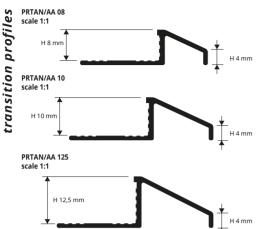



NATURAL ALUMINIUM thermo packed 5 Pcs

and intense pedestrian traffic.

bar length Z, /U im - pack. Z	U PCS - 54 II	n	
Article	H mm	€/lm	€/Pc
PRTAN 08	8	4,81	12,99
PRTAN 10	10	5,42	14,63
PRTAN 125	12,5	6,24	16,85

INSTRUCTIONS FOR LAYING

1. Choose the "PROCARPET ALL" taking into consideration the exact height of the floor. 2. Using a notched spreader apply the adhesive onto the area of application of the profile. 3. Lay and align the profile, cut to the necessary length, pressing the perforated flange into the adhesive. 4. Lay the tiles, aligning them so that the top edge of the profile is "flush" with the tile. 5. Fill the profile/tile area of contact with adhesive to prevent the accumulation of water in any voids.



ANODIZED SILVER ALUMINIUM thermo packed -1. 20 Dee

bai leligui 2,70 mi - pack. 2	20 F CS - J4 II		
Article	Hmm	€/lm	€/Pc
PRTAA 08	8	5,64	15,23
PRTAA 10	10	6,63	17,90
PRTAA 125	12,5	7,85	21,20

COLOURS

PROCARPET ALL is a profile in aluminium (natural or silver anodized) used for joining two floors of differing thickness and in particular for joining a tiled or parquet floor to wall-to-wall carpeting, making a perfect join thanks to the vertical part of less than 4 mm. In addition to completely protecting the edge of the higher floor, this particularly sturdy profile withstands high loads and supports the frequent passage of manual trolleys, vehicles




PROSKID


EXAMPLES OF LAYING

PROSKID is a sloping profile ideal for the stepless joining of two existing floors of differing heights where no transition profile was installed at the time of laying. Silicone is used for the laying. The notching on the profile helps anchorage of the silicone or adhesive. Hardwearing and attractive.

POLISHED BRASS AND ANODIZED SILVER ALUMINIUM

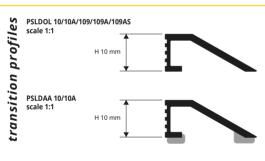

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS



 Choose the "PROCARPET" taking into consideration the exact height of the floor. 2. Using a notched spreader apply the adhesive onto the area of application of the profile. 3. Lay and align the profile, cut to the necessary length, pressing the perforated flange into the adhesive 4. Use the time performer to the tax of one of the adhesive. 4. Lay the tiles, aligning them so that the top edge of the profile is "flush" with the tile. 5. Fill the profile/tile area of contact with adhesive to prevent the accumulation of water in any voids.



POLISHED BRASS thermo packed

bar length 2,70 lm - pack. 20 Pcs	- 54 Im		
Article	H mm	€/lm	€/Pc
PSLDOL 10	10	20,10	54,27
	40	22.24	50.07

PSLDOL 10A	10	22,21	59,97
A" at the end of the product coc	le = Item w	ith adhesive	

POLISHED BRASS thermo packed

bar length 0,90 lm - pack. 20 Pcs			PACK
Article	H mm	€/lm	€/Pc
PSLDOL 109AS	10	/	25,00

"AS" at the end of the product code = Item with adhesive

POLISHED BRASS thermo packed

bar length 0,90 lm - pack. 20 Pcs		-	BLISTER
Article	Hmm	€/lm	€/Pc
PSLDOL 109	10	/	21,91
PSLDOL 109A	10	/	23,61
"A" at the end of the product coo	de = Item v	ith adhesive	



ANODIZED SILVER ALUMINIUM thermo packed har length 2 70 lm - nack 20 Pcs - 54 lm

patriengar =, re patrie = e			
Article	Hmm	€/Im	€/Pc
PSLDAA 10	10	6,24	16,85
PSLDAA 10A	10	7,64	20,63
"A" at the end of the product co	ode = Item v	vith adhesive	

COLOURS

100	
OL - Polished brass	AA - Anodized silver alum.

FLOORSFLOORS

🖈 = Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed

SELF

7

*



PROLEVALL 29 is a transition profile in anodized aluminium available in the self-adhesive or punched versions. It is used to give a clean-cut, elegant finish when joining and compensating differences in level of floors that are already laid and in differing or same materials e.g. ceramic tiles-wood-parquet-marble, etc. It joins and compensates a thickness between 4 and 6mm. **PROLEVALL 29** ensures a perfect finish with little height, covering any flaws created during laying, while the contoured edges guarantee perfect adherence to the floor.

PROLEVALL 29

ANODIZED ALUMINIUM WITH SELF-ADHESIVE AND PUNCHED

FLOORSFLOORS



HxLmm

5,5 X 29

HxLmm

55X29

HxLmm

55X29

HxLmm

5,5 X 29

€/lm

6.63

€/lm

€/lm

€/lm

€/Pc

17.90

€/Pc

6.51

€/Pc

7 32

€/Pc

7.97

SELF

SELF

ANODIZED ALUM. with adhesive thermo packed

bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article

bar length 0,83 lm - pack. 20 Pc Article <u>H ></u>

bar length 0,93 lm - pack. 20 Pc Article H x

bar length 1,03 lm - pack. 20 Pc

Article

PLV... 2910AS

PLV... 29A

PLV... 298AS

PLV... 299AS

and the second second		and the second s	1211
	and the second division of the second divisio		
			1
		11	/
and the second division of the second divisio			1000
		(BIGAN	

ANODIZED ALUM. punched thermo packed har length 2.7 lm - pack 40 Pcs - 108 lm


bar length 2,7 lm - pack	. 40 Pcs - 108 lm		
Article	HxLmm	€/lm	€/Pc
PLV 29F	5,5 X 29	5,16	13,93
ANODIZED ALUM. punche thermo packed - bar			SEL
Article	HxLmm	€/lm	€/Pc
PLV 298FS	5,5 X 29	/	6,05
ANODIZED ALUM. punche thermo packed - bar l Article			SEL PAC €/Pc
PLV 299FS	5,5 X 29	/	6,16
ANODIZED ALUM. punche thermo packed - bar l	d with screws and screw		SEL
	ength 1,03 lm - pack.	20 Pc 🛛 🛡	PAC
Article	ength 1,03 lm - pack. H x L mm	20 Pc €/lm	PAC €/Pc
•			


Available in the colours: AA - AO (AB, AT, CH e SB available on demand with a minimum quantity order of 100 pcs). The code of the selected colour must be added to the article code. E.g.: PLV... 29A (chosen colour anodized gold alum.) PLVAO 29A



PLV... 29A PLV... 29A PLV... 29IOAS scale 1:1 PLV... 29F PLV... 29F PLV... 29F PLV... 29F PLV... 29IOFS Scale 1:1 H 5,5 mm 29 mm 15,5 mm 15

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS





Adhesive version

Choose the suitable profile and cut it to the necessary length.
 Degrease, wash and clean the solid surface thoroughly.
 Remove the protective paper from the adhesive. 4. Lay the profile by applying pressure evenly over the whole surface without using a hammer.


Punched version

*


Choose the suitable profile and cut it to the necessary length.
 Mark the position of the holes using the existing holes in the profile as reference.
 Insert the screw anchors into the drilled holes.
 Fix the profile using flathead screws suitable for the relative slots in the profile.

PROLEVALL 33

POLISHED BRASS WITH SELF-ADHESIVE AND PUNCHED



EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS



1. Choose the suitable profile and cut it to the necessary length Adhesive version

Degrease, wash and clean the solid surface thoroughly.
 Remove the protective paper from the adhesive. 4. Lay the profile by applying pressure evenly over the whole surface without using a hammer.
 Punched version

 Mark the position of the holes using the existing holes in the profile as reference. 3. Insert the screw anchors into the drilled holes. 4. Fix the profile using flathead screws suitable for the relative slots in the profile.

PROLEVALL 33 is a transition profile in extruded polished brass, available in the self-adhesive or punched versions. It is used to give a clean-cut, elegant finish when joining and compensating differences in level of floors that are already laid and in differing or same materials e.g. ceramic tiles-wood-parquet-marble, etc. It joins and compensates a thickness between 4 and 6mm. **PROLEVALL 33** ensures a perfect finish with little height, covering any flaws created during laying, while the contoured edges guarantee perfect adherence to the floor.

POLISHED BRASS with adhesive thermo packed bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	HxLmm	€/lm	€/Pc	
PLVOL 33A	5,5 X 33	17,41	47,01 📩	•
POLISHED BRASS with a bar length 0,83 lm - pack.		o packed	SELF PACK	
Article	HxLmm	€/lm	€/Pc	
PLVOL 338AS	5,5 X 33	/	15,74 📩	•
POLISHED BRASS with a bar length 0,93 lm - pack.	20 Pc	· •	SELF PACK	
Article	HxLmm	€/lm	€/Pc	
PLVOL 339AS	5,5 X 33	/	17,57 📩	
POLISHED BRASS with a bar length 1,03 lm - pack.		o packed	SELF PACK	
Article	HxLmm	€/lm	€/Pc	
PLVOL 3310AS				
PLVOL 33 IUAS	5,5 X 33	/	19,39 📩	

Article	HxLmm	€/Im	€/Pc
PLVOL 33F	5,5 X 33	15,52	41,90
POLISHED BRASS punched hermo packed - bar l			SELF PACH
Article	HxLmm	€/Im	€/Pc
		e ,	
PLVOL 338FS	5,5 X 33	/	14,61
PLVOL 338FS OLISHED BRASS punched hermo packed - bar l	5,5 X 33 I with screws and screv ength 0,93 Im - pack.	/ v anchors 20 Pc	14,61
PLVOL 338FS DLISHED BRASS punched termo packed - bar l Article	5,5 X 33 I with screws and screw ength 0,93 Im - pack. H x L mm	/ v anchors 20 Pc €/Im	14,61 SELF PACH €/Pc
PLVOL 338FS OLISHED BRASS punched hermo packed - bar l	5,5 X 33 I with screws and screv ength 0,93 Im - pack.	/ v anchors 20 Pc	14,61
PLVOL 338FS OLISHED BRASS punched hermo packed - bar l Article	5,5 X 33 I with screws and screw ength 0,93 Im - pack. H x L mm 5,5 X 33 I with screws and screw	/ v anchors 20 Pc €/Im / v anchors	14,61 SELF PACI €/Pc 16,15
PLVOL 338FS OLISHED BRASS punched hermo packed - bar I Article PLVOL 339FS OLISHED BRASS punched	5,5 X 33 I with screws and screw ength 0,93 Im - pack. H x L mm 5,5 X 33 I with screws and screw	/ v anchors 20 Pc €/Im / v anchors	14,61 SELF PACH €/Pc

COLOURS

OL - Polished brass




🛪 = Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed


PROLEVALL 305

PROLEVALL 305 is a transition/terminal profile for floors of medium thickness (from 3 to 7 mm), used to join and compensate two floors of differing height, material and thickness. Ideal as a finishing terminal, it covers flaws and chipping or splintering of tiles, wood and carpeting. Available in stainless steel 1.4016 and polished brass. A protective film protects the finish of the 2.70 m long bars with either self-adhesive backing or punched for fixing with screws and anchors. The 93 cm blister pack version (self pack) is shrink-wrapped with bar code.

POLISHED STAINLESS STEEL 1.4016 AND POLISHED BRASS WITH SELF-ADHESIVE AND PUNCHED

FLOORSFLOORS

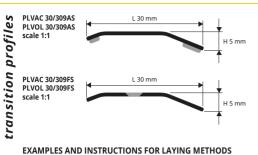





POLISHED STAINLESS ST.	1.4016 with adhesive thermo packed	
bar length 2,7 lm - pack. 40	Pcs - 108 lm	

Article	HxLmm	€/lm	€/Pc	
PLVAC 30A	5 X 30	6,79	18,33	
POLISHED STAINLESS S thermo packed - bar ler			SELF PACK	
Article	HxLmm	€/lm	€/Pc	
PLVAC 309AS	5 X 30	/	8,33	
POLISHED BRASS with bar length 2,7 lm - pack. 4 Article		o packed €/Im	€/Pc	
PLVOL 30A	5 X 30	9,91	26,76	
POLISHED BRASS with adhesive thermo packed SELF bar length 0,93 Im - pack. 20 Pc				
Article	HxLmm	€/lm	€/Pc	
PLVOL 309AS	5 X 30	/	10,54	
COLOURS				
	10	100		

OL - Polished brass



POLISHED STAINLESS ST. 1.4016 punched with protective film bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	HxLmm	€/lm	€/Pc
PLVAC 30F	5 X 30	5,29	14,28
POL. STAINLESS ST. 1.4016 pun thermo packed - bar le			SELF PACK
Article	HxLmm	€/lm	€/Pc
PLVAC 309FS	5 X 30	/	7,17 📌
POLISHED BRASS pune bar length 2,7 lm - pack.		tive film	
Article	HxLmm	€/lm	€/Pc
PLVOL 30F	5 X 30	8,03	21,68 対
POL. BRASS punched with thermo packed - bar le			SELF PACK
Article	HxLmm	€/lm	€/Pc

5 X 30

ON DEMAND HAND-BRUSHED STAINLESS STEEL

(Price to be agreed, Production delay 4/5 weeks)

Adhesive version

1. Choose the suitable profile and cut it to the necessary length Degrease, wash and clean the solid surface thoroughly.
 Remove the protective paper from the adhesive. 4. Lay the profile by applying pressure evenly over the whole surface without using a hammer.

 Punched version
 Choose the suitable profile and cut it to the necessary length. 2. Mark the position of the holes using the existing holes in the profile as reference. 3. Insert the screw anchors into the drilled holes. **4.** Fix the profile using flathead screws suitable for the relative slots in the profile.

PROLEVALL 32

ANODIZED ALUMINIUM WITH SELF-ADHESIVE AND PUNCHED



EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

32 mm

Adhesive version

 Choose the suitable profile and cut it to the necessary length.
 Degrease, wash and clean the solid surface thoroughly.
 Remove the protective paper from the adhesive. 4. Lay the profile by applying pressure evenly over the whole surface without using a hammer. Punched version

80

 Choose the suitable profile and cut it to the necessary length.
 Mark the position of the holes using the existing holes in the profile as reference.
 Insert the screw anchors into the drilled holes.
 Fix the profile using flathead screws suitable for the relative details to the profile. relative slots in the profile



while the contoured edges guarantee perfect adherence to the floor.

ANODIZED SILVER and GOLD ALUMINIUM Dec. 100 lu

AC - Polished stainless

steel 1.4016

thermo packed - bar length Z,	7 IM - раск. 40) PCS - 108 II	n
Article	L x H mm	€/lm	€/Pc
PLV 32A	32 X 8	8,44	22,79
PLV 32F	32 X 8	5,64	15,23
"A" at the end of the product code = Item with adhesive			

"F" at the end of the product code = Punched Item

Available in the colours: AA - AO (AB -AT, CH e SB available on demand with a minimum quantity order of 100 pcs). The code of the selected colour must be added to the article code. E.g.: PLV... 32F (chosen colour Anodized gold alum.) PLVAO 32F.

COLOURS AA - Anodized silver alum. AO - Anodized gold alum.



ANODIZED SILVER and GOLD ALUMINIUM thermo packed - bar length 0,93 Im - pack. 20 Pc				
Article	L x H mm	€/Im	€/Pc	
PLV 329AS	32 X 8	/	8,59	
PLV 329FS	32 X 8	/	6,51	
"AS" at the end of the product code = Item with adhesive				

"FS" at the end of the product code = Punched Item

PLVOL 309FS

PROLEVALL 32 are transition profiles in anodized aluminium available in the self-adhesive or punched versions. They are used to give a clean-cut, elegant finish when joining and compensating differences in level of floors that are already laid and in differing or same materials e.g. ceramic tiles-wood-parquet-marble, etc. They join and compensate a thickness

between 7 and 9 mm. PROLEVALL 32 ensures a perfect finish with little height, covering any flaws created during laying,



🖈 = Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed

Prices are referred to whole packs 10% increase for minimum orders of 10 Pcs 20% increase for orders of less than 10 Pcs



PROLEVALL 358 are transition profiles in polished extruded brass, available in the self-adhesive or punched versions. They are used to give a clean-cut, elegant finish when joining and compensating differences in level of floors that are already laid and in differing or same materials e.g. ceramic tiles-wood-parquet-marble, etc. They join and compensate a thickness between 7 and 9 mm. **PROLEVALL 358** ensures a perfect finish with little height, covering any flaws created during laying, while the contoured edges guarantee perfect adherence to the floor.

PROLEVALL 358

POLISHED BRASS WITH SELF-ADHESIVE AND PUNCHED



POLISHED BRASS thermo packed - bar length 2,7 lm pack. 20 Pcs - 54 lm (PLVOL 358F: 15 Pcs - 40,5 lm)

 Article
 L x H mm
 €/Im
 €/Pc

 PLVOL 358A
 35 X 8
 24,88
 67,18

 PLVOL 358F
 35 X 8
 23,11
 62,40
 ★

"A" at the end of the product code = Item with adhesive "F" at the end of the product code = Punched Item

COLOURS







POLISHED BRASS thermo packed bar length 0,90 lm - pack. 20 Pc		SELF PACK
Article	LxHmm	€/Pc
PLVOL 3589AS	35 X 8	23,75
PLVOL 3589FS	35 X 8	22,21

"AS" at the end of the product code = Item with adhesive "FS" at the end of the product code = Punched Item

PLVOL 358A/PLVOL 3589AS PLVOL 358F/PLVOL 3589FS scale 1:1



EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS



Adhesive version

Addressive version
1. Choose the suitable profile and cut it to the necessary length.
2. Degrease, wash and clean the solid surface thoroughly.
3. Remove the protective paper from the adhesive.
4. Lay the profile by applying pressure evenly over the whole surface without using a hammer.

Punched version

Choose the suitable profile and cut it to the necessary length.
 Mark the position of the holes using the existing holes in the profile as reference.
 Insert the screw anchors into the drilled holes.
 Fix the profile using flathead screws suitable for the relative slots in the profile.

PROLEVALL 4413 are transition profiles in polished extruded brass and anodized aluminium available in the selfadhesive or punched versions. They are used to give a clean-cut, elegant finish when joining and compensating differences in level of floors that are already laid and in differing or same materials e.g. ceramic tiles-woodparquet-marble, etc. They join and compensate a thickness between 13 and 15 mm. **PROLEVALL 4413** ensures a perfect finish with little height, covering any flaws created during laying, while the contoured edges guarantee perfect adherence to the floor.

CELE

🖈 = Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed

Prices are referred to whole packs 10% increase for minimum orders of 10 Pcs 20% increase for orders of less than 10 Pcs.

POLISHED BRASS thermo packed

bar length 2,7 lm - pack. 10 Pcs - 27 lm

Article	L x H mm	€/lm	€/Pc	
PLVOL 4413A	44 X 13	24,70	66,69	*
PLVOL 4413F	44 X 13	22,75	61,43	*
"A" at the end of the product code = Item with adhesive "F" at the end of the product code = Punched Item				

POLISHED	RRASS ther	mo nacked

bar length 0,90 lm - pack. 20 Pc		PACK	
Article	L x H mm	€/Pc	
PLVOL 44139AS	44 X 13	26,70	*
PLVOL 44139FS	44 X 13	25,30	*

"AS" at the end of the product code = Item with adhesive "FS" at the end of the product code = Punched Item

COLOURS

COLOUKS	
AA - Anodized silver alum.	AO - Anodized gold alum.



ANODIZED SILVER and GOLD ALUMINIUM thermo packed bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	L x H mm	€/Im	€/Pc
PLV 4413A	44 X 13	10,58	28,57
PLV 4413F	44 X 13	9,25	24,98
"A" at the end of the product of	ode = Item wit	h adhesive	

"F" at the end of the product code = Punched Item

Available in the colours: AA - AO (OL, AT, CH e SB available on demand with a minimum quantity order of 100 pcs). The code of the selected colour must be added to the article code. E.g.: PLV... 4413F (chosen colour anodized gold alum.) PLVAO 4413F.


AVAILABLE MINIMUM QUANTITY 100 PCS by color and height

	•	, ,	
		ALC: NOT	
OL - Poliched bracs	AT - Anodized titanium alum	CH - Anod champage alum	SB - Anodized cand alum

(Price to be agreed. Production delay 4/5 weeks)

PROLEVALL 4413


POLISHED BRASS AND ANODIZED SILVER ALUMINIUM WITH SELF-ADHESIVE AND PUNCHED

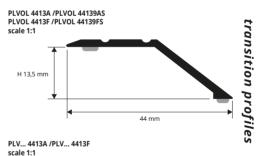



44 mm

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS



Choose the suitable profile and cut it to the necessary length.
 Degrease, wash and clean the solid surface thoroughly.
 Remove the protective paper from the adhesive. 4. Lay the profile by applying pressure evenly over the whole surface without using a hammer.

Punched version


Choose the suitable profile and cut it to the necessary length.
 Mark the position of the holes using the existing holes in the profile as reference.
 Insert the screw anchors into the drilled holes.
 Fix the profile using flathead screws suitable for the relative slots in the profile.






ANODIZED ALUMINIUM

PRONIVO is a transition and edging profile with a rounded shape in anodized aluminium with tap-down edge It is ideal to give a clean-cut, elegant finish when joining and compensating differences in level of floors that are already laid and in differing or same materials e.g. ceramic tiles-wood-parquet. With its rounded shape it compensates for differences in thickness between 7 and 13 mm where no profile was installed at the time of laying. PRONIVO ensures a perfect finish and is easy to lay with the self-adhesive backing guaranteeing perfect adherence to the floor.

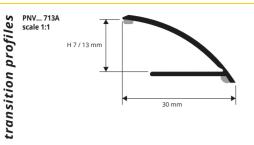

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS



 Choose the suitable profile and cut it to the necessary length.
 Degrease, wash and clean the solid surface thoroughly.
 Remove the protective paper from the adhesive.
 Lay the profile by applying pressure evenly over the whole surface without using a hammer



ANODIZED ALUMINIUM self-adhesive thermo packed ngth 2.7 lm - pack. 30 Pcs - 81 lm ba

Article	Hmm	€/Im	€/Pc			
PNVAA 713A	7/13	7,37	19,90			

Available in the colours: AA (AO available on demand with a minimum quantity order of 100 pcs). The code of the selected colour must be added to the article code.

E.g.: PNV... 713 (chosen colour anodized gold alum.) PNVAO 713A



COLOURS

AA - Anodized silver alum.

AVAILABLE MINIMUM QUANTITY 100 PCS by color and height




(Price to be agreed. Production delay 4/5 weeks)

PROTRANS

ANODIZED ALUMINIUM

PROTRANS is a transition and edging profile with a rounded shape in anodized aluminium. It is ideal to give a clean-cut, elegant finish when joining and compensating differences in level of floors that are already laid and in differing or same materials e.g. ceramic tiles-wood-parquet. With its rounded shape it compensates for differences in thickness between 6 and 13 mm where no profile was installed at the time of laying. **PROTRANS** ensures a perfect finish and is easy to lay with the self-adhesive backing guaranteeing perfect adherence to the floor.

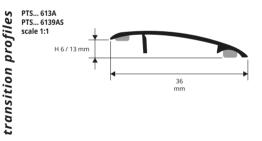

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS



2. Degrease, wash and clean the solid surface thoroughly. 3. Remove the protective paper from the adhesive. 4. Lay the profile by applying pressure evenly over the whole surface without using a hammer



ANODIZED ALUMINIUM self-adhesive thermo packed bar len


PTS/

COLOURS

AA - Anodized silver alum.

	IZED ALUMINIUM self-adhesive thermo packed gth 2,7 lm - pack. 40 Pcs - 108 lm			ANODIZED ALUMINIUM self-adhesive thermo packed - bar length 0,90 Im - pack. 20 Pcs			
Article	Hmm	€/lm	€/Pc	Article	Hmm	€/lm	€/Pc
SAA 613A	6 / 13	7,04	19,01	PTS 6139AS	6 / 13	1	7,44

Available in the colours: AA (AO, AT, CH e SB available on demand with a minimum quantity order of 100 pcs). The code of the selected colour must be added to the article code. Eg:: PTS... 613A (chosen colour anodized gold alum.) PTSAO 613A.



AO - Anodized gold alum. AT - Anodized titanium alum. CH - Anod. champagne alum. SB - Anod. sand aluminium (Price to be agreed. Production delay 4/5 weeks)



PROFLOOR 712 is a self-adhesive sloping terminal transition profile in AISI 304/1.4301-V2A stainless steel with protective film. It is used to give a clean-cut, elegant finish when joining and compensating differences in level of floors that are already laid and in differing or same materials e.g. ceramic tiles-wood-parquet-marble. It joins and compensates a thickness between 7 and 12mm. **PROFLOOR 712** ensures a perfect finish with little height, covering any flaws created during laying of the floor. Easy to lay; the high-strength elastomer adhesive ensures an excellent grip.



POLISHED STAINLESS ST. AISI 30 thermo packed - bar lengt			SELF PACK
Article	L x H mm	€/lm	€/Pc
PFRAC 7129AS	38 X 7/12	/	9,47
POLISHED STAINLESS ST. AISI thermo packed - bar lengt			SELF PACK
Article	L x H mm	€/Im	€/Pc
PFRAC 71216AS	38 X 7/12	/	16,67

POLISHED STAINLESS ST. AISI 304/1.4301-V2A self-adhesive thermo packed - bar length 2,7 Im - pack. 20 Pcs - 54 Im LxHmm €/lm Article €/Pc DEPAC 712A 38 X 7/12 8.97 24 22 POLISHED STAINLESS ST. AISI 304/1.4301-V2A self-adhesive SELF PACK thermo packed - bar length 0,83 lm - pack. 20 Pcs Article L x H mm €/lm €/Pc **PERAC 7128AS** 38 X 7/12 8.54 POLISHED STAINLESS ST. AISI 304/1.4301-V2A self-adhesive SELF thermo packed - bar length 1,03 lm - pack. 20 Pcs Article LxHmm €/lm €/Pc PERAC 71210AS 38 X 7/12 10.41 COLOURS On demand hand-brushed stainless steel (Price to

be agreed. Production delay 4/5 weeks)

SUITABLE FOR USE IN CONTACT WITH FOODSTUFFS.

AC - Polished stainless steel AISI 304/1.4301-V2A

PROFLOOR 712 is a self-adhesive sloping terminal transition profile in polished brass with protective film. It is used to give a clean-cut, elegant finish when joining and compensating differences in level of floors that are already laid and in differing or same materials e.g. ceramic tiles-wood-parquet-marble. It joins and compensates a thickness between 7 and 12mm. **PROFLOOR 712** ensures a perfect finish with little height, covering any flaws created during laying of the floor. Easy to lay; the high-strength elastomer adhesive ensures an excellent grip.





POLISHED BRASS self-adhesive thermo packed bar length 1,66 lm - pack. 20 Pcs					
Article	L x H mm	€/Im	€/Pc		
PFROL 71216AS	38 X 7/12	/	23,61		

POLISHED BRASS self-ad bar length 2,7 lm - pack. 20		ked	
Article	L x H mm	€/lm	€/Pc
PFROL 712A	38 X 7/12	13,08	35,32
POLISHED BRASS self-ad bar length 0,83 lm - pack. 2		ked	SELF PACK
Article	L x H mm	€/Im	€/Pc
PFROL 7128AS	38 X 7/12	/	11,95
PFROL 7128AS POLISHED BRASS self-ad bar length 1,03 lm- pack. 2	hesive thermo pac	/ :ked	11,95 SELF PACK
POLISHED BRASS self-ad	hesive thermo pac	/ ^{:ked} F	SELF
POLISHED BRASS self-ad bar length 1,03 lm- pack. 2	hesive thermo pac 0 Pcs		SELF PACK
POLISHED BRASS self-ad bar length 1,03 lm- pack. 2 Article	hesive thermo pac 0 Pcs L x H mm		SELF PACK €/Pc
POLISHED BRASS self-ad bar length 1,03 lm- pack. 2 Article PFROL 71210AS	hesive thermo pac 0 Pcs L x H mm		SELF PACK €/Pc

PROFLOOR 712

POLISHED STAINLESS STEEL AISI 304/1.4301-V2A WITH SELF-ADHESIVE






 Degrease, wash and clean the solid surface thoroughly.
 Remove the protective paper from the adhesive. 4. Lay the profile by applying pressure evenly over the whole surface without using a hammer

PROFLOOR 712

POLISHED BRASS WITH SELF-ADHESIVE

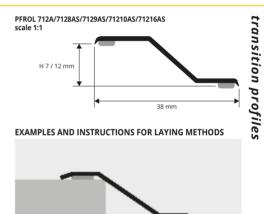

Choose the suitable profile and cut it to the necessary length Degrease, wash and clean the solid surface thoroughly.
 Remove the protective paper from the adhesive. 4. Lay the profile by applying pressure evenly over the whole surface without using

PROFLOOR 712 is a self-adhesive sloping terminal transition profile in anodized aluminium with silver-gold-bronze finish with protective film. It is used to give a clean-cut, elegant finish when joining and compensating differences in level of floors that are already laid and in differing or same materials e.g. ceramic tiles-wood-parquet-marble. It joins and compensates a thickness between 7 and 12mm. **PROFLOOR 712** ensures a perfect finish with little height, covering any flaws created during laying of the floor. Easy to lay; the high-strength elastomer adhesive ensures an excellent grip.



38 X 7/12

Anodized ALUMINIUM self-adhesive thermo packed bar length 2,7 lm - pack. 40 Pcs - 108 lm L x H mm

Article

PFR... 712A




Available in the colours: AA - AO - AB (AT. CH and SB available on demand with a minimum quantity order of 100 pcs) The code of the selected colour must be added to the article code. E.g.: PFR... 712A (chosen colour anodized gold alum.) PFRAO 712A

€/Pc

19,17

PROFLOOR 712

ANODIZED GOLD, SILVER AND BRONZE ALUMINIUM WITH SELF-ADHESIVE

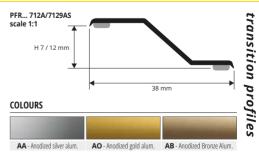

AVAILABLE MINIMUM QUANTITY 100 PCS by color and height

AT - Anodized titanium alum. CH - Anod. champagne alum. SB - Anod. sand aluminium (Price to be agreed. Production delay 4/5 weeks)

FLOORS

€/lm

7,10





PROPRESS 712

POLISHED STAINLESS STEEL AISI 304/1.4301 AND POLISHED BRASS WITH SELF-ADHESIVE **PROPRESS 712** is a self-adhesive sloping terminal transition profile in stainless steel 1.4301 and polished brass with protective film. It is used to give a clean-cut, elegant finish when joining and compensating differences in level of floors that are already laid and in differing or same materials e.g. ceramic tiles-wood-parquet-marble, etc. It joins and compensates a thickness between 7 and 12mm.

PROPRESS 712 ensures a perfect finish with little height, covering any flaws created during laying of the floor. Easy to lay; the high-strength elastomer adhesive ensures an excellent grip.

PRSAC 712A/7129AS PRSOL 712A/7129AS scale 1:1 H 7 / 12 mm EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

1. Choose the suitable profile and cut it to the necessary length

Degrease, wash and clean the solid surface thoroughly.
 Remove the protective paper from the adhesive.
 Lay the profile by applying pressure evenly over the whole surface without

using a hammer.



POLISHED STAINLESS ST. AISI 304/1.4301-V2A self-adhesive thermo packed - bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	H x L mm	€/Im	€/Pc			
PRSAC 712A	27 X 7/12	11,89	32,10			
POLISHED STAINLESS ST. AISI 304/1.4301-V2A self-adhesive						

thermo packed - bar length 0,90 lm - pack. 20 Pcs PAC

Article		€/PC
PRSAC 7129AS	27 X 7/12	13.03

COLOURS



POLISHED BRASS self-adhesive thermo packed bar length 2,7 Im - pack. 20 Pcs - 54 Im


barrengar 2,7 m pack. 20103 34 m						
Article	H x L mm	€/lm	€/Pc			
PRSOL 712A	27 X 7/12	15,40	41,58			
POLISHED BRASS self-adhesive thermo packed SELF bar length 0,90 Im - pack. 20 Pcs						
Article	LxHm	m	€/Pc			
PRSOL 7129AS	27 X 7/1	12	15,74			

SUITABLE FOR USE IN CONTACT WITH FOODSTUFFS.

On demand hand-brushed stainless steel (Price to be agreed. Production delay 4/5 weeks)

PROFLOOR 1216

POLISHED STAINLESS STEEL AISI 304/1.4301 AND POLISHED BRASS WITH SELF-ADHESIVE

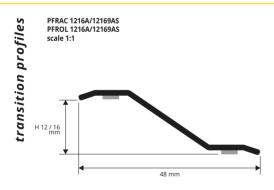

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS



Choose the suitable profile and cut it to the necessary length.
 Degrease, wash and clean the solid surface thoroughly.
 Remove the protective paper from the adhesive.
 Lay the profile by applying pressure evenly over the whole surface without using a hammer.

PROFLOOR 1216 is a self-adhesive chamfered terminal transition profile in stainless steel AISI 304/1.4301-V2A and polished brass with protective film. It is used to give a clean-cut, elegant finish when joining and compensating differences in level of floors that are already laid and in differing or same materials e.g. ceramic tiles-wood-parquet-marble, etc. It joins and compensates a thickness between 12 and 16mm. **PROFLOOR 1216** ensures a perfect finish with little height, covering any flaws created during laying of the floor. Easy to lay; the high-strength elastomer adhesive ensures an excellent grip.



POLISHED STAINLESS ST. AISI 304/1.4301-V2A self-adhesive thermo packed - bar length 2,7 lm - pack. 20 Pcs - 54 lm

PFRAC 1216A 48 X 12/16	1 37,02
DLISHED STAINLESS ST. AISI 304/1.4301-V2A s nermo packed - bar length 0,93 lm - pa	

 Article
 L x H mm
 €/Pc

 PFRAC 12169AS
 48 X 12/16
 13,45

SUITABLE FOR USE IN CONTACT WITH FOODSTUFFS. On demand hand-brushed stainless steel (Price to be agreed. Production delay 4/5 weeks)



POLISHED BRASS self-adhesive thermo packed bar length 2,7 Im - pack. 20 Pcs - 54 Im

Article	L x H mm	€/lm	€/Pc		
PFROL 1216A	48 X 12/16	19,81	53,49		
POLISHED BRASS self-adhesive thermo packed SELF bar length 0,93 Im - pack. 20 Pcs					
Article	LxHm	m	€/Pc		
PFROL 12169AS	48 X 12/	16	19,90		

COLOURS





PROLINOLEUM is a self-adhesive transition profile in anodized aluminium with gold/silver finish. It is used to give a clean-cut, elegant finish to hardwearing surfaces in PVC or linoleum and other thin materials between 2.3 mm thick. **PROLINOLEUM** ensures a perfect finish with little height, covering any flaws created during laying of the floor. Easy to lay; the high-strength elastomer adhesive ensures an excellent grip.

PROLINOLEUM

FLOORS

ANODIZED GOLD AND SILVER ALUMINIUM WITH AND WITHOUT SELF-ADHESIVE



ANODIZED GOLD AND SILVER ALUMINIUM thermo packed

bar length 2,7 lm - pack. 40 Pcs	i - 108 lm			ADHESIVE - bar l	ength 2,7 lm - pack. 40 Pcs -	108 lm
Article	H x L mm	€/lm	€/Pc	Arti	cle H x L mm	€/In
PLU 16	2,5 X 16	4,29	11,58	PLU 16A	2,5 X 16	5,43

Available in the colours: AA (AO, AT, CH and SB available on demand with a minimum quantity order of 100 pcs). The code of the selected colour must be added to the article code. E.g.: PLU ... 16 (chosen finish anod. gold) PLUAO 16.



AA - Anodized silver alum.

 AVAILABLE MINIMUN	I QUANTITY 100 PCS b	y color and height
		100 C

AO - Anodized gold alum. AT - Anodized titanium alum. CH - Anod. champagne alum. SB - Anod. sand aluminium (Price to be agreed. Production delay 4/5 weeks)

ANODIZED GOLD AND SILVER ALUMINIUM thermo packed - WITH

€/lm

5,43

€/Pc

14,66

PLU ... 16 PLU ... 16A profiles for low thicknesses scale 1:1 H 3.5 mm **EXAMPLES AND INSTRUCTIO**

1. Choose the suitable profile th. **2.** Degrease, wash and clea **3.** Remove the protective pap ıly. he profile by applying pressure evoluting a hammer. ut

DNS FOR LAYING METHODS
and cut it to the necessary lengt an the solid surface thoroughl per from the adhesive. 4. Lay the enly over the whole surface withou

PROFLOOR 24 is a self-adhesive transition profile with chamfered edges in stainless steel 1.4016 and polished brass with protective film. It is used to give a clean-cut, elegant finish to hardwearing surfaces in PVC and linoleum - carpeting and other thin materials between 2 and 5mm thick. **PROFLOOR 24** ensures a perfect finish with little height, covering any flaws created during laying of the floor. Easy to lay; the high-strength elastomer adhesive ensures an excellent grip.



POLISHED STAINLESS ST. AISI 304/1.4301-V2A self-adhesive thermo packed - bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	L x H mm	€/Im	€/Pc
PFRAC 24A	2/4,5 X 30	6,79	18,33
POLISHED STAINLESS ST. AISI thermo packed - bar len			SELF PACK

• •		
Article	L x H mm	€/Pc
PFRAC 249AS	2/4,5 X 30	7,49

SUITABLE FOR USE IN CONTACT WITH FOODSTUFFS. On demand hand-brushed stainless steel (Price to be agreed. Production delay 4/5 weeks)



POLISHED BRASS self-adhesive thermo packed nack AO Dec 109 Im 7 lm


Article	L x H mm	€/lm	€/Pc	
PFROL 24A	2/4,5 X 30	9,91	26,76	
POLISHED BRASS self-adhesive thermo packed self-adhesive thermo packed bar length 0,93 lm - pack. 20 Pcs				
		packed	SELF PAC	
			SELF PAC €/Pc	

COLOURS

	1 CONTRACTOR OF
	1000
	10000
AC - Polished stainless steel AISI 304/1 4301-V2A	OL - Polished brass

PROFLOOR 24

POLISHED STAINLESS STEEL AISI 304/1.4301 AND POLISHED BRASS WITH SELF-ADHESIVE



1. Choose the suitable profile and cut it to the necessary length 2. Degrease, wash and clean the solid surface thoroughly **3.** Remove the protective paper from the adhesive. **4.** Lay the profile by applying pressure evenly over the whole surface without using a hammer






PROSLIDER **KL ALL**

ANODIZED SILVER ALUMINIUM

FLOORS

PROSLIDER KL ALL is a slide shape progressive transition terminal square suitable for connecting perfectly without steps two floor levels. The particular strength of the square allows to resist and bear heavy loads and frequent passages of manual trolleys and motor vehicles besides protecting the edge of the higher floor. The **PROSLIDER KL ALL** is especially used to connect LA Kerlite/Laminam and thin ceramic tiles to each other or else it is used with wood and/or a pre-existing floor. Available in anodized aluminium.

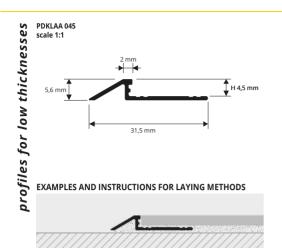



1. Choose the profile with the required finish. 2. Fill the profile cavity with adhesive and apply the adhesive onto the area of application. 3. Lay the "PROSLIDER KL ALL". 4. Align it flush with the floor/covering. 5. Use the adhesive to seal any empty interstices.


ANODIZED SILVER ALUMINIUM thermo packed bar length 2,7 lm - pack. 40 Pcs - 108 lm


Article	Hmm	€/lm	€/Pc
PDKLAA 045	4,5	6,51	17,58
COLOURS			

AA - Anodized silver alum.


PROCOVER 1045 ALL ANODIZED AND POLISHED

SILVER, CHROME AND GOLD ALUMINIUM





EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS





1. Choose "PROCOVER 1045 ALL" in the desired finish considering a side lap of 2/3 mm. 2. Fill the gap with single-pack silicone or with the adhesive used for laying the floor. 3. Bury the profile into the adhesive, making sure that both side laps of the profile rest on the

IMPORTANT: Take care of the external edges of the profile rest of the auminium "PROCOVER 1045 ALL". They must be protected from aggressive substances such as adhesives and sealants and from smoothing or scraping action.

ANODIZED SILVER ALUMINIUM thermo packed bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	Hmm	€/Im	€/Pc
PCRAA 1045	4,5	3,55	9,59

POLISHED CHROME/GOLD ALUMINIUM thermo packed

bar length 2,7 im - pack. 40 PCS - 108 im					
Article	Hmm	€/lm	€/Pc		
PCRBC 1045	4,5	6,10	16,47		
PCRBO 1045	4,5	6,10	16,47		
601 011PC					

COLOURS

AA - Anodized silver alum. BC - Polished chrome alum. BO - Polished gold alum.





FLOORS ex 1


PROCOVER

FLOORS


PROCOVER is a joint-cover profile in stainless steel (polished or brushed) with aluminium supports. It is applied at the end of laying two adjoining floors with the same height, having left a 6 - 24 mm gap between the two floors set in a thin bed of adhesive. It protects the outside edges of the floor/covering. It is easy to lay and attractive. The design of the profile with lower vertical arrowhead part allows excellent anchorage with the silicone/adhesive. The aluminium structure with the stainless steel lining provides it with a high level of resistance to cuts and deformation.

PROCOVER is a joint-cover profile in polished, chromed and antique brass. It is applied at the end of laying two adjoining floors with the same height, having left a 6 - 24 mm gap between the two floors set in a thin bed of adhesive. It protects the outside edges of the floor/covering. It is easy to lay and attractive. The design of the profile with lower vertical arrowhead part allows excellent anchorage with the silicone/adhesive.

POLISHED AND BRUSHED STAINLESS STEEL AISI 304/1.4301-V2A

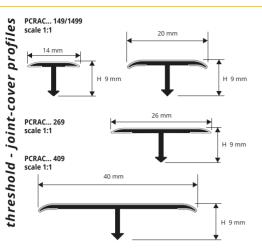

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS



1. Choose the "PROCOVER" with the width suitable for the gap between the two floors to be joined, taking into consideration 2/3 mm side lap. 2. Fill the gap with single-pack silicone or with the adhesive used for laying the floor. 3. Bury the profile into the adhesive, making sure that both side laps of the profile rest on the coverings to be joined.

PROCOVER

POLISHED, CHROMED AND ANTIQUE BRASS



POLISHED STAINLESS ST. AISI 304/1.4301-V2A with protective film - bar length 2,7 lm

(PCRAC 1499 - bar length 0,90 lm) - 4/10 mm			-	BLISTER
Article	Pcs/Pack	L x H mm	€/Im	€/Pc
PCRAC 149	40	14 X 9	10,86	29,32
PCRAC 1499	20	14 X 9	11,52	31,10
PCRAC 209	40	20 X 9	14,12	38,12
PCRAC 269	30	26 X 9	15,52	41,90
PCRAC 409	20	40 X 9	20,75	56,03








BRUSHED STAINLESS ST. AISI 304/1.4301-V2A with protective film - bar length 2,7 lm - 4/10 mm (PCRACS 1499 - bar length 0 90 lm - park 20 Prs)


(PCRACS 1499 - bar length 0,90 lm - pack. 20 Pcs)				
Article	Pcs/Pack	L x H mm	€/Im	€/Pc
PCRACS 149	40	14 X 9	13,71	37,02
PCRACS 1499	20	14 X 9	14,13	38,15
PCRACS 209	40	20 X 9	15,59	42,09
PCRACS 269	30	26 X 9	19,51	52,68
PCRACS 409	20	40 X 9	23,52	63,50

FCO

SUITABLE FOR USE IN CONTACT WITH FOODSTUFFS.

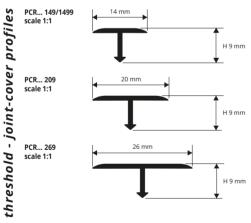

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS



1. Choose the "PROCOVER" with the width suitable for the gap between the two floors to be joined, taking into consideration 2/3 mm side lap. 2. Fill the gap with single-pack silicone or with the adhesive used for laying the floor. 3. Bury the profile into the adhesive, making sure that both side laps of the profile rest on the coverings to be joined.

Profiles in natural or polished brass may be subject to oxidation in environments with high degrees of humidity. Resulting marks may be easily removed by polishing the profiles with specific products to be found on sale such as Sidol, Smac and similar.

> PROGRESS® PROFILES



POLISHED BRASS thermo packed - bar length 2,7 Im (PCROL 1499 - bar length 0,90 Im - pack. 40 Pcs)

Article	Pcs/Pack	L x H mm	€/Im	€/Pc
PCROL 149	20	14 X 9	7,91	21,36
PCROL 1499	40	14 X 9	8,07	21,87
PCROL 209	20	20 X 9	11,96	32,29
PCROL 269	20	26 X 9	14,44	38,99

CHROMED BRASS (polished stainless st. effect) thermo packed bar length 2,7 Im - pack. 20 Pcs - 54 Im

Article	L x H mm	€/lm	€/Pc
PCROC 149	14 X 9	15,88	42,88
PCROC 209	20 X 9	18,48	49,90
PCROC 269	26 X 9	21,95	59,27



ANTIQUE BRASS thermo packed bar length 2.7 Im - pack. 20 Pcs - 54 Im

······			
Article	L x H mm	€/lm	€/Pc
PCROB 149	14 X 9	25,36	68,47
PCROB 209	20 X 9	28,70	77,49
PCROB 269	26 X 9	31,70	85,59
BRUSHED BRASS thermo bar length 2,7 lm - pack. 20			
Article	L x H mm	€/lm	€/Pc

	Article	LXHmm	€/Im	€/Pc	
0	PCROS 149	14 X 9	7,91	21,36	*
0	PCROS 209	20 X 9	11,96	32,29	*
\odot	PCROS 269	26 X 9	14,44	38,99	*

COLOURS



🧿 = News 2023

🖈 = Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed

Prices are referred to whole packs 10% increase for minimum orders of 10 pcs. 20% increase for orders of less than 10 pcs.



PROCOVER is a joint-cover profile in anodized aluminium. It is applied at the end of laying two adjoining floors with the same height, having left a 6 - 24 mm gap between the two floors set in a thin bed of adhesive. It protects the outside edges of the floor/covering. It is easy to lay and attractive. The design of the profile with lower vertical arrowhead part allows excellent anchorage with the silicone/adhesive.

PROCOVER

FLOORS

ANODIZED SILVER, DARK BRONZE ALUMINIUM



ANODIZED SILVER, DARK BRONZE ALUMINIUM thermo packed - bar length 2,7 lm


(PCRAA 1499 - bar	length 0,90 Im	- pack. 40 PCS)	-	DEISTER
Article	Pcs/Pack	L x H mm	€/lm	€/Pc
PCRAA 149	40	14 X 9	4,08	11,02
PCRDB 149	40	14 X 9	5,22	14,09
PCRAA 1499	40	14 X 9	4,83	13,04
PCRAA 209	40	20 X 9	4,37	11,80
PCRDB 209	40	20 X 9	5,67	15,31
PCRAA 269	40	26 X 9	5,43	14,66
PCRDB 269	40	26 X 9	7,07	19,09
PCRAA 409	20	40 X 9	7,97	21,52
PCRDB 409	20	40 X 9	10,37	28,00





AT - Anodized titanium alum. AB - Anodized bronze alum. AO - Anodized gold alum. Available on demand PCRAT_PCRAB and PCRAO Price: add +20% to the price of PCRAA.

* PCRAA - DB 149 curvable available

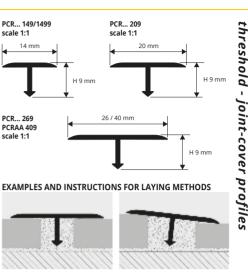

14 mr

PCR. 269 PCRAA 409 scale 1:1

1 Choose the "PROCOVER" with the width suitable for the gap between the two floors to be joined, taking into consideration 2/3 mm side lap. 2. Fill the gap with single-pack silicone or with the adhesive used for laying the floor. 3. Bury the profile into the adhesive, making sure that both side laps of the profile rest on the coverings to be joined.

PROCOVER WOOD is a joint-cover profile in aluminium covered with a very strong film available in 77 wooden finishes (72 on demand). It is applied at the end of laying two adjoining floors with the same height, having left a 6 - 24 mm gap between the two floors set in a thin bed of adhesive. It protects the outside edges of the floor/covering. It is easy to lay and attractive. The design of the profile with lower vertical arrowhead part allows excellent anchorage with the silicone/adhesive.

ECO BLISTER

ALUMINUM COVERED WOODEN FINISHES thermo packed bar length 2,7 lm - pack. 40 Pcs - 108 lm (L 26 mm - 54 lm) Article L x H mm €/lm €/Pc PCRA... 149 14 X 9 6.60 17.82


PCRA... 269 26 X 9 11,61 31,35 Available in the wood finishes: 05W - 11W - 28W - 29W - 30W. The code of the selected colour must be added to the article code Es.: PCRA.. 149 (chosen finish light oak) PCRA04W 149.

COLOURS


05W - Light oak (strip)	11W - Decapè bleached	28W - Aspen oak	29W - White oak	30W - Grey oak

PROCOVER WOOD

ALUMINIUM COVERED WITH PROTECTIVE FILM IN 77 WOODEN FINISHES (72 on demand)

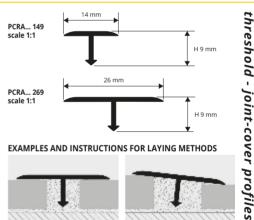


EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS




1. Choose the "PROCOVER" with the width suitable for the gap *b* choice the two floors to be joined, taking into consideration 2/3 mm side lap. **2.** Fill the gap with single-pack silicone or with the adhesive used for laying the floor. **3.** Bury the profile into the adhesive, making sure that both side laps of the profile rest on the coverings to be joined.

PROCOVER INSERT for inserting Procover profiles

VINYL RESIN / BLACK RUBBER

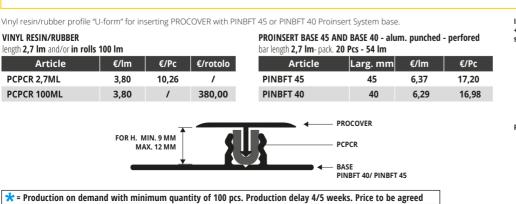



ΤL

All rights reserved by Progress Profiles. Printed in Italy 2028 6






PROPLATE

PROPLATE is a flat joint-cover profile with special profiled edges for perfect adherence to flooring. Made in stainless steel 1.4016 with a protective film and available with or without adhesive or for certain widths also in the punched version. Available in widths of 20 – 30 - 40 – 60 – 80 mm with protective film.

POLISHED STAINLESS 1.4016 STEEL SELF-ADHESIVE OR PUNCHED

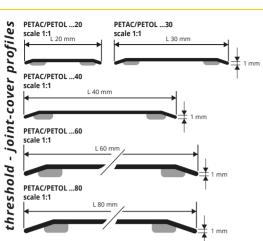

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS



1. Choose "PROPLATE" in the required width and material and 1. Choose "PROPLATE" in the required width and material and whether punched or with self-adhesive backing. 2. Cut the profile to the required length. When laying the self-adhesive proplate, clean, degrease and dry the surface, checking that the temperature for application is at least 15°. 3. Remove the protective paper from the adhesive and lay the profile correctly applying a uniform vertical pressure by hand without moving the punched version, align the profile and mark the position of the holes using the holes in the profile and reference. 5. Insert suitable screw anchors (usually Ø 3mm screws & 5x25mm screw anchors) 6. Align the profile and tighten the galvanised or brassed flathead screws.

PROPLATE

POLISHED BRASS

SELF-ADHESIVE OR PUNCHED

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS - joint-cover profiles threshold

1. Choose "PROPLATE" in the required width and material and

1. Choose "PROPLATE" in the required width and material and whether punched or with self-adhesive backing, 2. Cut the profile the required length. When laying the self-adhesive Proplate, Clean, degrease and dry the surface, checking that the temperature for application is at least 15°. 3. Remove the protective paper from the adhesive and lay the profile correctly applying a uniform vertical pressure by hand without moving the profile and without using iron/steel hammers. 4. When laying the punched version, align the profile and mark the position of the holes using the holes in the profile as reference. 5. Insert suitable screw anchors (usually Ø 3mm screws & 5x25mm screw anchors) 6. Align the profile and tighten the galvanised or brassed flathead screws

COLOURS





bar length 2,70 lm - pack. 20 Pcs - 54 lm (L 20/30mm - 108 lm) - 10				- 10/10 mn	1
	Article	Width	€/lm	€/Pc	
	PETOL 20A	20mm	9,24	24,95	
	PETOL 30A	30mm	9,49	25,62	
	PETOL 40A	40mm	11,99	32,37	
	PETOL 60A	60mm	21,00	56,70	*
	PETOL 80A	80mm	26,49	71,52	*

POLISHED STAINLESS 1.4016 ST. thermo packed - ADHESIVE

Article

Article

Article

PETAC 20A

PETAC 30A

PETAC 40A

PETAC 60A

PETAC 80A

PETAC 60

PETAC 80

PETAC 30F

PETAC 40F

bar length 2,70 lm - pack. 20 Pcs - 54 lm (L 20 - 30mm - 108 lm) - 10/10 mm

Width

20mm

30mm

40mm

60mm

80mm

POLISHED STAINLESS 1.4016 STEEL thermo packed - without holes

Width

60mm

80mm

PETAC 60A/80A/60/80 with 12/10 thickness available on demand PUNCHED POLISHED STAINLESS 1.4016 ST. with protective film

bar length 2,70 lm- pack. 20 Pcs - 54 lm (L 30mm - 108 lm) - 10/10 mm Width

30mm

40mm

bar length 2,70 lm - pack. 20 Pcs - 54 lm- 10/10 mm

€/lm

6,34

6,79

9,82

17,15

21.66

€/lm

15.06

19,55

€/lm

5 29

8 29

€/Pc

17.12

18,33

26,51

46,30

58.48

€/Pc

40.66

52,79

€/Pc

14 28

22 38

.....

POLISHED BRASS thermo packed WITHOUT HOLES bar length 2,70 lm - pack. 20 Pcs - 54 lm (L 20 mm - 108 lm) - 10/10 mm

Article	Width	€/lm	€/Pc	
PETOL 20	20mm	7,46	20,14	*
PETOL 60	60mm	19,18	51,79	*
PETOL 80	80mm	24,63	66,50	*

PETOL 60A/80A/60/80 with 13/10 thickness available on demand.

DOLICHED REACC with protoctive film DUNCHED

bar length 2,70 lm - pack. 20 Pcs - 54 lm (L 30 mm - 108 lm) - 10/10 mm						
Article	Width	€/lm	€/Pc			
PETOL 30F	30mm	7,72	20,84	*		
PETOL 40F	40mm	10,22	27,59	*		



POLISHED STAINLESS 1.4016 ST. thermo packed ADHESIVE bar length 0,93 Im- pack. 20 Pcs - 10/10 mm					
Article	Width	€/Pc			
PETAC 309AS	30mm	6,83			
PETAC 609AS	60mm	16,96			
PETAC 809AS	80mm	21,80			

POLISHED STAINLESS 1.4016 ST. thermo packed -SELF PACK PUNCHED WITH SCREWS bar length 0,93 lm- pack. 20 Pcs - 10/10 mm

Article	Width	€/Pc
PETAC 309FS	30mm	5,55

COLOURS

AC - Polished stainles steel 1.4016

PROPLATE is a flat joint-cover profile with special profiled edges for perfect adherence to flooring. Made in polished brass with a protective film and available with or without adhesive or for certain widths also in the punched version. Available in widths of 20 - 30 - 40 - 60 - 80 mm with protective film.

POLISHED BRASS thermo packed bar length 0,83 lm - pack. 20 Pcs - 1		SELF PACK	
Article	Width	€/Pc	
PETOL 308AS	30mm	9,10	*
PETOL 408AS	40mm	11,18	*
POLISHED BRASS thermo packed bar length 0,93 Im - pack. 20 Pcs - 1		SELF PACK	
Article	Width	€/Pc	
PETOL 309AS	30mm	10,12	
PETOL 309FS	30mm	8,79	
PETOL 409AS	40mm	13,00	
PETOL 409AS PETOL 409FS	40mm 40mm		*
		11,52	**
PETOL 409FS	40mm	11,52 19,15	

AS" at the end of the product code = Item with adhesive "FS" at the end of the product code = Punched Item

POLISHED BRASS thermo packed bar length 1,03 lm - pack. 20 Pcs - 10		SELF PACK	
Article	Width	€/Pc	
PETOL 3010AS	30mm	11,52	
PETOL 4010AS	40mm	13,99	
PETOL 4010FS	40mm	12,78	*

"AS" at the end of the product code = Item with adhesive "FS" at the end of the product code = Punched Item

POLISHED BRASS thermo packed bar length 1,66 lm - pack. 20 Pcs - 10		SELF PACK	
Article	Width	€/Pc	
PETOL 3016AS	30mm	18,19	*
PETOL 4016AS	40mm	23,09	*

PROGRESS®

* = Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed

Prices are referred to whole packs 10% increase for minimum orders of 10 pcs. 20% increase for orders of less than 10 pcs.



PROPLATE 80 ALZ is a new aluminium joint cover, threshold cover. It is very resistant and suitable for covering the expanding joint of two different supporting structures, or to connect a floor with an adjoining one of the same or different kind. Particularly used in Industrial field, in the malls, sport facilities and gyms equipped with wood and/or resin floors.

PROPLATE 80 ALZ

KNURLED ANODIZED SILVER ALUMINIUM

FLOORS



ANODIZED SILVER ALUMINIUM thermo packed ADHESIVE bar length 2.7 Im - pack. 20 Pcs - 54 Im (PETAA 80Z - 40.5 Im)

Article	Width mm	€/lm	€/Pc		
PETAA 80ZA	80	19,45	52,52		








ANODIZED SILVER ALUMINIUM thermo packed bar length 2.7 lm - pack. 20 Pcs - 54 lm (PETAA 80Z - 40.5 lm)

	'	1			- /
	Artic	le	Width mm	€/lm	€/Pc
PETAA	80Z		80	18,10	48,87

Punched version available on demand.

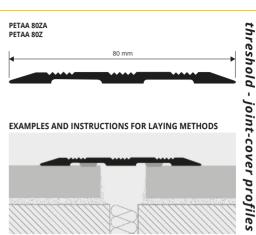

1. Choose "PROPLATE 80ALZ" model with or without sticker and cut it to the required length.

Adhesive version 2. Degrease, wash and clean accurately the solid floor. 3. Remove the protective label from the sticker (sticker model). **4.** Rest the square pressing evenly without hammering. Punched version

2. Perforate on one side and insert the nogs in the holes. 3. Fix and screw the square equipped with flared head screws suitable to the holes made.

PROCOVER 14PT is a small aluminium joint cover / threshold cover square. It is used to finish technically floors laid at the same level in ceramic tiles/ ceramics ceramics / wood. It covers eventual laying flaws and guarantees that the floors which are underneath expand enough. In Gold-Silk anodized Aluminium and Bronze with sticker.

PROCOVER 14PT

ΡΓΡΔΑ 14ΡΤΔ

PCRAO 14PTA PCRAB 14PTA scale 1:1

ANODIZED SILVER, GOLD AND BRONZE ALUMINIUM




ANODIZED ALUMINIUM WITH ADHESIVE thermo packed har length 2 7 lm - nack 40 Prs - 108 lm

Article	Width mm	€/Im	€/Pc	
PCRAA 14PTA	14	5,09	13,74	_
PCRAO 14PTA	14	5,09	13,74	*
PCRAB 14PTA	14	5,09	13,74	*

COLOURS

AA - Anodized silver alum.





1. Choose the superficial finish of "PROCOVER 14PT" and cut it to the required lenght. 2. Degrease, wash and clean accurately the solid floor. 3. Remove the protective label from the sticker. 4. Lay the square pressing evenly without hammering.

AVAILABLE MINIMUM QUANTITY 100 PCS by color and height



(Price to be agreed. Production delay 4/5 weeks)



🖈 = Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed

Prices are referred to whole packs 10% increase for minimum orders of 10 pcs. 20% increase for orders of less than 10 pcs.







PROSOL 18-30-35-40 in steel are self-adhesive joint - covers in stainless steel 1.4016 available in various widths. They are used to join floors of the same or differing material and thickness. The rounded shape also allows the profile to be used to edge shallow floors max. 5 mm thick. **PROSOL** is normally used to cover flaws and defects created during laying of ceramic/wood/parquet floors by covering the joint/threshold. **PROSOL** is recommended for all sorts of public environments: hotels, offices, shops and private dwellings; it guarantees an impeccable and attractive finish.



STAINLESS ST. 1.4016 with adhesive thermo packed bar length 2,7 lm - pack. 40 Pcs - 108 lm (L 35/40 mm - 54 lm)						
Article	Width-thick.	€/lm	€/Pc			
PLSAC 18A	18 mm - 10/10	5,58	15,07			
PLSAC 30A	30 mm - 10/10	6,13	16,55			
PLSAC 35A	35 mm - 10/10	6,91	18,66			
PLSAC 40A	40 mm - 12/10	9,66	26,08			
STAINLESS ST. 1.4016 with adhesive thermo packed - bar length 0,83 Im - pack. 20 Pcs						
Article	Width-thick.	:	€/Pc			
PLSAC 308A	30 mm - 10/10	0	5,10			
PLSAC 358A	35 mm - 10/10)	5,74			
On demand 0,73 or 0 agreed. Production de		uantity and p	prices to be			
STAINLESS ST. 1.4016 thermo packed - bar le		20 Pcs	ECO BLISTER			
Article	Width-thick.		€/Pc			
PLSAC 189A	18 mm - 10/10)	6,07			
STAINLESS ST. 1.4016 with adhesive thermo packed - bar length 0,93 Im - pack. 20 Pcs						
Article	Width-thick.		€/Pc			
PLSAC 309A	30 mm - 10/10)	5,69			

35 mm - 10/10


el ati	/	
	7	
TTA		Mr. A.L.


STAINLESS ST. 1.4016 thermo packed - bar ler		cs SELF PACK	
Article	Width-thick.	€/Pc	
PLSAC 308AS	30 mm - 10/10	6,38	*
PLSAC 358AS	35 mm - 10/10	6,76	*
On demand 0,73 or 0,6	63 lm bar lenght (quar	tity and prices to be	

On demand 0, 73 or 0,63 Im bar lenght (quantity and prices to be agreed. Production delay 4/5 weeks).

Article	Width-thick.	€/Pc	
PLSAC 309AS	30 mm - 10/10	7,02	
PLSAC 359AS	35 mm - 10/10	7,54	
PLSAC 409AS	40 mm - 12/10	10,14	
	ength 1,03 lm - pack. 20 Pcs		SELF PACK
		€/Pc	SELF PACK
hermo packed - bar le	ength 1,03 lm - pack. 20 Pcs	€/Pc 7,73	SELF PACK
hermo packed - bar le Article PLSAC 3010AS TAINLESS ST. 1.4016	ength 1,03 lm - pack. 20 Pcs Width-thick. 30 mm - 10/10		SELF PACK
hermo packed - bar le Article PLSAC 3010AS TAINLESS ST. 1.4016	with adhesive		PACK
Article PLSAC 3010AS STAINLESS ST. 1.4016 Shermo packed - bar le	ength 1,03 Im - pack. 20 Pcs Width-thick. 30 mm - 10/10 with adhesive ength 1,66 Im - pack. 20 Pcs	7,73	PACK

PLSAC 18A/189A scale 1:1 PLSAC 30A/3010AS/309A/309AS/308A/308AS/3016AS scale 1:1 2,8+3 mm PLSAC 35A/359A/359A/358A/358AS scale 1:1 3,1 mm PLSAC 40A/409AS scale 1:1 40 mm 3,8+4 40 mm





Choose the suitable profile and cut it to the necessary length.
 Degrease, wash and clean the solid surface thoroughly.
 Remove the protective paper from the adhesive.
 Lay the profile by applying pressure evenly over the whole surface without using a hammer.


COLOURS

PLSAC 359A



On demand hand-brushed stainless steel (Prices to be agreed. Production delay 4/5 weeks)

6,52

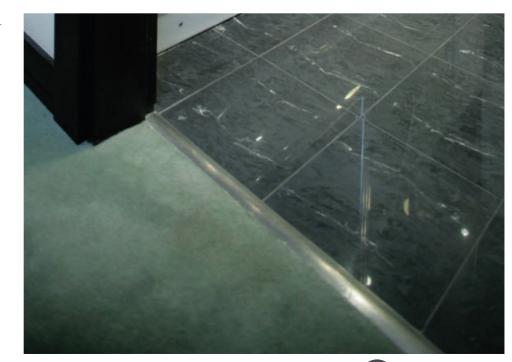

***** = Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed

Prices are referred to whole packs, 10% increase for minimum orders of 10 Pcs, 20% increase for orders of less than 10 Pcs.



PROSOL

18-30-35-40

STAINLESS STEEL 1.4016 WITH SELF-ADHESIVE WITH PROTECTIVE FILM




PROSOL 30-35-40


PUNCHED STAINLESS STEEL 1.4016 WITH PROTECTIVE FILM

scale 1:1

FLOORS

PLSAC 30F/308F/309F/308FS/309FS/3010FS/3016FS





*

STAINLESS ST. 1.4016 punched - with protective film bar length 2,7 lm - pack. 20 Pcs - 54 lm (L 30 mm - 108 lm)

Article	Width-thick.	€/lm	€/Pc
PLSAC 30F	30 mm - 10/10	4,66	12,58
PLSAC 35F	35 mm - 10/10	5,55	14,99
PLSAC 40F	40 mm - 12/10	8,14	21,98

ECO BLISTER
€/Pc
3,89
4,60

STAINLESS ST. 1.4016 punched thermo packed bar length 0,93 Im - pack. 20 Pcs			
Article	Width-thick.	€/Pc	
PLSAC 309F	30 mm - 10/10	4 34	

35 mm - 10/10

5,17

*

*

....


PROSOL 30-35-40 in steel are punched joint - covers in stainless steel 1.4016 available in various widths. They are used to join floors of the same or differing material and thickness. The rounded shape also allows the profile to be used to edge shallow floors max. 5 mm thick. **PROSOL** is normally used to cover flaws and defects created during laying of ceramic/wood/parquet floors by covering the joint/threshold. **PROSOL** is recommended for all sorts

of public environments: hotels, offices, shops and private dwellings; it guarantees an impeccable and attractive finish.

STAINLESS ST. 1.4016 punched thermo packed - bar len			SELF PACK
Article	Width-thick.	€/Pc	
PLSAC 308FS	30 mm - 10/10	5,24	
PLSAC 358FS	35 mm - 10/10	5,87	*
STAINLESS ST. 1.4016 punched thermo packed - bar len			SELF PACK
Article	Width-thick.	€/Pc	
PLSAC 309FS	30 mm - 10/10	5,69	
PLSAC 359FS	35 mm - 10/10	6,46	*
PLSAC 409FS	40 mm - 12/10	8,99	*
STAINLESS ST. 1.4016 punched thermo packed - bar len			SELF PACK
Article	Width-thick.	€/Pc	
PLSAC 3010FS	30 mm - 10/10	6,31	
STAINLESS ST. 1.4016 punched thermo packed - bar len			SELF
Article	Width-thick.	€/Pc	
PLSAC 3016FS	30 mm - 10/10	9,45	
PLSAC 3016FS PLSAC 3516FS	30 mm - 10/10 35 mm - 10/10	9,45 11,18	*

© 2023 All nights reserved by Progress Profiles. Printed in Unity

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS



Choose the suitable profile and cut it to the necessary length
 Mark the position of the holes using the existing holes in the

Choose the suitable profile and cut it to the necessary length.
 Mark the position of the holes using the existing holes in the profile as reference.
 Insert the screw anchors into the drilled holes.
 Fix the profile using flathead screws suitable for the relative slots in the profile.

COLOURS

PLSAC 359F

AC - Polished stainless Steel 1.4016

On demand hand-brushed stainless steel (Prices to be agreed. Production delay 4/5 weeks)



*= Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed

Prices are referred to whole packs, 10% increase for minimum orders of 10 Pcs, 20% increase for orders of less than 10 Pcs.



PROSOL 18-30-35-40 in brass are self-adhesive joint - covers in polished brass available in various widths. They are used to join floors of the same or differing material and thickness. The rounded shape also allows the profile to be used to edge shallow floors max. 5 mm thick. **PROSOL** is normally used to cover flaws and defects created during laying of ceramic/wood/parquet floors by covering the joint/threshold. **PROSOL** is recommended for all sorts of public environments: hotels, offices, shops and private dwellings; it guarantees an impeccable and attractive finish.



POLISHED BRASS with adhesive therm

bar length 2,7 lm - pack.	40 Pcs - 108 lm (L	35/40mm -	54 lm)	
Article	Width-thick.	€/lm	€/Pc	
PLSOL 18A	18 mm - 10/10	8,29	22,38	
PLSOL 30A	30 mm - 10/10	8,93	24,11	
PLSOL 35A	35 mm - 10/10	10,96	29,59	*
PLSOL 40A	40 mm - 10/10	20,52	55,40	*

no packed (L 35/40mm - 54 lm)			POLISHED BRASS with a bar length 0,83 lm - pack.		
	€/Im	€/Pc		Article	Width-
0	8,29	22,38		PLSOL 308AS	30 mm ·
0	8,93	24,11		PLSOL 358AS	35 mm -
0	10,96	29,59	*		



nermo packed

0		
Article	Width-thick.	€/Pc
PLSOL 308AS	30 mm - 10/10	8,57
PLSOL 358AS	35 mm - 10/10	10,39

SELF

*


€/Pc

9,33

POLISHED BRASS with adhesive thermo packed


bar length 0,93 lm - pack. 20 Pcs Article

PLSOL 309AS



scale 1:1

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS



Choose the suitable profile and cut it to the necessary length.
 Degrease, wash and clean the solid surface thoroughly.
 Remove the protective paper from the adhesive.
 Lay the profile by applying pressure evenly over the whole surface without using a hammer.

POLISHED BRASS with adhesive thermo packed bar length 0,83 lm - pack. 20 Pcs	-	ECO BLISTER
--	---	----------------

Article	Width-thick.	€/Pc	
PLSOL 308A	30 mm - 10/10	7,37	*

On demand 0,73 or 0,63 lm bar lenght (quantity and prices to be agreed. Production delay 4/5 weeks).

POLISHED BRASS with adhesive thermo packed ECO BLISTER bar length 0,90 lm - pack. 20 Pcs

Article	Width-thick.	€/Pc
PLSOL 189A	10 mm - 10/10	8,57

POLISHED BRASS with a bar length 0,93 lm - pack.	ed eco BLISTER	
Article	Width-thick.	€/Pc
PLSOL 309A	30 mm - 10/10	8,29
PLSOL 359A	35 mm - 10/10	10,19
PLSOL 409A	40 mm - 10/10	18,96

POLISHED BRASS with bar length 1,03 lm - pac	adhesive thermo pac k. 20 Pcs	ked eco
Article	Width-thick.	€/Pc
PLSOL 3010A	30 mm - 10/10	9,21
POLISHED BRASS with bar length 1,66 lm - pac	adhesive thermo pac k. 20 Pcs	ked eco


Article PLSOL 3016A


hesive thermo pacl) Pcs		R	COLO
Width-thick.	€/Pc		
30 mm - 10/10	14,81	*	(

OURS

*

OL - Polished brass

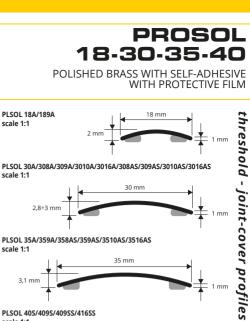



Width-thick.

30 mm - 10/10

Article	Width-thick.	€/Pc
PLSOL 3010AS	30 mm - 10/10	10,46
PLSOL 3510AS	35 mm - 10/10	12,72

POLISHED BRASS with a bar length 1,66 lm - pack.	ked SELF PACK	
Article	Width-thick.	€/Pc
PLSOL 3016AS	30 mm - 10/10	16,72

PLSOL 3016AS	30 mm - 10/10	16,72	*
PLSOL 3516AS	35 mm - 10/10	20,43	- e -
PLSOL 4016AS	40 mm - 10/10	36,26	*

🖈 = Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed

Prices are referred to whole packs, 10% increase for minimum orders of 10 Pcs, 20% increase for orders of less than 10 Pcs.




PROSOL 30-35-40

PUNCHED POLISHED BRASS WITH PROTECTIVE FILM


FLOORS

PLSOL 30F/308F/309F/3010F/3016F/308FS/309FS/3010FS/3016FS







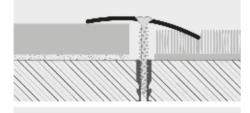



Choose the suitable profile and cut it to the necessary length.
 Mark the position of the holes using the existing holes in the profile as reference.
 Insert the screw anchors into the drilled holes.
 Fix the profile using flathead screws suitable for the relative slots in the profile.

PROGRESS® PROFILES

	/	1
	\$	111
-	M	11/1
25	- And	11

PROSOL 30-35-40 in brass are punched joint - covers in polished brass available in various widths. They are used to join floors of the same or differing material and thickness. The rounded shape also allows the profile to be used to edge shallow floors max. 5 mm thick. **PROSOL** is normally used to cover flaws and defects created during laying of ceramic/wood/parquet floors by covering the joint/threshold. **PROSOL** is recommended for all sorts of public

environments: hotels, offices, shops and private dwellings; it guarantees an impeccable and attractive finish.

ECO BLISTER

ECO BLISTER PLSOL 3510FS

POLISHED BRASS punched with protective film

bar length 2,7 lm - pack. 40 Pcs - 108 lm (L 35/40mm - 54 lm)					
	Article	Width-thick.	€/lm	€/Pc	
	PLSOL 30F	30 mm - 10/10	7,17	19,36	-
	PLSOL 35F	35 mm - 10/10	9,14	24,68	*
	PLSOL 40F	40 mm - 10/10	18,69	50,46	*

POLISHED BRASS punct bar length 0,83 lm - pack.	d ECO BLISTER	
Article	Width-thick.	€/Pc
PLSOL 308F	30 mm - 10/10	5,96

POLISHED	BRASS	punch	ned	thermo	packed	
har longth (02 Im	nack	20	Dec		

bui ichgui 0,35 illi puck.	20103		
Article	Width-thick.	€/Pc	
PLSOL 309F	30 mm - 10/10	6,68	*
PLSOL 359F	35 mm - 10/10	8,50	*
PLSOL 409F	40 mm - 10/10	16,60	*

POLISHED BRASS	punched thermo packed
bar length 1,03 lm	- pack. 20 Pcs

Article	Width-thick.	€/Pc	
PLSOL 3010F	30 mm - 10/10	7,44	_;
POLISHED BRASS pu bar length 1,66 lm - p	unched thermo packed back. 20 Pcs	ECO BLIST	TER

Article	Width-thick.	€/Pc	
PLSOL 3016F	30 mm - 10/10	11,95	*

COLOURS



OL - Polished brass



POLISHED BRASS punched w thermo packed - bar leng			ĸ
Article	Width-thick.	€/Pc	
PLSOL 308FS	30 mm - 10/10	7,51	*
PLSOL 358FS	35 mm - 10/10	9,27	*
On demand 0,73 or 0,6		uantity and prices to be	

POLISHED BRASS punched thermo packed - bar le			SELF PACK
Article	Width-thick.	€/Pc	
PLSOL 309FS	30 mm - 10/10	8,23	*
PLSOL 359FS	35 mm - 10/10	10,19	
PLSOL 409FS	40 mm - 10/10	19,12	*
POLISHED BRASS punched thermo packed - bar le			SELF PACK
Article	Width-thick.	€/Pc	
PLSOL 3010FS	30 mm - 10/10	7,44	*

POLISHED BRASS punched with thermo packed - bar leng			LF .CK
Article	Width-thick.	€/Pc	
PLSOL 3016FS	30 mm - 10/10	14,33	*
PLSOL 3516FS	35 mm - 10/10	17,71	*
PLSOL 4016FS	40 mm - 10/10	33,58	*

35 mm - 10/10

11,32



PROSOL 30-35-40 are self-adhesive or punched joint - covers in polished brass available in various widths. They are used to join floors of the same or differing material and thickness. The rounded shape also allows the profile to be used to edge shallow floors max. 5 mm thick. **PROSOL** is normally used to cover flaws and defects created during laying of ceramic/wood/parquet floors by covering the joint/threshold. **PROSOL** is recommended for all sorts of public environments: hotels, offices, shops and private dwellings; it guarantees an impeccable and attractive finish.

PROSOL 30.35.40

ANODIZED GOLD AND SILVER ALUMINIUM WITH SELF-ADHESIVE AND PUNCHED



ANODIZED ALUMINIUM with adhesive thermo packed orth 2 7 lm - nack 40 Pcs - 108 lm

bai lengti 2,7 mi - pack	. 40 FCS - 100 IIII		
Article	Width-thick.	€/Im	€/Pc
PLS 30A	30 mm - 1,3	5,64	15,23
PLS 35A	35 mm - 1,5	6,78	18,31
PLS 40A	40 mm - 2	7,92	21,38



ANODIZED ALUMINIUM punched thermo packed th 2 7 lm - nack 40 Pcs - 108 lm

bai icligiti 2,7 mi - pack.	40103-100111		
Article	Width-thick.	€/lm	€/Pc
PLS 30F	30 mm - 1,3	4,08	11,02
PLS 35F	35 mm - 1,5	5,24	14,15
PLS 40F	40 mm - 2	6,44	17,39

Available in the colours: AA - AO (AB, AT, CH and SB available on demand with a minimum quantity order of 100 pcs). The code of the selected colour must be added to the article code. E.g.: PLS... 30A (chosen finish anod. silver) PLSAA 30A.

ANODIZED ALUMINIU thermo packed - bar le	M with adhesive ngth 0,83 lm - pack. 20 Pcs	SELF PACK
Article	Width-thick.	€/Pc
PLS 308AS	30 mm - 10/10	5,69
On demand 0,73 or 0, agreed. Production de	63 lm bar lenght (quantity a lay 4/5 weeks).	and prices to be
ANODIZED ALUMINIU thermo packed - bar le	M with adhesive ngth 0,93 lm - pack. 20 Pcs	SELF PACK
Article	Width-thick.	€/Pc
PLS 309AS	30 mm - 10/10	6,37
ANODIZED ALUMINIU thermo packed - bar le Article PLS 3010AS	M with adhesive ngth 1,03 lm - pack. 20 Pcs Width-thick. 30 mm - 10/10	€/Pc
ANODIZED ALUMINIU		6,97
Article	Width-thick.	€/Pc
PLS 3016AS	30 mm - 10/10	11,06
ANODIZED ALUMINIU thermo packed - bar le	M with adhesive ngth 0,93 lm - pack. 20 Pcs	ECO BLISTER
Article	Width-thick.	€/Pc
PLS 309A	30 mm - 10/10	5,24

ANODIZED ALUM. punched thermo packed - bar len			F K
Article	Width-thick.	€/Pc	
PLS 308FS	30 mm - 10/10	4,83	*

ANODIZED ALUM. punched with screws and screw anchors

ι	nermo packed - bar len	gtn 0,93 im - pack. 20 P	CS PACE	<
	Article	Width-thick.	€/Pc	
	PLSAA 309FS	30 mm - 10/10	5,24	*

PLS 3016FS	30 mm - 10/10	8.90	
		0,50	
hermo packed - bar leng Article	th 0,93 lm - pack. 20 Pc Width-thick.	s ← ECC BLI	STER


Available in the colours: AA - AO (AB, AT, CH and SB available on demand with a minimum quantity order of 100 pcs). The code of the selected colour must be added to the article code. E.g.: PLS... 309A (chosen finish anod. silver) PLSAA 309A.


COLOURS

ON DEMAND MINIMUM 100 PCS by color and height


1000		
AA - Anodized silver alum.	AO - Anodized gold alum.	A
		(Pr


AB - Anodized bronze alum.	AT - Anodized titanium alum.	CH - Anod. champagne alum.	SB - Anod. sand aluminium	
rices to be agreed. Production delay 4/5 weeks)				

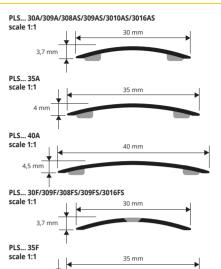



EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS






1. Choose the suitable profile and cut it to the necessary length.

Adhesive version 2. Degrease, wash and clean the solid surface thoroughly. Degrease, wash and clean the solid surface thoroughly.
 Remove the protective paper from the adhesive. 4. Lay the profile by applying pressure evenly over the whole surface without using a hammer.
 Punched version

2. Mark the position of the holes using the existing holes in the profile as reference. 3. Insert the screw anchors into the drilled holes. 4. Fix the profile using flathead screws suitable for the relative slots in the profile. FLOORS



Prices are referred to whole packs, 10% increase for minimum orders of 10 Pcs, 20% increase for orders of less than 10 Pcs.





PROLEVALL 25-35-38-50 are joint - covers in anodized aluminium with gold, silver and bronze finish in various widths with a more or less knurled flat surface, available with self-adhesive backing or punched in various lengths. They are used to join floors of the same or differing material e.g. ceramic tiles, wood, marble, parquet or

laminated, mainly to cover flaws created during laying or expansion joints. The chamfered edges ensure perfect adhesion to the floor, while the flat top allows perfect door closure. Recommended for dwellings and public environments with intense pedestrian traffic. Easy to lay; the highstrength elastomer adhesive ensures an excellent grip.



ANODIZED ALUMINIUM with adhesive thermo packed bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	Width mm	€/Im	€/Pc
PLV 25A	25	5,64	15,23
PLV 35A	35	6,70	18,09
PLV 38A	38	7,32	19,76
PLV 50A	50	8,87	23,95

Available in the colours: AA - AO (AB, AT, CH and SB available on demand with a minimum quantity order of 100 pcs). The code of the selected colour must be added to the article code. E.g.: PLV... 25A (chosen finish anod. silver) PLVAA 25A

ANODIZED ALUMINIUM with adhesive SELF

thermo packed - bar length 0,93 lm - pack. 20 Pcs				
Article	Width mm	€/Pc		
PLV 259AS	25	6,37		
PLV 359AS	35	7,32		
PLV 389AS	38	7,97		
PLV 509AS	50	9,51		

Available in the colours: AA - AO (AB, AT, CH and SB available on demand with a minimum quantity order of 100 pcs). The code of the selected colour must be added to the article code.

© 2028. All dights reserved by Progress Profiles. Printed in Italy

E.g.: PLV... 259AS (chosen finish anod. silver) PLVAA 259AS.

ANODIZED ALUMINIUM thermo packed - bar len		, ––	SELF PACK
Article	Width mm	€/Pc	
PLV 3510AS	35	8,03	*
ANODIZED ALUMINIUM with adhesive thermo packed - bar length 1,66 lm - pack. 20 Pcs FACK			
Article	Width mm	€/Pc	
PLV 3516AS	35	12,87	*



ANODIZED ALUMINIUM punched thermo packed bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	Width mm	€/Im	€/Pc
PLV 25F	25	4,16	11,23
PLV 35F	35	5,24	14,15
PLV 38F	38	5,83	15,74
PLV 50F	50	7,61	20,55

Available in the colours: AA - AO (AB, AT, CH and SB available on demand with a minimum quantity order of 100 pcs). The code of the selected colour must be added to the article code. E.g.: PLV... 25F (chosen finish anod. silver) PLVAA 25F

OFF-CENTRE HOLES ON DEMAND

ANODIZED ALUM. punched with screws and screw anchors SELF PACK thermo packed - bar length 0,93 lm - pack. 20 Pcs

Article	Width mm	€/Pc	
PLV 259FS	25	5,30	
PLV 359FS	35	6,24	
PLV 389FS	38	6,57	
PLV 509FS	50	8,12	*

PLV... 259FS-359FS available in the colours: AA - AO (AB, AT, CH and SB available on demand with a minimum quantity order of 100 pcs). The code of the selected colour must be added to the article code. E.g.: PLV... 359FS (chosen finish anod. silver) PLVAA 359FS

ANODIZED ALUM. punched thermo packed - bar length 1		nchors	ELF ACK
Article	Width mm	€/Pc	
PLV 3510FS	35	6,85	*
ANODIZED ALUM. punched thermo packed - bar length 1		ichors SI	ELF ACK
Article	Width mm	€/Pc	
PLV 3516FS	35	10,65	*

The code of the selected colour must be added to the article code. E.g.: PLV... 3510AS (chosen colour anodized gold alum.) PLVAO 3510AS

COLOURS	
AA - Anodized silver alum.	AO - Anodized gold alum.

AB - Anodized bronze alum.	AT - Anodized titanium alum.	CH - Anod, champagne alum,	SB - Anod, sand alumini

(Prices to be agreed. Production delay 4/5 weeks)

ON DEMAND MINIMUM 100 PCS by color and height

1. Choose the suitable profile and cut it to the necessary length. Adhesive version

Degrease, wash and clean the solid surface thoroughly.
 Remove the protective paper from the adhesive. 4. Lay the profile by applying pressure evenly over the whole surface without using a hammer.

ium

Punched version

2. Mark the position of the holes using the existing holes in the profile as reference. **3.** Insert the screw anchors into the drilled holes. **4.** Fix the profile using flathead screws suitable for the relative screw in the profile. relative slots in the profile.

ANODIZED GOLD AND SILVER ALUMINIUM WITH SELF-ADHESIVE AND PUNCHED 25 mm threshold -PLV... 359A PLV... 3510A joint-cover profiles PLV... 3516A 231 38 mr

PLV... 25A PLV... 259A

scale 1:1

PLV 35A

scale 1:1


PLV... 38A PLV... 389A

scale 1.1 PLV... 509A


scale 1:1


PROLEVALL


25.35.38.50

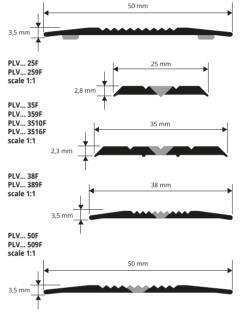

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS



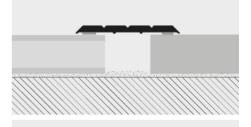

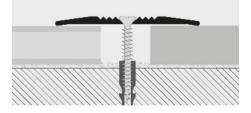



99

🖈 = Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed

Prices are referred to whole packs, 10% increase for minimum orders of 10 Pcs, 20% increase for orders of less than 10 Pcs.


A

FLOORS

PROMOQUETTE

PROMOQUETTE is an anodized aluminium rounded edging profile with tap-down edge, which is ideal for the clean-cut, elegant finishing of carpeted floors. The carpeting is inserted inside the curved/rounded section, which is then pressed down until the carpeting is secured, thereby also protecting the edge. **PROMOQUETTE** ensures a perfect finish, covering any flaws created during laying and protecting the edge. Easy to lay with the self-adhesive backing ensuring perfect adherence to the floor.

ANODIZED GOLD AND SILVER ALUMINIUM WITH OR WITHOUT SELF-ADHESIVE

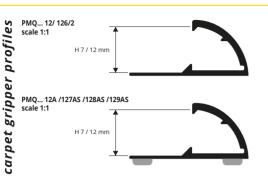

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS



 Cut the profile to the necessary length. 2. Fix the "PROMOQUETTE" to the floor using screws/nails or double-sided adhesive tape.
 Insert the carpeting into the curved side with the necessary tension. 4. Apply pressure evenly over the edge of the profile until it closes over and secures the carpeting.



ANODIZED GOLD and SILVER ALUMINUM ADHESIVE thermo nacked - bar length 2 7 Jm - pack 40 Prs - 108 Jm

uleinio packeu - bai lengui 2,7 mi - pack. 40 rts - 100 mi				
Article	Hmm	€/Im	€/Pc	
PMQ 12A	7/12	5,76	15,55	
PMQ 12	7/12	4,42	11,93	
"^" at the end of the product code = Item with adhesive				

A valiable in the colours: AA - AO. (AB available on demand with a minimum quantity order of 100 pcs). The code of the selected colour must be added to the article code. E.g.: PMQ... 12A (chosen colour Anodized gold alum.) PMQAO 12A.

ANODIZED GOLD and SILVER ALUMINUM


thermo packed - bar length 0,67 lm - pack. 2 Pcs				
Article	H mm	€/Pc		
PMQ 126/2	7/12	7,78		



Article	Hmm	€/Pc
PMQAA 127AS	7/12	5,30
		SELF PACK
ANODIZED GOLD, SILVER and BRON thermo packed - bar length 0,83 l Article		

ANODIZED GOLD, SILVER and BRONZE ALUM. ADHESIVE SELF thermo packed - bar length 0,93 Im - pack. 20 Pcs				
Article	H mm	€/Pc		
PMQ 129AS	7/12	6,51	*	

COLOURS



ON DEMAND MINIMUM 100 PCS by color and height




PROMOQUETTE FIX s a profile in anodized aluminium made as a terminal profile to edge carpeted floors held


under tension or simply laid with double-sided adhesive tape. Two versions are available: notched or with holes/ notches for laying under tension and then permanently fixed with screws/nails; or the punched version to edge without holding under tension. **PROMOQUETTE FIX** ensures an impeccable finish to the edge of carpeting that is

PROMOQUETTE FIX

ANODIZED GOLD AND SILVER ALUMINIUM PUNCHED OR NOTCHED

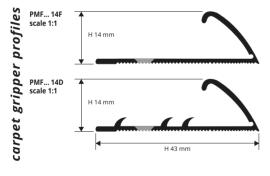

EXAMPLES OF LAYING





not always perfectly cut. It speeds up laying time and the result is attractive.

ANODIZED GOLD and SILVER ALUMINIUM

unermo packeu - bar length Z,7 im - pack. Zu PCS - 54 im				
Article	Hmm	€/lm	€/Pc	
PMF 14F	14	4,97	13,42	-
PMFAA 14D	14	7,51	20,28	*
"D" at the end of the product code = Item with notched				

"F" at the end of the product code = Punched Item

Available in the colours: AO - AA. (AB available on demand with a minimum quantity order of 100 pcs). The code of the selected colour must be added to the article code. E.g.: PMF... 14F (chosen colour anodized gold alum.) PMFAO 14F.

INSTRUCTIONS FOR LAYING

1. Cut the profile to the necessary length. **2.** Fix the "PROMOQUETTE FIX" to the floor using screws/nails. **3.** Insert the carpeting into the curved side with the necessary tension. **4.** Apply pressure evenly over the edge of the profile until it closes over and secures the carpeting.







(Prices to be agreed. Production delay 4/5 weeks)

PROGRESS® PROFILES


100

*= Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed

Prices are referred to whole packs, 10% increase for minimum orders of 10 Pcs, 20% increase for orders of less than 10 Pcs.



PROMOQUETTE GIN is a profile in anodized aluminium with tap-down edge for edging or joining floors in carpeting, PVC, linoleum, ceramic tiles/wood, etc. Two versions are available: punched for laying under tension and then permanently fixed with screws/nails or the adhesive version for laying with glue and which can be taken up if required. **PROMOQUETTE GIN** guarantees an impeccable finish and offers the dual function of both joining and of covering any flawed edges of the floors. It speeds up laying time and the result is attractive.

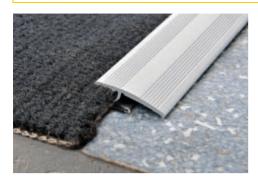

ANODIZED GOLD, SILVER AND BRONZE ALUMINIUM ADHESIVE thermo packed - bar length 2,7 lm - pack. 20 Pcs - 54 lm

alemo puelea barlenga 2,7 m paele 2016 01 m					
Art	icle	H mm	€/lm	€/Pc	
PMGAA 813	4	8/13	9,52	25,70	_
PMGAO 813/	4	8/13	9,52	25,70	
PMGAB 813	4	8/13	9,52	25,70	
PMGAT 813A	1	8/13	9,52	25,70	*
PMGCH 813	4	8/13	9,52	25,70	*
PMGSB 813A	L	8/13	9,52	25,70	*

Available in the colours: AO - AA - AB (AT, CH and SB available on demand with a minimum quantity order of 100 pcs). The code of the selected colour must be added to the article code. E.g.: PMG... 813F (chosen colour anodized gold alum.) PMGAO 813F



ANODIZED GOLD, SILVER AND BRONZE ALUMINIUM PUNCHED mo packed - bar length 2,7 lm - pack. 20 Pcs - 54 lm

thermo packed - bai lengui 2,7 mi - pack. 20 FCS - 54 mi			
Hmm	€/lm	€/Pc	
8/13	7,51	20,28	
8/13	7,51	20,28	
8/13	7,51	20,28	
8/13	7,51	20,28	*
8/13	7,51	20,28	*
8/13	7,51	20,28	*
	H mm 8/13 8/13 8/13 8/13 8/13	H mm €/Im 8/13 7,51 8/13 7,51 8/13 7,51 8/13 7,51 8/13 7,51 8/13 7,51 8/13 7,51	H mm €/Im €/Pc 8/13 7,51 20,28 8/13 7,51 20,28 8/13 7,51 20,28 8/13 7,51 20,28 8/13 7,51 20,28 8/13 7,51 20,28 8/13 7,51 20,28

COLOURS


AA - Anodized silver alum. AO - Anodized gold alum. AB - Anodized bronze alum. ON DEMAND MINIMUM 100 PCS by color and height

AT - Anodized titanium alum. CH - Anodized champagne alum. SB - Anodized sand alum. (Prices to be agreed. Production delay 4/5 weeks)

PROMOQUETTE

FLOORS

ANODIZED GOLD, SILVER AND BRONZE ALUMINIUM WITH SELF-ADHESIVE AND PUNCHED

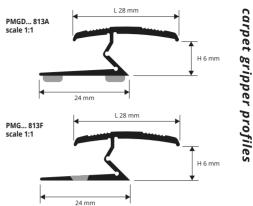

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS






1. Cut the profile to the necessary length. 2. Fix the "PROMOQUETTE GIN" to the floor using screws/nails or two-sided adhesive tape. 3. Lay the required floor, inserting the carpeting, PVC, linoleum, ceramic tile or wood under the upper curved part. 4. Apply pressure evenly on the edges of the profile until they close and secure the flooring on both sides.

🖈 = Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed

Prices are referred to whole packs, 10% increase for minimum orders of 10 Pcs, 20% increase for orders of less than 10 Pcs.






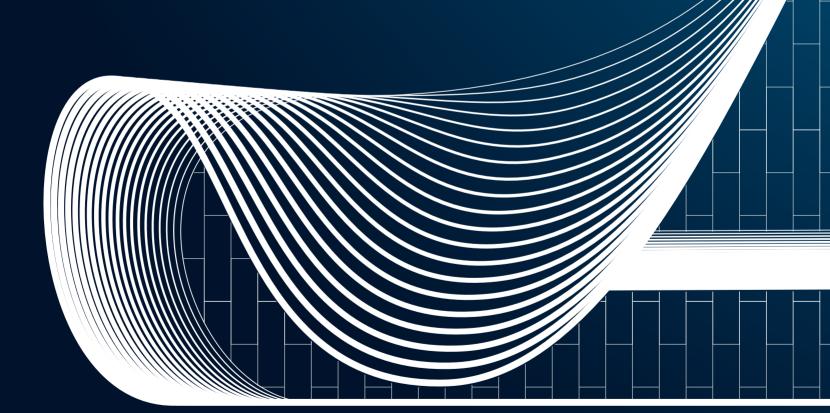

An interpretation of: Heydar Aliyev Cultural Center, Zaha Hadid, BAKU (Azerbaijan), 2012



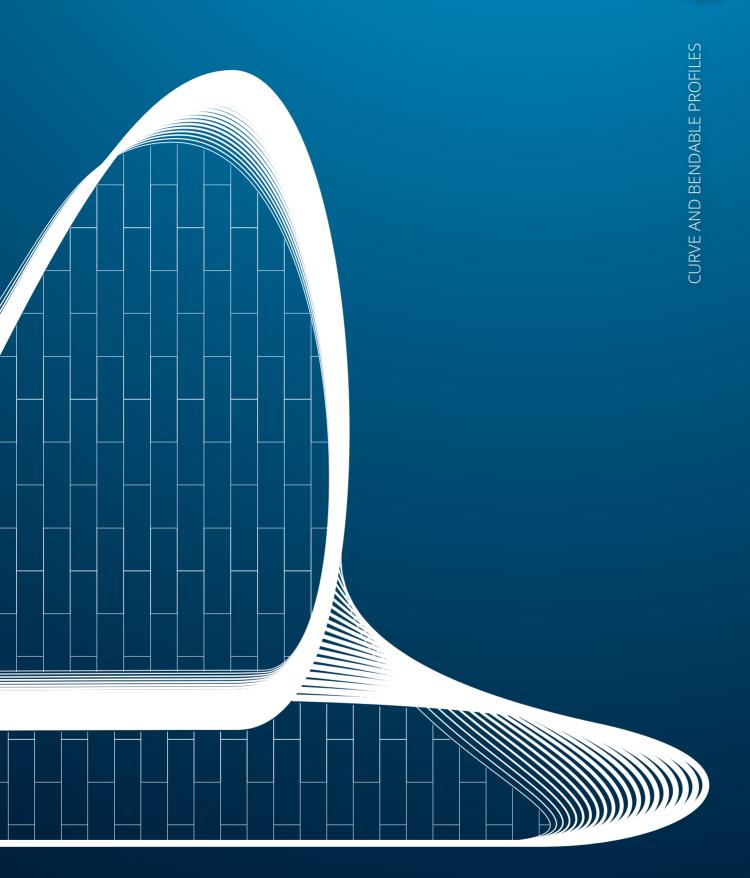


PRO CURVE LINE

PRO CURVE LINE are a range of profiles that may be curved/shaped, with a special system of perforations allowing them to be bent so that particular geometric shapes may be easily obtained in situ. This allows decorative patterns to be created at will according to technical and aesthetic requirements. The profiles in the PRO CURVE LINE may be used as transition or edging profiles or to create joining and expansion joints on any type of ceramic, parquet, wood, laminate/melamine coated wood, marble, carpeted, Palladian, Venetian floor, etc. The profiles are made in AISI 304/1.4301-V2A stainless steel, aluminium and brass and may be easily shaped by using the PROCURVE MACHINE to bend the profiles mechanically.

.

PROTERMINAL CURVE

STAINLESS STEEL AISI 304/1.4301-V2A CURVABLE

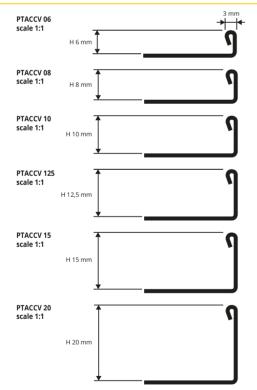

EXAMPLES OF LAYING



PROTERMINAL CURVE are a range of edging and joining profiles that may be curved/shaped, with a special system of perforations allowing them to be bent so that particular geometric shapes may be easily obtained in situ. This allows decorative patterns to be created at will according to technical and aesthetic requirements and with a separation of 3 mm. The product is made in stainless steel AISI 304/1.4301-V2A in various heights (6, 8, 10, 12,5, 15 and 20 mm) in 2.7 m bars.



POLISHED STAINLESS STEEL AISI 304/1.4301-V2A with protective film bar length 2,7 lm - pack. 20 Pcs - 54 lm - 10/10 mm

Article	Hmm	€/lm	€/Pc
PTACCV 06	6	11,50	31,05
PTACCV 08	8	11,82	31,91
PTACCV 10	10	12,26	33,10
PTACCV 125	12,5	12,72	34,34
PTACCV 15	15	14,95	40,37
PTACCV 20	20	15,83	42,74

For hand-brushed version + 30% gross price.

LAYING INSTRUCTIONS 1. Choose the "PROTERMINAL CURVE" with the required height and material. **2.** Cut the profile to the necessary length, calculating the total length. **3.** Bend the profile mechanically with the PROCURVE MACHINE. **4.** If necessary fix with screws and screw anchors or simply insert the punched base under the floor laid with the same adhesive. If it is used as a joining profile, bring each floor to the edge of the profile



COLOURS






SUITABLE FOR USE IN CONTACT WITH FOODSTUFFS



PROTERMINAL CURVE are a range of edging and joining profiles that may be curved/shaped. They feature a special system of perforations allowing them to be bent easily so that particular geometric shapes may be easily obtained in situ. This allows decorative patterns to be created at will according to technical and aesthetic requirements and with a separation of 3 mm of sandable profile. The product is made in natural brass in 2.7 m bars and heights of 6, 8, 10, 12.5, 15 and 20 mm.

PROTERMINAL CURVE NATURAL BRASS

CURVABLE



NATURAL BRASS CURVABLE thermo packed 10pcs bar length 2,7 Im - pack. 40 Pcs - 108 Im (H:15; 20 mm - 54 Im)


bar iengan - , in pacia ie				
Article	Hmm	€/lm	€/Pc	
PTONCV 06	6	10,54	28,46	*
PTONCV 08	8	11,09	29,94	*
PTONCV 10	10	11,67	31,51	
PTONCV 125	12,5	12,57	33,94	
PTONCV 15	15	13,49	36,42	
PTONCV 20	20	15,47	41,77	

COLOURS


ON - Natural brass



EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS




 Choose the "PROTERMINAL CURVE" in the required height and material.
 Cut the profile to the necessary length, calculating the total length.
 Bend the profile mechanically with the PROCURVE MACHINE.
 If necessary fix with screws and screw anchors or simply insert the punched base under the floor laid with the same adhesive.
 Any oxidation marks may be easily removed with specific chemical products (Sidol-Smac, etc.). If it is used as a joining profile, bring each floor to the edge of the profile.

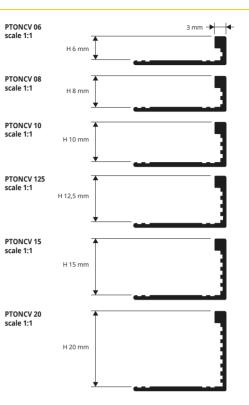

PROTERMINAL


CURVE

PROTERMINAL CURVE are a range of edging and joining profiles that may be curved/shaped. They feature a special system of perforations allowing them to be bent easily so that particular geometric shapes may be easily obtained in situ. This allows decorative patterns to be created at will according to technical and aesthetic requirements and with a separation of 3 mm of sandable profile. The product is made in natural aluminium in 2.7 m bars and heights of 6, 8, 10, 12.5, 15 and 20 mm.

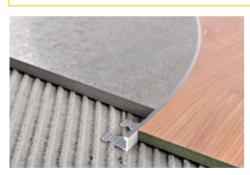

NATURAL ALUMINIUM CURVABLE thermo packed 10 Pcs bar length 2,7 lm - pack. 40 Pcs - 108 lm


Article	Hmm	€/Im	€/Pc
PTANCV 06	6	4,16	11,23
PTANCV 08	8	4,37	11,80
PTANCV 10	10	4,48	12,10
PTANCV 125	12,5	4,63	12,50
PTANCV 15	15	4,97	13,42
PTANCV 20	20	5,64	15,23




ANODIZED SILVER ALUMINIUM CURVABLE thermo packed 10 Pcs bar length 2,7 lm - pack. 40 Pcs - 108 lm

	Article	Hmm	€/Im	€/Pc
\odot	PTAACV 08	8	6,44	17,39
۲	PTAACV 10	10	6,63	17,90
\odot	PTAACV 125	12,5	6,98	18,85
۲	PTAACV 15	15	7,28	19,66

EXAMPLES OF LAYING (for laying instructions, see above)




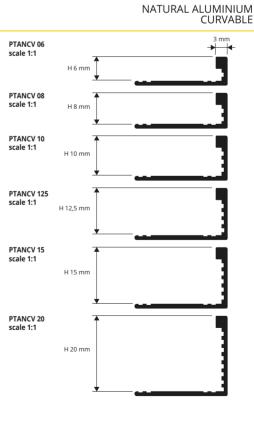



*= Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed

Prices are referred to whole packs 10% increase for minimum orders of 10 pcs. 20% increase for orders of less than 10 pcs.

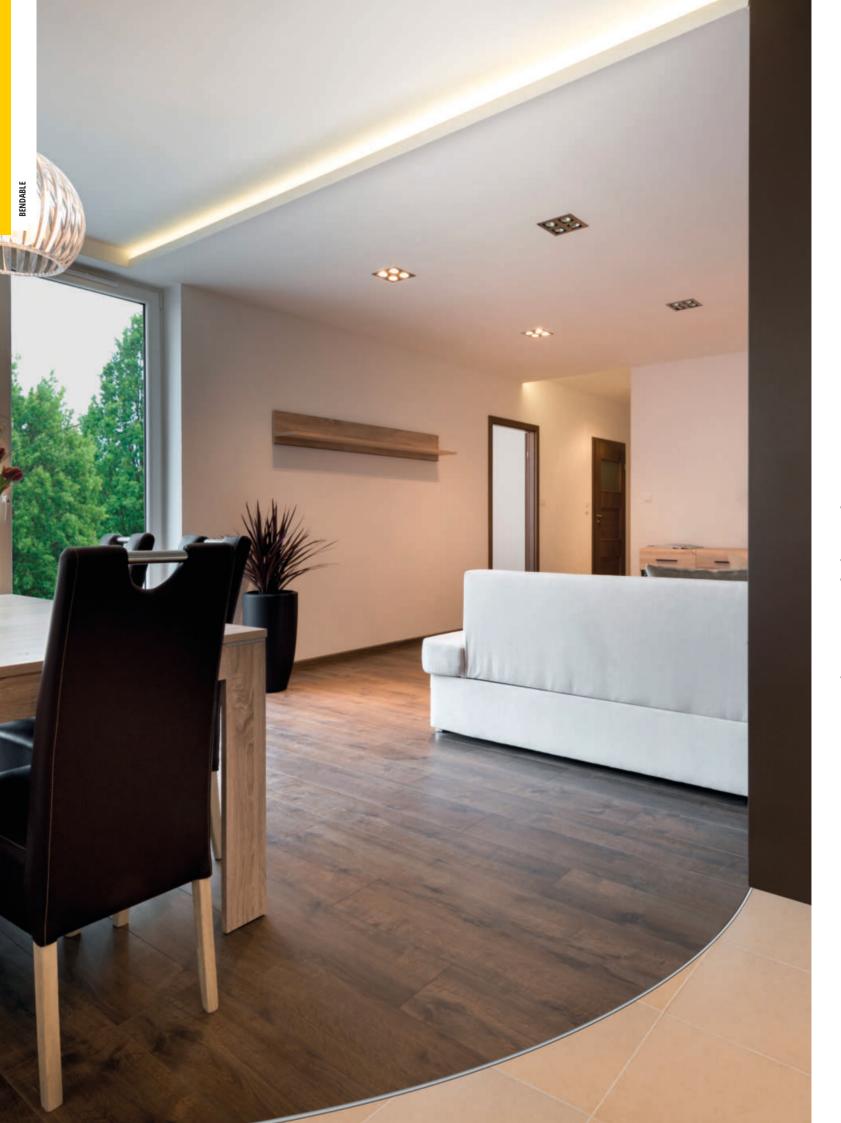



PROELEGANT CURVE are a range of edging and joining profiles that may be curved/shaped. They feature a special system of perforations allowing them to be bent easily so that particular geometric shapes may be easily obtained in situ. This allows decorative patterns to be created at will according to technical and aesthetic requirements and with a separation of 6 mm of sandable profile. The product is made in natural brass in 2.7 m bars and heights of 8-10-12.5 and 14 mm.

PROELEGANT CURVE NATURAL BRASS CURVABLE

BENDABLE



NATURAL BRASS CURVABLE thermo packed 5 Pcs

H mm

8

10

12.5

14

€/lm

17,57

18,19

18.83

20,37

€/Pc

47,44

49.11

50.84

55,00

*

*

bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article

PELONCV 08

PELONCV 10

PELONCV 125

PELONCV 14



COLOURS

ON - Natural brass

PELONCV 08 scale 1:1 6 mm H 8 m PELONCV 10 scale 1:1 H 10 mm PELONCV 125 scale 1:1 H 12,5 mr PELONCV 14 scale 1:1 H 14 mm

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS



1. Choose the "PROELEGANT CURVE" in the required height and material. **2**. Cut the profile to the necessary length, calculating the total length. **3**. Bend the profile mechanically with the PROCURVE MACHINE. 4. If necessary fix with screws and screw anchors or simply insert the punched base under the floor laid with the same adhesive. Any oxidation marks may be easily removed with specific chemical products (Sidol-Smac, etc.).

PROELEGANT CURVE are a range of edging and joining profiles that may be curved/shaped. They feature a special system of perforations allowing them to be bent easily so that particular geometric shapes may be easily obtained in situ. This allows decorative patterns to be created at will according to technical and aesthetic requirements and with a separation of 6 mm of sandable profile. The product is made in silver anodized aluminium in 2.7 m bars and heights of 8-10-12.5 mm.

PROELEGANT CURVE


CURVABLE

6 mm




ANODIZED SILVER ALUMINIUM CURVABLE thermo packed bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	H mm	€/lm	€/Pc
PELAACV 08	8	8,32	22,46
PELAACV 10	10	8,59	23,19
PELAACV 125	12,5	8,99	24,27






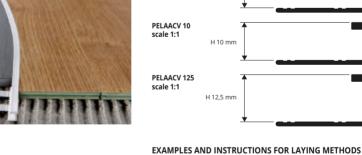

PELAACV 08 scale 1:1

H 8 r





Prices are referred to whole packs 10% increase for minimum orders of 10 pcs. 20% increase for orders of less than 10 pcs.

Choose the "PROELEGANT CURVE" in the required height and material. 2. Cut the profile to the necessary length, calculating the total length. 3. Bend the profile mechanically with the PROCURVE MACHINE. 4. If necessary fix with screws and screw anchors or simply insert the punched base under the floor laid with the same adhesive. Any oxidation marks may be easily removed with specific chemical products (Sidol-Smac, etc.).


ANODIZED SILVER ALUMINIUM

0

PROFINAL CURVE

PROFINAL CURVE are a range of edging and joining profiles that may be curved/shaped. They feature a special system of perforations allowing them to be bent easily so that particular geometric shapes may be easily obtained in situ. This allows decorative patterns to be created at will according to technical and aesthetic requirements and with a separation of 8 mm of sandable profile. The product is made in natural brass in 2.7 m bars and heights of 8, 10 and 12.5 mm.

NATURAL BRASS CURVABLE

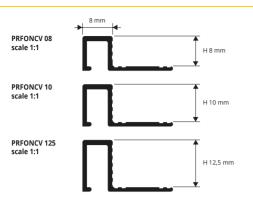


EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS



NATURAL BRASS CURVABLE thermo packed 5 Pcs bar length 2,7 Im - pack. 20 Pcs - 54 Im

Article	Hmm	€/lm	€/Pc	
PRFONCV 08	8	18,96	51,19	*
PRFONCV 10	10	21,08	56,92	
PRFONCV 125	12,5	23,05	62,24	





ON - Natural brass




and heights of 8, 10 and 12.5 mm.


 Choose the "PROFINAL CURVE" in the required height and material. 2. Cut the profile to the necessary length, calculating the total length. 3. Bend the profile mechanically with the PROCURVE MACHINE. 4. If necessary fix with screws and screw anchors or simply insert the punched base under the floor laid with the same adhesive. Any oxidation marks may be easily removed with specific chemical products (Sidol-Smac, etc.). If it is used as a joining profile, bring each floor to the edge of the profile.

PROFINAL CURVE

ANODIZED SILVER ALUMINIUM CURVABLE

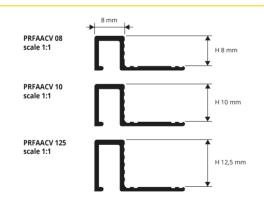

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS



1. Choose the "PROFINAL CURVE" in the required height and material. **2**. Cut the profile to the necessary length, calculating the total length. **3**. Bend the profile mechanically with the PROCURVE MACHINE. **4**. If necessary fix with screws and screw anchors or simply insert the punched base under the floor laid with the same adhesive. Any oxidation marks may be easily removed with specific chemical products (Sidol-Smac, etc.). If it is used as a joining profile, bring each floor to the edge of the profile.

PROGRESS[®] PROFILES



ANODIZED SILVER ALUMINIUM CURVABLE thermo packed - bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	Hmm	€/lm	€/Pc	
PRFAACV 08	8	8,99	24,27	*
PRFAACV 10	10	9,46	25,54	
PRFAACV 125	12,5	9,80	26,46	




COLOURS

PROFINAL CURVE are a range of edging and joining profiles that may be curved/shaped. They feature a special system of perforations allowing them to be bent easily so that particular geometric shapes may be easily obtained

in situ. This allows decorative patterns to be created at will according to technical and aesthetic requirements and with a separation of 8 mm of sandable profile. The product is made in silver anodized aluminium in 2.7 m bars

AA - Anodized silver alum.





Prices are referred to whole packs 10% increase for minimum orders of 10 pcs. 20% increase for orders of less than 10 pcs.



PROJOLLY CURVE is a range of terminal transition profiles that may be curved/shaped, with a special system of perforations allowing it to be bent so that particular geometric shapes may be easily obtained in situ. This allows decorative patterns to be created at will according to technical and aesthetic requirements. It is made in natural brass, height H 8 - H 10mm, length 2.7 lm.

COLOURS

ON - Natural brass

PJONCV 08 scale 1:1 H 8 mm PJONCV 10 scale 1:1 H 10 mm

PROJOLLY


CURVE

NATURAL BRASS CURVABLE




NATURAL BRASS CURVABLE thermo packed 5 Pcs bar length 2,7 lm - pack. 20 Pcs - 54 lm

PIONCV 08 8 19 94 53 84	Article	Hmm	€/Im	€/Pc	
	JONCV 08	8	19,94	53,84	*
PJONCV 10 10 21,23 57,32	ONCV 10	10	21,23	57,32	

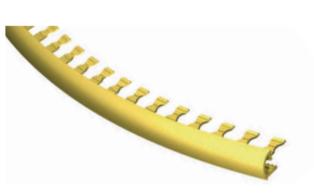

PROJOLLY CURVE is a range of terminal transition profiles that may be curved/shaped, with a special system of perforations allowing it to be bent so that particular geometric shapes may be easily obtained in situ. This allows decorative patterns to be created at will according to technical and aesthetic requirements. It is made in anodized aluminium, height H 8 -H 10mm, length 2.7 lm.

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS



1. Choose the "PROJOLLY CURVE" in the required height and material. Cut the profile to the necessary length, calculating the total length.
 Bend the profile mechanically with the PROCURVE MACHINE. If necessary fix with screws and screw anchors or simply insert the punched base under the floor laid with the same adhesive.

PIAACV 08 scale 1:1

PJAACV 10 scale 1:1

adhesive.

н 8

H 10 m

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

PROJOLLY CURVE ANODIZED SILVER ALUMINIUM

CURVABLE




ANODIZED SILVER ALUMINIUM CURVABLE thermo packed bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	H mm	€/lm	€/Pc	
PJAACV 08	8	7,26	19,60	*
PJAACV 10	10	7,72	20,84	




COLOURS

AA - Anodized silver alum.

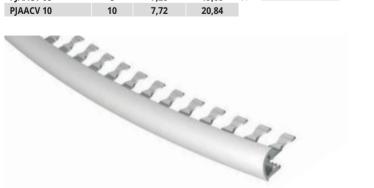

🖈 = Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed

Prices are referred to whole packs 10% increase for minimum orders of 10 pcs. 20% increase for orders of less than 10 pcs.






TERMINAL CURVE ANODIZED SILVER ALUMINIUM

AND 10 WOOD FINISHES - CURVABLE

TERMINAL CURVE is a range of edging and joining profiles that may be curved/shaped, with a special system of perforations allowing it to be bent so that particular geometric shapes may be easily obtained in situ. This allows decorative patterns to be created at will according to technical and aesthetic requirements.Recommended for edging and/or joining floating floors in wood & melamine-laminated wood. It is made in anodized aluminium and in 10 wood effect finishes; it comes in various heights, length 2.7m.

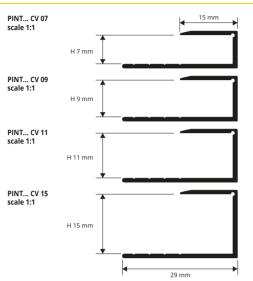



ANODIZED SILVER ALUMINIUM CURVABLE thermo packed bar length 2,7 Im - pack. 20 Pcs - 54 Im

bullengul z, im pack zo tes stim						
Article	Hmm	€/lm	€/Pc			
PINTAACV 07	7	7,85	21,20			
PINTAACV 09	9	7,97	21,52			
PINTAACV 11	11	8,12	21,92			
PINTAACV 15	15	8,73	23,57	*		



ALUMINIUM 10 WOOD FINISHES thermo packed bar length 2,7 Im - pack. 20 Pcs - 54 Im

Article	H mm	€/lm	€/Pc				
PINT CV 09	9	13,53	36,53	*			
PINT CV 15	15	15,16	40,93	*			
Available in the wood finishes: 04W-05W-07W-08W-09W-10W-11W-							

28W-29W-30W. The code of the selected colour must be added to the article code. E.g.: PINT... CV 09 (chosen finish Dark beech) PINT04W CV 09.

> AB - Anod.bronze aluminium

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS



1. Choose the "TERMINAL CURVE" in the required height and material. 2. Cut the profile to the necessary length, calculating the total length. 3. Bend the profile mechanically with the PROCURVE MACHINE. 4. If necessary fix with screws and screw anchors or simply insert the punched base under the floor laid with the same adhesive.



AO - Anod. gold


WOODEN COLOURS

05W - Light oak (strip)	08W - Dark cherry	10W - Wengè	29W - white oak	30W - Rovere grigio	30W - Victoria oak	34W - Havana oak	37W - Carvi oak	41W - Ice oak	42W - Grace oak


PROCOVER PROCOVER WOOD

PROCOVER is a joint-cover profile in anodized aluminium and aluminium covered with a very strong film available in wood finishes. It is applied at the end of laying two adjoining floors with the same height, having left a 6 - 24 mm gap between the two floors set in a thin bed of adhesive. It protects the outside edges of the floor/covering. It is easy to lay and attractive. The design of the profile with lower vertical arrowhead part allows excellent anchorage with the silicone/adhesive.

ANODIZED ALUMINIUM AND WOOD FINISHES – CURVABLE



EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS



1. Choose the "PROCOVER" with the width suitable for the gap between the two floors to be joined, taking into consideration 2/3 mm side lap. 2. Fill the gap with single-pack silicone or with the adhesive used for laying the floor. 3. Bury the profile into the adhesive, making sure that both side laps of the profile rest on the coverings to be joined.



ANODIZED SILVER ALUMINIUM CURVABLE thermo packed bar length 2,7 Im - pack. 40 Pcs - 108 Im

Article	Hmm	€/lm	€/Pc
PCRAA 149	14 x 9	4,08	11,02
PCRDB 149	14 x 9	5,22	14,09



ALUMINIUM WOOD FINISHES thermo packed bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	L x H mm	€/Im	€/Pc
PCRA 149	14 x 9	6,60	17,82

Available in the wood finishes: 05W-11W-28W-29W-30W. The code of the selected colour must be added to the article code. E.g.: PCRA...149 (chosen finish Dark beech) PCRA 04W 149.

COLOURS AA - Anodized silver alum. DB - Anodized dark bronze OSW - Light oak I1W - Decapè bleached 28W - Aspen oak 29W - White oak 30W - Grey oak

Prices are referred to whole packs 10% increase for minimum orders of 10 pcs. 20% increase for orders of less than 10 pcs.

BENDABLE



PROSLIDER CURVE is a range of transition profiles that may be curved/shaped, with a special system of perforations allowing it to be bent so that particular geometric shapes may be easily obtained in situ. This allows decorative patterns to be created at will according to technical and aesthetic requirements. Recommended for joining floating floors in wood, melamine laminated wood and ceramics. It is made in natural brass in various heights, length 2.7 Im.

PROSLIDER CURVE NATURAL BRASS CURVABLE


BENDABLE



8	20,37	55,00
10	23,19	62,61
	-	

LAYING INSTRUCTIONS

1. Choose the "PROSLIDER CURVE" in the required height and material. Cut the profile to the necessary length, calculating the total length.
 Bend the profile mechanically with the PROCURVE MACHINE.
 If necessary fix with screws and screw anchors, if used for floating floors in melamine/laminated wood, or simply insert the punched base under the floor laid with the same adhesive.



EXAMPLES OF LAYING



PROSLIDER CURVE is a range of transition profiles that may be curved/shaped, with a special system of perforations allowing it to be bent so that particular geometric shapes may be easily obtained in situ. This allows decorative patterns to be created at will according to technical and aesthetic requirements. Recommended for joining floating floors in wood, melamine laminated wood and ceramics. It is made in anodized aluminium in various heights, length 2.7 lm.



ANODIZED SILVER ALUMINIUM CURVABLE thermo packed bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	Hmm	€/Im	€/Pc
PDAACV 08	8	9,87	26,65
PDAACV 10	10	11,40	30,78
COLOURS			
1000			
AA - Anodized silver alum.			




PDAACV 08 scale 1:1 PDAACV 10 scale 1:1 H 10 r

PROCURVE MACHINE is a manual profile bending machine for profiles of the CURVE SERIES. complete with wheels for all profiles

PROCURVE MACHINE

MINIMUM OUTSIDE RADIUS

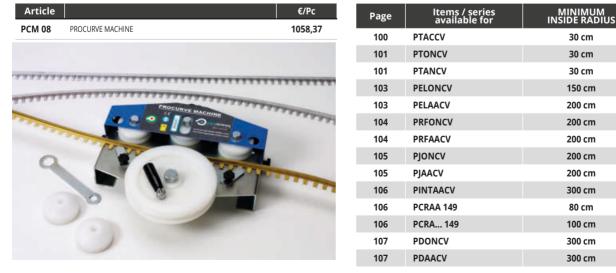

30 cm 30 cm 30 cm 30 cm 30 cm 30 cm 300 cm 150 cm 200 cm 300 cm 200 cm 200 cm 300 cm 200 cm 300 cm 200 cm 300 cm 80 cm 80 cm 100 cm 100 cm 300 cm 300 cm

🖈 = Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed Prices are referred to whole packs 10% increase for minimum orders of 10 pcs. 20% increase for orders of less than 10 pcs.





An interpretation of: Elbphilharmonie, Herzog & De Meuron, HAMBURG (Germany), 2017







STAIR NOSINGS PROFILES




STEPS

PROSTAIR ACC

BRUSHED STAINLESS STEEL AISI 304/1.4301-V2A

PROSTAIR ACC is steps protecting technical profile, designed and conceived to make the step scales made of ceramic, porcelain stoneware and others nonskid and non-slip ones; it's to be applied before the step laying process. Manufactured in aisi 304/1.4301-V2A glazed stainless steel, with the superior side level crimped in order to increase its adhesion. It replaces special ceramic elements in refined, resistant and economic way. It is compulsory in public places for the accident prevention. It is recommended for elegant, refined industrial, commercial and private environments: available in H 4,5-6-8-10-12,5-15 mm versions. Combining with the entire series of steel profiles recommended.

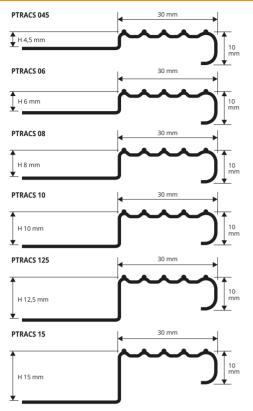


EXAMPLES OF LAYING

STEPS



PROSTYLE 2610

BRUSHED STAINLESS STEEL AISI 304/1.4301-V2A SELF ADHESIVE OR PUNCHED




Adhesive version

 Choose the suitable profile and cut it to the necessary length.
 Degrease, wash and clean the solid surface thoroughly. 3. Remove the protective paper from the adhesive. **4.** Lay the profile by applying pressure evenly over the whole surface without using a hamme

Punched version

 Choose the suitable profile and cut it to the necessary length.
 Mark the position of the holes using the existing holes in the profile as reference.
 Insert the screw anchors into the drilled holes.
 Fix the profile using flathead screws suitable for the detection the interface the screw and the screw suitable for the screw screw suitable for the screw screw suitable for the screw sc relative slots in the profile



BRUSHED STAINLESS ST. AISI 304/1.4301-V2A with protective film bar length 2,7 lm - pack. 15 Pcs - 40,5 lm - 10/10 mm

p			
Article	Hmm	€/lm	€/Pc
PTRACS 045	4,5	16,60	44,82
PTRACS 06	6	17,09	46,14
PTRACS 08	8	17,49	47,22
PTRACS 10	10	18,01	48,63
PTRACS 125	12,5	18,65	50,35
PTRACS 15	15	19,54	52,76

Available in Brushed STAINLESS STEEL AISI 316L/1.440-V4A (minimum quantity order 100 pcs - price to be agreed. Production delay 4/5 weeks).

OUT OF STANDARD SIZE PRICES:


For Length 1 Im + 10% (minimum order of 100 pcs) For Length 1,5 Im + 5% (minimum order of 100 pcs)

LAYING INSTRUCTIONS

LAYING INSTRUCTIONS 1. Choose the PROSTAR ACC of the desired height and material on the basis of the tile (steps) thickness. 2. Fix the first rising part laying it down at its appropriate and definitive level. 3. Fill completely the empty spaces under the profile with the tile adhesive. 4. Spread out the adhesive on the tread, lay down the profile with its cut base immersed completely in adhesive and align it so that the profile covers the riser tile edge. 5. Lay down the tread tiles and align them with the covers the riser tile edge. 5. Lay down the tread tiles and align them with the superior grazing part of the profile by drawing its back close and filling the inner space with the adhesive.



END CAP IN VARNISHED PLASTIC BRUSHED STAINLESS STEEL EFFECT pack. 2 Pcs (1 right and 1 left



COLOURS ACS - Brushed stainless st. AISI 304/1.4301-V2A

SUITABLE FOR USE IN CONTACT WITH FOODSTUFFS

PROSTYLE 2610 is steps protecting technical profile, designed and conceived to keep the step scales made of ceramic, porcelain stoneware, wood, marble and others nonskid and non-slip ones ; it's to be applied after the step laying process or in the already present rooms. Manufactured in aisi 304/1.4301-V2A glazed stainless steel, with the superior side level crimped in order to increase its adhesion. It replaces special ceramic elements in refined, resistant and economic way. It's ideal for the edges protection and screening as well as of the corner between the rising and the tread which is the point of the greatest strain. It is compulsory in public places for the accident prevention. It is recommended for elegant, refined industrial, commercial and private environments. Available in drilled version or in with adhesive one.



BRUSHED STAINLESS STEEL AISI 304/1.4301-V2A PUNCHED with protective film - bar length 2,7 lm - pack. 20 Pcs - 54 lm - 10/10mm

	Article	Hmm	€/Im	€/PC	
F	PSYACS 2610F	10	14,00	37,80	*

Available in Brushed STAINLESS STEEL AISI 316L/1.440-V4A (minimum quantity order 100 pcs - price to be agreed. Production delay 4/5 weeks).

OUT OF STANDARD SIZE PRICES:

For Length 1 lm + 10% (minimum order of 100 pcs) For Length 1,5 lm + 5% (minimum order of 100 pcs)



BRUSHED STAINLESS STEEL AISI 304/1.4301-V2A WITH ADHESIVE with protective film - bar length 2,7 lm - pack. 20 Pcs - 54 lm - 10/10mm

Article	H mm	€/lm	€/Pc	
PSYACS 2610A	10	16,54	44,66	*

COLOURS



ACS - Brushed stainless st. AISI 304/1.4301-V2A


© 2023 All rights reserved by Progress Profiles. Printed in Italy


SUITABLE FOR USE IN CONTACT WITH FOODSTUFFS



★ = Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed

Prices are referred to whole packs, 10% increase for minimum orders of 10 pcs, 20% increase for orders of less than 10 pcs.

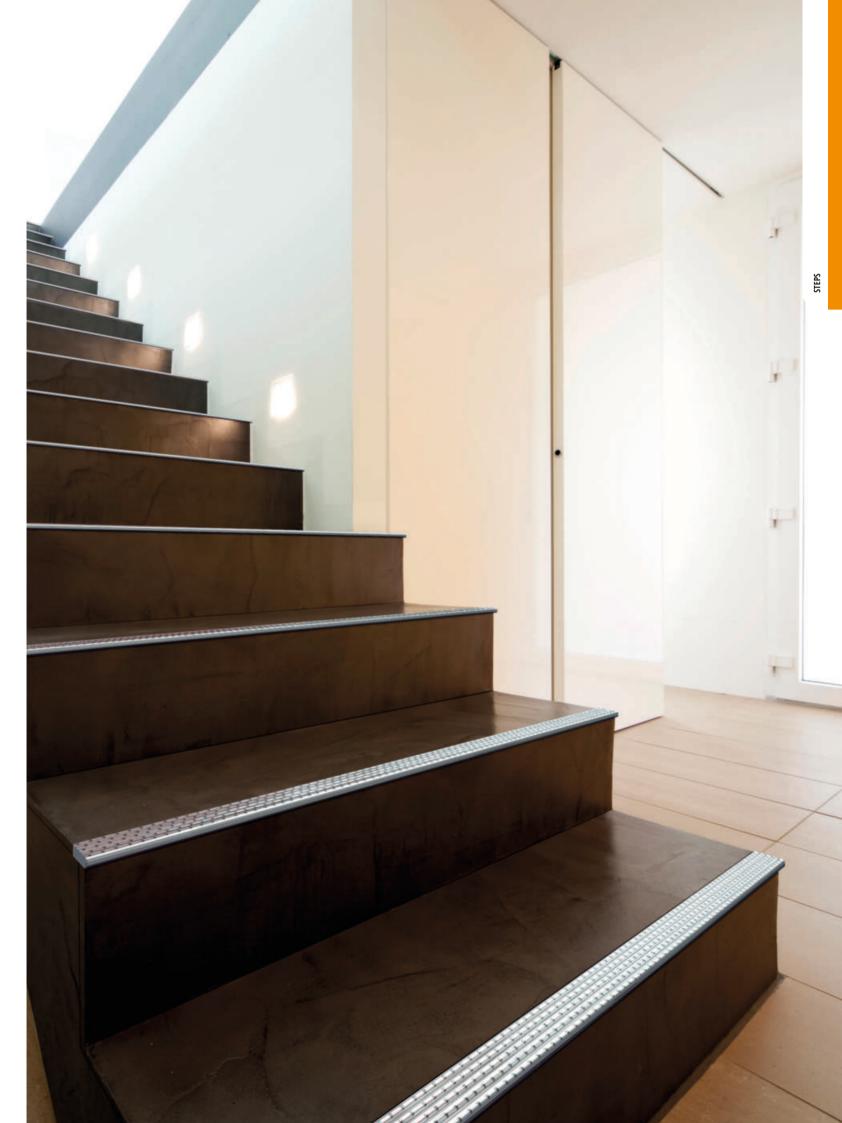

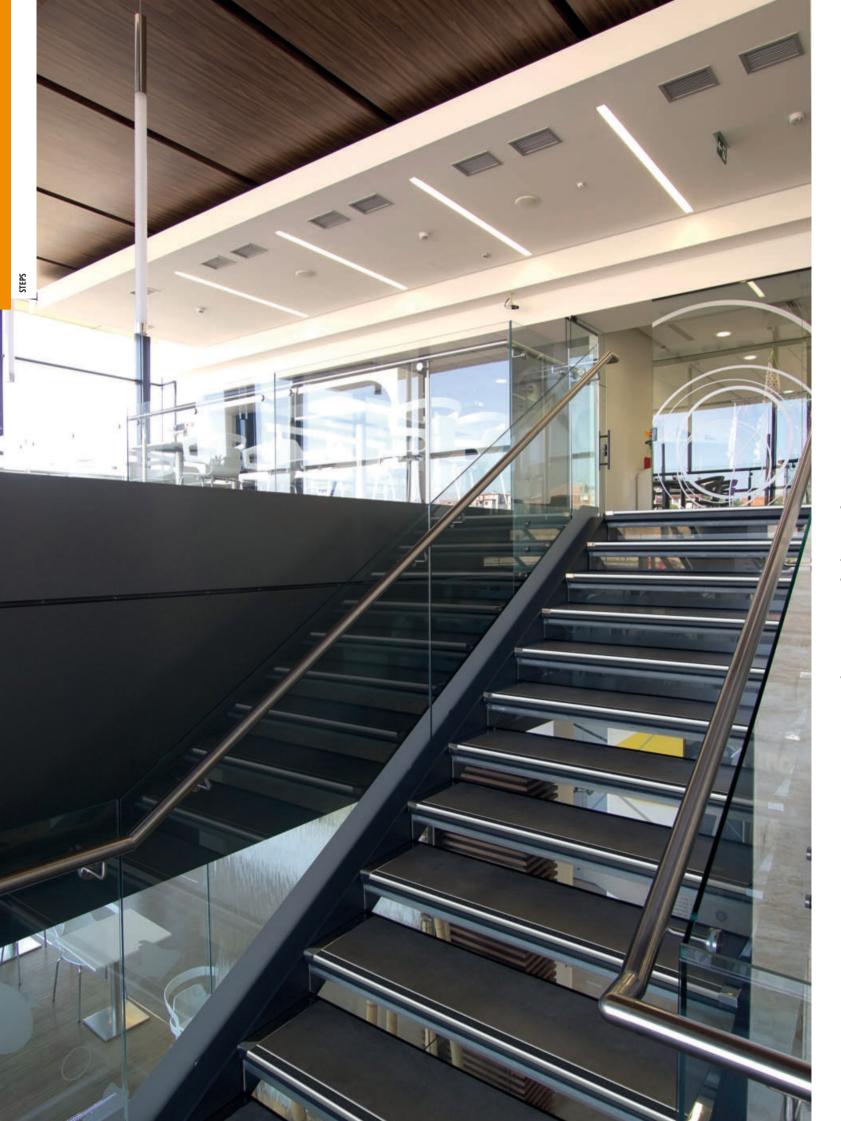



PROSTAIR GRIP ACC is an AISI 304/1.4301-V2A brushed stainless steel profile, consisting of a punched flange, ensuring perfect anchorage to the substrate, a 36,5 and 56,5 mm horizontal visually exposed surface with the carborundum stripe insert and a 20mm vertical visually exposed flat surface. The profile is available in the heights 4,5/6/8/10/12,5/15/20 mm and is equipped with end caps made of varnished plastic in brushed steel-effect finish. The design of this profile together with the completing elements make it an elegant and appreciated solution also for modern stairs.

GRIP ACC BRUSHED STAINLESS STEEL AISI 304/1.4301-V2A

PROSTAIR


STEPS









PTRGRACS ...35

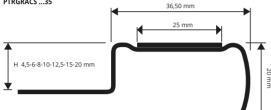






BRUSHED STAINLESS STEEL AISI 304/1.4301-V2A

with protective film - bar length 2,7 lm - width 36,50 mm					
Article	Hmm	Pcs/Pack	€/lm	€/Pc	
PTRGRACS 04535	4,5	20	32,96	88,99	
PTRGRACS 0635	6	20	33,40	90,18	
PTRGRACS 0835	8	20	33,71	91,02	
PTRGRACS 1035	10	10	35,45	95,72	
PTRGRACS 12535	12,5	10	37,50	101,25	
PTRGRACS 1535	15	7	39,62	106,97	
PTRGRACS 2035	20	7	43,41	117,21	

BRUSHED STAINLESS STEEL AISI 304/1.4301-V2A w

with protective film - bar length 2,7 Im - width 56,50 mm					
Article	H mm	Pcs/Pack	€/lm	€/Pc	
PTRGRACS 04555	4,5	20	39,48	106,60	
PTRGRACS 0655	6	20	40,43	109,16	
PTRGRACS 0855	8	20	41,36	111,67	
PTRGRACS 1055	10	10	42,91	115,86	
PTRGRACS 12555	12,5	10	45,40	122,58	
PTRGRACS 1555	15	7	47,26	127,60	
PTRGRACS 2055	20	7	50,99	137,67	

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS





1. Choose the PROSTAIR GRIP ACC in the required height, according Choose the PROSTAIR GKIP ACC in the required height, according to the thickness of the floor covering and the desired profile width;
 Lay the floor covering on the stair riser and apply the adhesive on the of stair tread, where the profile will be installed;
 Fill the empty spaces under the profile with the adhesive for tiles. Lay the profile on the step tread, making sure that it is aligned with the stair riser;
 Lay the floor covering on the stair tread and align;
 Plaster the inicite between the profile and the tiles. joints between the profile and the tiles.

THE ADHESIVE CARBORUNDUM STRIP (PROGRIP) IS NOT INCLUDED WITH THE PROFILE. FOR PTRGRACS ...35 ORDER PGR... 25 (SPECIFY THE CHOSEN COLOUR).

FOR PTRGRACS ... 55 ORDER PGR... 40 (SPECIFY THE CHOSEN COLOUR).

B - White

Y - Yellow

Width mm

20

25

50

ADHESIVE NON-SLIP STRIP for STEPS - rolls length 18,2 Im

The PGRT (trasparent) are not

suitable for outside use.

€/lm

2 03

2,72

5,58

COLOURS

COLOURS

N - Black

G - Gray

GN - Yellow/Black

PGRGN 20

PGRGN 25

PGRGN 50

 \odot

0

0

Article



END CAPS - R/L - pack. 2 Pcs (1 R and 1 L)

Article	Hmm	L mm	€/Pack
TPTRGRACS 55/1	4,5÷20	56,5	3,12
TPTRGRACS 35/1	4,5÷20	36,5	3,12
Articles not for sale singly		5	1

ADHESIVE NON-SLIP STRIP for STEPS - rolls length 18,2 Im

Article

PGRN 25

PGRB 25

PGRT 25

PGRG 25

PGRY 25

PGRM 25

PGRN 40

PGRB 40

PGRT 40

PGRG 40

PGRY 40

PGRM 40

Width mm

25

25

25

25

25

25

40

40

40

40

40

40

€/lm

2 68

4,02

2 68

4.56

4,42

3,08

4,02

7,12

4.02

8,01

8,01

4.65

€/Roll

48.78

73,16

48.78

82.99

80,44

56,06

73,16

129,58

73.16

145,78

84,63

145,78 🜟

*

*

PROGRIP

PROGRIP is a carborundum adhesive stripe, consisting of an elastic film coated with high wear resistant abrasive grains. It is usually employed in public as well as in domestic environments to make stair steps non-slip. The stripe is available in different colors and widths to meet any technical and aestetic requirement. If **PROGRIP** is applied directly on the step covering, it is advisable to apply two stripes on each step, rounding their ends.

ADHESIVE CARBORUNDUM - 7 COLOURS

PGRGN... PGRB. PGRN. PGRG

All depts reserved by Progress Profiles. Printed in Italy

0 2028 /



SUITABLE FOR USE IN CONTACT WITH FOODSTUFFS

101,56 🜟 = Production on demand with minimum quantity of 10 rolls. Production delay 4/5 weeks. Price to be agreed 🛛 🥥 = News 2023

€/Roll

36 95

49,50

Prices are referred to whole packs, 10% increase for minimum orders of 10 pcs, 20% increase for orders of less than 10 pcs.

T - Transparent


M - Brown



PROSTYLE **GRIP ACC BRUSHED STAINLESS STEEL**


AISI 304/1.4301-V2A

PROSTYLE GRIP ACC is a non-slip profile in AISI 304/1.4301–V2A brushed stainless steel, consisting of a 40 or 60 mm horizontal top with a groove for the insertion of a non-slip carborundum stripe and a 20mm vertical flat side. The profile can be fixed with adhesive film or with screws. The particular design of this profile makes it an elegant and appreciated solution also for modern stairs.

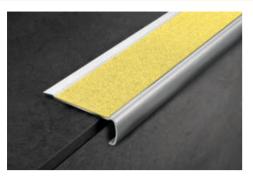




PSYGRACS 6020 scale 1:1



BRUSHED STAINLESS STEEL AISI 304/1.4301-V2A with protective film bar length 2.7 lm - pack. 20 Pcs - 54 lm

	Article	Lmm	€/lm	€/Pc		
	PSYGRACS 6020A	60	35,95	97,07	*	
	PSYGRACS 6020F	60	34,32	92,66	*	
Without adhesive version deduct 3,00 €/LM to the gross price						

The adhesive carborundum strip (PROGRIP) is not included with the profile. For PSYGRACS 6020A/F order PGR... 40 (Specify the chosen colour). For PSYGRACS 4020A/F order PGR... 25 (Specify the chosen colour).



PSYGRACS 4020 scale 1:1 L 40 mm 20

bar length 2.7 lm - pack. 20 Pcs - 54 lm

0 . 1			
Article	Lmm	€/lm	€/Pc
PSYGRACS 4020A	40	30,48	82,30
PSYGRACS 4020F	40	28,60	77,22
Without adhesive version d	educt 3,00	€/LM to the	gross price

Version with adhesive

1. Choose the profile according to the desired width and cut it to the necessary length; 2. Clean the surface on which the profile is to be laid, ensuring that it is dry. Remove the protective film and place the profile, applying adequate pressure on it; **3**. Apply the adhesive non-slip carborundum insert of the desired color. **Punched version**

 Choose the profile according to the desired width and cut it to the necessary length;
 Mark the position of the holes using the existing holes on the profile as reference;
 Drill the step using a drill with 5mm diameter and insert the 5x 25mm screws; **4**. Screw the profile to the step; **5**. Apply the adhesive non-slip carborundum insert of the desired color

PROGRIP

COLOURS



END CAPS STAINLESS STEEL - R/L - pack. 2 Pcs - (1 R and 1 L)				
Article	Lmm	€/Pack.		
TPSYGRACS 6020/1	60	3,28	2	
TPSYGRACS 4020/1	40	3,28		
Articles not for sale singly				

SUITABLE FOR USE IN CONTACT WITH FOODSTUFFS

🛪 = Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed

PROGRIP is a carborundum adhesive stripe, consisting of an elastic film coated with high wear resistant abrasive grains. It is usually employed in public as well as in domestic environments to make stair steps non-slip. The stripe is available in different colors and widths to meet any technical and aestetic requirement. If **PROGRIP** is applied directly on the step covering, it is advisable to apply two stripes on each step, rounding their ends.

PGRGN... PGRB. PGRG.. PGRN.


ADHESIVE CARBORUNDUM - 7 COLOURS

```
PROGRESS®
```

ADHESIVE CARBORUNDUM NON-SLIP STRIP for STEPS rolls length 18,2 lm Article Width mm €/lm €/Roll PGRN 25 25 2,68 48,78 PGRB 25 25 4,02 73,16 PGRT 25 25 48.78 2.68 PGRG 25 25 4,56 82,99 PGRY 25 25 4,42 80,44 PGRM 25 25 3.08 56.06 PGRN 40 40 4,02 73,16 PGRB 40 40 7,12 129.58 PGRT 40 40 4,02 73,16 PGRG 40 40 8,01 145,78 * PGRY 40 40 145.78 * 8.01 PGRM 40 40 4,65 84,63

COLOURS B - White T - Transparent N - Black M - Brown G - Grav Y - Yellow The PGRT (trasparent) are not suitable for outside use. GN - Yellow/Black

ADHESIVE NON-SLIP STRIP for STEPS - rolls length 18,2 lm					
Article Width mm €/lm €/Ro					
PGRGN 20	20	2,03	36,95		
PGRGN 25	25	2,72	49,50		
🗿 PGRGN 50	50	5,58	101,56		






🜟 = Production on demand with minimum quantity of 10 rolls. Production delay 4/5 weeks. Price to be agreed 🛛 🧔 = News 2023

Prices are referred to whole packs, 10% increase for minimum orders of 10 pcs, 20% increase for orders of less than 10 pcs.

STEPS



PROSTAIR 50

NATURAL ALUMINIUM + VINYL RESIN / RUBBER INSERT





NATURAL ALUMINIUM + VINYL RESIN / RUBBER INSERT bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	H mm	€/lm	€/Pc
PTR50 08	8	21,44	57,89
PTR50 10	10	22,31	60,24
PTR50 125	12,5	23,00	62,10
PTR50 15	15	24,18	65,29

Available in the colours: G - N - B - A. The code of the selected colour must be added to the article code. E.g.: PTR50 08... (chosen colour grey) PTR50 08G.

COLOURS









END CAP IN PVC - pack. 2 Pcs (1 R and 1 L) Article

TPTR50 .../1 8-10-12,5-15 3.28 Available in the colours: G - N - B - A The code of the selected colour must be added to the article code. E.g.: TPTR50 ... (chosen colour grey) TPTR50 G.

H mm

€/Pack.



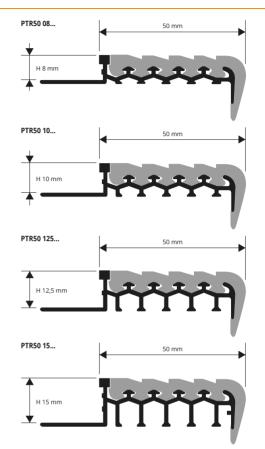

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS



 Choose a PROSTAIR 50 height and color corresponding to the thickness of the tile.
 Fix the riser laying it at the appropriate and definitive height.
 Fill the empty spaces under the square completely with adhesive.
 Rest the adhesive on the tread, lay the square with the base cut in the adhesive and line it up so that the square covers the tile edge of the riser.
 Lay the tiles of the tread lining them up with upper part of the square so that it meets with the adne. the edge.

INTERCHANGEABLE INSERT for Prostair 50

VINYL RESIN / RUBBER

INTERCHANGEABLE VINYL RESIN / RUBBER INSERT	
bar length 2,7 lm - pack. 20 Pcs - 54 lm	

Article	Hmm	€/Im	€/Pc
PTG50	8-10-12,5-15	7,44	20,09
Linivorcal incort cuita	bla for four profile b	oighte	

Available in the colours: G - N - B - A. The code of the selected colour must be added to the article code. E.g.: PTG50... (chosen colour grey) PTG50 G.





119

STEPS



PROSTAIR


STEPS

PROSTAIR is a step nosing profile used to improve slip and slide resistance on the step, to protect ceramic steps and to prevent accidents. It consists of a rigid aluminium base and a changeable vinyl rubber insert available in various colours and widths. Compulsory in public environments to comply with EEC accident-prevention standards.

PROSTEP is a step nosing profile used to improve slip and slide resistance on the step, to protect ceramic steps and to prevent accidents. It consists of a rigid base in high-strength vinyl resin and a changeable vinyl rubber

insert available in various colours and widths. Compulsory in public environments to comply with EEC accident-

NATURAL ALUMINIUM + VINYL RESIN / RUBBER INSERT

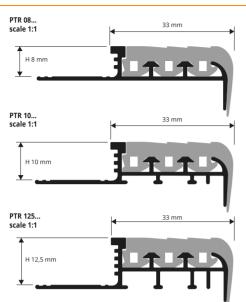

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS



1. Choose the PROSTEP/PROSTAIR in the required width and colour according to the thickness of the tile. **2**. First fix the riser part, placing it at the correct and final height. **3**. Fill the empty spaces under the profile with the tile adhesive. **4.** Apply the adhesive to the tread, lay the profile with the punched base fully sunk into the adhesive and align the profile so that its lip covers the edge of the riser tile. **5.** Lay the tread tiles, aligning them so that they are flush with the upper and rear part of the profile




INTERCHANGEABLE VINYL RESIN / RUBBER INSERT bar length 2,7 lm - pack. 20 Pcs - 54 lm

barrengar 2,7 mil paca 20100 01 mil		
Article	€/ml	€/Pack.
PTGRA	4,59	12,39
PTGRB	4,59	12,39
PTGRN	4,59	12,39
PTGRG	4,59	12,39
	5	

COLOURS

prevention standards.



NATURAL ALUMINIUM + VINYL RESIN / RUBBER INSERT oth **2 7 lm** - nack 10 **Pcs - 27 lm**


bai iciigui 2,7 iii - pack. io	103-27 111		
Article	H mm	€/ml	€/Pack.
PTR 08	8	13,47	36,37
PTR 10	10	14,54	39,26
PTR 125	12,5	15,03	40,58

Available in the colours: G - N - B - A. The code of the selected colour must be added to the article code. E.g.: PTR 08... (chosen colour grey) PTR 08G

END CAP IN PVC - pack. 2 Pcs (1 R and 1 L)


Article	Hmm	€/Pack.
TPT 08/1	8	3,28
TPT 10/1	10	3,28
TPT 125/1	12,5	3,28

Available in the colours: G - N - B - A. The code of the selected colour must be added to the article code. E.g.: TPT 08... (chosen colour grey) TPT 08G. Articles not for sale singly



PROSTEP

RIGID VINYL RESIN + VINYL RESIN / RUBBER INSERT

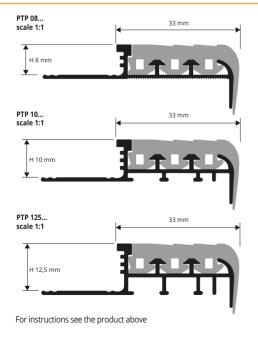



INTERCHANGEABLE VINYL RESIN / RUBBER INSERT bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	€/lm	€/Pc
PTGRA	4,59	12,39
PTGRB	4,59	12,39
PTGRN	4,59	12,39
PTGRG	4,59	12,39



IMPACT PROOF VINYL RESIN + VINYL RESIN / RUBBER INSERT bar length 2,7 lm - pack. 10 Pcs - 27 lm (PTP 08... - 54 lm)


Article	Hmm	€/lm	€/Pc
PTP 08	8	6,74	18,20
PTP 10	10	7,44	20,09
PTP 125	12,5	8,10	21,87

Available in the colours: G - N - B - A. The code of the selected colour must be added to the article code. E.g.: PTP 08... (chosen colour grey) PTP 08G.

END CAP IN PVC - pack. 2 Pcs (1 R and 1 L)

Article	Hmm	€/Pack.
TPT 08/1	8	3,28
TPT 10/1	10	3,28
TPT 125/1	12,5	3,28

Available in the colours: G - N - B - A. The code of the selected colour must be added to the article code. E.g.: TPT 08... (chosen colour grey) TPT 08G. Articles not for sale singly



COLOURS

G - Grav (E83) N - Black (E85) B - Beige (E84) A - Ivory (E81)



PROBRASTEP is a very elegant step nosing profile used to improve slip and slide resistance on the step. Made in natural and polished brass or natural and anodized silver aluminium, the upper part is knurled to increase adherence. Compulsory in public buildings to comply with accident-prevention regulations. Recommended for elegant, refined surroundings and for steps in wood, tiles, melamine-coated/laminated wood, marble or natural stones. Width: 8, 10, 12.5 mm.



NATURAL BRASS thermo packed 5 Pcs

bar length 2,7 lm - pack. 2(
Article	Hmm	€/Im	€/Pc
PBPON 10	10	27,09	73,14
PBPON 125	12,5	28,66	77,38

POLISHED BRASS thermo packed

bar length 2,7 Im - pack. 20 Pcs - 54 Im				
Article	H mm	€/lm	€/Pc	
PBPOL 10	10	30,81	83,19	*
PBPOL 125	12,5	32,34	87,32	*

COLOURS

ON - Natural brass	OL - Polished brass	AN - Natural aluminium	AA - Anodized silver aluminium

PROSTAIR BOTTON / STRIP are a tactile anti-slip botton/strip made in stainless steel AISI 316/1.4401-V4A. PROSTAIR BOTTON / **STRIP** has the function to realize the signaling lanes to the floor, and warning stairs, able to guide the blind and visually impaired. It is available with a length of 28.5 cm, a width of 3.5 cm and a thickness of 5mm and is provided with 3 stems, 2 cm high, for its fastening.



€/Pc

17.39

18,31

NATURAL ALUMINIUM thermo packed 5 Pcs bar length 2,7 lm - pack. 20 Pcs - 54 lm


€/Im Article H mm PBPAN 08 6.44 8 PBPAN 10 10 6,78 PBPAN 125 7.26 12.5 19,60

ANODIZED SILVER ALUMINIUM thermo packed


bar length 2,7 lm - pack. 20 Pcs - 54 lm					
Article	H mm	€/Im	€/Pc		
PBPAA 08	8	8,18	22,09		
PBPAA 10	10	8,53	23,03		
PRPAA 125	12 5	8 99	24 27		

PROBRASTEP

KNURLED NATURAL AND POLISHED BRASS NATURAL AND ANODIZED SILVER ALUMINIUM



EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS



1. Choose the PROBRASTEP in the required width and colour ac-cording to the thickness of the tile (stairs). 2. First fix the riser part, placing it at the correct and final height **3**. Fill the empty spaces under the profile with the tile adhesive. **4**. Apply the adhesive to the tread, lay the profile with the punched base fully sunk into the adhesive and align the profile so that its lip covers the edge of the riser tile. **5.** Lay the tread tiles, aligning them so that they are flush with the upper and rear part of the profile and filling the internal part with adhesive. Oxidation marks in the polished/natural brass range may be easily

removed with specific chemical products (Sidol-Smac).

PROSTAIR BOTTON

STRIP POLISHED, BRUSHED STAINLESS STEEL AISI 316/1.4404-V4A

PROSTAIR BOTTON POLISHED STAINLESS STEEL AISI 316/1.4404-V4A - pack. 20 Pcs

Article	Ømm	€/Pc	€/pack
PTRB 3520/20	35		129,33

INSTRUCTIONS FOR LAYING METHODS

 Put PROSTAIR BOTTON TEMPLATE on the desired zone. 2. Score on the support the position of the necessary holes. 3. Remove the template and drill the substrate with a tip 4 mm for a depth of approximately 2.5 cm. 4. Open the holes already made with a 8mm drill bit. **5.** Remove dust residues. **6.** Fill the hole with PROBAND FIX. **7.** Put in the hole PROSTAIR BOTTON.

Ø

T5 mm

20 mm





BRUSHED STAINLESS STEEL AISI 316/1.4404-V4A - pack. 10 Pcs Article LxHmm €/Pc €/pack PTRB 28035/10 280 X 35 378,08

INSTRUCTIONS FOR LAYING METHODS

1. Put PROSTAIR BOTTON STRIP on the desired zone. 2. Scoring on the support in correspondence of the stems the points at which pierce. **3.** Drill the substrate with a tip 4 mm for a depth of approximately 2.5 cm. **4.** Open the holes already made with a 8mm drill bit. **5.** Remove dust residues. 6. Fill the hole with PROBAND FIX. 7. Put in the hole PROSTAIR BOTTON STRIP.

280 mm

Û



PROSTAIR BOTTON TEMPLATE for PROSTAIR BOTTON


PTRB 28035

ZINC-PLATED STEEL

PROSTAIR BOTTON TEMPLATE is a mold, made in zinc-plated steel, which allows to score the points where to drilling for the mounting of PROSTAIR BOTTONN. **PROSTAIR BOTTON TEMPLATE** has A Size of 30 x 44.5 cm and is Equipped with 48 holes of a diameter 4 mm. Provided with circular joints which can be connected to other molds.

pack. 4 Pcs	
Article L x H mm €/Pc €/pack	
PTRTEM/4 445 x 300 780,96	00 mm

₿




PROGRESS


🖈 = Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed

Prices are referred to whole packs, 10% increase for minimum orders of 10 pcs, 20% increase for orders of less than 10 pcs.

PROTERMSTEP ACC

POLISHED, BRUSHED STAINLESS STEEL AISI 304/1.4301-V2A

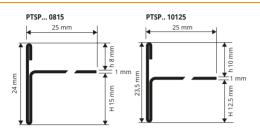

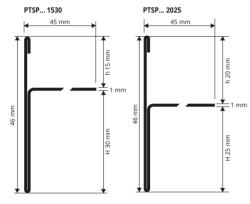

EXAMPLES OF LAYING for instructions see the product below





POLISHED STAINLESS STEEL AISI 304/1.4301-V2A with protective film bar length 2,7 Im - pack. 15 Pcs - 40,5 Im

Article	h / H mm	€/lm	€/Pc			
PTSPAC 0815	08 / 15	17,88	48,28			
PTSPAC 10125	10 / 12,5	17,88	48,28			
PTSPAC 1530	15 / 30	34,23	92,42			
PTSPAC 2025	20 / 25	34,23	92,42			
EXTERNAL CORNERS - pack. 10 Pcs						
Article	h / H mm	€/Pc	€/Pack.			
REPTSAC 0815/10	08 / 15	43,92	439,20			
REPTSAC 10125/10	10 / 12,5	43,92	439,20			
REPTSAC 1530/10	15 / 30	43,92	439,20			
REPTSAC 2025/10	20 / 25	43,92	439,20			
JUNCTION H 10 - 12,5 - 15 - 20 mm - pack. 10 Pcs						
Article	h/Hmm	€/Pc	€/Pack.			
GIPTSAC 0815/10	08 / 15	8,03	80,30			
GIPTSAC 10125/10	10 / 12,5	8,03	80,30			
GIPTSAC 1530/10	15 / 30	8,03	80,30			
GIPTSAC 2025/10	20 / 25	8.03	80.30			




BRUSHED STAINLESS ST. AISI 304/1.4301-V2A bar length 2,7 lm - pack. 15 Pcs - 40,5 lm

001.10	bar lengar =, in pacia io i co i co i co i co i co i co i					
	Article	h/Hmm	€/Im	€/Pc		
PTS	SPACS 0815	08 / 15	23,25	62,78	*	
PTS	SPACS 10125	10 / 12,5	23,25	62,78	*	
PTS	SPACS 1530	15 / 30	44,50	120,15	*	
PTS	SPACS 2025	20 / 25	44,50	120,15	*	
COLO	OURS					

COLOOKS

PROTERMSTEP ACC is the new step cover profile made of stainless steel. Designed to protect the edge of the step and to hide the joint between the tread and the step rise. The special notched shape in the upright stem provides it with excellent anchorage between floor/glue/profile. Reversible profile.




SUITABLE FOR USE IN CONTACT WITH FOODSTUFFS
PROTERMSTEP ALL is the new step cover profile made of natural and anodized aluminium. Designed to protect

the edge of the step and to hide the joint between the tread and the step rise. The special notched shape in the upright stem provides it with excellent anchorage between floor/glue/profile.

PROTERMSTEP ALL

NATURAL AND ANODIZED SILVER ALUMINIUM

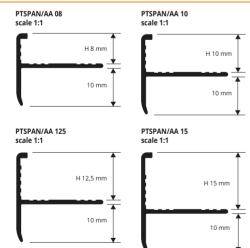

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS




PROGRESS[®] PROFILES



NATURAL ALUMINIUM bar length 2,7 lm - pack. 20 Pcs - 54 lm

bai tengai _, paeta _e			
Article	H mm	€/lm	€/Pc
PTSPAN 08	8	3,55	9,59
PTSPAN 10	10	3,68	9,94
PTSPAN 125	12,5	3,90	10,53
PTSPAN 15	15	4,23	11,42

1. Choose the PROTERMSTEP in the required width and colour according to the thickness of the tile (stairs). **2.** First fix the riser part, placing it at the correct and final height. **3.** Fill the empty spaces under the profile with the tile adhesive. **4.** Apply the adhesive to the tread, lay the profile with the punched base fully sunk into the adhesive and align the profile so that its lip covers the edge of the riser tile. **5.** Lay the tread tiles, aligning them so that they are flush with the upper and rear part of the profile and filling the internal part with adhesive.



ANODIZED SILVER ALUMINIUM thermo packed bar length 2,7 Im - pack. 20 Pcs - 54 Im

Article	Hmm	€/lm	€/Pc
PTSPAA 08	8	4,68	12,64
PTSPAA 10	10	4,83	13,04
PTSPAA 125	12,5	5,04	13,61
PTSPAA 15	15	5,35	14,45

COLOURS

AN - Natural aluminium	AA - Anodized silver aluminium

* = Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed

Prices are referred to whole packs, 10% increase for minimum orders of 10 pcs, 20% increase for orders of less than 10 pcs.

122

STEPS

PROSIDE WALK is a perimeter profile in varnished aluminium, available in grey and anthracite colour. It is designed to protect the edges of the tiles and the screed on pavements. The profile is equipped with a punched flange that ensures its fixing to the support. The flange is also provided with small holes that allow the momentary fixing of the profile with nails. To reach a right connection between profile and the waterproofing system it's needed to use PROBAND 150 with PROBAND KOLL/AB. The product is also available on request in **BENDABLE VERSION** and with a **SPECIAL SEASIDE PRE-TREATMENT** which increases its resistance to corrosion when installed at sea front environments.

VARNISHED EMBOSSED ALUMINIUM nack 20 Prs - 54 lm

bai leligui 2,7 mi - pac	A. 20 FLS -	J4 III			
Article	h mm	H mm	L	€/lm	€/Pc
PSDWK 10AL	10	45	80	21,22	57,29
PSDWK 125AL	12,5	45	80	21,56	58,21
PSDWK 15AL	15	45	80	21,87	59,05
PSDWK 20AL	20	45	80	23,14	62,48

EMBOSSED COLOURS

A - Anthracite grey (no RAL) GF - Gray (7038) TF - Dark brown (8019)

EMBOSSED COLOURS ON DEMAND

BF - White (9010)	C - Corten	EF - Beige (1019)




EXTERNAL CORNERS - pack. 10 Pcs

Article	h mm	H mm	L	€/Pc	€/Pack
AEPSDWK 10AL/10	10	45	80	22,86	228,60
AEPSDWK 125AL/10	12,5	45	80	23,51	235,10
AEPSDWK 15AL/10	15	45	80	24,82	248,20
AEPSDWK 20AL/10	20	45	80	26,69	266,90

JOINTS - pack. 10 Pcs

Article	€/Pc	€/Pack
GINSDWK 10AL/10	6,53	65,30
GINSDWK 125AL/10	6,53	65,30
GINSDWK 15AL/10	6,53	65,30
GINSDWK 20AL/10	6,53	65,30

AEPSDWK external




GINSDWK joint


PROSIDE WALK

VARNISHED / COATED ALUMINIUM

STEPS

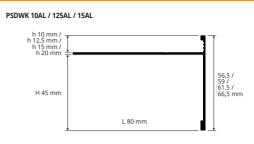


EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS



1. Choose PROSIDE WALK according to the tile thickness and desired colour. 2. Waterproof with PROBAND 150 and PROBAND KOLL the front of the screed. 3. Fix the external corners with nails. 4. Cut PROSIDE WALK to the desired length and fix it with nails; connect it with the corners using the junction element. **5.** Lay the tiles, leaving about 5 mm between tiles and profile. **6.** Seal the space between tiles and profile with **PROBAND FIX (PRBFX). PROFILE BENDING: 1)** Cut the anchoring flange into sections and engrave the metal close to the vertical side **2)** bend the profile with the help of a toroglatic. template;

HOW TO REQUEST SEASIDE TREATMENT

When placing your order please add SD to the article's number Example: PSDWK 10ALGF (seaside) = **PSDWK 10ALGFSD** price for seaside treatment +50% on the gross price.

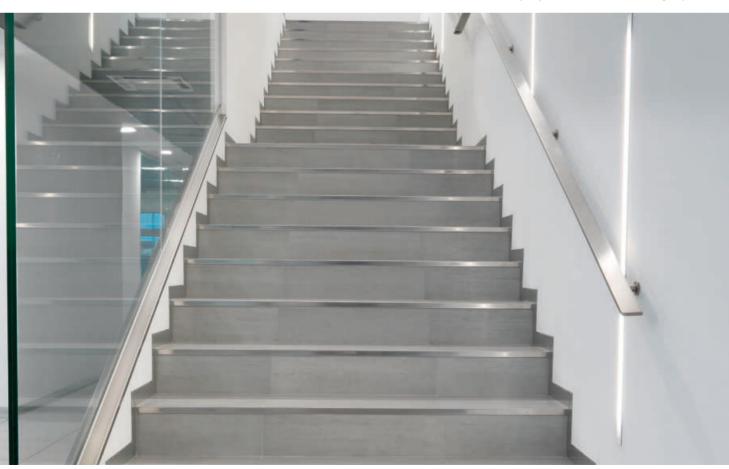


🖈 = Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed Prices are referred to whole packs, 10% increase for minimum orders of 10 pcs, 20% increase for orders of less than 10 pcs.

PROSTAIR LED

ANODIZED SILVER ALUMINIUM - FLAT - LED

STEPS

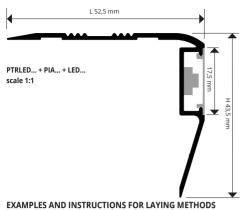

Choose PEOSTAIR LED depending on the desired finish light

1. Choose PROSTAIR LED depending on the desired finish, light effect and polycarbonate plate; 2. If you are using the version with adhesive, clean first the surface where the profile will be installed. Once the surface has dried, remove the protective film and install the profile, applying adequate pressure on it; 3. If you are using the punched version, place the profile on the step tread and mark the position of the profile holes on the step tread; 4. Drill the step tread and fasten the profile using plugs; 5. Connect the LED to the low tension power supply and install the polycarbonate plate.



ANODIZED SILVER ALUMINIUM bar length 2,7 Im - pack. 20 Pcs - 54 Im

 ADAPTOR LED, LED & FLAT NOT INCLUDED

 Article
 H x L mm
 €/Im

 PTRLEDAA 5040
 43,5 X 52,5
 25,47

 PTRLEDAA 5040A
 43,5 X 52,5
 29,39

PTRLEDAA 5040F43,5 X 52,527,42"A" at the end of the product code = Item with adhesive

"F" at the end of the product code = Punched Item

ADHESIVE FLEXIBLE LED COIL length 5 Im - pack 1 ROLL

iengui 3 im - pack. I koll		
Article	€/lm	€/Pack.
LEDN	22,47	112,35
LEDF	22,47	112,35
LEDC	22,47	112,35
	li internet de la constant l'estat	

"N" at the end of the product code = neutral light "F" at the end of the product code = cold light

"C" at the end of the product code = hot light

COLOURS



POLYCARBONATE FLAT bar length 2,7 Im - pack. 20 Pc - 54 Im (AL = transparent / AO = matt)

Article	€/lm	€/Pc
PIAL 17	5,16	13,93
PIAO 17	5,16	13,93

ENDCAPS- R / L - pack. 6 Pcs (3 R and 3 L)

PROSTAIR LED is an aluminium profile available in the silver anodized finishes, that can be fixed with adhesive or dowels to the step tread. It has a grooved non-slip 52,5mm wide horizontal surface and an integrated LED lighting system, placed on its 43,5mm high vertical side. The integrated LED system generates cold or warm light and is protected by a matt or transparent polycarbonate plate, provided with a special fixing system, that allows it to be removed any time maintenance on the lighting system should be required. Its design and to the range of finishes available, together with its easy installation make **PROSTAIR LED** an appreciated solution both in public and in residential spaces.

€/Pc

68,77

79,35

74,03

Article H x L mm €/Pc €/Pack. TPTRLEDAA 5040/3 43,5 X 52,5 27.47 LED ADAPTOR AC/DC 75W - 12V (15 lm) Article €/Pc ALL 7512 82 27 LED ADAPTOR AC/DC 25W - 12V (5 lm) Article €/Pc ALL 2512 56,42





124





PROSTYLE


STEPS

PROSTYLE is a technical/decorative profile in stainless steel AISI 304/1.4301-V2A for ceramic tile/wood steps. Its special pieces. Elegant profile for all public/private environments. In order to perfect placing and to look after details, external angles and closing caps are available.

PROSTYLE is a technical/decorative profile in natural brass, as well as with polished or chromed finish, for

ceramic lie/wood steps. Its particular rounded shape has been conceived to create the "torus" of the step, which is normally created with special pieces. It is knurled on the top to make the profile non-slip. Elegant profile for all

ROUNDED STEP NOSING STAINLESS STEEL AISI 304/1.4301-V2A

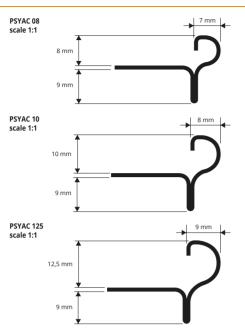



POLISHED STAINLESS ST. AISI 304/1.4301-V2A with protective film bar length 2,7 lm - pack. 20 Pcs - 54 lm - 10/10mm

Article	Hmm	€/lm	€/Pc
PSYAC 08	8	15,59	42,09
PSYAC 10	10	16,08	43,42
PSYAC 125	12,5	16,88	45,58
COLOURS			



AC - Polished stainless st. AISI 304/1.4301-V2A

SUITABLE FOR USE IN CONTACT WITH FOODSTUFFS

IOINT - pack. 20 Pcs

Article	€/Pc	€/Pack.
RPSYAC 08/20	8,05	161,00
RPSYAC 10/20	8,05	161,00
RPSYAC 125/20	8,05	161,00

public/private environments. Shrink-wrapped profile with bar code.



EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS



1. Choose the PROSTYLE with suitable height for the thickness of the floor (stairs). 2. Apply the adhesive onto the area of application of the profile. 3. Lay and align the profile, cut to the necessary length, pressing the perforated flange into the adhesive. 4. Lay the tiles, aligning them so that the top edge of the profile is "flush" with the tile. 5. Fill the profile/tile area of contact with adhesive to prevent the accumulation of water in any voids.


	VARNISHED PLASTIC STEEL EFFECT
	Article
	RPSYAC 08/20
<u> </u>	RPSYAC 10/20
	RPSYAC 125/20
TPSYAC 08/10/125	

STAINLESS ST. END CAPS H 8 - 10 - 12,5 mm - pack. 20 Pcs			
€/Pc	€/Pack.		
3,71	74,20		
3,71	74,20		
3,71	74,20		
	€/Pc 3,71 3,71		

PROSTYLE

RPSYAC 08/10/125

KNURLED, ROUNDED STEP NOSING NATURAL, POLISHED AND CHROMED BRASS

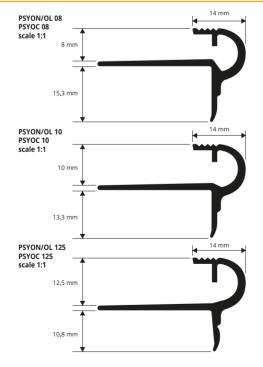

CHROMED BRASS thermo packed bar length 2,7 lm - pack. 10 Pcs - 27 lm

Article	Hmm	€/lm	€/Pc	
PSYOC 08	8	33,66	90,88	*
PSYOC 10	10	34,71	93,72	*
PSYOC 125	12,5	36,26	97,90	*

NATURAL BRASS thermo packed

bar length 2,7 lm - pack. 10 Pcs - 27 lm					
Article	H mm	€/lm	€/Pc		
PSYON 08	8	23,75	64,13		
PSYON 10	10	24,59	66,39		
PSYON 125	12,5	26,55	71,69		

VADNICHED DI ACTIC IOINIT mark 20 Dec

VARINISHED FLASHIC JOINT - Pack. 20 FCS		
Article	€/Pack	
RPSYOC 08-10-125/20	160,77	*
RPSYOL 08-10-125/20	160,77	*
RPSYON 08-10-125/20	160,77	

POLISHED BRASS thermo packed har length 2 7 lm - nack 10 Pcs - 27 lm

Article	Hmm	€/lm	€/Pc	
PSYOL 08	8	28.94	78.14	*
PSYOL 10	10	29,78	80,41	*
PSYOL 125	12,5	31,34	84,62	*

COLOURS		
	100	
OC - Chromed brass	OL - Polished brass	ON - Natural brass

PROGRESS® PROFILES

🛪 = Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed

Prices are referred to whole packs, 10% increase for minimum orders of 10 pcs, 20% increase for orders of less than 10 pcs.



126




PROSTYLE is a technical/decorative profile for ceramic tile/wood steps made in gold-silver anodized aluminium. Its particular rounded shape has been conceived to create the "torus" of the step, which is normally created with special pieces. It is knurled on the top to make the profile non-slip. Elegant profile for all public/private environments. Shrink-wrapped profile with bar code.

PROSTYLE

14 mm

STEPS

KNURLED, ROUNDED STEP NOSING GOLD AND SILVER ANODIZED ALUMINIUM



1. Choose the PROSTYLE in the required width and colour according to the thickness of the tile. 2. First fix the riser part, placing it at the correct and final height. 3. Fill the empty spaces under the profile with the tile adhesive. 4. Apply the adhesive to the tread, lay the profile with the punched base fully sunk into the adhesive and align the profile so that its vertical part covers the edge of the riser tile. 5. Lay the tread tiles, aligning them so that they are flush with the upper and rear part of the profile and filling the internal part with adhesive. Oxidation marks in the polished/natural brass range may be easily removed with specific chemical products (Sidol-Smac).

AA - Anodized silver alum. AO - Anodized gold alum.

VARNISHED PLASTIC JOINT - pack. 20 Pcs

Universal, suitable for three profile heights

covered with wodden flooring.

RPSYAO 08/20

Available: AA - AO

RPSY... 08-10-125/20

Article

The code of the selected colour must be added to the article code.

E.g.: RPSY... 08 (chosen colour polished brass) RPSYOL 08



ANODIZED SILVER ALUMINIUM thermo packed bar length 2,7 Im - pack. 20 Pcs - 54 Im

	Article	H mm	€/lm	€/Pc
	PSYAA 08	8	9,31	25,14
	PSYAA 10	10	9,80	26,46
	PSYAA 125	12,5	10,46	28,24

ANODIZED GOLD ALUMINIUM thermo packed

bar length 2,7 lm - pack. 20 Pcs - 54 lm					
Article	Hmm	€/lm	€/Pc		
PSYAO 08	8	9,31	25,14	*	
PSYAO 10	10	9,80	26,46		
PSYAO 125	12,5	10,46	28,24		

ALUMINIUM CAPS H 8 - 10 - 12,5 mm - pack. 20 Pcs

Article	€/Pack	
TPSYAO 08/20	77,85	*
TPSY 08/20	77,85	
TPSY 10/20	77,85	
TPSY 125/20	77,85	

Available: AA - AO.

€/Pack


160.77

160,77


PROSTEP INS is a non-slip profile in aluminium that allows to connect the rise and the tread in case of stairs covered with wooden or laminate flooring. The profile has to be laid together with rise and tread. It is equipped

with a punched flange that guarantees its fixing. PROSTEP INS in anodized aluminium is suitable for any stair

The code of the selected colour must be added to the article code. E.g.: TPSY... 08 (chosen colour polished brass) TPSYOL 08.

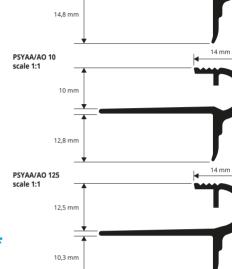

PSYAA/AO 08 scale 1:1



PROSTEP INS

ANODIZED SILVER ALUMINIUM

COLOURS

ANODIZED SILVER ALUMINIUM bar length 2,7 Im - pack. 40 Pcs - 108 Im

Article	Hmm	€/lm	€/Pc
PTSAA 105	10,5	6,85	18,50
PTSAA 16	16	7,37	19,90
COLOURS	_		






EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS



1. Choose "PROSTEP INS" according to the thickness of the tile. 2. Cut "PROSTEP INS" to the desired length. 3. Lay the wood or laminate on the step rise and apply adhesive on the area of the step tread, where the profile will be laid. 4. Lay the profile on the step tread, aligning it with the edge of the rise covering. 5. Lay the wood or laminate on the tread of the step taking care to insert it into the cavity.

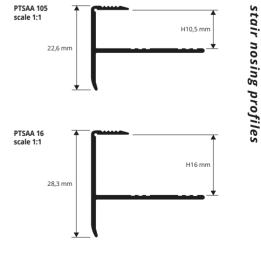



127


🖈 = Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed

PROSTAIR WOOD

PROSTAIR WOOD is a step nosing profile in real oak with aluminium base. Its rounded "torus/convex" shape makes a perfect and elegant nosing for stairs and steps in ceramic-tile-terracotta-wood for indoor and outdoor environments. Attractive.

PROSTAIR WOOD may be treated and painted subsequently at the time of laying, according to the finishes chosen for the staircase

NATURAL OAK + ALUMINIUM BASE



EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS



1. Choose the PROSTAIR WOOD with suitable height for the thickness of the covering of the step or staircase. 2. Apply the adhesive onto the area of application of the profile. 3. Lay and align the profile, cut to the necessary length, pressing the perforated flange into the adhesive. **4.** Lay the step covering, aligning it so that the top edge of the profile is flush" with the covering. **5.** Fill the profile/covering area of contact with adhesive to prevent any infiltration



NATURAL OAK + ALUMINIUM BASE bar length 2.7 lm - pack. 10 Pcs - 27 lm

bai iengai 2,7 ini paca io	105 27 1111			
Article	H mm	€/Im	€/Pc	
PTRW 10	10	41,98	113,35	*
PTRW 125	12,5	44,53	120,23	*
H 15 mm on demand				

COLOURS





NATURAL OAK + ALUMINIUM BASE th 1 20 lm - nack 10 Pcs - 12 lm

buildingai i, zo iiii paca io i co i z iiii			
Article	H mm	€/Pc	
PTRW 1020	10	61,19	*
PTRW 12520	12,5	62,87	*

NATURAL OAK + ALUMINIUM BASE

bar length 1,00 m - pack. 10 PCS - 10 m			
Article	Hmm	€/Pc	
PTRW 1080	10	93,17	*
PTRW 12580	12,5	94,34	*


ITEMS SUPPLIED ALREADY ASSEMBLED

Treat the wood appropriately with paint or oil.

PROSTAIR WOOD Z

PROSTAIR WOOD Z is a step nosing profile in real oak with aluminium base. The rounded shape of the "knurled convex" torus with non-slip surface makes a perfect and elegant nosing for stairs and steps in ceramic-tileterracotta-wood for indoor and outdoor environments. Attractive. **PROSTAIR WOOD Z** may be treated and painted subsequently at the time of laying, according to the finishes chosen for the staircase.

KNURLED NATURAL OAK + ALUMINIUM BASE



EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS



1. Choose the PROSTAIR WOOD Z with suitable height for the thickness of the covering of the step or staircase. 2. Apply the adhesive onto the area of application of the profile. 3. Lay and align the profile, cut to the necessary length, pressing the perforated flange into the adhesive. **4.** Lay the step covering, aligning it so that the top edge of the profile is "flush" with the covering. **5.** Fill the profile/covering area of contact with adhesive to prevent any infiltration.



NATURAL OAK + ALUMINIUM BASE

bar length 2,7 lm - pack. 10	Pcs - 27 Im			_
Article	Hmm	€/lm	€/Pc	
PTRWZ 10	10	53,51	144,48	*
PTRWZ 125	12,5	54,99	148,47	*
H 15 mm on demand				

COLOURS

Natural oak



NATURAL OAK + ALUMINIUM BASE bar length 1,20 lm - pack. 10 Pcs - 12 lm

······			_
Article	Hmm	€/Pc	
PTRWZ 1020	10	64,19	*
PTRWZ 12520	12,5	65,99	*

NATURAL OAK + ALUMINIUM BASE bar length 1,80 lm - pack. 10 Pcs - 18 lm

builtengai 1,00 mil paca 101 co			
Article	H mm	€/Pc	
PTRWZ 1080	10	96,31	*
PTRWZ 12580	12,5	98,98	*

ITEMS SUPPLIED ALREADY ASSEMBLED

Treat the wood appropriately with paint or oil

PROGRESS® 128 ILE

🛪 = Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed

Prices are referred to whole packs, 10% increase for minimum orders of 10 pcs, 20% increase for orders of less than 10 pcs.

STEPS



elegant nosing for modern stairs and steps in ceramic-tile-terracotta-wood for indoor and outdoor environments. Attractive.

PROSTEP WOOD may be treated and painted subsequently at the time of laying, according to the finishes chosen for the staircase.

NATURAL OAK + ALUMINIUM BASE

STEPS



NATURAL OAK + ALUMINIUM BASE har length 2 7 lm - nack 10 Pcs - 27 lm

COLOURS

Natural oak

bui iciigai 2,7 iiii pucit. Io	105 27 1111			
Article	Hmm	€/Im	€/Pc	
PTPW 10	10	47,68	128,74	*
PTPW 125	12,5	48,95	132,17	*




NATURAL OAK + ALUMINIUM BASE bar length 1.20 lm - pack. 10 Pcs - 12 lm

Article	H mm	€/Pc	
PTPW 1020	10	48,94	*
PTPW 12520	12,5	50,68	*

NATURAL OAK + ALUMINIUM BASE

bar length 1,80 lm - pack. 10 PCS - 18 lm			
Article	Hmm	€/Pc	
PTPW 1080	10	73,30	*
PTPW 12580	12,5	75,99	*

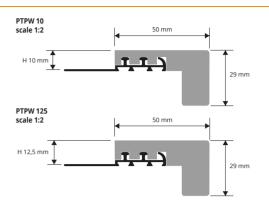

PROSTEP WOOD

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS



1. Choose the PROSTEP WOOD with suitable height for the thickness of the covering of the step or staircase. 2. Apply the adhesive onto the area of application of the profile. 3. Lay and align the profile, cut to the necessary length, pressing the perforated flange into the adhesive. **4.** Lay the step covering, aligning it so that the top edge of the profile is "flush" with the covering. **5.** Fill the profile/covering area of contact with adhesive to prevent any infiltration.

ITEMS SUPPLIED ALREADY ASSEMBLED

Treat the wood appropriately with paint or oil.

PROSTYLE WOOD is a step nosing profile in real oak with aluminium base. Its rounded "torus/fret" shape makes a perfect and elegant nosing for stairs and steps in ceramic-tile-terracotta-wood for indoor and outdoor environments. Attractive. **PROSTYLE WOOD** may be treated and painted subsequently at the time of laying, according to the finishes

chosen for the staircase

PROSTYLE WOOD

NATURAL OAK + ALUMINIUM BASE



NATURAL OAK + ALUMINIUM BASE bar length 2,7 lm - pack. 10 Pcs - 27 lm

COLOURS

Natural oak

Article	H mm	€/lm	€/Pc	
PSYW 10	10	46,26	124,90	*
PSYW 125	12,5	47,61	128,55	*



NATURAL OAK + ALUMINIUM BASE bar length 1,20 lm - pack. 10 Pcs - 12 lm


Article	H mm	€/Pc	
PSYW 1020	10	61,19	*
PSYW 12520	12,5	62,87	*

NATURAL OAK + ALUMINIUM BASE 10 Prs

bar lengur 1,00 mil- pack. 10 FCS - 10 mil			
Article	H mm	€/Pc	
PSYW 1080	10	91,76	*
PSYW 12580	12,5	97,22	*

ITEMS SUPPLIED ALREADY ASSEMBLED

Treat the wood appropriately with paint or oil.



EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS




1. Choose the PROSTYLE WOOD with suitable height for the Choose the PROSIYLE WOOD with suitable height for the thickness of the covering of the step or staircase. 2. Apply the adhesive onto the area of application of the profile. 3. Lay and align the profile, cut to the necessary length, pressing the perforated flange into the adhesive. 4. Lay the step covering, aligning it so that the top edge of the profile is "flush" with the covering. 5. Fill the profile/covering area of contact with adhesive to prevent any infiltration. infiltration.

🖈 = Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed





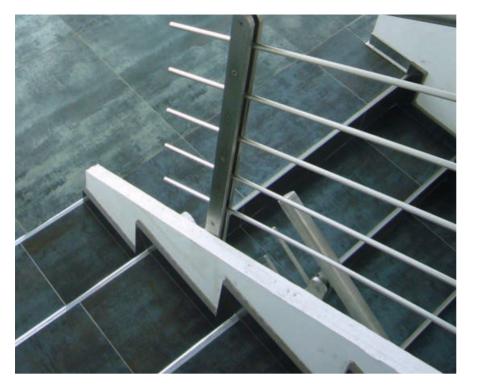





TUBE and ACCESSORIES for runners and stair-carpet guides, available in the finishes in polished painted brass, polished gold aluminium and polished chrome aluminium.



GOLD AND CHROME POLISHED ALUMINIUM POLISHED VARNISHED BRASS




BLISTER KIT - 2 TUBES AND 4 TUBE PLUGS - POLISHED BRASS COATED length tube 0,8 lm - pack. 60 Pcs


Ømm

TCTOL 118S	11		23,43	
TCTOL 138S	13		25,44	
BLISTER KIT - 2 TUBES AND 4 TUBE PLUGS - POLISHED BRASS COATED SELF length tube 0,9 Im - pack. 60 Pcs				
Article	Ømm		€/Pc	
TCTOL 119S	11		25,62	
TCTOL 139S	13		27,80	
10101 1000	15		27,00	

BLISTER KIT - 2 TUBES AND 4 TUBE PLUGS - POLISHED BRASS COATED SELF length tube 1 Im - pack. 60 Pcs				
Article	Ømm		€/Pc	
TCTOL 1110S	11		27,80	
TCTOI 13105	13		30 13	



BLISTER KIT - 2 TUBES and 4 TUBE PLUGS - POLISHED ALUM. SELF length tube 0,8 Im - pack. 60 Pcs					
Article	Ømm		€/Pc		
TCTBO 128S	12		16,31		
TCTBC 128S	12		19,13		
BLISTER KIT - 2 TUBES and 4 TUBE PLUGS - POLISHED ALUM. SELF length tube 0,9 Im - pack. 60 Pcs					
Article	Ømm		€/Pc		
TCTBO 129S	12		17,77		
TCTBC 129S	12		20,56		
BLISTER KIT - 2 TUBES and 4 TUBE PLUGS - POLISHED ALUM. SELF length tube 1 Im - pack. 60 Pcs					
Article	Ømm		€/Pc		
TCTBO 1210S	12		19,18		
TCTBC 1210S	12		22,00		

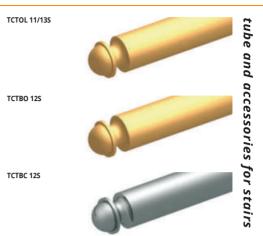

STEPS

Varnished polished brass is not suitable for places subject to heavy foot-trafic and / orabrasion.

COLOURS

BO - Polished gold alum.	BC - Polished chrome alum.	OL - Polished brass coated

TUBE for runners and stair-carpet guides

GOLD AND CHROME POLISHED ALUMINIUM, POLISHED VARNISHED BRASS

€/Pa

POLISHED BRASS COATED

Article

bar length 2 lm - pack. 40 Pcs - 80 lm					
Article	Ømm	€/ml	€/Pc		
TGSOL 112	11	18,49	36,98		
TGSOL 132	13	21,66	43,32		
For different size bars, contact the sales office					

POLISHED ALUMINIUM bar length 2 Im - pack. 40 Pcs - 80 Im				
Article	Ømm	€/ml	€/Pc	
TGSBO 122	12	6,91	13,82	
TGSBC 122	12	6.91	13 82	



For different size bars, contact the sales office

bar length 2 Im - pack. 40 Pcs - 80 Im				
Article	Ømm	€/ml	€/Pc	
TGSBO 122	12	6,91	13,82	
TGSBC 122	12	6,91	13,82	

TUBE PLUGS/END CAPS for tube

POLISHED BRASS AND CHROMED BRASS

POLISHED BRASS AND CHROME	OLISHED BRASS AND CHROMED BRASS - pack. 60 Pcs			
Article Ø mm €/Pack.				
TETOL 11	11	44,63		
TETOC 12	12	116,36		
TETOL 12	12	52,60		
TETOL 13	13	60,57		

TETOL 11 TETOC 12 TETOL 12 TETOI 13

SUPPORT / EYELET for tube with screw

POLISHED BRASS AND CHROMED BRASS

POLISHED BRASS AND CHROMED BRASS - pack. 20 Pcs

Article	Ømm	€/Pack.
SOOL 12	12	49,15
SOOC 12	12	82,89
SOOL 14	14	52,06



HINGE SUPPORT for tube

POLISHED BRASS

POLISHED BRASS - pack. 20 Pcs

Article	Ømm	€/Pack.
SCOL 11	11	163,11
SCOL 13	13	172,94

Articles without bar code. For bar code add the letter "C" after the article code. E.g.: SCOL 11C and add \in 0,40 x Pc (+ 0,20 x Im) to the gross price. For cutting to required length 1 Im + 5 % x Im.




🖈 = Production on demand with minimum quantity of 200 pcs. Production delay 4/5 weeks. Price to be agreed

PROWALK ACC

PROWALK ACC is steps protecting steel profile for existing scales. Its superior side level is crimped in order to increase its adhesion. Available in version or with holes either with adhesive. Available sizes: 30 x 10, 30 x 20, and 30 x 30 mm. All profiles are protected with protective film. It's ideal for the edges protection and screening as well as of the corner between the rising and the tread which is the point of the greatest strain.

POLISHED STAINLESS STEEL AISI 304/1.4301-V2A PUNCHED OR SELF ADHESIVE

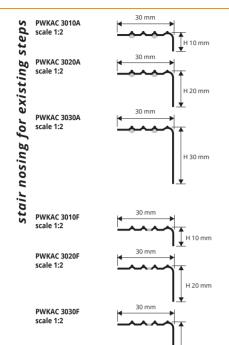



POLISHED STAINLESS STEEL AISI 304/1.4301-V2A with adhesive thermo packed - bar length 2,7 Im - pack. 20 Pcs - 54 Im - 10/10mm

Article	L x H mm	€/Im	€/Pc
PWKAC 3010A	30 X 10	18,46	49,84
PWKAC 3020A	30 X 20	20,95	56,57
PWKAC 3030A	30 X 30	23,51	63,48

INSTRUCTIONS FOR LAYING METHODS

Adhesive version 1. Choose the suitable profile and cut it to the necessary length. 2. Degrease, wash and clean the solid surface thoroughly. **3**. Remove the protective paper from the adhesive. **4**. Lay the profile by applying Pressure evenly over the whole surface without using a hammer Punched version

 Choose the suitable profile and cut it to the necessary length.
 Mark the position of the holes using the existing holes in the profile as reference.
 Insert the screw anchors into the drilled holes.
 Fix the profile using flathead screws suitable for the relative slots in the profile using flathead screws suitable for the relative slots in the profile



POLISHED STAINLESS STEEL AISI 304/1.4301-V2A punched - with protective film - bar length 2,7 lm - pack. 20 Pcs - 54 lm - 10/10mm

Article	L x H mm	€/lm	€/Pc
PWKAC 3010F	30 X 10	16,54	44,66
PWKAC 3020F	30 X 20	19,03	51,38
PWKAC 3030F	30 X 30	21,59	58,29


COLOURS



ON DEMAND HAND-BRUSHED STAINLESS STEEL (Price to be agreed. Production delay 4/5 weeks)

SUITABLE FOR USE IN CONTACT WITH FOODSTUFFS

PROEND is a step nosing profile in anodized aluminium with silver-gold-bronze finish, available with self-adhesive backing or punched. Ideal for protecting existing steps and with knurled flat surface, it guarantees excellent safety features to prevent accidents in public and private environments. PROEND ensures a perfect finish, covering laying defects and protecting the edge. Easy to lay with the selfadhesive backing ensuring perfect adherence to the step or using screws and screw anchors in the punched

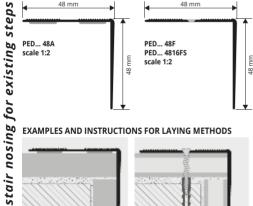

GOLD, SILVER AND BRONZE ANOD. ALUMINIUM

WITH/ WITHOUT ADHESIVE AND PUNCHED

H 30 mm

Adhesive version

PROEND

1. Choose the suitable profile and cut it to the necessary length. Degrease, wash and clean the solid surface thoroughly.
 Remove the protective paper from the adhesive. 4. Lay the profile by applying pressure evenly over the whole surface without using a hammer

Punched version

132

 Choose the suitable profile and cut it to the necessary length.
 Mark the position of the holes using the existing holes in the profile as reference.
 Insert the screw anchors into the drilled holes.
 Fix the profile using flathead screws suitable for the relative detail to the the screw anchors. relative slots in the profile.



ANOD. ALUMINIUM with and without adhesive thermo packed bar length 2,7 lm - pack. 10 Pcs - 27 lm

Article	H x L mm	€/lm	€/Pc
PED 48A	48 X 48	10,94	29,54
PED 48	48 X 48	9,40	25,38
'A" at the end of the produc	t code = Item	with adhesive	

On demand bar length 3 Im with minimum quantity of 200 pcs. Production delay 4/5 weeks. Price to be agreed.

COLOURS

version.

	the Rest of Lot	the survey of the second second
AA - Anodized silver alum.	AO - Anodized gold alum.	AB - Anodized bronze alum.



ANODIZED ALUMINIUM punched thermo packed bar length 2,7 lm - pack. 10 Pcs - 27 lm

Article	H x L mm	€/lm	€/Pc
PED 48F	48 X 48	9,40	25,38

ANOD. ALU. punched with s	w anchors 🦰	SELF	
thermo packed - bar length	20 Pcs	PACK	
Article	H x L mm	€/lm	€/Pc
PED 4816FS	48 X 48		19,17

Available in the colours: AA - AO - AB. The code of the selected colour must be added to the article code. E.g.: PED... 48A (chosen colour anodized gold) PEDAO 48A.



STEPS



PROWALK is a step nosing profile in polished brass and anodized aluminium for existing steps. The upper part is knurled to increase slip and slide resistance and is applied after laying. Available with holes or with adhesive. Available in the widths 22 x 22 and 30 x 30 mm. All the profiles are shrink-wrapped. Ideal for protecting and shielding the edges and corner between riser and tread, which are the areas subjected to most stress.

PROWALK

STEPS

POLISHED BRASS and ANODIZED ALUMINIUM ADHESIVE and PUNCHED

scale 1:1

scale 1.1

PWK... 30F

scale 1:1



KNURLED POLISHED BRASS with adhesive thermo packed har length 2 7 lm - nack 15 Pcs - 40 5 lm

bui iengai 2,7 ini puer	10100 10,0 111			
Article	H x L mm	€/Im	€/Pc	
PWKOL 22A	22 X 22	25,43	68,66	
PWKOL 30A	30 X 30	32,75	88,43	*



KNURLED POLISHED BRASS punched thermo packed bar length 2,7 lm - pack. 15 Pcs - 40,5 lm

Article

PWKOI 22F 22 X 22 22 62 61 07 PWKOL 30F 29,94 80,84 30 X 30

HxLmm


KNURLED POLISHED BRASS without holes thermo packed bar length 2.7 im - pack. 15 Pcs - 40.5 im


U . I					
Article	HxLmm	€/lm	€/Pc		
PWKOL 22	22 X 22	22,34	60,32		PWK 22F PWK 229F
PWKOL 30	30 X 30	29,35	79,25	*	scale 1:1

€/lm

€/Pc

KNURLED POLI. BRASS punched with screws and screw anchors thermo packed - bar length 0,90 Im - pack. 20 Pcs						
Article	HxLmm	€/lm	€/Pc			
PWKOL 309FS	30 X 30		26.55	*		

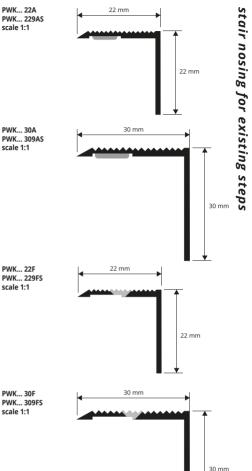



COLOURS

OL - Polished brass



KNURLED ANODIZED ALUMINIUM with adhesive thermo packed th 2 7 lm - nack 20 Pcs - 54 lm

Article	HxLmm	€/Im	€/Pc			
PWK 22A	22 X 22	8,37	22,60			
PWK 30A	30 X 30	12,12	32,72			

KNURLED ANODIZED ALUMINIUM with adhesive

thermo packed - bar length 0,90 lm - pack. 20 Pcs

Article

PWK... 229AS

PWK... 309AS



KNURLED ANODIZED ALUMINIUM punched thermo packed bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	HxLmm	€/Im	€/Pc	
PWK 22F	22 X 22	6,31	17,04	
PWK 30F	30 X 30	9,17	24,76	

KNURLED ANODIZED ALUM. WITHOUT HOLES thermo packed bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	HxLmm	€/lm	€/Pc
PWK 22	22 X 22	6,10	16,47
PWK 30	30 X 30	8,85	23,89

KNURLED ANOD. ALU. punched with screws and screw anchors SEL F

thermo packed - bar length t	,90 im - pack. 2 0	JPCS –	PAC	K
Article	H x L mm	€/lm	€/Pc	
PWK 229FS	22 X 22		7,43	
PWK 309FS	30 X 30		10,12	*

Available in the colours: AO - AA - AB (AT, CH and SB available on demand with a minimum quantity order of 100 pcs) The code of the selected colour must be added to the article code. E.g.: PWK... 22A (chosen colour anodized gold) PWKAO 22A.

€/Pc

9.10

12,42

COLOURS



HxLmm

22 X 22

30 X 30

€/lm

ON DEMAND MINI	UM QUANTITY	100 PCS	for color	and height

AT - Anodized titanium alum. CH - Anod. champagne alum. SB - Anodized sand aluminium





Adhesive version

1. Choose the suitable profile and cut it to the necessary length. Degrease, wash and clean the solid surface thoroughly.
 Remove the protective paper from the adhesive. 4. Lay the profile by applying pressure evenly over the whole surface without using a hammer.

Choose the suitable profile and cut it to the necessary length.
 Choose the suitable profile and cut it to the necessary length.
 Mark the position of the holes using the existing holes in the profile as reference.
 Insert the screw anchors into the drilled holes.
 Fix the profile using flathead screws suitable for the relative slots in the profile.


🖈 = Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed




PROWALK 2510 PROWALK 2520

PROWALK 2510 e **2520** are new stair-nosing profiles for existing stairways. Designed to protect and restore stair steps made of wood, laminate, ceramic, etc. Made with anodized aluminium with silver, gold and bronze finish and available in self-adhesive or perforated versions. Sizes available: 2.7 m lengths and 0.9 m & 1.35 m Self-Pack.

ALUMINIUM 30 WOOD FINISHES AND 6 ANODIZED FINISHES PUNCHED OR SELF ADHESIVE

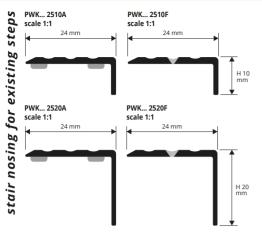

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS



Adhesive version

1. Choose the suitable profile and cut it to the necessary length Degrease, wash and clean the solid surface thoroughly.
 Remove the protective paper from the adhesive. 4. Lay the profile by applying pressure evenly over the whole surface without using a hammer.

Punched version

1. Choose the suitable profile and cut it to the necessary length 2. Mark the position of the holes using the existing holes in the profile as reference. **3.** Insert the screw anchors into the drilled holes. **4.** Fix the profile using flathead screws suitable for the relative slots in the profile.





ANODIZED

ON DEMAND MINIMUM QUANTITY 100 PCS for color and



ANODIZED ALUMINIUM with adhesive thermo packed bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	L x H mm	€/lm	€/Pc
PWK 2510A	24 X 10	6,24	16,85
PWK 2520A	24 X 20	6,85	18,50

ANODIZED ALUMINIUN thermo packed - bar length		SELF PACK
Article	LxHmm	€/Pc
PWK 25109AS	24 X 10	6,71
PWK 25209AS	24 X 20	7,73



ANODIZED ALUMINIUM punched thermo packed bar length 2,7 lm - pack. 40 Pcs - 108 lm

PWK... 251013FS

Article	L x H mm	€/lm	€/Pc
PWK 2510F	24 X 10	4,68	12,64
PWK 2520F	24 X 20	5,38	14,53

Article	LxHmm		€/Pc
WK 25109FS	24 X 10		5,64
WK 25209FS	24 X 20		6,49
IODIZED ALUM. punche		anchore	0,10

24 X 10

Available in the finishes: AO - AA - AB (AT, CH e SB on demand with a minimum order of 100 pcs). The code of the selected finish must be added to the article code. E.g.:PWK... 2510A (chosen finish anodized silver) PWKAA 2510A.

ALUMINIUM WOODEN FINISHES with adhesive thermo packed bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article LxHmm €/lm €/Pc

PWK 2510A	24 X 10	10,38	28,03	*
PWK 2520A	24 X 20	12,48	33,70	*
Available on demand in	the colours: 04W	V - 05W - 07W	/ - 09W - 13W	/

- 18W - 21W - 25W - 29W - 30W - 31W - 32W - 33W - 34W - 35W - 36W - 37W - 38W - 39W - 41W - 42W - 44W - 45W - 46W - 48W -49W - 53W - 55W - 55W - 65W - 73W - 75W with a minimum quantity order of 100 pcs. The code of the selected colour must be added to the article code.

E.g.: PWK... 2510A (chosen finish dark beech) PWK04 2510A

d bronze alum.	
d height	(For a precise assessment of colours request th
d sand aluminium	

the wooden finishes sample range)

AT - Anodized titanium alum.	CH - Anod. champagne alum.	SB - Anodized sand aluminium						
04W - Dark beech	05W - Light oak (strip)	07W - Light cherry (strip)	09W - Red walnut (merbau-apple-walnut)	13W - Indonesian teak	18W - Light zerbano	21W - Oak powder	25W - Bleached fir	29W - White oak
					- 200			
30W - Grey oak	31W - Victoria oak	32W - Pink oak	33W - Sawed oak	34W - Havana oak	35W - Edinburgh oak	36W - American oak	37W - Carvi oak	38W - Queens oak
			Section 1				and the second	and a state
39W - Grey elm	41W - Ice oak	42W - Grace oak	44W - Honey oak	45W - Marocco oak	46W - Black decape'	48W - Cork oak	49W - Sand oak	53W
54W	55W	65W - Tripoli	73W - Bangkok	75W - Liotard				

On demand it is possible to produce samples of wood finishes. Contact the office for negotiation, small amounts, timing and costs.



🖈 = Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed

8,18



PROEND INS 75 is a step nosing profile in anodized aluminium with interchangeable rubber insert: the upper part is knurled to increase slip and slide resistance and is applied after laying. Available anodized with gold, bronze or silver finish and with adhesive or punched.

PROEND INS 75 ensures a perfect finish, covering laying defects and protecting the edge. Easy to lay with the self-adhesive backing ensuring perfect adherence to the step or with screws and screw anchors in the punched version.

PROEND INS 75

GOLD, SILVER AND BRONZE ANOD. ALUMINIUM ADHESIVE AND PUNCHED

L 75,5 mm



ANODIZED ALUMINIUM with DOUBLE INSERT thermo packed - with adhesive

har length 2 7 lm - nack 10 Pcs - 27 lm

Article	HxLmm	€/Im	€/Pc
PED 7537A	37 X 75,5	26,98	72,85

ANODIZED ALUMINIUM with DOUBLE INSERT

thermo packed - punched

bar length 2,7 lm - pack. 10 Pcs - 27 lm

Article	H x L mm	€/lm	€/Pc
PED 7537F	37 X 75,5	23,08	62,32
On demand bar lengt Production delay 4/5			ity of 200 pcs.

Available in the finishes: AA - AO - AB. The code of the selected finish must be added to the article code. E.g.:PED... 7537A (chosen finish anodized gold) PEDAO 7537A.





EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS Adhesive version


Achesive version 1. Choose the suitable profile and cut it to the necessary length. 2. Degrease, wash and clean the solid surface thoroughly. 3. Remove the protective paper from the adhesive. 4. Lay the profile by applying pressure evenly over the whole surface without using a hammer. Punched version 1. Choose the suitable profile and cut it to the necessary length.

2. Mark the position of the holes using the existing holes in the profile as reference. 3. Insert the screw anchors into the drilled holes. 4. Fix the profile using flathead screws suitable for the relative slots in the profile.

COLOURS



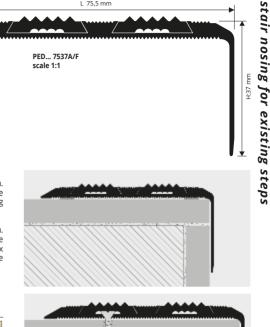



PROEND INS

PROEND INS is a step nosing profile in anodized aluminium with interchangeable rubber insert: the upper part is knurled to increase slip and slide resistance and is applied after laying. Available anodized with gold, bronze or silver finish and with adhesive or punched.

PROEND INS ensures a perfect finish, covering laying defects and protecting the edge. Easy to lay with the self-adhesive backing ensuring perfect adherence to the step or with screws and screw anchors in the punched version.



ANODIZED ALUM. with adhesive WITH INSERT thermo packed

bar length 2,7 lm - pack.	20 Pcs - 54 Im		
Article	HxLmm	€/Im	€/Pc
PED 4528A	28 X 45	17,10	46,17


ANODIZED ALUM. punched WITH INSERT thermo packed bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	H x L mm	€/lm	€/Pc
PED 4528F	28 X 45	12,34	33,32

On demand bar length 3 Im with minimum quantity of 200 pcs. Production delay 4/5 weeks. Price to be agreed.

COLOURS





HxLmm Article €/lm €/Pc PED... 452816FS 28 X 45 31,06 Available in the finishes: AA - AO - AB.

AN. ALUM. punched WITH INSERT, screws and screw anchors

thermo packed - bar length 1,65 im - pack. 20 Pcs


The code of the selected colour must be added to the article code E.g.: PED... 4528A (chosen finish anodized gold) PEDAO 4528A.

BLACK INTERCHANGEABLE INSERT VINYL RESIN / RUBBER

*

VINYL RESIN / RUBBER bar length 2,7 lm - pack. 20 Pcs - 54 lm		
Article	€/Im	
IIN 12	2 21	






🖈 = Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed Prices are referred to whole packs, 10% increase for minimum orders of 10 pcs, 20% increase for orders of less than 10 pcs.

€/Pc

5 97

litelly

GOLD, SILVER AND BRONZE ANOD. ALUMINIUM ADHESIVE AND PUNCHED



EXAMPLES OF LAYING



PROEND GRIP 70

PROEND GRIP 70 is a non-slip step nosing profile in anodized aluminium with adhesive non-slip 50mm thick insert in black carborundum to be fitted in the relative groove in the top of the profile upon completion of laying. The profile may be laid with fixing screws hidden afterwards by the adhesive carborundum, or with silicone and/or adhesive to be applied on the bottom of the profile, which is designed to ensure an excellent grip. It is made in anodized aluminium with silver, gold or bronze finish with anodizing coat of approx. 15/20 micron.

PEGRAA 7032.. PROGRIE steps L 70 mm stair nosing for existing 32.5 **EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS**

Adhesive version 1. Choose the suitable profile and cut it to the necessary length. Degrease, wash and clean the solid surface thoroughly.
 Remove the protective paper from the adhesive. 4. Lay the profile by applying pressure evenly over the whole surface without using a hammer.

Punched version 1. Choose the suitable profile and cut it to the necessary length. 2. Mark the position of the holes using the existing holes in the profile as reference. 3. Insert the screw anchors into the drilled holes. **4.** Fix the profile using flathead screws suitable for the relative slots in the profile.

SILVER, GOLD AND BRONZE ANODIZED ALUM. with adhesive thermo packed - bar length 2,7 lm - pack. 20 Pcs - 54 lm Hylmm _____€/l Articlo

Article		C/IIII	
PEGR 7032A	32,5 X 70	19,20	51,84
SILVER. GOLD AND BR	ONZE ANODIZED	ALUM. pund	hed

thermo packed - bar length 2.7 lm - pack. 20 Pcs - 54 lm

Article	HxLmm	€/lm	€/Pc
PEGR 7032F	32,5 X 70	15,72	42,44

Available in the finishes: AA - AO - AB. The code of the selected finish must be added to the article code. E.g.: PEGR... 7032A (chosen finish anodized gold) PEGRAO. 7032A

On demand bar length 3 Im with minimum quantity of 200 pcs. Production delay 4/5 weeks. Price to be agreed.


COLOURS

AA - Anodized silver alum.

The adhesive carborundum strip (PROGRIP) is not included with the profile. For PEGR... 7032... order PGR... 50 (Specify the chosen colour).

PROEND 5050

ANODIZED SILVER ALUMINIUM + NON-SLIP INSERT ADHESIVE AND PUNCHED **PROEND 5050** is a non-slip profile for stairs in anodized silver aluminium, with a visible surface of 50x50 mm. The profile, available in the adhesive or punched version, is characterized of a horizontal surface partially milled, equipped with a specific groove where the non-slip adhesive Progrip in carborundum could be applied. The profile has also a vertical inclined of 83-degrees surface completely smooth. The ease of application and the availability of the carborundum in different colours, make it a much-sought profile.



ADHESIVE

HOLE

ANODIZED SILVER ALUMINIUM punched / with adhesive

bar length 2,7 lm - pack. 20 Pcs - 54 lm					
Article	HxL mm	€/lm	€/Pc		
PEGRAA 50F	50 X 50	13,45	36,31	*	
PEGRAA 50A	50 X 50	16,07	43,39	*	



AO - Anodized gold alum. AB - Anodized bronze alum.

COLOURS

AA - Anodized silver alum.

On demand bar length 3 Im with minimum quantity of 200 pcs. Production delay 4/5 weeks. Price to be agreed.

The adhesive carborundum strip (PROGRIP) is not included with the profile.

For PEGRAA 50... order PGR... 20 (Specify the chosen colour)

INSTRUCTIONS FOR LAYING METHODS

Adhesive version

desired color.

1. Cut PROEND 5050 to the desired length; 2. Remove all the remains of oil, grease and dirt from the surface where the profile will be laid; **3.** When the surface is perfectly dry, remove the protective film and press the profile exerting the appropriate pressure; **4.** Apply the non-slip strip in carborundum in the desired colour. Punched version

1. Cut PROEND 5050 to the correct size: 2. Mark on the support the position of the holes present on the profile; 3. Drill holes in the bracket with a 5 mm diameter bit and insert the 5 x 25 mm rawlplugs; **4.** Align the profiles over the holes and screw it to support **5.** Apply the non-slip carborundum adhesive insert in the



EXAMPLES OF LAYING






★ = Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed

Prices are referred to whole packs, 10% increase for minimum orders of 10 pcs, 20% increase for orders of less than 10 pcs.

H 50





SILVER, GOLD AND BRONZE ANOD, ALUMINIUM + NON-SLIP INSERT ADHESIVE AND PUNCHED



ANODIZED SILVER, GOLD AND BRONZE ALUM. with adhesive thermo packed - bar length 2,7 lm - pack. 20 Pcs - 54 lm


Article	HxLmm	€/Im	€/Pc		Article	HxLmm	€/Im	
PEGR 5230A	30 X 52	16,21	43,77		PEGR 5230F	30 X 52	13,61	3
On demand	l bar length 3 lm	with minim	um quantity	of 200	pcs. Production dela	y 4/5 weeks. Pri	ce to be agre	ed.

ANODIZED CILVED, COLD AND PRONZE ALLIM

ANODIZED SILVER, GOLD AND BRONZE ALUM. with adhesive - thermo packed bar length 1,66 lm - pack. 20 Pcs		SELF PACK	ANODIZED SILVER, GOLD AND BRONZE ALUM. punched, screws and screw anchors - thermo packed bar length 1,66 lm - Pack 20 Pcs			
Article	HxLmm	€/Im	€/Pc	Article	H x L mm	€/Ir
PEGR 523016AS	30 X 52		32,06 📩	PEGR 523016FS	30 X 52	

Available in the finishes: AA - AO - AB

The code of the selected finish must be added to the article code. E.g.: PEGR... 523016AS (chosen finish anodized silver) PEGRAA 523016AS.



		the state of the s
AO - Anodized gold alum.	AA - Anodized silver alum.	AB - Anodized bronze alum.

🚼 = Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed

PROGRIP is a self-adhesive product in carborundum consisting of a plastic film plus abrasive granules with high resistance to wear. It is normally used to guarantee safety on steps in public and private environments, as required by accident-prevention laws. Available in various colours and widths to meet all technical and aesthetic requirements. It is advisable to apply 2 strips on each step, rounding off the ends.

rolls length 18.2 lm



ADHESIVE CARBORUNDUM NON-SLIP STRIP for STEPS

thermo packed - bar length 2,7 lm - pack. 20 Pcs - 54 lm

€/lm


€/Pc

36,75

€/Pc 28,90



COLOURS




0113 1C118(11 10,2 111				
Article	Width mm	€/Im	€/Roll	
PGRN 20	20	2,02	36,76	_
PGRB 20	20	3,56	64,79	*
PGRT 20	20	2,02	36,76	
PGRG 20	20	4,00	72,80	
PGRY 20	20	4,00	72,80	
PGRM 20	20	2,32	42,22	
PGRN 25	25	2,68	48,78	
PGRB 25	25	4,02	73,16	*
PGRT 25	25	2,68	48,78	
PGRG 25	25	4,56	82,99	
PGRY 25	25	4,42	80,44	
PGRM 25	25	3,08	56,06	
PGRN 50	50	5,50	100,10	
PGRB 50	50	8,18	148,88	*
PGRT 50	50	5,50	100,10	
PGRG 50	50	9,05	164,71	
PGRY 50	50	8,99	163,62	
PGRM 50	50	6,10	111,02	

ADHESIVE NON-SLIP STRIP for STEPS - rolls length 18,2 Im

	Article	Width mm	€/lm	€/Roll
٩	PGRGN 20	20	2,03	36,95
۲	PGRGN 25	25	2,72	49,50
0	PGRGN 50	50	5,58	101,56

PROEND GRIP

SILVER, GOLD AND BRONZE ANOD, ALUMINIUM + NON-SLIP INSERT ADHESIVE AND PUNCHED

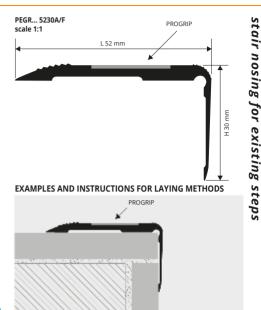

1. Choose the suitable profile for covering the edge of the step. 2. Clean the surface on which the profile is to be laid, ensuring that it is grease-free and dry. Do not apply the strips at temperatures below 15°. **3.** Remove the protective paper from the adhesive and lay correctly by applying pressure evenly over the whole profile without using a hammer. If the punched PROEND GRIP has been chosen, screw the profile to

the step and apply the adhesive carborundum to hide the screws.

PROGRIP

ADHESIVE CARBORUNDUM - 6 COLOURS



LAYING INSTRUCTIONS


LAYING INSTRUCTIONS
 Thoroughly clean and degrease the surface of application. 2. Round the ends of the strips. 3. Remove the protective paper from the adhesive and lay the PROGRIP using a roller. 4. Do not apply the strips at temperatures below 15°, otherwise heat the strips and the step.
 When necessary clean away impurities with a brush and preserve the PROGRIP. 6. When laying on tiles, cut and round the corners of the strips on the inner part of the tile. 7. Carefully seal the outer edges of the strips to prevent water infiltration.


***** = Production on demand with minimum quantity of 10 rolls. Production delay 4/5 weeks. Price to be agreed

Prices are referred to whole packs, 10% increase for minimum orders of 10 pcs, 20% increase for orders of less than 10 pcs.

non-slip strip for steps




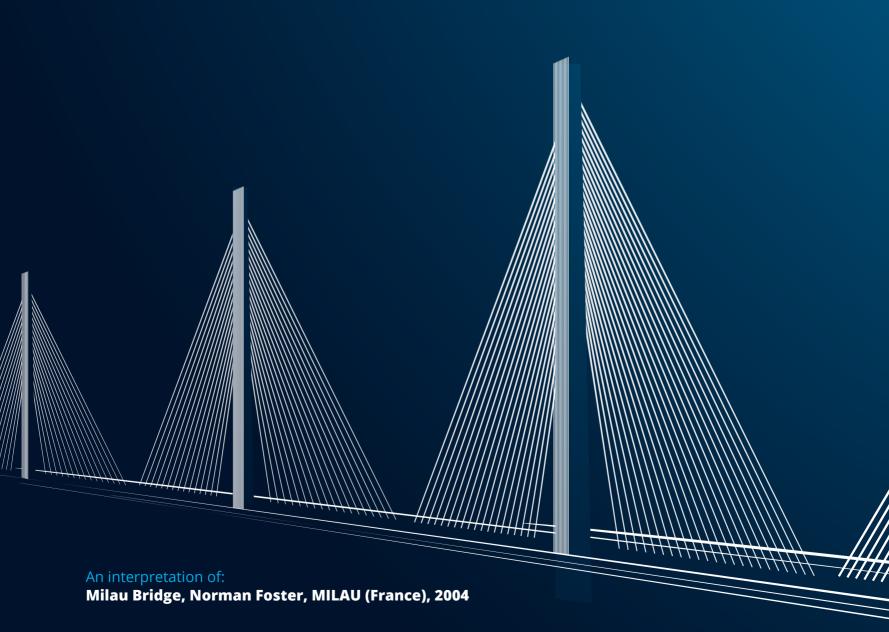

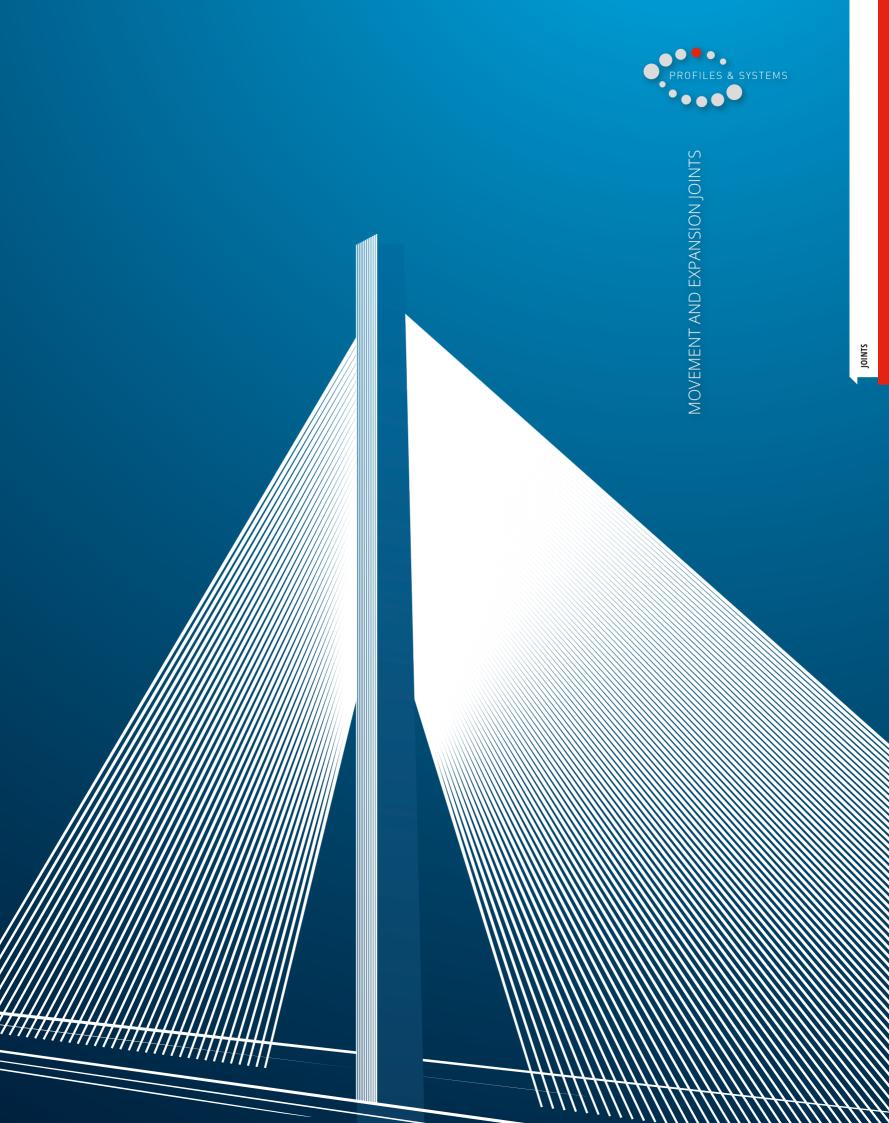

PROFLEX ACC

STAINLESS STEEL AISI 304/1.4301-V2A + VINYL RESIN / RUBBER INSERT

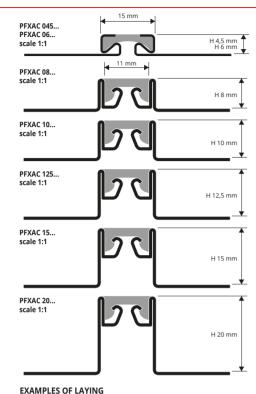



POLISHED STAINLESS STEEL AISI 304/1.4301-V2A + VINYL RESIN / RUBBER INSERT

bar length 2,5 lm - pack. 10 Pcs - 25 lm (PFXAC 045/06/08 - 50 lm)

Article	Hmm	€/lm	€/Pc
PFXAC 045	4, 5	24,64	61,60
PFXAC 06	6	25,67	64,18
PFXAC 08	8	30,91	77,28
PFXAC 10	10	31,29	78,22
PFXAC 125	12,5	32,19	80,47
PFXAC 15	15	33,59	83,98
PFXAC 20	20	36,02	90,05

LAYING INSTRUCTIONS

1. Choose the PROFLEX ACC with the same height as the thickness of the floor (tile) also choosing the colour of the insert. 2. Using a notched spreader apply the adhesive in the point where the joint will be laid. 3. Lay the PROFLEX ACC with the punched flanges in the adhesive (we recommend the expansion joint being laid in line with the joint in the screed/floor rough). 4. Lay the tiles, aligning them with and adjoining the upper edge of the profile (the joint must always be 0.5-1mm lower than the tile, never above). Always place the uncut side of the tile against the profile. 5. Use sealant to fill any spaces between the tile and the PROFLEX ACC joint.

WE SIM

VINYL RES	IN/RUBBER INSERT	length 2,5 lm	
Article	Hmm	€/lm	€/Pc
ISPFXAC 820	8-10-12,5-15-20	4,23	10,58
VINYL RES	IN/RUBBER INSERT	length 2,5 Im	
		-	

Article	H mm	€/lm	€/Pc
ISPFXAC 045	4,5	3,90	9,75
ISPFXAC 06	6	3,90	9,75

Insert available in the colours: G - N (Beige and ivory available on demand with a minimum quantity order of 200 pcs). The code of the selected finish must be added to the article code. E.g.: PFXAC 045... (chosen insert colour grey) PFXAC 045G.

COLOURS

PROFLEX ACC is a new, stainless steel expansion joint with interchangeable (H. 4,5 e 6 mm excluded) vinyl resin/rubber insert, available in black, grey, beige or ivory. **PROFLEX ACC** provides elastic expansion joints for various kinds of flooring, such as ceramic, marble, granite, Kerilite/Laminam or any other flooring material laid with glue/adhesive and having a thickness of 4.5 to 20 mm. The joint is specially designed to protect the edges of the tiles, and its exceptional strength makes it capable of


supporting frequent traffic, both pedestrian and vehicular (forklifts, pallet trucks, automobiles). The joint must be installed at the same level of the floor or 0.5-1 mm lower (never above). Lay the joints according with the standards in force. HIGH RESISTANCE TO LOADS AND TO FREQUENT TRAFFIC OF PALLET TRUCKS AND FORKLIFTS.



(Price to be agreed. Production delay 4/5 weeks)

PROFLEX ACC PR

STAINLESS STEEL AISI 304/1.4301-V2A + VINYL RESIN / RUBBER INSERT **PROFLEX ACC PR** is a new perimeter joint made of AISI 304/1.4301-V2A stainless steel, with an interchangeable vinyl resin/rubber insert. **PROFLEX ACC PR** is applied on fixed parts, such as doors, windows and frames, and also on ceramic tiling, plaster and vertical walls. The visible part of the perimeter joint is the same as PROFLEX ACC, with an exposed steel flange. **PROFLEX ACC PR** joints prevent sound from propagating through the wall lining and reduce the transmission of noise caused by footfalls and vibrations. Available with grey (G), black (N), beige (B) or ivory (A) inserts and in various heights H 8-10-12.5-15-20 mm. Lay the joints according with the standards in force.

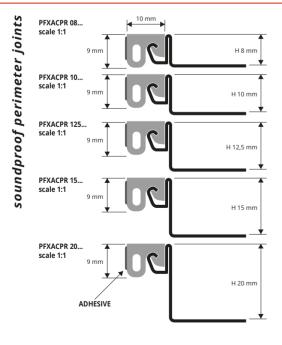



POLISHED STAINLESS STEEL AISI 304/1.4301- V2A + VINYL RESIN / RUBBER INSERT

bar length 2,5 lm - pack. 20 Pcs - 50 lm				
Article	Hmm	€/lm	€/Pc	
PFXACPR 08	8	21,26	53,15	
PFXACPR 10	10	21,51	53,78	
PFXACPR 125	12,5	22,23	55,58	
PFXACPR 15	15	23,06	57,65	
PFXACPR 20	20	24,47	61,17	
COLOURS				
AC - Polished stainless steel AISI 304/1.4301-V2A				




VINYL RESIN / RUBBER INTERCHANGEABLE INSERT length 2,5 lm

Article	H mm	€/lm	€/Pc
ISPFXACPR 820	8-10-12,5-15-20	4,23	10,58


Insert available in the colours: G - N (Beige and ivory available on demand with a minimum quantity order of 200 pcs). The code of the selected finish must be added to the article code.

E.g.: ISPFXACPR 820... (chosen insert colour grey) ISPFXACPR 820G.

COLOURS				
N - Black (E85)	G - Grey (E83)			
ON DEMAND MINIMUM QUANTITY 200 pcs for colour and height				



PROGRESS® PROFILES



PROFLEX OT

NATURAL BRASS + VINYL RESIN / RUBBER INSERT



NATURAL BRASS + VINYL RESIN / RUBBER INSERT bar length 2.5 lm - pack 10 Pcs - 25 lm

bui iciigai 2,5 iii pucit.	0105 25 111	•		
Article	Hmm	€/Im	€/Pc	
PFXOT 08	8	33,79	84,47	
PFXOT 10	10	35,41	88,52	
PFXOT 125	12,5	37,38	93,45	
PFXOT 15	15	39,62	99,05	*
PFXOT 20	20	43,48	108,70	*
PFXOT 30	30	46,79	116,97	

Insert available in the colours: G - N (Beige and ivory available on demand with a minimum quantity order of 200 pcs).

The code of the selected finish must be added to the article code E.g.: PFXOT 08... (chosen insert colour grey) PFXOT 08G.

COLOURS

N - Black (E85)	G - Grey (E83)



VINYL RESIN/RUBBER INSERT

B - Beige (E84)

bar length 2,5 lm - pack Article	. 40 Pcs - 100 lm L x H mm	€/lm	€/Pc
IGC	14 X 6	4,88	12,20
Insert available in the	e colours: G - N (Be	ige and ivon	, available or

demand) The code of the selected finish must be added to the article code. E.g.: IGC ... (chosen insert colour grey) IGCG

* The inserts of the on demand profiles are also on demand

ON DEMAND MINIMUM QUANTITY 200 pcs for colour and height

A - Ivory (E81)

(Price to be agreed. Production delay 4/5 weeks)

PFXOT 30 scale 1:1 H 30 mm

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS



1. Choose the PROFLEX OT with the same height as the thickness of the floor (tile) also choosing the colour of the insert. **2.** Using a notched spreader apply the adhesive in the point where the joint will be laid. **3.** Lay the PROFLEX OT with the punched flanges in the adhesive (we recommend the expansion joint being laid in line with the joint in the screed/floor rough). **4.** Lay the tiles, aligning them with and adjoining the upper edge of the profile (the joint must always be 0.5-1mm lower than the tile, never above). Always place the uncut side of the tile against the profile. **5.** Use sealant to fill any spaces between the tile and the PROFLEX OT joint.

> 55 mm 17 mm



JOINTS

NATURAL ALUMINIUM + VINYL RESIN / RUBBER INSERT

H 8 mm

H 10 mn

H 12,5

H 15 mm

H 20 mn

laid with glue/adhesive between 8 and 20 mm thick. The special structure of the joint is designed to protect the corners of the tiles and its high strength withstands frequent pedestrian and vehicular (lift trucks, pallet trucks, cars) traffic. The joint must be placed level with or 0.5-1 mm below the floor level, never above. Lay the joints according with the standards in force. HIGH RESISTANCE TO HEAVY LOADS AND TO FREQUENT PALLET TRUCK AND LIFT TRUCK TRAFFIC.

PROFLEX AL is an expansion joint in natural aluminium with the PVC/rubber insert. It is available in black, grey, beige or ivory and serves to fabricate expansion joints for ceramic tile, marble or granite floors and any floor



NATURAL ALUMINIUM + VINYL RESIN / RUBBER INSERT 7th 2.5 lm - pack 20 Pcs - 50 lm

bai icligiti 2,5 mi - pack. 2	0103-3011		
Article	Hmm	€/lm	€/Pc
PFXAL 08	8	14,48	36,20
PFXAL 10	10	14,76	36,90
PFXAL 125	12,5	15,16	37,90
PFXAL 15	15	16,03	40,08
PFXAL 20	20	17,37	43,43

Insert available in the colours: G - N (Beige and ivory available on demand with a minimum quantity order of 200 pcs). The code of the selected finish must be added to the article code. E.g.: PFXAL 08... (chosen insert colour grey) PFXAL 08G

COLOURS



LAYING INSTRUCTIONS

1. Choose "PROFLEX AL" according to the tile thickness and desired colour. 2. Cut "PROFLEX AL" to the desired length and apply the adhesive on the support where the profile will be laid. **3.** Place the joint exactly over the screed joint and press the anchor glange into the adhesive. **4.** Lay the tiles aligning them with the profile leaving a 2 mm joint. After laying the joint should be 0,5 mm below the floor covering surface. Remove immediately all the remains of adhesive from the surface of the profile. **5.** Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile.



VINYL RESIN/RUBBER INSERT

bar length 2,5 lm - pack. 40 Pcs - 100 lm				
Article L x H mm €/lm €/Pc				
IGC	14 X 6	4,88	12,20	

Insert available in the colours: G - N (Beige and ivory available on demand)

The code of the selected finish must be added to the article code E.g.: IGC ... (chosen insert colour grey) IGCG

ON DEMAND MINIMUM QUANTITY 200 pcs for colour and height



PFXAL/OT 20 scale 1:1


PFXAL/OT 08 scale 1:1

PFXAL/OT 10 scale 1:1

PEXAL/OT 125 scale 1:1

PFXAL/OT 15

scale 1:1






PROFLEX ACN

STAINLESS STEEL AISI 304/1.4301-V2A

PROFLEX ACN is a movement joint suitable for vehicular traffic composed by two interlocked sliding stainless steel profiles. The two stainless steel profiles have punched flanges which guarantee a perfect fixing to the support and a correct movement. **PROFLEX ACN** stainless steel is suitable for all areas with heavy chemical and mechanical stress. Lay the joints according to UNI 11493-1.

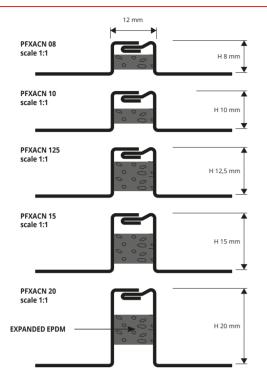

SUITABLE FOR USE IN CONTACT WITH FOODSTUFFS

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

POLISHED STAINLESS STEEL AISI 304/1.4301-V2A bar length 2,5 Im - pack. 10 Pcs - 25 Im

Article	Hmm	€/lm	€/Pc
PFXACN 08	8	33,81	91,29
PFXACN 10	10	34,78	93,91
PFXACN 11	11	35,32	95,36
PFXACN 125	12,5	36,23	97,82
PFXACN 15	15	37,74	101,90
PFXACN 20	20	39,25	105,98
PFXACN 25	25	40,75	110,03
PFXACN 30	30	42,26	114,10

COLOURS

Stainless steel AISI 304/1.4301-V2A

PROFLEX ALN is a new, natural aluminium expansion joint consisting of two interlocked sliding profiles designed for glued floors. PROFLEX ALN provides elastic expansion joints for various kinds of flooring, such as ceramic, marble, granite, Kerilite or any other

flooring material laid with glue/adhesive and having a thickness of 8 to 20 mm. The joint is specially designed to protect the edges of the tiles, and its exceptional strength makes it capable of supporting frequent traffic, both pedestrian and vehicular (forklifts, pallet trucks, automobiles). The joint must be installed at the same level of the floor or 0.5-1 mm lower (never above). Lay the joints

according with the standards in force. HIGH RESISTANCE TO LOADS AND TO FREQUENT TRAFFIC OF PALLET TRUCKS AND FORKLIFTS.

ACM - Polished stainless st. AISI 316LL

ON DEMAND*

*Minimum quantity 200 pcs.

Price to be agreed. Production delay 4/5 weeks.


1. Choose the PROFLEX ACN with the same height as the thickness of the floor (tile). 2. Using a notched spreader apply the adhesive in the point where the joint will be laid. 3. Lay the PROFLEX ACN with the punched flanges in the adhesive (we recommend the expansion joint being laid in line with the joint in the screed/floor rough). 4. Lay the tiles, aligning them with and adjoining the upper edge of the profile (the joint must always be 0.5-1mm lower than the tile, never above). Always place the uncut side of the tile against the profile. 5. Use sealant to fill any spaces between the tile and the PROFLEX ACN joint.

AVAILABLE H 11mm - PFXACN 11, H 25mm - PFXACN 25, H 30mm - PFXACN 30

PROFLEX ALN

NATURAL ALUMINIUM

JOINTS

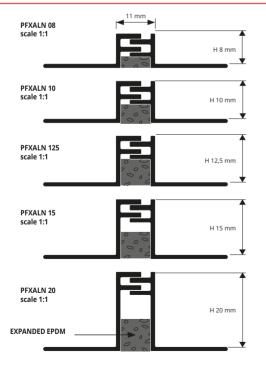



NATURAL ALUMINIUM bar length 2,5 Im - pack. 20 Pcs - 50 Im

Article	Hmm	€/lm	€/Pc	
PFXALN 08	8	15,56	38,90	*
PFXALN 10	10	16,16	40,40	
PFXALN 125	12,5	16,71	41,78	
PFXALN 15	15	17,49	43,72	
PFXALN 20	20	18,71	46,78	
COLOURS				
and the second sec				


AN - Natural aluminium



EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS



1. Choose the PROFLEX ALN with the same height as the thickness of the floor (tile). 2. Using a notched spreader apply the adhesive in the point where the joint will be laid. 3. Lay the PROFLEX ALN with the punched flanges in the adhesive (we recommend the expansion joint being laid in line with the joint in the screed/floor rough). 4. Lay the tiles, aligning them with and adjoining the upper edge of the profile (the joint must always be 0.5-1mm lower than the tile, never above). Always place the uncut side of the tile against the profile. 5. Use sealant to fill any spaces between the tile and the PROFLEX ALN joint.





STAINLESS STEEL AISI 304/1.4301-V2A WITH SANDABLE VULCANIZED EPDM - bar length 2,7 lm - pack. 20 Pcs - 54 lm (GCAC 20 - 27 lm)

Article	H mm	€/Im	€/Pc
GCAC 08 (8x10)	8	43,17	116,56
GCAC 10 (10x10)	10	44,95	121,37
GCAC 125 (12,5x10)	12,5	48,66	131,38
GCAC 15 (15x10)	15	51,36	138,67
GCAC 20 (20x10)	20	59,20	159,84

SUITABLE FOR USE IN CONTACT WITH FOODSTUFFS



Insert available in the colours: N - G. The code of the selected finish must be added to the article code E.g.: GCAC 08... (chosen insert colour grey) GCAC 08G H 25 / H 30 on demand.

COLOURS



Insert available in the colours: N - G. The code of the selected finish must be added to the article code

EXAMPLES OF LAYING 1. Choose "PRODILAT" according to the desired finish, tile thickness and desired colour. 2. Cut "PRODILAT" to the desired length and apply the adhesive on the support where the profile will be laid. 3. Place the joint exactly over the screed joint and press the anchoring flange into the adhesive. 4. Lay the tiles, aligning them with the profile leaving a 2 mm. joint. After laying the joint should be 0.5 mm below the floor covering surface. Remove immediately, all the remains of adhesive

covering surface. Remove immediately all the remains of adhesive from the surface of the profile. **5.** Fill the joints between the profile

and the tiles with grout, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile.

.g.: GCAN 08... (chosen insert colour grey) GCAN 08G.

H 25 / H 30 on demand

EXAMPLES OF LAYING

Possible specks on the surface of the vulcanised rubber are due to the nature of the product itself, they disappear once the laid profile is polished or cleaned. Claims due to these specks will not be taken into consideration

PRODILAT is an expansion joint in natural aluminium composed of two counterposed profiles in "L" shape, joined with a vulcanized EPDM which can be polished, available in black and grey colour. The counterposed profile in "L" shape have perforated wings for a perfect bond to the substrate and a correct movement of the joint. The expanding EPDM has a high resistance to mechanical & chemical stress, UV rays, to fungi and bacteria. PRODILAT in aluminium is suitable to be used in all environments with high mechanical and chemical stress. Lay the joints according to UNI 11493-1 regulation.



ALUMINIUM WITH SANDABLE VULCANIZED EPDM bar length 2,7 lm - pack. 20 Pcs - 54 lm


Article	H mm	€/lm	€/Pc
GCAN 08 (8x10)	8	29,70	80,19
GCAN 10 (10x10)	10	30,71	82,92
GCAN 125 (12,5x10)	12,5	32,66	88,18
GCAN 15 (15x10)	15	34,74	93,80
GCAN 20 (20×10)	20	38,77	104,68

COLOURS Aluminium COLOURS (EPDM) N - Black G - Grey

Possible specks on the surface of the vulcanised rubber are due to the nature of the product itself, they disappear once the laid profile is polished or cleaned. Claims due to these specks will not be taken into consideration.

WITH SANDABLE VULCANIZED EPDM 10 m H 8 mm

STAINLESS STEEL AISI 304/1.4301-V2A



EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS




1. Choose the PRODILAT with the same height as the thickness of the foor (tile) also choosing the colour of the insert. **2**. Using a notched spreader apply the adhesive in the point where the joint will be laid. **3**. Lay the PRODILAT with the punched flanges in the adhesive (we recommend the expansion joint being laid in line with the joint in the screed/floor rough). **4.** Lay the tiles, aligning them with and adjoining the upper edge of the profile (the joint must always be 0.5-1mm lower than the tile, never above). Always place the uncut side of the tile against the profile. **5.** Use sealant to fill any spaces between the tile and the PRODILAT.

PRODILAT

JOINTS

ALUMINIUM WITH SANDABLE VULCANIZED EPDM

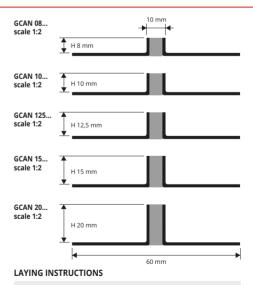



PRODILAT

Prices are referred to whole packs, 10% increase for minimum orders of 10 Pcs, 20% increase for orders of less than 10 Pcs.


PROGRESS®

ILE

PROFLEX

JOINTS

NON-TOXIC IMPACT-RESISTANT CO-EXTRUDED VINYL RESIN (PVC)

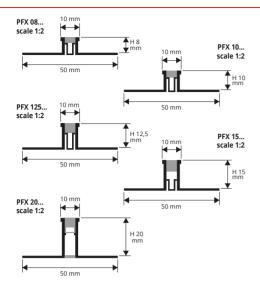

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS





NON - TOXIC CO-EXTRUDED VINYL RESIN - bar length 2,5 Im pack. 40 Pcs - 100 Im (PFX 15 and PFX 20 - pack. 20 Pcs)

Article	Hmm	€/lm	€/Pc
PFX 08	8	4,08	10,20
PFX 10	10	4,48	11,20
PFX 125	12,5	4,89	12,22
PFX 15	15	5,43	13,57
PFX 20	20	6,51	16,27

1. Choose the PROFLEX with suitable height for the thickness of the floor. **2**. Apply the adhesive onto the area of application of the profile. 3. Lay and align the profile, cut to the necessary length, pressing the perforated flange into the adhesive. **4.** Lay the tiles, aligning them so that the top edge of the profile is flush with the tile. **5.** Fill the profile. tile area of contact with adhesive to prevent the accumulation of water in any voids.



Available in the colours: GS-GT-GL (Beige and ivory available on demand). The code of the selected finish must be added to the article code. E.g.: PFX 08... (chosen colour dark grey) PFX 08GS.

COLOURS

PROFLEX is an expansion joint in PVC with PVC/rubber insert. Available in 3 standard colours, PROFLEX serves to

fabricate expansion joints for ceramic tile, marble or granite floors and any floor laid with glue/adhesive between 8 and 20 mm thick. The special structure of the joint is designed to protect the corners of the tiles and its high strength withstands frequent pedestrian and vehicular (lift trucks - pallet trucks - cars) traffic. The joint must be placed level

with or 0.5-1 mm below the floor level, never above. Lay the joints according with the standards in force.


GS - Dark grey for rigid	GT - Dark grey for rigid part /	GL - Light grey for rigid
and flexible part	Transparent for flexible part	and flexible part

ON DEMAND MINIMUM QUANTITY 200 pcs



PROFLEX 5

NON-TOXIC IMPACT-RESISTANT CO-EXTRUDED VINYL RESIN (PVC)



PROFLEX 5 is a range of technical expansion joint profiles for floors laid with glue/adhesive. They are made in non-toxic, impact-resistant, co-extruded PVC with perforated horizontal lateral flanges in rigid PVC while the elastic central part is made in flexible vinyl resin 5 mm in width. They are able to absorb moderate tensile and compressive stress, while being resistant to most chemical agents, to wear and to UV rays. They may be used indoors and outdoors. Thanks to the limited widths, **PROFLEX 5** may be considered a "gap cover" because it blends in with the gaps between tiles. The joint profile must never be placed over a tiled floor and should preferably always be 0.5-1 mm lower. Lay the joints according with the standards in force.



NON - TOXIC CO-EXTRUDED VINYL RESIN - bar length 2,5 Im pack. 40 Pcs - 100 Im (PFX5 15 - pack. 20 Pcs - 50 Im)

Article	Hmm	€/lm	€/Pc
PFX5 045	4,5	3,21	8,03
PFX5 06	6	3,49	8,73
PFX5 08	8	3,61	9,03
PFX5 10	10	4,02	10,05
PFX5 125	12,5	4,37	10,93
PFX5 15	15	4,68	11,70

 Choose the PROFLEX 5 with suitable height for the thickness of the floor. 2. Apply the adhesive onto the area of application of the profile.
 Lay and align the profile, cut to the necessary length, pressing the perforated flange into the adhesive. 4. Lay the tiles, aligning them so that the top edge of the profile is flush with the tile. 5. Fill the profile/ tile area of contact with adhesive to prevent the accumulation of water in avaided. water in any voids.



Available in the colours: GS-GL (Beige and ivory available on demand with a minimum quantity order of 200 pcs). The code of the selected finish must be added to the article code. E.g.: PFX5 08... (chosen colour dark grey) PFX5 08GS.


COLOURS

GS -Dark grey for rigid	GL - Light grey for rigid
and flexible part	and flexible part

ON DEMAND MINIMUM QUANTITY 200 pcs for colour and height

B - Beige (E84)	A - Ivory (E81)
(Price to be agreed. Pr	oduction delay 4/5 weeks)

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS



© 2028 All dights reserved by Progress Profiles. Pdnted in litely

144



PROFLEX 5 PR is a perimeter joint made of coextruded vinyl resin that can be used to connect the floor to the wall lining or the wall lining to doors and windows and/or to any other kind of lining. The 5 mm elastic part (exposed) allows the floor/lining to expand as necessary. **PROFLEX 5 PR** prevents and dampens the propagation of sound waves and the forming of sound bridges. Available in dark grey, light grey, Beige and ivory, in various heights H 4,5-6-8-10-12,5 mm. Lay the joints according with the standards in force.

PROFLEX 5 PR

NON-TOXIC IMPACT-RESISTANT CO-EXTRUDED VINYL RESIN (PVC)




VINYL RESIN - bar length 2	2,5 lm - pack.	40 Pcs - 100 In	n	_
Article	H mm	€/lm	€/Pc	
PFX5PR 045	4,5	3,21	8,03	*
PFX5PR 06	6	3,49	8,73	*
PFX5PR 08	8	3,61	9,03	_
PFX5PR 10	10	4,02	10,05	
PFX5PR 125	12,5	4,37	10,93	
PFX5PR 15	15	4,68	11,70	

Available in the colours: GS-GL (Beige and ivory available on demand with a minimum quantity order of 200 pcs). The code of the selected finish must be added to the article code. E.g.: PFX5PR 045... (chosen insert colour dark grey) PFX5PR 045GS.


Prices are referred to whole packs, 10% increase for minimum orders of 10 Pcs, 20% increase for orders of less than 10 Pcs.

COLOURS

GS - Dark grey for rigid	GL - Light grey for rigid
and flexible part	and flexible part

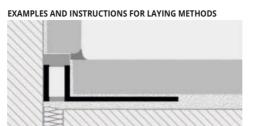


1. Choose "PROFLEX 5 PR" higher than the thickness of the tile 2. Cut "PROFLEX 5 PR" to the desired length and apply the adhesive on the support where the joint will be laid. 3. Position the profile along the perimeter and press the anchoring flap into the adhesive layer. 4. Lay the tiles. 5. Lay the skirting board taking care to rest it on the profile. 6. Silicone between the floor and skirting board

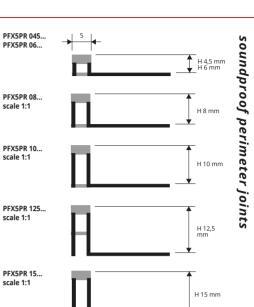

26 mm

JOINTS

ON DEMAND MINIMUM QUANTITY 200 pcs for colour and height






PROGRESS® PROFILES

ADHESIVE-LAID JOINTS

CO-EXTRUDED VINYL RESIN

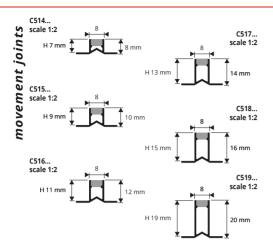

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS


JOINTS




1. Choose the joint in accordance with the colour and thickness of the floor, calculating 0.5-1 mm less for laying the joint, which under no circumstances must protrude. **2.** Place the joint over the cut/ joint in the screed; if there is none, make a cut of 2/3 the thickness of the screed. **3**. Apply the adhesive and lay the joint, pressing it into the glue. **4**. Lay the tiles, aligning them with the rigid vertical part of the joint. **5**. Using the special glue, fill the gap between the tiles and the profile.

MORTAR-LAID JOINTS

POLISHED BRASS - STAINLESS STEEL AISI304/1.4301-V2A NATURAL ALUMNINUM WITH SANDABLE VULCANIZED FPDM



EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS



1. Choose the colour and the necessary height of the joint. I. Choose the colour and the necessary height of the joint, calculating the thickness of the finished floor and the thickness of the screed. 2. Insert the joint into the screed letting it protrude slightly. 3. Proceed with laying the floor, aligning it with the rigid vertical part of the joint. 4. Complete laying by levelling the joint with the floor 5. Using the motor arguit the agen between the tiles with the floor. 5. Using the mortar, grout the gap between the tiles and the profile.

PROGRESS® PROFILES



POLISHED BRASS WITH SANDABLE VULCANIZED EPDM bar length 2 Im - pack. 25 Pcs - 50 Im (GOT 40... - 20 Im)

Article	L x H mm	€/lm	€/Pc	
GOT 20	10 X 20	50,11	100,22	*
GOT 40	10 X 40	85,88	171,76	*

COLOURS

-	1	
OL - Polished Brass	AC - Polished Stainless Steel AISI 304/1.4301-V2A	AN - Natural aluminium
COLOURS (EPDM)		
N - Black	G - Grey	



POLISHED STAINLESS STEEL AISI 304/1.4301-V2A WITH SANDABLE VULCANIZED EPDM bar length 2 Im - pack. 25 Pcs - 50 Im (GAC 40 ... - 20 Im)

Article	L x H mm	€/lm	€/Pc	
GAC 20	10 X 20	42,86	85,72	*
GAC 40	10 X 40	61,05	122,10	*
SUITABLE FOR U	SE IN CONTA	CT WITH FOOD	STUFFS	

NATURAL ALUMINIUM WITH SANDABLE VULCANIZED EPDM

bar length 2 lm - pack. 2	5 Pcs - 50 lm (GA	AL 40 40 I	m)	
Article	L x H mm	€/Im	€/Pc	
GAL 20	10 X 20	38,54	73,40	7
GAL 40	10 X 40	58,76	111,92	2
Incort available in the	colours: C N	•		

The code of the selected finish must be added to the article code

E.g.: GAC 20... (chosen insert colour grey) GAC 20G

heights. Lay the joints according with the standards in force.

CO-EXTRUDED VINYL RESIN bar length 2,5 lm - pack. 40 Pcs - 100 lm

the second				
Article	Hmm	€/lm	€/Pc	
C514 (8x8)	7	1,05	2,63	
C515 (10x8)	9	1,18	2,95	
C516 (12x8)	11	1,32	3,30	
C517 (14x8)	13	1,45	3,63	
C518 (16x8)	15	1,61	4,03	
C519 (20x8)	19	2,18	5,45	

ARTICLES NOT FOR SALE SINGLY

Available combinations: GS-GT-GL (RT-MT-BIBI-B-A and N available on demand with a minimum quantity order of 400 pcs). The code of the selected colour must be added to the article code


On demand (at same price) also

available WITHOUT FLAP with a

minimum order of 200 pcs. N.B.: specify "WITHOUT FLAP" in

E.g.: C514... (combination chosen colour Dark Grey / Transparent) C514 GT

order.



The **MOVEMENT JOINT** has been specially created to relieve the stress in prestige floors (marble, granite, ceramic tiles or wood) laid on a mortar bed. The joint is simply inserted by hand and is levelled with a plastic hammer. It is available in brass and stainless steel with internal vulcanised expanded EPDM gasket. Strong, practical and top quality. Lay the joints according with the standards in force.

ADHESIVE-LAID MOVEMENT JOINTS are a range of joints in co-extruded vinyl resin with the flanges and vertical supports made in rigid synthetic vinyl resin and the elastic central part in flexible synthetic vinyl resin. The glue-laid joints must be placed at least 0.5-1 mm below the level of the flooring (usually tiles) and never above. Suitable for pedestrian traffic, they absorb compressive and slip stress. Laying modules between 16 and 30 m3 inclusive are

recommended and the joint laid in line with the joints in the underlying screed. Available in various colours and








(Price to be agreed, Production delay 4/5 weeks)

🜟 = Production on demand with minimum quantity of 500 pcs. Production delay 4/5 weeks. Price to be agreed Prices are referred to whole packs, 10% increase for minimum orders of 10 Pcs, 20% increase for orders of less than 10 Pcs.



Laying modules between 16 and 30 m³ inclusive are recommended and the joint laid in line with the joints in the underlying screed. Available in various colours and heights. Lay the joints according with the standards in force.

MORTAR-LAID JOINTS

CO-EXTRUDED VINYL RESIN



GT - Dark grey for rigid part / Transparent for flexible part

ON DEMAND MINIMUM QUANTITY 400 PCS for colour and height

MT - Brown for rigid part / Transparent for flexible part

A - Ivory (E81)

(Price to be agreed. Production delay 4/5 weeks)

GL - Light grey for rigid

BIBI - White for rigid and flexible part

N - Black for rigid

and flexible na

COLOURS

GS - Dark grey for rigid

RT - Red for rigid part / Transparent for flexible part


B - Beige (E84)

CO-EXTRUDED VINYL RESIN


bar length 2,5 lm - pack. 40 Pcs - 100 lm (C513 - pack. 50 lm)				
Article	L x H mm	€/lm	€/Pc	
C511	8 X 25	1,67	4,17	
C512	8 X 35	1,93	4,83	
C513	8 X 45	2,43	6,08	

ARTICLES NOT FOR SALE SINGLY

Available combinations: GS-GT-GL (RT-MT-BIBI-B-A and N available on demand with a minimum quantity order of 400 pcs). The code of the selected colour must be added to the article code. Eg: CS11...(combination chosen colour dark grey/transparent) CS11 GT.

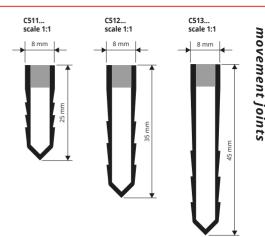

EXAMPLES OF LAYING



STAGE1 STAGE 2 STAGE 3

1. Choose the colour and the necessary height of the joint, calculating the thickness of the finished floor and the thickness of the screed. 2. Insert the joint into the screed letting it protrude slightly (stage 1-2-3). 3. Proceed with laying the floor, aligning it with the rigid vertical part of the joint. 4. Complete laying by levelling the joint with the floor. 5. Using the mortar, grout the gap between the tiles and the profile.

@ 2028. All rights reserved by Progress Profiles. Printed in Itely

This **DOUBLE SILICONE JOINT** is a co-extruded profile in hard and soft PVC. The double internal silicone provides a high degree of resistance to any type of compressive stress, heavy loads and foot traffic. The extension is designed to lengthen the joint, extending it to the total depth of auxiliary or insulation castings as required. Lay the joints according with the standards in force.

MORTAR-LAID DOUBLE JOINT

VINYL RESIN CO-EXTRUSION (PVC)



CO-EXTRUDED VINYL RESIN (PVC) WITH DOUBLE SILICONE bar length 2,5 lm - pack. 40 Pcs - 100 lm (GDSP 43 - CONF. 50 lm)

Article	L x H mm	€/lm	€/Pc
GDSP 43	10 X 43	4,21	10,53
GDS 23	10 X 25	2,34	5,85
GP 20	8 X 20	1,51	3,77

ARTICLES NOT FOR SALE SINGLY


Available combinations: GS - GT - GL.

The code of the selected colour must be added to the article code. E.g.: GDSP 43... (combination chosen colour dark grey/transparent) GDSP 43GT.





EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

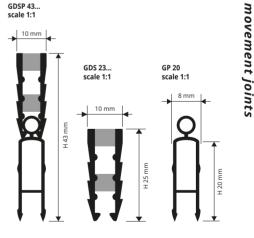


 Choose the colour and the necessary height of the joint, calculating the thickness of the finished floor and the thickness of the screed.
 Insert the joint into the screed letting it protrude slightly. 3. Proceed with laying the floor, aligning it with the rigid vertical part of the joint.
 Complete laying by leveling the joint with the floor. 5. Using the mortar, grout the gap between the tiles and the profile.



MORTAR LAYING FULL JOINT


CO-EXTRUDED VINYL RESIN (PVC) WITH FULL SILICONE

FULL SILICONE JOINT is a co-extruded profile in hard and soft PVC. The double internal silicone provides a high degree of resistance to any type of compressive stress, heavy loads and foot traffic. The extension is designed to lengthen the joint, extending it to the total depth of auxiliary or insulation castings as required. Lay the joints according with the standards in force.

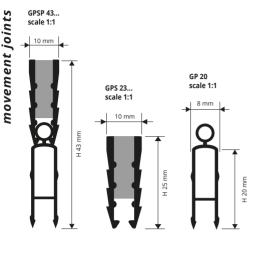


JOINTS

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

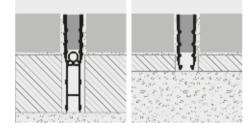


PROFLEX 25

NON-TOXIC IMPACT-RESISTANT CO-EXTRUDED VINYL RESIN



EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS



1. Choose the colour of the joint. **1a**: For the version with the extension, insert it onto the fresh cement base leaving the cylindrical part out, for subsequent fitting with PROFLEX 25. **2**. Place and fix with screws/nails to the cement floor and snap the PROFLEX 25 into protruding extension. **3**. Begin laying the floor from the inside, near the joint aligning it with the edges. **4**. Finish laying the floor and joint with specific mortar.



CO-EXTRUDED VINYL RESIN (PVC) WITH FULL SILICONE bar length 2.5 Im - pack. 40 Pcs - 100 Im

Article	L x H mm	€/lm	€/Pc	
GPSP 43	10 x 43	5,64	14,10	*
GPS 23	10 x 25	3,36	8,40	
GP 20	8 x 20	1,51	3,77	

ARTICLES NOT FOR SALE SINGLY

The code of the selected colour must be added to the article code. E.g.: GPSP 43... (combination chosen colour dark grey/transparent) GPSP 43GT.

1. Choose the colour and the necessary height of the joint, calculating the thickness of the finished floor and the thickness of the screed. 2. Insert the joint into the screed letting it protrude slightly. 3. Proceed with laying the floor, aligning it with the rigid vertical part of the joint. 4. Complete laying by levelling the joint with the floor. 5. Using the mortar, grout the gap between the tiles and the profile.



COLOURS

GS - Dark grey for rigid and flexible part	GT - Dark grey for rigid part / Transparent for flexible part	GL - Light grey for rigid and flexible part

PROFLEX 25 H 25 mm is a new expansion joint made of coextruded vinyl resin available in two standard colours – dark grey (GS) and light grey (GL). PROFLEX 25 H 25 mm provides elastic expansion joints for various kinds of flooring, such as marble or granite, and especially floors made with Sasso Italia. The new decorative indoor and outdoor flooring also known as SASSO ITALIA is approx. 25 mm thick and laid over a 10-20 mm base of cement/ concrete. This kind of floor needs an expansion/control joint every 16-30 m3 of material to avoid cracking caused by the floor's expansion. PROFLEX H 25 mm lets you place a GP 20 EXTENSION JOINT at the bottom in order to apply/lay the joint inside the concrete base. It can withstand the frequent passage of pedestrians and vehicles (forklifts, pallet trucks, automobiles). The joint must be installed at the same level of the floor or 0.5-1 mm lower (never above). Lay the joints according with the standards in force. HIGH RESISTANCE TO LOADS AND TO FREQUENT TRAFFIC OF PALLET TRUCKS AND FORKLIFTS.



CO-EXTRUDED VINYL RESIN bar length 2,5 lm - pack. 20 Pcs - 50 lm

	Article	Hmm	€/lm	€/Pc	
PFXGP 4	5	45	11,14	27,85	*
PFX 25		25	8,53	21,32	
GP 20		20	1,51	3,77	


The code of the selected colour must be added to the article code. E.g.: PFX 25 .. (chosen colour dark grey) PFX 25GS.



COLOURS


GS -Dark grey for rigid	GL - Light grey for rigid
and flexible part	and flexible part

PROGRESS® PROFILES



Prices are referred to whole packs, 10% increase for minimum orders of 10 Pcs, 20% increase for orders of less than 10 Pcs.

148



Made to withstand vertical, horizontal and transversal structural movements due to compressive and tensile stress in large buildings or complexes. The joint is laid on existing surfaces, also vertically, over the void between the two semi-detached surfaces of the same building or between two bays. It withstands frequent pedestrian traffic and also vehicles with rubber tyres that can load to 700 kgs. (PENF 190-210)

PROEXPAN 115-130-190-210

NATURAL ALUMINIUM + VINYL RESIN / RUBBER INSERT



NATURAL ALUMINIUM + VINYL RESIN / RUBBER INSERT bar length 2,7 lm - pack. 10 Pcs - 27 lm

Article	LxHxLa mm	€/lm	€/Pc
PENF 115	21 x 12 x 115	39,21	105,87
PENF 130	38 x 12 x 128	42,65	115,16

NATURAL ALUMINIUM + NEOPRENE INSERT

bar length 3 lm - pack. 10 Pcs - 30 lm				
Article	LxHxLa mm	€/lm	€/Pc	
PENF 190N	65 x 19 x 185	87,84	263,52	
PENF 210	90 x 19 x 210	141,50	424,50	*

Movement mm:-10/+16 (PENF 190N) -15/+10 (PENF 210...). Available in the colours: G - N (PENF 190N excluded). The code of the selected finish must be added to the article code. E.g.: PENF 130... (chosen insert colour grey) PENF 130G.

Due to the nature of the product itself, natural aluminium, and its specific use on the floor as technical joint with no decorative

 Article
 L mm
 €/lm
 €/Pc

 IPEN 20...
 20
 7,20
 21,60

 IPEN 40...
 35
 10,41
 31,23

 INTERCHANGEABLE NEOPRENE INSERT BLACK OR GREY bar length 4 Im - pack. 10 Pcs - 40 Im
 540 Im


INTERCHANGEABLE INSERT IN VINYL RESIN/RUBBER INSERT

BLACK OR GREY - bar length 3 Im - pack. 10 Pcs - 30 Im

Article	Lmm	€/lm	€/Pc
IPEN 65N	65	20,12	80,48
IPEN 452	45 x 2	30,85	123,40
and the second sec	0		D.

Insert available in the colours: G - N (IPEN 65N excluded). The code of the selected finish must be added to the article code. E.g.: IPEN 20... (chosen insert colour grey) IPEN 20G.


e to the nature of the product itself, natural aluminium, and its specific use on the floor as technical joint with no decorative role, light scratches on its surface will not be accepted for claims.

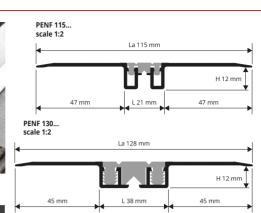

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

Fix the side wings/flanges in aluminium with:

 Screws and screw anchors at 20 cm intervals along both sides of the whole joint 2. Two-pack epoxy adhesive or with strong fastsetting silicone.

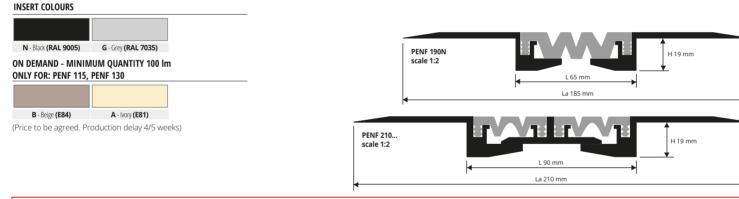

ANGLES BAR / WALL

NATURAL ALUMINIUM + NEOPRENE INSERT

ANGLE BAR NATURAL ALUMINIUM + NEOPRENE INSERT bar length 3 im - pack, 10 Pcs - 30 im

Article	LxHxLa mm	€/lm	€/Pc	
PENFP 190N	65 x 19 x 125	87,84	263,52	*
PENFP 210	90 x 19 x 150	141,50	424,50	*


INTERCHANGEABLE BLACK OR GREY VINYL RESIN/RUBBER INSERT bar length 3 Im - pack. 10 Pcs - 30 Im

Article	L mm	€/lm	€/Pc
IPEN 65N	65	20,12	60,36
IPEN 452	45 x 2 Pz	30,85	92,55
Available in the colours: G - I	N.		

The code of the selected finish must be added to the article code. E.g.: PENFP 210... (chosen insert colour grey) PENFP 210G.

PRODUCT SUPPLIED NOT ASSEMBLED

Due to the nature of the product itself, natural aluminium, and its specific use on the floor as technical joint with no decorative role, light scratches on its surface will not be accepted for claims.

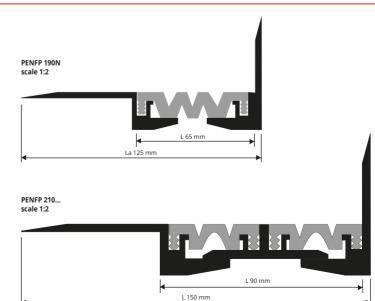

🛪 = Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed

Prices are referred to whole packs, 10% increase for minimum orders of 10 Pcs, 20% increase for orders of less than 10 Pcs.




JOINTS


PROEXPAN H20 PROEXPAN H40

structural joints

JOINTS

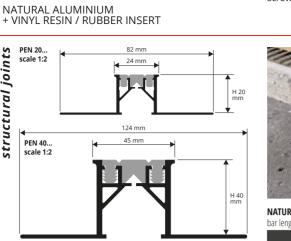

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS



1. Choose the expansion joint with suitable height for the thickness of the floor and the screed/floor rough and choose the colour of the incort and the schedulino holg in and choose the colour of the insert. **2.** Fix the punched flanges to the substrate using screws and screw anchors, calculating the fixing points at 30cm intervals on both sides. **3.** Make the screed over the punched flanges of the structural or expansion joint, calculating the thickness of the final floor and theory are made floor, and then lay the floor as normal.



NATURAL ALUMINIUM + VINYL RESIN / RUBBER INSERT bar length 3 Im - pack. 5 Pcs - 15 Im

screw anchors (approx. every 30 cm).

Article	HxL mm	€/Im	€/Pc
PEN 20	20 x 24	56,87	170,61
PEN 40	40 x 45	76,04	228,12

NATURAL ALUMINIUM ANGLE BAR / WALL + VINYL RESIN /

RUBBER INSERI - bar length 3	Im - pack. 5	Pcs - 15 lm		
Article	HxL mm	€/lm	€/Pc	
PENP 20	20 x 24	56,87	170,61	*
PENP 40	40 x 45	76,04	228,12	*

Available in the colours: G - N (Beige and Ivory available on demand with a minimum quantity order of 300 lm). The code of the selected finish must be added to the article code.

E.g.: PEN 20... (chosen insert colour grey) PEN 20G.



INTERCHANGEABLE INSERT IN VINYL RESIN/RUBBER INSERT BLACK OR GREY - bar length 3 Im - pack. 10 Pcs - 30 Im

Article	L mm	€/lm	€/Pc
IPEN 20	20	7,20	21,60
IPEN 40	35	10,41	31,23

INSERT COLOURS




ON DEMAND - MINIMUM QUANTITY 100 PCS



GDA 25 - GDA 35 is a range of professional structural joints for floors laid on mortar bed. They are made with a punched aluminium base and a vinyl rubber insert available in black or grey. It withstands traffic of vehicles with tyreload to 700 kgs and also trucks with maximum tyreload to 1000 kgs.


PROEXPAN H20 - H40 is a range of professional structural joints for floors laid on mortar bed (PEN H20) and

(PEN H 40). They are made with a punched aluminium base and a vinyl rubber insert available in black or grey. **PROEXPAN H20 - H40** profiles for laying with mortar must have the flanges fixed to the substrate by screws and



GDA 25 GDA 35

NATURAL ALUMINIUM + NEOPRENE INSERT




1. Choose the colour of the joint. 2. Fix the punched flanges to the substrate using screws and screw anchors, calculating the fixing points at 30cm intervals on both sides. **3.** Make the screed over the punched flanges of the structural or expansion joint, calculating the thickness of the final floor, and then lay the floor as normal. **4.** Using the special glue, fill the gap between the tiles and the profile.

150


INSERT COLOURS


150





ON DEMAND







NATURAL ALUMINIUM + NEOPRENE INSERT bar length **3 lm**

Article	HxL mm	€/Im	€/Pc	
GDA 25	50 x 25	64,39	193,17	*
GDA 35	50 x 35	72,42	217,26	*
Movement mm: +/- 5.				

Insert in smooth neoprene on demand


NATURAL ALUMINIUM ANGLE BAR / WALL + NEOPRENE INSERT bar length 3 Im

Article	HxL mm	€/Im	€/Pc	
GDAP 25	50 x 25	64,39	193,17	_
GDAP 35	50 x 35	72,42	217,26	*

Available in the colours: G - N (lvory on demand). The code of the selected finish must be added to the article code E.g.: GDA 25... (chosen insert colour grey) GDA 25G.

Insert in smooth neoprene on demand.

🛪 = Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed



GDA 55

ALUMINIUM + NEOPRENE INSERT



ALUMINIUM + BLACK / GREY NEOPRENE INSERT bar length 3 lm

Article	L x H x L1 mm	€/lm	€/Pc	
GDA 5535	55 x 35 x 155	79,80	239,40	
GDA 5550	55 x 50 x 155	91,88	275,64	*
GDA 5580	55 x 80 x 155	129,42	388,26	*
Movement mm: +/-	10			

Available in the colours: N - G

The code of the selected finish must be added to the article code E.g.: GDA 5535.....(chosen insert colour black) GDA 5535N

Insert in smooth neoprene on demand.

ANGLES BAR ALUMINIUM + BLACK NEOPRENE INSERT bar length **3 lm**


Article	L x H x L1 mm	€/Im	€/Pc	
GDAP 5535	55 x 35 x 105	79,80	239,40	
GDAP 5550	55 x 50 x 105	91,88	275,64	4
GDAP 5580	55 x 80 x 105	129,42	388,26	

COLOURS








EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS



1. Choose the expansion joint with suitable height for the thickness of the floor and the screed/floor rough and choose the colour of the insert. 2. Fix the punched flanges to the substrate using screws and screw anchors, calculating the fixing points at 30 cm intervals on both sides. 3. Make the screed over the punched flanges of the structural or expansion joint calculating the fixing points at the fixing point and the screed over the punched flanges of the structural or expansion joint calculating the fixing points at 50 cm intervals on both sides. 3. Make the screed over the punched flanges of the structural or expansion joint calculating the fixing points at 50 cm intervals on both sides. or expansion joint, calculating the thickness of the final floor, and then lay the floor as normal.

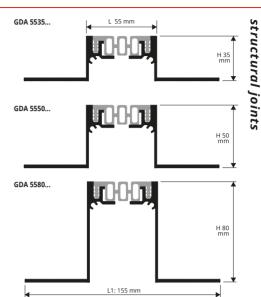






GDAP 5580

GDAP 5550



FIREPROOF CORD MINERAL WOOL AND FIBREGLASS

FIREPROOF GLUE FOR CORD FIXING FIREPROOF CORD - Diameter 20 - 60 mm Pack. Kg Ø mm Im Roll Article €/Pack. Article €/lm €/Roll €/Kg CIC 014 342,00 51,64 72.30 * **CDT 20** 20 30 11,40 * 1,4 CIC 7 38,68 📩 * 7 27,63 **CDT 30** 30 30 12,08 362.40 The delivery of the test certificate depends on the use of silicate * 40 522.90 **CDT 40** 30 17.43 Jue for the fixing of the same. The cord is certified in accordance with the new European Standard 50 25 563,10 * **CDT 50** 18,77 EN 13501-2 **CDT 60** 60 25 22,13 663,90 4 Consumption of sealant is of about 50 g per linear metre of cord.





JOINTS

🖈 = Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed



NATURAL ALUMINIUM



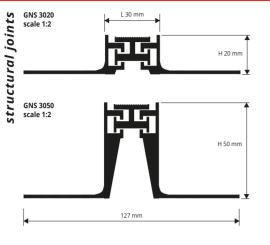




NATURAL ALUMINIUM

bar length 3 lm				
Article	L x H mm	€/lm	€/Pc	
GNS 3020	30 x 20	79,13	237,39	*
GNS 3050	30 x 50	93,89	281,67	
Movement mm· +/- 3				

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS




Choose the expansion joint with suitable height for the thickness of the floor and the screed/floor rough and choose the colour of the insert.
 Fix the punched flanges to the substrate using screws and screw anchors, calculating the fixing points at 30cm intervals on both sides.
 Make the screed over the punched flanges of the structural or expansion joint, calculating the thickness of the final floor, and then lay the floor as normal.

ANGLES BAR / WALL

NATURAL ALUMINIUM

JOINTS



NATURAL ALUMINIUM ANGLES BAR bar length 3 Im - pack. 10 Pcs - 30 Im Article . x H mm €/lm €/Pc **GNSP 3020** 30 x 20 79,13 237,39 * **GNSP 3050** 30 x 50 93,89 281,67 *


COLOURS

AN - Natural aluminium

GNS 75... 18/50/80

Structural joint GNS 75 is in good quality natural aluminium with neoprene in the lower central part and another aluminium profile in the upper visible part. It withstands heavy loads and frequent pedestrian traffic. Bar length 3 m, visible head width 75 mm. It withstands forklift trucks with rubber tyre and transpallets to a maximum total load of 6,5 kgs/mmq.

NATURAL ALUMINIUM

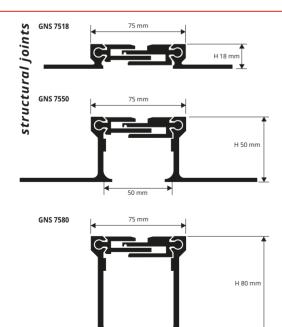

50 mm


PROGRESS[®] PROFILES



bar length 3 Im Article €/Pc H mm €/lm GNS 7518 18 141,50 424,50 GNS 7550 50 168,98 506,94 GNS 7580 80 187,76 563,28

Movement mm: +10/-5 Horizz. +/-5 Vert.

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS



 Choose the expansion joint with suitable height for the thickness of the floor and the screed/floor rough and choose the colour of the insert.
 Fix the punched flanges to the substrate using screws and screw anchors, calculating the fixing points at 30cm intervals on both sides.
 Make the screed over the punched flanges of the structural or comparing inject calculating the fixing points at factor and then sides. or expansion joint, calculating the thickness of the final floor, and then lay the floor as normal.

COLOURS

*

*

*





and vehicular traffic. Available upon request with stainless steel fixing clips (5 Pcs. for vertical/façade use 10 Pcs. for horizontal/floor use); corner profiles are also available.

FLAT AND ANGLE PROFILE IN ALUMINIUM

JOINTS

PROPLATE FIX



FLAT PROFILE - SILVER ANOD. ALUMINIUM bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	Lmm	€/Im	€/Pc
PETFXPAA 50	50	18,25	49,28
PETFXPAA 70	70	31,67	85,51



ANGLE PROFILE - SILVER ANOD. ALUMINIUM nack 20 Dec 54 lm 2 7 1....

bai leligui 2,7 mi - pack. 2	.0 FCS - 34 IIII			
Article	H x L mm	€/Im	€/Pc	
PETFXAA 50	22 x 50	19,08	51,52	*
PETFXAA 70	24 x 70	28,37	76,60	

PRODUCT SUPPLIED NOT ASSEMBLED

PROPLATE FIX is a range of flat joint-cover profiles to cover structural movements (contraction due to flexural or

compressive stress) of two different load-bearing structures. **PROPLATE FIX** made in rigid PVC is recommended for walls and facades and for ceilings. Available upon request with stainless steel fixing clips (5 Pcs. for vertical/façade use 10 Pcs. for horizontal/floor use); corner profiles are

Article €/Pc €/Pack. Hmm **CPFXAC 40/10** 40 23.06


COLOURS




AA - Anodized silver alum.


also available.

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS 1. Choose the profile in the required width and material. 2. Insert The choose the provine in the required wider and that all 2. Insert the fixing clips into the relative groove, one every 50/75 cm (5 Pcs. for wall applications - 10 Pcs. for floor applications). **3**. Insert/Lay the PROPLATE FIX in the existing void, applying uniform pressure or using a plastic hammer, thereby creating a perfect joint cover. The same method is used for laying the corner profile.



PETFXPAA 50

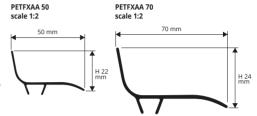



PROPLATE FIX

FLAT AND ANGLE PROFILE IN VINYL RESIN (PVC)



FLAT PROFILE - VINYL RESIN (PVC)

bar length 2,7 lm - pack. 20 Pcs - 54 lm			
Article	L mm	€/Im	
PETFXP 50-01	50	12,14	



ANGLE PROFILE - VINYL RESIN (PVC)				
oar length 2,7 lm - pack. 2	0 Pcs - 54 lm			
Article	Hvl mm	£/lm		

ar length 2,7 lm - pack. 2	20 Pcs - 54 lm	
Article	H x L mm	€

	0 Pcs - 54 lm	ar length 2,7 lm - pack. 2
f	HxLmm	Article


ar length 2,	7 lm - pack. 2	20 Pcs - 54 lm	
Art	icle	H x L mm	€


bar length 2,7 lm - pack. 20 Pcs - 54 lm				
Article	H x L mm	€/lm		
PETFX 50-01	22 x 50	12.54		

PRODUCT SUPPLIED NOT ASSEMBLED


€/Pc

32.78





L 50 r PETEXP 50-01 scale 1:2 PETFX 50-01 L 50 mn




scale 1:2


€/Pc

33,86

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS



1. Choose the profile in the required width and material. 2. Insert the fixing clips into the relative groove (5 Pcs. for wall applications -10 Pcs. for floor applications). **3**. Insert/Lay the PROPLATE FIX in the existing void, applying uniform pressure or using a plastic hammer, thereby creating a perfect joint cover. The same method is used for laying the corner profile.






An interpretation of: Norwegian National Opera House, Snøhetta, OSLO (Norway), 2008

1

lI

[[[[]]]

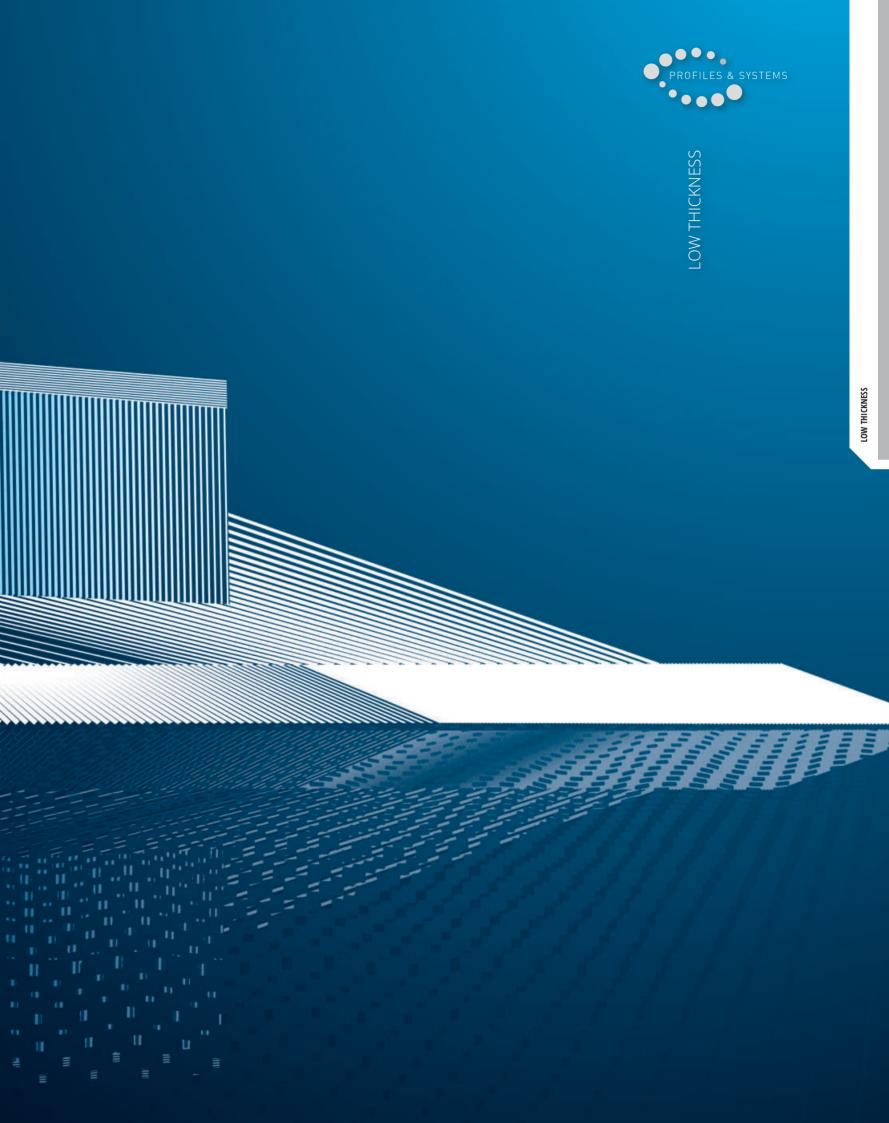

PROKERLAM SQUARE is a square corner bead profile in anodized and polished aluminium suitable to protect the external corners of coverings with low thickness. It can be used like connection profile between step tread and riser of stairs coated with ceramic and mosaic with low thickness. Its particular section and the availability in three different finishes make PROKERLAM SQUARE a much sought-after profile that allows a workmanlike application

ANODIZED SILVER, POLISHED CHROME AND GOLD ALUMINIUM

PROKERLAM

SQUARE

PKLQ... 045 scale 1:1 H 4,5 mm f 5,5 mm 6 mm EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS



ANODIZED SILVER ALUMINIUM thermo packed bar length 2.7 Im - pack. 40 Pcs - 108 Im

even with low thickness coverings.

surrengar 2,7 mill pace to teo mil				
Article	H mm	€/lm	€/Pc	
PKLQAA O45	4,5	6,85	18,50	

COLOURS

		States and the
AA - Anodized silver alum.	BC - Polished chrome alum.	BO - Polished gold alum.

POLISHED GOLD ALUMINIUM thermo packed bar length 2,7 lm - pack. 40 Pcs - 108 lm

bai iengai 2,7 ini paea. 10	100 100 11			
Article	H mm	€/lm	€/Pc	
PKLQBO 045	4,5	10,58	28,57	*

POLISHED CHROME ALUMINIUM thermo packed

PROKERLAM JOLLY is a quarter-circle rounded bead profile in anodized and polished aluminium suitable to protect the external corners of coverings with low thickness. It can be used like connection profile between step

tread and riser of stairs coated with ceramic and mosaic with low thickness. Its particular section and the availability in three different finishes make **PROKERLAM JOLLY** a much sought-after profile that allows a workmanlike

Article	H mm	€/Im	€/Pc	
PKLQBC 045	4,5	10,58	28,57	

PROKERLAM JOLLY

LOW THICKNESS

ANODIZED AND POLISHED ALUMINIUM SILVER, CHROME AND GOLD



 Choose "PROKERLAM SQUARE" according to the desired finish.
 Cut "PROKERLAM SQUARE" to the desired length and apply the adhesive on the support where the profile will be laid. 3. Press the anchoring flange of "PROKERLAM SQUARE" into the adhesive. 4. Lay the tiles, aligning them with the profile leaving a 2 mm joint. Remove immediately all remains of adhesive from the surface of the profile.
 Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile.

EXAMPLE FOR LAYING



 Choose "PROKERLAM Jolly" according to the desired finish.
 Cut "PROKERLAM Jolly" to the desired length and apply the adhesive on the support where the profile will be laid. 3. Press the anchoring flange of "PROKERLAM Jolly" into the adhesive. 4. Lay the tiles, aligning them with the profile leaving a 2 mm joint. Remove immediately all remains of adhesive from the surface of the profile.
 Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile.



application even with low thickness coverings.

ANODIZED SILVER ALUMINIUM thermo packed bar length 2,7 Im - pack. 40 Pcs - 108 Im

0 1				_
Article	Hmm	€/Im	€/Pc	
PKLJAA 045	4,5	6,63	17,90	*

COLOURS

AA - Anodized silver alum. BC - Polished chrome alum. BO - Polished gold alum.



POLISHED CHROME ALUMINIUM thermo packed bar length 2,7 Im - pack. 40 Pcs - 108 Im

Article	H mm	€/lm	€/Pc	
PKLJBC 045	4,5	10,33	27,89	*

POLISHED GOLD ALUMINIUM thermo packed bar length 2,7 Im - pack. 40 Pcs - 108 Im

Article	Hmm	€/Im	€/Pc	
PKLJBO 045	4,5	10,33	27,89	*



Prices are referred to whole packs, 10% increase for minimum orders of 10 pcs, 20% increase for orders of less than 10 pcs.

156



PROKERLAM LINE is a profile in polished and brushed stainless steel AISI 304/1.4301-V2A suitable to protect the external corners of coverings in low thickness. It can be used like connection profile between step tread and riser of stairs coated with ceramic and mosaic with low thickness. Its particular section and the availability in three different heights and finishes and special pieces such as internal and external corners, end caps and joints make **PROKERLAM LINE** a much sought-after profile that allows a workmanlike application even with low thickness coverings.

POLISHED STAINLESS ST. AISI 304/1.4301-V2A with protective film Bar lenght 2.7 Im - Park 40 PCS - 108 Im

	Article	Hmm	€/Im	€/Pcs
٩	PKLLAC 045	4,5	7,97	21,52
٩	PKLLAC 06	6	8,21	22,17



BRUSHED STAINLESS ST. AISI 304/1.4301-V2A with protective film Bar lenght 2,7 Im - Pack 40 PCS - 108 Im


	Article	H mm	€/lm	€/Pcs
3	PKLLACS 045	4,5	9,90	26,73
۲	PKLLACS 06	6	10,26	27,70

COLOURS



PROKERLAM LINE

POLISHED AND BRUSHED STAINLESS STEEL AISI 304/1.4301-V2A



LAYING INSTRUCTIONS



 Choose "PROKERLAM LINE" according to the desired finish. 2. Cut "PROKERLAM LINE to the desired length and apply the adhesive on the support where the profile will be laid. 3. Press the anchoring filange of "PROKERLAM LINE" into the adhesive. 4. Lay the tiles, aligning them with the profile leaving a 2 mm joint. Remove immediately all remains of adhesive from the surface of the profile.
 Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile.

PROKERLAM LINE is a Y-shaped profile in anodized and polished aluminium suitable to protect the external corners of coverings in low thickness. It can be used like connection profile between step tread and riser of stairs coated with ceramic and mosaic with low thickness. Its particular section and the availability in three different heights and finishes and special pieces such as internal and external corners, end caps and joints make **PROKER-LAM LINE** a much sought-after profile that allows a workmanlike application even with low thickness coverings.



ANODISED SILVER ALUMINIUM thermo packed

	Bar lengnt 2,7 im - Pack 4 0	PCS - 108 I	m		
	Article	H mm	€/lm	€/Pcs	
۲	PKLLAA 045	4,5	5,39	14,55	
0	PKILAA 06	6	5 71	15 42	

VARNISHED ALUMINIUM (White-Black) thermo packed Bar lenght 2,7 lm - Pack 40 PCS - 108 lm

	0			
	Article	H mm	€/lm	€/Pcs
3	PKLLA 045-01	4,5	6,52	17,60
3	PKLLA 045-11	4,5	6,52	17,60
3	PKLLA 06-01	6	6,90	18,63
3	PKLLA 06-11	6	6,90	18,63



STONE LINE ALUMINIUM thermo packed Bar lenght 2.7 lm - Pack 40 PCS - 108 lm

	JICJ - 1001		
Article	H mm	€/lm	€/Pcs
② PKLLA 045-SL	4,5	8,65	23,36
PKLLA 06-SL	6	9,17	24,76


The code of the selected colour must be added to the article code E.g.: PKLLA 06-... (chosen colour stone cream) PKLLA 06-SL02.

COLOURS



PROKERLAM LINE ANODIZED, VARNISHED AND STONE LINE

ANODIZED, VARNISHED AND STONE L ALUMINIUM



LAYING INSTRUCTIONS



 Choose "PROKERLAM LINE" according to the desired finish.
 Cut "PROKERLAM LINE to the desired length and apply the adhesive on the support where the profile will be laid. 3. Press the anchoring flange of "PROKERLAM LINE" into the adhesive. 4. Lay the tiles, aligning them with the profile leaving a 2 mm joint. Remove immediately all remains of adhesive from the surface of the profile.
 Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile.





© 2022) All rights reserved by Progress Profiles. Printed in Utaly



PROSHELL D ALL is a profile in anodized and polished aluminum with a visible 45° sloping surface. The profile allows to connect the floor and wall coverings in ceramic and mosaic with low thickness. It is particularly suitable to ensure cleanliness and hygiene in every kind of environment where good resistance to mechanical and chemical stresses are required. Its particular section and availability in three different finishes, make **PROSHELL D ALL** a much sought after profile.

PROSHELL D ALL

ANODIZED SILVER, POLISHED CHROME AND GOLD ALUMINIUM



ANODIZED SILVER ALUMINIUM thermo packed bar length 2,7 lm - pack. 40 Pcs - 108 lm


Article	Hmm	€/lm	€/Pc	
PSHDAA 045	4,5	8,32	22,46	*





POLISHED CHROME/GOLD ALUMINIUM thermo packed bar length 2.7 lm - pack. 40 Pcs - 108 lm

				_
Article	H mm	€/lm	€/Pc	
PSHDBC 045	4,5	10,58	28,57	*
PSHDBO 045	4,5	10,58	28,57	*



EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS



 Choose "PROSHELL D ALL" according to the desired finish.
 Cut "PROSHELL D ALL" to the desired length and apply the adhesive on the support where the profile will be laid. 3. Press the anchoring flange of "PROSHELL D ALL" into the adhesive. 4. Lay the tiles, aligning them with the profile leaving a 2 mm joint. Remove immediately all remains of adhesive from the surface of the profile.
 Fill the joints between the profile and the tiles with grout, in order to profile and the tiles with grout, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile.

PROSHELL R ALL is a cove-shaped profile in anodized and polished aluminum. The profile allows to connect the floor and wall coverings in ceramic and mosaic with low thickness. It is particularly suitable to ensure cleanliness and hygiene in every kind of environment where good resistance to mechanical and chemical stresses are required. Its particular section and availability in three different finishes, make **PROSHELL R ALL** a much sought after profile.

PROSHELL R ALL

ANODIZED SILVER, POLISHED CHROME AND GOLD ALUMINIUM


© 2028. All dights reserved by Progress Profiles. Printed in Italy



Article	Hmm	€/Im	€/Pc
PSHRAA 045	4,5	8,32	22,46
			cked
			cked
OLISHED CHROME/G ar length 2,7 lm - pack Article			cked €/Pc
ar length 2,7 lm - pack	. 40 Pcs - 108 lm	· ·	

COLOURS

		and the second
AA Anodized silver alum	PC Deliched chrome alum	PO Dolichod gold alum



EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS



 Choose "PROSHELL RALL" according to the desired finish. 2. Cut "PROSHELL RALL" to the desired length and apply the adhesive on the support where the profile will be laid. 3. Press the anchoring flange of "PROSHELL RALL" into the adhesive. 4. Lay the tiles, aligning them with the profile leaving a 2 mm joint. Remove immediately all remains of adhesive from the surface of the profile.
 Fill the joints between the profile and the tiles with grout, in order to avoid water standing. Profile and the tiles with grout, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile.


🖈 = Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed





PROINTER KL ACC

STAINLESS STEEL AISI 304/1.4301-V2A





1. Choose "PROINTER KL ACC" according to the desired finish. 2. Cut "PROINTER KL ACC" to the desired length. 3. Apply the silicone along the floor-wall connection. 4. Press the arrowhead of "PROIN-TER KL ACC" into the silicone evenly untili t is completely adherent to the floor and wall



PROINTER KL ALL

LOW THICKNESS

POLISHED AND CHROMED BRASS AND ANODIZED AND POLISHED ALUMINIUM



POLISHED STAINLESS ST. AISI 304/1.4301-V2A with protective film bar length 2,7 lm - pack. 40 Pcs - 108 lm - 8/10mm

Article	H mm	€/lm	€/Pc
PIKLAC 15	15	12,62	34,07

BRUSHED STAINLESS ST. AISI 304/1.4301-V2A with protective film bar length 2,7 lm - pack.. 40 Pcs - 108 lm - 8/10mm

Article H mm €/lm €/Pc **PIKLACS 15** 15 15,94 43,04





SANDED STAINLESS ST. AISI 304/1.4301-V2A with protective film bar length 2,7 lm - pack. 40 Pcs - 108 lm - 8/10mm

Article	H mm	€/lm	€/Pc	
PIKLACSB 15	15	17,27	46,63	*

SUPER POLISHED ST. AISI 304/1.4301-V2A with protective film bar length 2,7 lm - pack.. 40 Pcs - 108 lm - 8/10mm

Article	H mm	€/lm	€/Pc	
PIKLACML 15	15	16,54	44,66	*

AVAILABLE MINIMUM QUANTITY 100 PCS



PROSHELL KL ALL is a cove-shaped profile in polished and chromed brass and anodized and polished aluminium. The profile allows to connect the floor and wall coverings in ceramic and mosaic also with low thickness. It is particularly suitable to ensure cleanliness and hygiene in every kind of environment where good resistance to mechanical and chemical stresses are required. Its particular section and availability in five different finishes, make PROSHELL KL ALL a much sought after profile.

PROINTER KL ACC is a cove-shaped profile in stainless steel AISI 304/1.4301-V2A. The profile allows to connect

the floor and wall coverings in ceramic and mosaic also with low thickness. It is particularly suitable to ensure cleanliness and hygiene in every kind of environment where good resistance to mechanical and chemical stresses

are required. Its particular section makes PROSHELL KL ALL a much sought after profile.

PIKL... 045 scale 1:1 14,2 m 4.2 mm

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

10 mm



1. Choose "PROINTER KL ALL" according to the desired finish. 2. Cut "PROINTER KL ALL" to the desired length. 3. Apply the silicone along the floor-wall connection. 4. Press the arrowhead of "PROINTER KL ALL" into the silicone evenly until t is completely adherent to the floor and wall.



POLISHED / CHROMED BRASS thermo packed bar length 2,7 lm - pack. 40 Pcs - 108 lm

, i i i i i i i i i i i i i i i i i i i				
Article	H mm	€/Im	€/Pc	
PIKLOL 045	4,5	15,24	41,15	_
PIKLOC 045	4,5	23,82	64,31	*

CAPS - VARNISHED PLASTIC

Article	€/Pack. 2 Pcs	€/Pack. 10 Pcs
TPIKL/	3,28	16,33



COLOURS

***** End caps of the on demand profiles are also on demand.



POLISHED CHROME ALUMINIUM / GOLD thermo packed bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	Hmm	€/lm	€/Pc
PIKLBC 045	4,5	8,43	22,76
PIKLBO 045	4,5	8,43	22,76

ANODIZED SILVER ALUMINIUM thermo packed bar length 2,7 lm - pack. 40 Pcs - 108 lm

pacing an - ,			
Article	Hmm	€/lm	€/Pc
PIKLAA 045	4,5	5,91	15,96
CAPS - VARNISHED PI	ASTIC		
Article	€/Pack. 2 I	Pcs €/Pa	ick. 10 Pcs
TPIKL/	3,28		16,33







160

OL - Polished brass OC - Chromed brass



PROSTYLE KL 10 is a step protecting profile, technical and very elegant, used to keep the step made of thin ceramic tiles and kerlite/laminam non-skid and non-slip. Product in anodized aluminium with the angle portion crimped in order to increase its adhesion. Internal height 4.5 mm. It is compulsory in public buildings to comply with accident-prevention regulations.

PROSTYLE KL 10

29 mm

ANODIZED SILVER ALUMINIUM




Article	Hmm	€/lm	€/Pc
PSYKLAA 1045	4,5	8,79	23,73
AA - Anodizad cilvar aluminium			
AA - Anodized silver aluminium CAPS - pack, 2 Pcs (1 R a	and 1 L)		
	and 1 L)	H mm	€/Pack.
CAPS - pack. 2 Pcs (1 R a	and 1 L)	H mm 4,5	€/Pack. 3,28

1. Cut "PROSTYLE KL 10" to the desired length. 2. Lay the tiles on the step rise and apply the adhesive on the step tread where the profile will be laid. 3. Lay the profile on the step tread aligning it with the tiles of the step rise. 4. Apply the adhesive on the step tread and lay the tiles, aligning them with the profile. Remove immediately all the remains of adhesive from the surface of the profile. 5. Grout the joints between the tile and the profile, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile. **EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS**

4,5 mm

PSYKLAA 1045

scale 1:1



PROSTAIR KL 20 is a step protecting profile, technical and very elegant, used to keep the step made of thin ceramic tiles and kerlite/laminam non-skid and non-slip. Product in anodized aluminium with the upper portion crimped in order to increase its adhesion and a lower vertical tab created to cover the riser of the step. It is compulsory in public buildings to comply with accident-prevention regulations. Available height H 4.5 mm.

ANODIZED SILVER ALUMINIUM

PROSTAIR KL 20

ANODIZED SILVER ALUMINIUM

PTRKLAA 2045 4,5 7,32	19,76
COLOURS	



1. Cut "PROSTAIR KL 20" to the desired length. 2. Lay the tiles on the step rise and apply the adhesive on the step tread where the profile will be laid. 3. Fill the cavities on back of the profile with adhesive and lay it on the step tread aligning it with the tiles of the step rise. 4. Apply the adhesive on the step tread and lay the tiles, aligning them with the profile. Remove immediately all the remains of adhesive from the surface of the profile. 5. Grout the joints between the tile and the profile, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile.

PTRKLAA 2045 scale 1:1 40 mm

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS






H 4.5 mm






An interpretation of: Petronas Towers, César Pelli, KUALA LUMPUR (Malaysia), 1996 Π

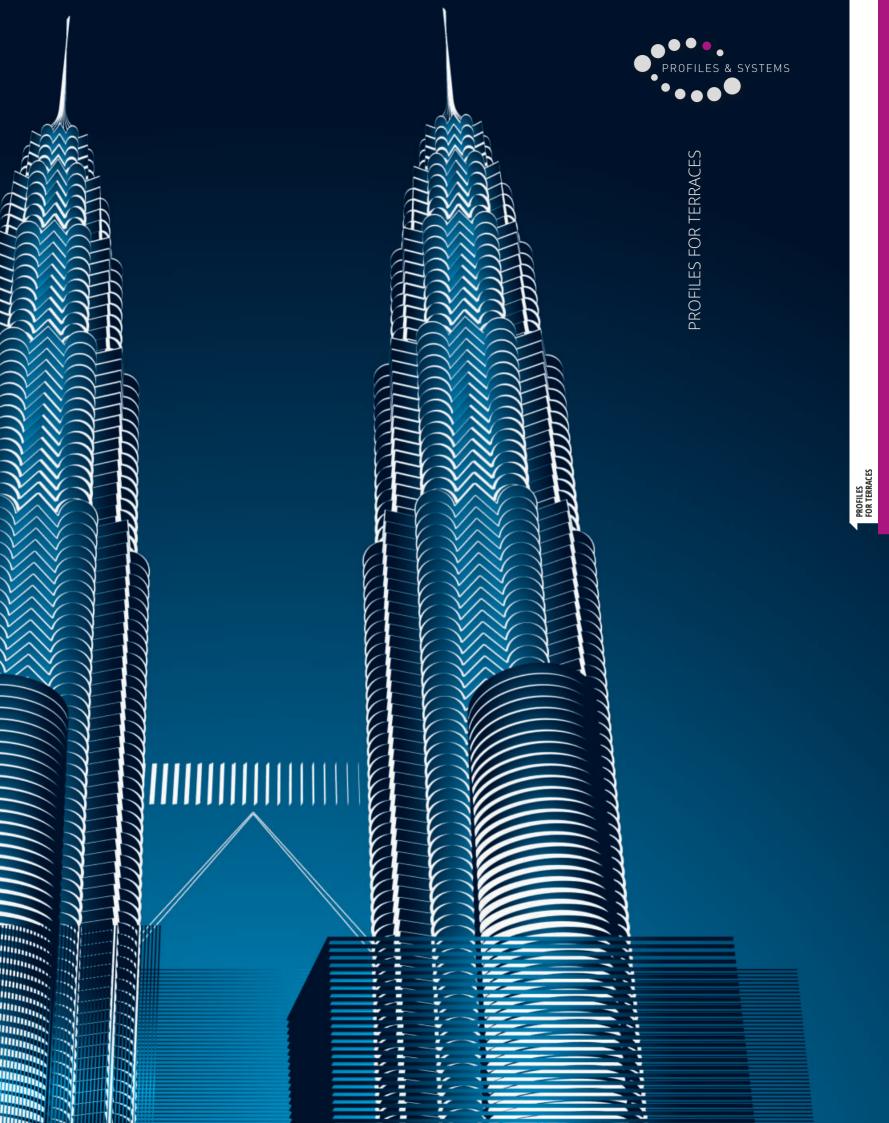

PROTERRACE DOUBLE DRIP

VARNISHED ALUMINIUM

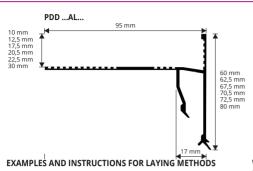

PRODESO DRAIN PROBAND FIX

1. Choose PROTERRACE DOUBLE DRIP according to the tile thickness and desired colour. **2**. Fix the external corners to the screed (at least 1 cm from it) with nails. **3**. Fix the draining adhesive stripe in polyurethane on the vertical draining adhesive stripe in polyurethane on the vertical side of the profile. **4**. Cut the PROTERRACE DOUBLE **3** GINPDD 10AL... DRIP at desired length joining it to the corners using the linking elements and fix it with nails to the substrate. **5**. Lay the desired waterproofing system. **6**. Lay the tiles leaving at 5 mm between the tile and the profile. **7**. Seal **3** GINPDD 205AL... the space between tile and profile with **PROBAND FIX 3** GINPDD 225AL... **7** (P.186).



resistance to corrosion when installed at sea front environments.

VARNISHED/COATED ALUMINIUM

	bar length 2,7 lm - pack. 5 Pcs - 13,5 lm						
	Article	Hmm	€/lm	€/Pc			
0	PDD 10AL	10	40,25	108,68			
0	PDD 125AL	12,5	41,67	112,51			
0	PDD 175AL	17,5	44,65	120,56			
0	PDD 205AL	20,5	45,98	124,15			
0	PDD 225AL	22,5	47,41	128,01			
\odot	PDD 30AL	30	51,82	139,91			

Available in the colours: BF - GF - A - TF (EF - C - B - G - E - T on demand). The code of the selected colour must be added to the article code. E.g.: PDD 175AL... (white) PDD 175ALBF.

JOINTS - pack. 10 Pcs €/Pc €/Pack Article Hmm 10 11,30 113.00 GINPDD 125AL... 12,5 11,85 118,50 GINPDD 175AL... 17,5 13,50 135,00 GINPDD 205AL... 20,5 140,60 14.06 GINPDD 225AL... 22,5 14,33 143,30 0 GIPDD 30AL... 30 159,90 15.99

EXTERNAL CORNERS - pack. 10 Pcs

PROTERRACE DOUBLE DRIP is an edging profile in varnished aluminium, designed to protect the edges of the tiles on terraces and balconies and to allow the downflow of water. The profile is provided with a flange that ensures the right fixing and an adhesive stripe, which protect the outflow holes to be closed by silicone. The double drip allows the drainage water to flow out in case of application with PRODESO DRAIN draining membrane. To reach a right connection between profile and the waterproofing system it's needed to use **PROBAND 150** with **PROBAND KOLL/AB**. The product is also available on request with a **SPECIAL SEASIDE PRE-TREATMENT** which increases its registrate to correct the store to protect to protect the store to protect the store to protect topen to protect to protect topen to pro

Article	Hmm	€/Pc	€/Pack
AEPDD 10AL/10	10	52,92	529,20
AEPDD 125AL/10	12,5	53,48	534,80
AEPDD 175AL/10	17,5	55,13	551,30
AEPDD 205AL/10	20,5	55,68	556,80
AEPDD 225AL/10	22,5	56,23	562,30
AEPDD 30AL/10	30	58,43	584,30

INTERNAL CORNERS - pack. 10 Pcs

ım €/Pc	€/Pack
) 55,13	551,30
5 55,68	556,80
5 57,33	573,30
5 57,89	578,90
5 58,43	584,30
60,64	606,40
	55,13 555,68 555,68 555,68 555,68 555,7,33 555,7,89 555,58,43

HOW TO REQUEST SEASIDE TREATMENT

When placing your order please add S to the article's number Example: PDD 175ALGF (seaside) = PDD 175ALGFS price for seaside treatment +50% on the gross price.

GINPDDAL...

AEPDD

AIPDD ...





PROTERRACE DRAIN DRIP is an edging profile in varnished aluminium, designed to protect the edges of the tiles on terraces and balconies and to allow the downflow of water. The profile is provided with a flange that ensures the right fixing and an adhesive stripe, which protect the outflow holes to be closed by silicone. To reach a right connection between profile and the waterproofing system it's needed to use **PROBAND 150** with **PROBAND KOLL/AB**. The product is also available on request with a **SPECIAL SEASIDE PRE-TREATMENT** which increases its resistance to corrosion when installed at sea front environments.

VARNISHED/COATED ALUMINIUM

END CAPS - Pack. 2 PCS

TPFDPP AL.../2

Article

TPFDPP

Article

JOINTS - pack. 1 upper + 1 lower

Hmm	£ /lma	€/Pc		
Article H mm €/lm				
10	36,51	98,58		
12,5	37,80	102,06		
20	41,71	112,62		
	12,5	12,5 37,80		

Available in the colours: BF - GF - A - TF (EF - C - B - G - E - T on demand). The code of the selected colour must be added to the article code. E.g.: PFDPP 10 AL... (white) PFDPP 10 ALBF.

€/Pc

6.27

€/Pack

9,87

10,38

11,92

€/pack

12.54


GINFDPP.

0



EXTERNAL CORNERS - pack. 10 Pcs

Article	€/Pc	€/pack
AEPFDPP 10AL/10	46,16	461,60
AEPFDPP 125AL/10	46,68	466,80
AEPFDPP 20AL/10	50,97	509,70




INTERNAL CORNERS - pack. 10 Pcs Article €/Pc €/pack

AIPFDPP 20AL/10	56,06	560,60
AIPFDPP 125AL/10	51,45	514,50
AIPFDPP 10AL/10	50,80	508,00


AIPFDPP...

PROTERRACE DRAIN DRIP

VARNISHED/COATED ALUMINIUM While stocks last.



EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS



1. Choose PROTERRACE DRAIN DRIP according to the tile thickness and desired colour. 2. Fix the external corners to the screed (at least 1 cm from it) with nails. 3. Fix the draining adhesive stripe in polyurethane on the vertical side of the profile. 4. Cut the PROTERRACE DRAIN FDP at desired length joining it to the corners using the linking elements and fix it with nails to the substrate. 5. Lay the desired waterproofing system. 6. Lay the tiles leaving at 5 mm between the tile and the profile. 7. Seal the space between tile and profile with PROBAND FIX (P.186).

HOW TO REQUEST SEASIDE TREATMENT

When placing your order please add S to the article's number Example: PFDPP 10ALGF (seaside) = **PFDPP 10ALGFS** price for seaside treatment +50% on the gross price.

EMBOSSED COLOURS

GINFDPP 10AL .../1

GINFDPP 125AL .../1

3 GINFDPP 20AL .../1

BF - White	GF - Grey	A - Anthracite grey	TF - Dark
(9010)	(7038)	(no RAL)	brown (8019)

COLOURS ON DEMAND


OLOUKS ON DEI	WIAND				
EMBOSSED		SEMIGLOSSY			
	State Shirts				
EF - Beige	C - Corten	B - White	G - Grey	E - Beige	T - Dark brown
(1019)	C - conten	(9010)	(7038)	(1019)	(8019)






PROTERRACE **DRAIN FDP**

VARNISHED/COATED ALUMINIUM

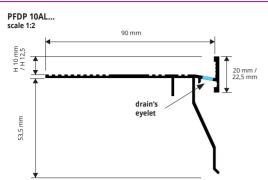

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS



 Choose PROTERRACE DRAIN FDP according to the tile thickness and desired colour. 2. Fix the external corners to the screed with nails taking care to separate them at least 1 cm from it. 3. Cut "PROTERRACE DRAIN FDP" to the desired length. Lay the profile and fix it with nails. Connect it with the corners using the junctions.
 Apply the desired waterproofing system. 5. Lay the tiles, leaving about 5 mm between tiles and profile. 6. Seal the space between tiles and profile with PROBAND FIX (P.186).

PROFILES FOR TERRACES

HOW TO REQUEST SEASIDE TREATMENT

When placing your order please add S to the article's number Example: PFDP 10ALGF (seaside) = **PFDP 10ALGFS** price for seaside treatment +50% on the gross price.



VARNISHED/COATED ALUMINIUM bar length 2,7 lm - pack. 5 Pcs - 13,5 lm

Article	Hmm	€/Im	€/Pc
PFDP 10AL	10	33,31	89,94
PFDP 125AL	12,5	33,82	91,31
Available in the colours: BE - GE	- A - TF (FF -	C - B - G - T - F	on demand


E.g.: PFDP 10 AL... (white) PFDP 10 ALB.

EMBOSSED COLOURS

environments.

BF - White (9010)	GF - Grey (7038)	A - Anthracite grey (no RAL)	TF - Dark brown (8019)

COLOURS ON DEMAND





EXTERNAL CORNERS - pack. 10 Pcs

PROTERRACE DRAIN FDP is an edging profile in varnished aluminium designed to protect the edges of the tiles

laid on terraces and balconies and to allow a correct water discharge. The profile is equipped with a punched flange that ensures its fixing to the support. The profile is also provided with holes that allow the discharge of the water filtered between the profile and tiles. To reach a right connection between profile and the waterproofing system it's needed to use PROBAND 150 with PROBAND KOLL/AB. The product is also available on request with a SPECIAL SEASIDE PRE-TREATMENT which increases its resistance to corrosion when installed at sea front

Article	€/Pc	€/Pack.
AEPFDP 10AL/10	42,04	420,40
AEPFDP 125AL/10	42,43	424,30
INTERNAL CORNERS - pack. 10 Pcs		


Article	€/Pc	€/Pack.
AIPFDP 10AL/10	46,29	462,90
AIPFDP 125AL/10	46,68	466,80

JOINTS - pack. 1 Pc upper + 1 Pc lower

Article	Hmm	€/Pack.
GINFDPAL/1	10/125	7,71

Choose the desired height and finish. E.g .: 10 mm joint with finish A - GINFDP 10ALA/10



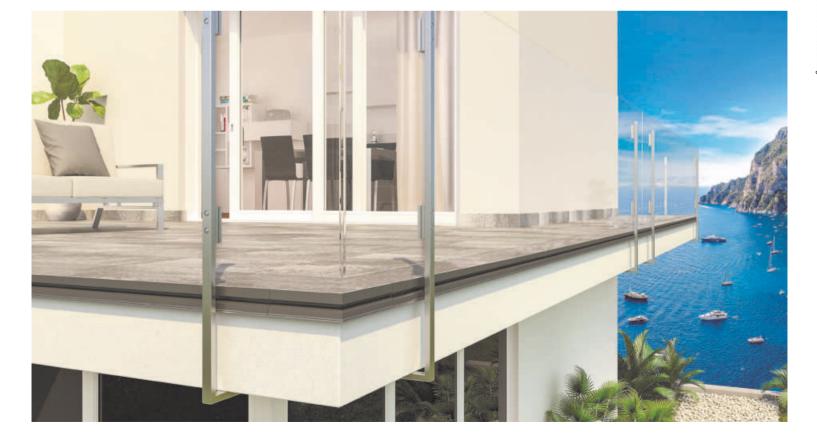

🧿 = News 2023 Prices are referred to whole packs, 10% increase for minimum orders of 10 pcs, 20% increase for orders of less than 10 pcs. **PROTERRACE ECO DRIP** is an edging profile in aluminium designed to protect the front of the screed from water penetration and the edges of the tiles laid on terraces and balconies. The profile is equipped with a punched flange that ensures its fixing to the support. The front the profile is equipped with a double drip to improve the push away of water from the wall. To reach a right connection between profile and the waterproofing system it's needed to use **PROBAND** 150 with **PROBAND** KOLL/AB. The product is also available on request in **BENDABLE VERSION** and with a **SPECIAL SEASIDE PRE-TREATMENT** which increases its resistance to corrosion when installed at sea front environments.



VARNISHED/COATED ALUMINIUM bar length 2,7 lm - pack. 20 Pcs - 54 lm

	Article	H mm	€/lm	€/Pc	
0	PTEDP 10AL	10	15,97	43,12	1
Ō	PTEDP 125AL	12,5	17,24	46,55	1
Available in the colours: BF - GF - A - TF (EF - C - B - G - E - T on demand) The code of the selected colour must be added to the article code.					

€/pack. 2Pcs €/pack. 10Pcs

70,36

75,43

TF - Dar

brown(8019)

PRE-TREATMENT which increases its resistance to corrosion when installed at sea front environments.

🖈 = Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed

Prices are referred to whole packs, 10% increase for minimum orders of 10 pcs, 20% increase for orders of less than 10 pcs.

15,48

16.59

(no RAL)

E.g.: PTEDP 10AL... (gray) PTEDP 10GFAL.

GF - Grey (7038)

Article

JOINTS - pack. 2 / 10 Pcs

GINEDP 10AL... /...

GINEDP 125AL.../...


BF - White (9010)

EMBOSSED COLOURS



EXTERNAL CORNER - pack 10 Pc

	Arti	icle	€/Pc	€/Pack
	AEEDP 10AL	/10	22,20	222,00
	AEEDP 125AL.	/10	22,82	228,20
d)				
	GINEDP 10/125	ALGF	AEEDP 10/125	
S				145 mm
	COLOURS ON DE		ilossy	
	B - White (9010)	G - Grey (7038)	E - Beige (1019)	T - Dark brown(8



PROSIDE WALK is a perimeter profile in varnished aluminium, available in grey and anthracite colour. It is designed to protect the edges of the tiles and the screed on pavements. The profile is equipped with a punched flange that ensures its fixing to the support. The flange is also provided with small holes that allow the momentary fixing of the profile with nails. To reach a right connection between profile and the waterproofing system it's needed to use **PROBAND 150** with **PROBAND KOLL/AB**. The product is also available on request in **BENDABLE VERSION** and with a **SPECIAL SEASIDE**



VARNISHED EMBOSSED ALUMINIUM

Dar length 2,7 mi - pack. 20 PCS - 54 mi					
Article	h mm	H mm	L	€/lm	€/Pc
PSDWK 10AL	10	45	80	21,22	57,29
PSDWK 125AL	12,5	45	80	21,56	58,21
PSDWK 15AL	15	45	80	21,87	59,05
PSDWK 20AL	20	45	80	23,14	62,48

EMBOSSED COLOURS






EXTERNAL CORNERS - pack. 10 Pcs					
Article	h mm	H mm	L	€/Pc	€/Pack.
AEPSDWK 10AL/10	10	45	80	22,86	228,60
AEPSDWK 125AL/10	12,5	45	80	23,51	235,10
AEPSDWK 15AL/10	15	45	80	24,82	248,20
AEPSDWK 20AL/10	20	45	80	26,69	266,90


Article	H mm	€/Pc	€/Pack.
GINSDWKAL/10	10/125/15/20	6,53	65,30

E.g.: 10 mm joint with finish A - GINSDWK 10ALA/10




ECO DRIP VARNISHED/COATED ALUMINIUM

PROTERRACE



EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS




1. Choose "PROTERRACE ECO DRIP" according to the tile thickness. 2. Cut "PROTERRACE ECO DRIP" to the desired length and fix it to the support with nails. 3. Apply the desired waterproofing 4. Lay the tiles, leaving about 5 mm between tiles and profile. 5. Seal the space between tiles and profile using **PROBAND FIX (P.186)**. **PROFILE BENDING:** 1) Cut the anchoring flange into sections and engrave the metal close to the vertical side 2) bend the profile with the help of a template;

HOW TO REQUEST SEASIDE TREATMENT


When placing your order please add S to the article's number Example: PTEDP 10ALGF (seaside) = **PTEDP 10ALGFS** price for seaside treatment +50% on the gross price. PROFILES FOR TERRACES

PROSIDE WALK

VARNISHED/COATED ALUMINIUM



EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS



 Choose PROSIDE WALK according to the tile thickness and desired colour. 2. Waterproof with PROBAND 150 and PROBAND KOLL the front of the screed. 3. Fix the external corners with nails. 4. Cut PROSIDE WALK to the desired length and fix it with nails; connect it with the corners using the junction element. 5. Lay the tiles, leaving about 5 mm between tiles and profile. 6. Seal the space between tiles and profile with PROBAND FIX (P.186). PROFILE BENDING: 1) Cut the anchoring flange into sections and engrave the metal close to the vertical side 2) bend the profile with the help of a template;

HOW TO REQUEST SEASIDE TREATMENT

When placing your order please add S to the article's number Example: PSDWK 10ALGF (seaside) = **PSDWK 10ALGFS** price for seaside treatment +50% on the gross price.



167


1 CB

litelly


PROTERRACE PCG

POLISHED STAINLESS STEEL AISI 304/1.4301-V2A

PROTERRACE PCG is an edging profile in polished stainless steel INOX AISI 304/1.4301-V2A designed to protect the edges of the tiles laid on terraces and balconies and to allow a correct water discharge. The profile is equipped with a punched flange that ensures its fixing to the support. The flange is also provided with small holes that allow the momentary fixing of the profile with nails. The availability of special pieces such as external corners and junctions make **PROTERRACE PCG** a much sought after and easy to lay profile. The product is also available on request in **BENDABLE VERSION**

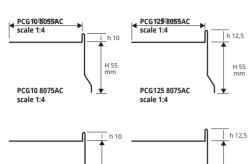





AEPG externa

PROFILES FOR TERRACES

GING ioints

corner (welded)

PROTERRACE PCG

VARNISHED/COATED ALUMINIUM



POLISHED STAINLESS STEEL AISI 304/1.4301-V2A with protective film bar length 2,7 lm - pack. 5 Pcs - 13,5 lm (H 55 mm - 18,9 lm)

Article	h x H x L mm	€/lm	€/Pc	
PCG10 8055AC	10 x 55 x 80	34,43	92,96	
PCG10 8075AC	10 x 75 x 80	38,19	103,11	
PCG10 8095AC	10 x 95 x 80	42,78	115,51	
PCG125 8055AC	12,5 x 55 x 80	34,74	93,80	
PCG125 8075AC	12,5 x 75 x 80	38,58	104,17	*
PCG125 8095AC	12,5 x 95 x 80	42,92	115,88	*


EXTERNAL CORNERS - pack. 10 Pcs

H 75

Article	€/Pc	€/Pack.
AEPG10 55AC/75AC/95AC/10	57,50	575,00
AEPG125 55AC/75AC/95AC/10	57,50	575,00

* Corners and joints of the on demand profiles are also on demand

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS




1. Choose "PROTERRACE PCG" according to the tile thickness. 2. Fix the external corners to the screed with nails taking care to separate them at least 1 cm from it. **3.** Cut "PROTERRACE PCG" to the desired length. Lay the profile and fix it with nails. Connect it with the corners using the junctions. **4**. Apply the desired waterproofing system. **5**. Lay the tiles, leaving about 5 mm between tiles and profile. **6**. Seal the space between tiles and profile with PROBAND FIX (P.186).

PROFILE BENDING: 1) Cut the anchoring flange into sections and engrave the metal close to the vertical side **2**) bend the profile with the help of a template;

JOINTS - pack. 10 Pcs

Article	€/Pc	€/Pack.
GING10 55AC/75AC/95AC/10	7,35	73,50
GING125 55AC/75AC/95AC/10	7,35	73,50


PROTERRACE PCG is an edging profile designed to protect the edges of the tiles laid on terraces and balconies and to allow a correct water discharge. The profile is equipped with a punched flange that ensures its fixing to the support and which is also provided with small holes that allow the momentary fixing of the profile with nails. The availability of special pieces such as external corners and junctions make PROTERRACE PCG a much sought after and easy to lay profile. To reach a right connection between profile and the waterproofing system it's needed to use PROBAND 150 with PROBAND KOLL/AB. The product is also available on request with a SPECIAL SEASIDE PRE-TREATMENT which increases its resistance to corrosion when installed at sea front environments. The product is also available on request in **BENDABLE VERSION**

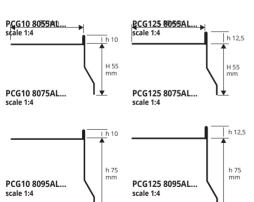

HOW TO REQUEST SEASIDE TREATMENT

When placing your order please add S to the article's number Example: PCG10 8055ALGF (seaside) = **PCG10 8055ALGFS** price for seaside treatment +50% on the gross price.

PROGRESS®





168

GING joints



VARNISHED/COATED ALUMINIUM

EXTERNAL CORNERS - pack. 10 Pcs Article

AEPG10 55AL.../75AL.../95AL.../10

AEPG125 55AL.../75AL.../95AL.../10

bar length 2,7 lm - pack. 5 Pcs - 13,5 lm (H 55 mm - 18,9 lm)				
Article	h x H x L mm	€/Im	€/Pc	
PCG10 8055AL	10 x 55 x 80	23,00	62,10	
PCG10 8055ALG	10 x 55 x 80	23,00	62,10	*
PCG10 8075AL	10 x 75 x 80	26,16	70,63	
PCG10 8075ALG	10 x 75 x 80	26,16	70,63	*
PCG10 8095AL	10 x 95 x 80	29,91	80,76	
PCG10 8095ALG	10 x 95 x 80	29,91	80,76	*
PCG125 8055AL	12,5 x 55 x 80	23,00	62,10	
PCG125 8075AL	12,5 x 75 x 80	26,16	70,63	
PCG125 8095AL	12,5 x 95 x 80	29,91	80,76	

Available in the colours: BF - GF - A - TF (EF - C - B - G - T - E on demand). The code of the selected colour must be added to the article code. E.g.: PCG10 8055AL... (white) PCG10 8055ALB.

	JOINTS - pack. TO PCS		
€/Pack.	Article	€/Pc	€/Pack.
326,00	GING10 55AL/75AL/95AL/10	6,44	64,40
326,00	GING125 55AL/75AL/95AL/10	6,44	64,40

The code of the selected colour must be added to the article code. E.g.: AEPG10 55AL... (white) AEPG10 55ALB.

€/Pc

32.60

32,60

* Corners and joints of the on demand profiles are also on demand

3 = News 2023

🛪 = Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed

Prices are referred to whole packs, 10% increase for minimum orders of 10 pcs, 20% increase for orders of less than 10 pcs.


Silico


EXEMPLES OF LAYING (for laying instructions, see above)

EMBOSSED COLOURS

BF - White	GF - Grey	A - Anthracite grey	TF - Dark
(9010)	(7038)	(no RAL)	brown (8019)

COLOURS ON DEMAND





PROTERRACE PC

POLISHED STAINLESS STEEL AISI 304/1.4301-V2A




POLISHED STAINLESS STEEL AISI 304/1.4301-V2A with protective film bar length 2,7 Im - pack. 7 Pcs - 18,9 Im (H 75 mm - 13,5 Im - H 95 mm - 5,4 Im)							
Article	L x H mm	€/lm	€/Pc				
PC 8055AC	80 x 55	32 52	87.80				



EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

1. Choose "PROTERRACE PC" according to the desired height. 2. Fix the external corners to the screed with nails taking care to separate them at least 1 cm from it. 3. Cut "PROTERRACE PC" to the desired length. Lay the profile and fix it with nails. Connect it with the corners using the junctions. 4. Apply the desired waterproofing system. 5. Lay the tiles. **PROFILE BENDING:** 1) Cut the anchoring flange into sections and engrave the metal close to the vertical side 2) bend the profile with the help of a template;



EXTERNAL CORNERS - pack. 10 Pcs			JOINTS - pack. 10 Pcs			
Article	€/Pc	€/Pack.	Article	€/Pc	€/Pack	
AEPC 55AC 10	57,32	573,20	GINC 55AC 10	8,05	80,50	

 \star Corners and joints of the on demand profiles are also on demand

AEPC external corner (welded)

PROTERRACE PC

PROTERRACE PC is a perimeter profile in varnished aluminium designed to protect the screed on terraces and balconies and to allow a correct water discharge. The profile is equipped with a punched flange that ensures its fixing to the support. The flange is also provided with small holes that allow the momentary fixing of the profile with nails. To reach a right connection between profile and the waterprofing system it's needed to use **PROBAND 150** with **PROBAND KOLL/AB**. The product is also available on request with a **SPECIAL SEASIDE PRE-TREATMENT** which increases its resistance to corrosion when installed at sea front environments. The product is also available on request in **BENDABLE VERSION**.



PROFILES FOR TERRACES


GINC ioints



VARNISHED/COATED ALUMINIUM - bar length 2,7 lm pack. 7 Pcs - 18,9 lm (H 75 mm - 13,5 lm - H 95 mm - 5,4 lm)							
Article	L x H mm	€/lm	€/Pc				
PC 8055AL	80 x 55	21,53	58,13	*			
The code of the colocted	colour must bo	added to the	articla codo				


The code of the selected colour must be added to the article coc E.g.: PC 8055AL... (white) PC 8055ALB.

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS



1. Choose "PROTERRACE PC" according to the desired colour and height. 2. Fix the external corners to the screed with nails taking care to separate them at least 1 cm from it. 3. Cut "PROTERRACE PC" to the desired length. Lay the profile and fix it with nails. Connect it with the corners using the junctions. 4. Apply the desired waterproofing system. 5. Lay the tiles. **PROFILE BENDING: 1**) Cut the anchoring flange into sections and engrave the metal close to the vertical side 2) bend the profile with the help of a template;


PC 8055AL



SEMIGLOSSY COLOURS ON DEMAND



EMBOSSED COLOURS ON DEMAND




HOW TO REQUEST SEASIDE TREATMENT

When placing your order please add S to the article's number Example: PC 8055ALGF (seaside) = **PC 8055ALGFS** price for seaside treatment +50% on the gross price.

EXTERNAL CORNERS - pack. 10 Pcs			JOINTS - pack. 10 Pcs		
Article	€/Pc	€/Pack.	Article	€/Pc	€/Pack.
AEPC 55AL 10	31,50	315,00	GINC 55AL 10	6,09	60,90

The code of the selected colour must be added to the article code. E.g.: AEPC 55AL... (white) AEPC 55ALB.

 \star Corners and joints of the on demand profiles are also on demand





UNDER EDGE L

PROTERRACE

VARNISHED ALUMINIUM

PROTERRACE UNDER EDGE L is a perimetric profile in aluminium designed to be installed under the edges of tiles or marbles laid on terraces and balconies, or can be installed as a terminal of lower edges of outdoor terraces with drip function and to ensure proper water outflow. Thanks to its ease of application and availability in different colors it is a highly appreciated profile.

JOINTS

GINPTUE...

END CAPS

TPPTUE...S (left)

TPPTUE...D (right)

CPPTUE...S

E - Beige (1019)

SEMILUCIDI

G - Grey (7038)

€/Pc

44,66

€/pack

30.88

30,88

GINPTUE.

Varnished aluminium

Article

Varnished aluminium - pack 2 Pcs

Article

CPPTUE...D

T - Dark brown (8019)

€/pack. 2 Pcs €/pack. 10 Pcs

49,61

€/pack.

11,02

11,02


TPPTUE...S TPPTUE...D

11,03

€/Pc

5.51

5.51

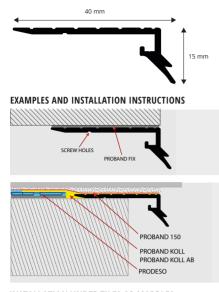

INSTALLATION UNDER TILES OR MARBLES:

1. Choose proterrace under edge I according to the desired colour. 2. Cut proterrace under edge I to the required size and fix it with nails to the substrate taking care to leave 2 mm between two adjacent bars. **3**. Apply the desired waterproofing system. **4**. Lay the flooring. **5**. Fix the joints with proband fix. INSTALLATION ON LOWER EDGES OF TERRACES AND

BALCONIES:





1. Choose proterrace under edge I according to the desired colour. 2. Cut proterrace under edge I to the required size and secure it with proband fix and screws to the substrate taking care to leave 2 mm between two adjacent bars 3. Fix the joints by gluing them with proband fix

PROTERRACE UNDER EDGE C

PROTERRACE UNDER EDGE C is a perimetric profile in aluminium designed to be installed under the edges of tiles or marbles laid on terraces and balconies and to ensure proper water outflow. Thanks to its ease of application and availability in different colors it is a highly appreciated profile.

VARNISHED ALUMINIUM





INSTALLATION UNDER TILES OR MARBLES:

1. Choose proterrace under edge c according to the desired Glue the profile to the structure with proband fix and secure it with screws, taking care to leave 2 mm between two adjacent bars;
 Attach the joints with proband fix.



PROTERRACE UNDER EDGE L Varnished aluminium

| H mm |

15

AN - N alumi

A - Anthracite gr (no RAL)

GOFFRATI

€/ml

16,54

€/Pc

15,44

15,44

- Dark b

Bar length 2.7 Lm - pack 5 pcs - 13.50 LM

Article

Varnished aluminium - pack 2 Pcs

Article

white GF - Embossed grey (7038)

GAMMA COLORI A RICHIESTA

C - Corten

STANDARD COLOURS

O PTUEL...

CAPSULES

CPPTUE...S (left)

CPPTUE...D (right)

(9010)

E - Beige (1019)

Bar length 2.7 Lm - pack 5 pcs - 13.50 LM

	Article	Hmm	€/ml	€/Pc	
PTUEC	•	15	16,76	45,25	🕗 GIN
CAPSUI Varnish	. ES ned aluminium -	pack 2 Pcs			ENI Var
	Article		€/Pc	€/pack.	
🧿 СРРТИ	JES (left)		15,44	30,88	🗿 TPI
🧿 СРРТИ	IED (right)		15,44	30,88	📀 TPI
STAN					
				GINF	PTUE
GAMN	A COLORI A P				
	GO	DFFRATI			S
E - Beige	(1019) C - Corten	A - Anthraciti (no RA)			G - Gr (7038



JOINTS /arnished aluminium


€/Pc		Article	€/	pack. 2 Pcs	€/pack. 10 Pcs
15,25	 GINP 	TUE		11,03	49,61
	END C Varnis	APS shed aluminiu	m - pack 2 P	cs	
pack.		Articl	e	€/Pc	€/pack.
0,88	🗿 ТРРТ	UES (left)		5,51	11,02
0,88	🗿 ТРРТ	UED (right)		5,51	11,02
		•	ð	-	
GINPT	UE	CPPTUES	CPPTUED	TPPTUE.	S TPPTUED
B - White (9010)	S E M G - Grey (7038)	E - Beige (1019)	T - Dark brown (80	19)	

★ = Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed Prices are referred to whole packs, 10% increase for minimum orders of 10 pcs, 20% increase for orders of less than 10 pcs.



PROSHOWER LATERAL AND VERTICAL DRAIN KIT are 2 central drain systems with lateral or vertical outflow equipped with a siphon, grate support, stainless steel grate, butyl double-sided ring for the fixing of the waterproof section, waterproof section and a protection cap with template function too that allows the correct positioning of the butyl ring and the waterproof section. LATERAL AND VERTICAL DRAIN KIT ensure a correct flow of rainwater.

PROSHOWER DRAIN KIT LATERAL AND VERTICAL DRAINS

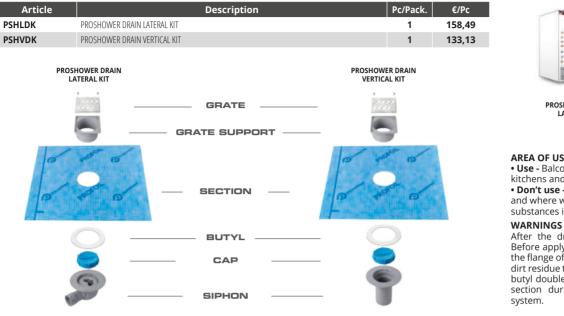



PROSHOWER DRAIN LATERAL KIT PSHLDK

PROSHOWER DRAIN VERTICAL KIT PSHVDK

AREA OF USE

• Use - Balconies, terraces, outdoor surfaces of any size, kitchens and showers.

• Don't use - In environments subject to heavy traffic and where washing with acidic and strong alkaline substances is foreseen.

After the drain installation, apply the protective cap. Before applying the butyl double-sided adhesive ring on the flange of the drain, thoroughly clean the flange of any dirt residue that may compromise its adhesion. Apply the butyl double-sided adhesive ring and the waterproofing section during the application of the waterproofing

PROSHOWER DRAIN CENTRAL PRO

PROFILES FOR TERRACES LATERAL DRAIN

PROSHOWER DRAIN CENTRAL PRO - G	ATE + POLYSTYRENE CHANNEL PROTECTI	ON + PROFOIL SECTION + DUCT BODY + SI	PHON

	Article	Description	Pc/Pack.	€/Pc
0	PSHWCP	PROSHOWER DRAIN CENTRAL PRO	1	176,40


PROSHOWER DRAIN CENTRAL PRO is a 10x10 cm stainless steel AISI 316L / 1.4404 - V4A drain for the realisation of floor-level shower. This low thickness drain is equipped with a grid that can also be tiled for floor-level drains.

PROSHOWER DRAIN CENTRAL PRO has excellent chemical resistance and is equipped with a 360 ° adjustable siphon.

ARFA OF LISE

• Use - PROSHOWER BASE L PRO it can be used in any indoor and outdoor environment.

• Don't use - In environments where very aggressive substances are used and a high concentrated load is expected.



PRODRIP is a perimeter drain in ASA (Modified ABS) equipped with wall-floor junction. The junction is covered with non-woven polypropylene to ensure sealing with the used waterproofing system.

PERIMETER DRAIN pack. per pallet = 192

puere per puree	<u>,</u>		
Article	Pcs/Pack.	€/Pc	€/Pack.
PDRP	4	24,82	99,28

AREA OF USE

• Use - To realise perimeter drains on balconies, terraces and outside horizontal surfaces of any size.


• Don't use - With bituminous waterproofing and as vertical drain.

WARNINGS

🧿 = News 2023

Do not heat with direct flames and do not use adhesive with solvents.

Consult the data sheet prior to application in the case of special applications, we recommend that you consult the technical department.

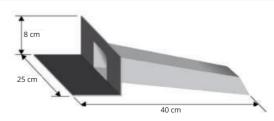


PRODRIP


PERIMETRAL DRAIN





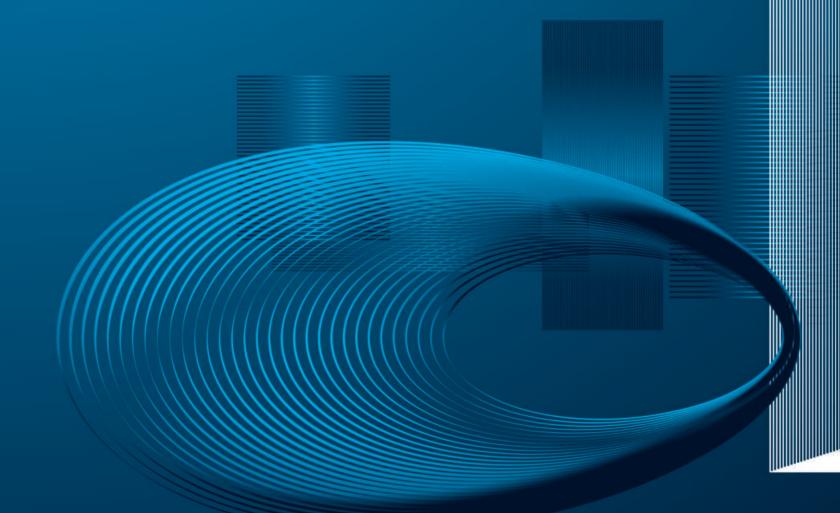

An interpretation of: Museum of the Future, Shaun Killa, The Frame, Fernando Domis, DUBAI (United Arab Emirates), 2018

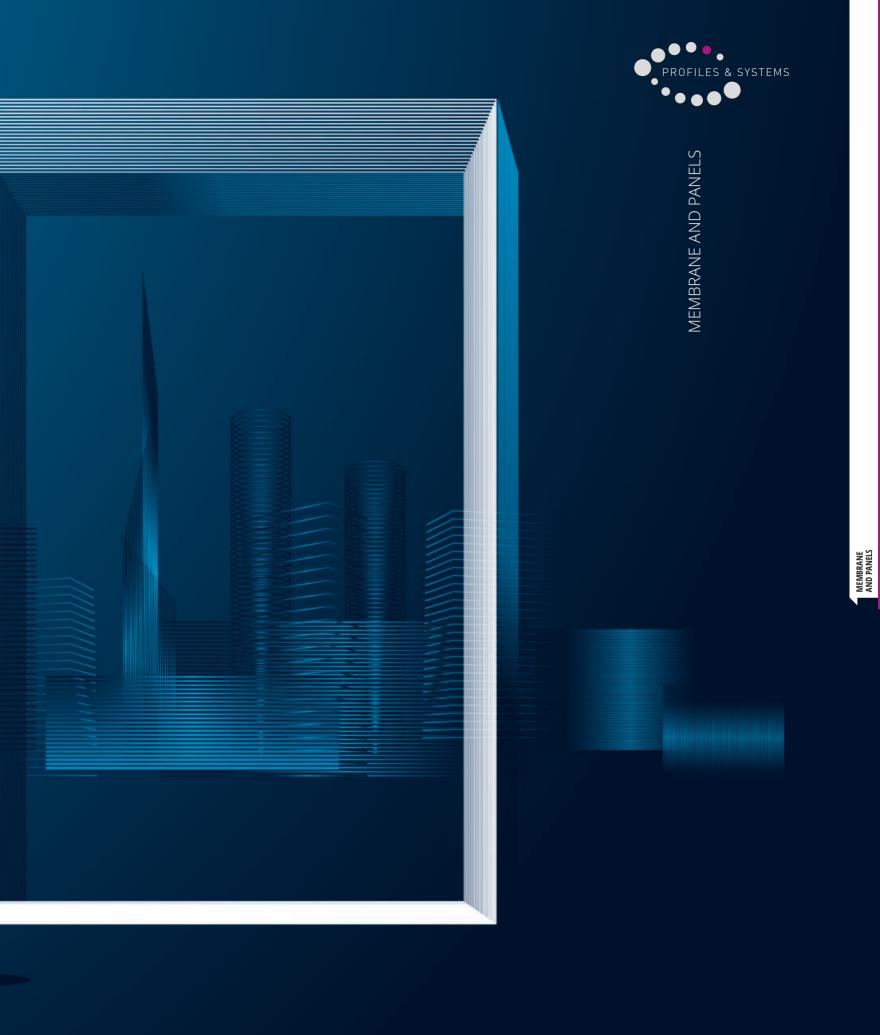



- 12004 Adhesion to the Substrate
- 12004 Adhesion to the Tiles
- 12004 Resistance to Substrate shear
- 12004 Resistance to Tile shear

- ASTM C627-18 Robinson Test with Screed
- ASTM C627-18 Robinson Test with Plywood
- ANSI A118.12 Uncoupling
- UNI EN 12667:2002 Heat Resistance

Discover Prodeso® Drain 5!! The essential microventilation and desolidarization for a correct laying of large slabs inside.

PRODESO® DRAIN 5 is an uncoupling membrane that, thanks to

fabric is thermowelded. On the back, there is a polypropylene

Functions









UNCOUPLING

DRAINAGE


MICRO VENTILATION

HEATING DISTRIBUTION



PRODESO® DRAIN 5 MEMBRANE is a 3-layers uncoupling and draining membrane ideal for indoor environments.

PRODESO® DRAIN 5 SYSTEM

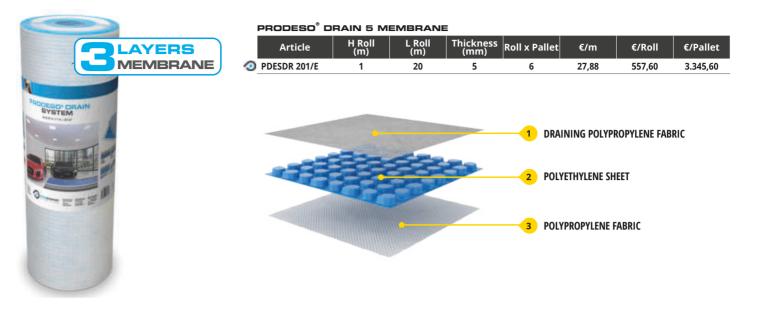

PROMEMBRANE KOLL is a C2ES1 class cementitious adhesive, with high workability and prolonged adjustability, specially designed to bond all the membranes of the "PRODESO®" family, even overlapping and on floor heating systems and the PROFOIL membrane.

PROMEMBRANE KOLL

CEMENTITIOUS ADHESIVE

PROMEMBRAN	NE KOLL					
Article	Kg/ Pack	Box/Pallet	kg/Pallet	€/kg	€/Pack	€/Pallet
PRMKL	25	25	625	1,45	36,25	906,25
Sold exclusively by th	e pallet.					







© 2028 All dights reserved by Progress Profiles. Publied in liely





Discover Prodeso® Drain 8!! The essential drainage and waterproofing function guaranteed by the most advanced system in the world.

PRODESO® DRAIN 8 is a draining, uncoupling and waterproofing patented membrane, with a total thickness of 8 mm, which can be installed even on not perfectly cured supports. The "air chamber" below the floor drains the water that has penetrated below it, it facilitates a fast drying of the adhesive and drastically reduces the rise of triacetates and the appearance of efflorescence.

The system, ideal for a correct laying on terraces and balconies even of large slabs, is completed with a band in polyethylene and elastic polypropylene and with a bicomponent waterproof adhesive. Quick and easy to install, the PRODESO® DRAIN 8 is very versatile and guarantees long life for outdoor flooring.

Functions











© 2022 All dights reserved by Progress Profiles. Pdnted in Italy

VAPOUR MANAGEMENT

DRAINAGE

MICRO VENTILATION



PRODESO® DRAIN 8 MEMBRANE is a waterproofing, uncoupling and draining membrane with 5 layers ideal for outdoor environments.

PRODESO® DRAIN 8 SYSTEM

		LAYERS		PRODESO [®] Article PDESDR 151/E	DRAIN B M H Roll 1	EMBRANE L Roll (m) 15		2 POLY	ETHYLENE SH	ROPYLENE FAB ILM	
PROBAND 150/250 guarantees high ac PROBAND 250 Article PRBPE 2530 For the indicative const	H Roll (mm) 250	L Roll Thickr (m) (mn 30 0,4:	ness n) Roll x P 2 3	rack €/m 7,68	€/Roll 230,40	€/Pallet 691,20		PR	F		250 DPE AND PP
PROBAND 150/250 PROBAND KOLL A PRODESO® MEMBE	B is a bicomp	onent hydrophobio	adhesive for t				PF				
PROBAND KOL Article PRBKLAB For the indicative consu PROBAND 150/250	Kg/Pack 15	Pack/pallet 27 and koll AB during the	Kg/Pallet 405 e installation of	€/kg 12,13 the PROBAND, con	€/Pack 181,95 sult the technical	€/Pallet 4912,65 data sheet of	-				kg
PROMEMBRANE K adjustability, specia on floor heating sys	Illy designed to	o bond all the mem	branes of the	:h high workabil "PRODESO®" far	ity and prolonge nily, even overla	ed pping and	PROI	MEM			COLL S ADHESIVE
PROMEMBRAN Article PRMKL Sold exclusively by the	Kg/Pack 25	Pack/Pallet 25	Kg/Pallet 625	€/kg 1,45	€/Pack 36,25	€/Pallet 906,25			HOLL HOLL	HOLA HO	
Internal and extern fabric that guarante			vlene provided	on both side w	ith nonwoven po	olypropylene		P		WEL ORN	
PRE-WELDED C	CORNERS H mm	L mm	Pcs/Pack	€/Pc	€/Pack						



MEMBRANE AND PANELS







A New evolution

with the goal of flexibility, innovation and energy efficiency

The system is composed of three elements: PRODESO® HEAT GRIP MEMBRANE, PRODESO® HEAT GRIP CABLE e PRODESO® HEAT GRIP THERMOSTAT KIT. The polyethylene membrane with uncoupling, waterproofing and vapour management features has a 8,5 mm thickness and a thermowelded nonwoven fabric on the back side, which guarantees the adhesion to the substrate.

The new membrane structure allows a perfect fixing of the

functions

- Only 8.5 mm thickness
- Higher crack-bridging ability
- Uncoupling
- Waterproofing








WATERPROOFING

heating cable and a crack-bridging ability 5 times more than the PRODESO® HEAT. The cables of last generation are composed of many resistances, each one 60 cm long, in a parallel circuit. If the cable is damaged, only the broken resistance stops working but not the whole cable. The thermostat of last generation interfaces with Android and Apple devices, that is why it is possible to adjust all settings and time schedule using an application with internet connection as remote control.

- Vapour management ducts
- Load distribution
- New constant power cable
- Remote controlled thermost



VAPOR AND MOISTURE MANAGEMENT



© 2023: All rights reserved by Progress Profiles. Printed in litely

LOAD DISTRIBUTION



PRODESO® HEAT GRIP MEMBRANE is an uncoupling membrane, waterproofing in polyethylene, equipped with reliefs that allow the attachment of the electric heating cable.

PRODESO® HEAT GRIP SYSTEM

L 13m

L 4,5m

PRODESO® HEAT GRIP MEMBRANE

Article	H Roll (m)	L Roll (m)	Thickness (mm)	Roll/Pallet	€/m	€/Roll	€/Pallet
PDESHG 131/E	1	13	8,5	6	21,73	282,49	1694,94
PDESHG 451/E	1	4,5	8,5	15	21,73	97,79	1466,85

it is a constant power electric heating cable to be embedded between the reliefs of PRODESO® HEAT GRIP MEMBRANE. The

cable distance can be 6.2 or 9.3 cm

PRODESO® HEAT GRIP CABLE

Article	Cable Lenght (m)	Heated surface on the WALL (6,2 cm)	on the FLOOR	Total Power W	€/Roll
PDHGCB 20	19,80	1,19 m ²	2,00 m ²	250 W	221,31
PDHGCB 26	25,80	1,55 m ²	2,50 m ²	325 W	259,34
PDHGCB 31	30,80	1,83 m ²	3,00 m²	385 W	299,67
PDHGCB 36	36,00	2,14 m ²	3,50 m²	450 W	327,35
PDHGCB 40	40,20	2,38 m ²	4,00 m ²	500 W	357,30
PDHGCB 46	46,20	2,74 m ²	4,50 m ²	575 W	413,78
PDHGCB 52	52,20	3,10 m ²	5,00 m²	650 W	458,73
PDHGCB 62	61,80	3,69 m ²	6,00 m²	775 W	497,93
PDHGCB 72	72,00	4,29 m ²	7,00 m²	900 W	571,70
PDHGCB 82	82,20	4,88 m ²	8,00 m²	1025 W	662,76
PDHGCB 94	94,20	5,60 m ²	9,00 m²	1175 W	752,66
PDHGCB 104	103,80	6,19 m ²	10,00 m ²	1300 W	826,42
PDHGCB 132	132,00	7,86 m ²	12,50 m ²	1650 W	962,43
PDHGCB 158	157,80	9,40 m ²	15,00 m ²	1975 W	990,10





PRODESO® HEAT

GRIP THERMOSTAT

It is composed of a Wi-Fi digital thermostat, a flush-mounting box, corrugated pipe, two floor temperature sensors and clips to fix the cable.

Lenght ml

450 M

PRODESO® HEAT GRIP DIGITAL THERMOSTAT - TOUCH SCREEN - WI-FI



Article

PDHGCBB450

All depts reserved by Progress Profiles. Publical in litely

2028 0



DIGITAL WIFI THERMOSTAT

Article	€/Kit	-25520
PDHTSMWT 230	285,27	_ Wi-Fi



PRODESO® HEAT GRIP SYSTEM OPTIONAL

Power w/ml Power supply V

PDSHI PDHCF 202

230 V

12,5W

RC	ILLER	FO	R	CABL	E.	INST	ALLAT	ION	
					~				

PRODESO® HEAT GRIP CABLE - 450 M

Diameter (mm)

6.5

Article	L cm 15	Pc/Pack	€/Pc 86,20				
insertion of the heating cables between the reliefs of the membranes PRODESO®HEAT e PRODESO® HEAT GRIP.							
Aluminum roller	r 15 cm long, fa	cilitates and sp	eeds up the				

1	

PRODESO® HEAT GRIP CABLE KIT

	Article	Lm shrink sheath	Cable Lugs Lm	€/Kit
\odot	PDHGCK110	1	10	14,57
\odot	PDHGCK550	5	50	71,00

PRODESO® HEAT CABLE CLIP

Plastic Clip to hold heating cable on PRODESO® HEAT MEMBRANE (40 mm x 5 mm)

Article	Pcs/Pack	€/Pc	€/Pack
PCBLF	200	1,58	316,00

€ / roll

2.723,63

GRIP CABLE

PROECOFON Roll of closed-cell polyethylene with adhesive used as edging between the wall and screed or where there are expansion joints - Pack. 2 Pcs Article | Thick. x H mm | Lm/Roll | €/Lm €/Pack

PEF 550A 5 X 50 25 1,96 98,00

PRODESO® HEAT GRIP POWER CABLE

Article	Lm/Roll	€/Lm	€/Roll
PDHGCBF	2,5	17,76	44,40



P	R	0	G	R	E	S	S	®
Ρ	R		F	1	L	E	S	



A World of warmth and comfort in respect with the nature.

Progress Profiles innovative and patented PRODESO[®] HEAT SYSTEM for electrical walls and floors heating ensures pleasant warm and comfortable environment with short laying times and at low cost. The system can be used on all kinds of substrate thanks to the membrane uncoupling and waterproofing properties. Temperature and operating times can be controlled from a latest generation thermostat that also guarantees significant savings in energy costs. The system

is quick and easy to install in all conditions and has an overall thickness of only 5.5 mm, far thinner than any alternative system. It is also maintenance free over time. This smart, responsible technology supports the growing demand for sustainable solutions and energy saving while also satisfying the needs of contemporary architecture and evolved home automation. A world of natural, warm wellbeing.

Functions




UNCOUPLING / CRACK ISOLATION



WATERPROOFING



VAPOR AND MOISTURE MANAGEMENT



LOAD DISTRIBUTION



PRODESO® HEAT MEMBRANE is an uncoupling membrane, waterproofing in polyethylene, equipped with reliefs that allow the attachment of the electric heating cable.

PRODESO® HEAT SYSTEM

PRODESO® HEAT MEMBRANE

Article	H Roll (m)	L Roll (m)	Thickness (mm)	Roll/Pallet	€/m	€/Roll	€/Pallet
PDESH 151/E	1	15	5,5	6	21,77	326,55	1959,30
PDESH 051/E	1	5	5,5	15	23,02	115,10	1726,50

it is a constant power electric heating cable to be embedded between the reliefs of **PRODESO® HEAT MEMBRANE**. The cable distance can be 6.2 or 9.3 cm

PRODESO® HEAT CABLE

PRODESO® HEAT CABLE

© 2028. All depts reserved by Progress Profiles. Publical in liely

۲

Article	Cable Lenght (m)		Heated surface on the FLOOR (9,3 cm)	Total Power W	€/Roll
PDHCB 12	12,07 ml	0,70 m ²	1,1 m²	150	187,88
PDHCB 17	17,66 ml	1,00 m ²	1,6 m ²	225	221,31
PDHCB 23	23,77 ml	1,40 m ²	2,2 m ²	300	247,81
PDHCB 29	29,87 ml	1,80 m ²	2,7 m ²	375	291,62
PDHCB 35	35,97 ml	2,20 m ²	3,3 m ²	450	335,41
PDHCB 41	41,56 ml	2,50 m ²	3,8 m ²	525	372,30
PDHCB 47	47,67 ml	2,90 m ²	4,4 m ²	600	427,61
PDHCB 53	53,77 ml	3,30 m ²	5,0 m ²	675	473,73
PDHCB 59	59,87 ml	3,70 m ²	5,5 m²	750	507,15
PDHCB 71	71,57 ml	4,40 m ²	6,6 m ²	900	584,38
		E 450 M			

PRODESO [°] HEAT CABLE · 450 M									
Article	Diameter (mm)	Lenght ml	Power w/ml	Power supply V	€ / roll				
PDHCBB450	4.8	450 M	12.5W	230 V	2.593.37				





PRODESO® HEAT THERMOSTAT

PRODESO® HEAT GRIP DIGITAL THERMOSTAT · TOUCH SCREEN · WI-FI

It is composed by a digital or analogic programmable thermostat, flush-mounting box, corrugated

Article	€/Kit	
PDHTSMWTK	329,65	Wi-Fi
		PDHSTSMWT 230

pipe and two floor temperature sensors.

PRODESO

[®] HEAT	THERMOSTA	T KIT · ANALOGIC		
cle	€/Kit			0
V	261,19		-	U
		PDSOT	PDSHI	PDHCF 202

Pc/Pack

316,00

DIGITAL WIFI THERMOSTAT	

€/Kit

208,95

Article €/Kit PDHTSMWT 230 285,27 ANALOGIC THERMOSTAT



PRODESO® HEAT GRIP SYSTEM OPTIONAL

PDSOT

PDSHI PDHCF 202

ROLLER FOR CABLE INSTALLATION

Artic

PDHTSK 230\

PSC	15	1	86.20					
Article	€/Pc							
insertion of the heating cables between the reliefs of the membranes PRODESO®HEAT e PRODESO® HEAT GRIP.								
Aluminum roller 15 cm long, facilitates and speeds up the								



	Article	Lm shrink sheath	Cable Lugs Lm	€/Kit
\odot	PDHGCK110	1	10	14,57
\odot	PDHGCK550	5	50	71,00

€/Pc 200

1,58

PRODESO® HEAT CABLE CLIP Plastic Clip to hold heating cable on PRODESO® HEAT



PROECOFON

PDHTSM 230

Article

Roll of closed-cell polyethylene with adhesive used as edging between the wall and screed or where there are expansion joints - Pack. 2 Pcs Article | Thick. x H mm | Lm/Roll €/Lm €/Pack **PEF 550A** 5 X 50 25 1,96 98,00



PRODESO® HEAT GRIP POWER CABLE

Article	Lm/Roll	€/Lm	€/Roll
OPDHGCBF	2,5	17,76	44,40



181



PCBLF

MEMBRANE (40 mm x 5 mm) Article

PRODESO® HEAT KIT SYSTEM

Floor and wall electric heating system kit, composed of 3 pieces: **PRODESO® HEAT MEMBRANE**, **PRODESO® HEAT CABLE AND PRODESO® HEAT THERMOSTAT KIT**. The polyethylene membrane, with its uncoupling, waterproofing and vapour management properties, has a thickness of just 5.5 mm.



PRODESO® HEAT KIT SYSTEM

	Article	mq membrane	Cable	Power tot W	Thermostat kit	Wall heated surface (with a cable distance of 6,2 cm)	Floor heated surface (with a cable distance of 9,3 cm)	price €/ kit	
\odot	PDESHK 4	3,2	PDHCB 23	300	1	1,40	2,20	627,60	
0	PDESHK 7	5,6	PDHCB 41	520	1	2,50	3,80	836,80	
\odot	PDESHK 10	8,0	PDHCB 59	750	1	3,70	5,50	1039,66	

heating cable PDHCB included in the kit

PRODESO[®] HEAT THERMOSTAT KIT: digital touch screen thermostat, 2 temperature sensors, flush mounting box, flexible corrugated pipe.



PRODESO HEAT MEMBRANE




PRODESO® HEAT CABLE





PRODESO[®] HEAT THERMOSTAT KIT

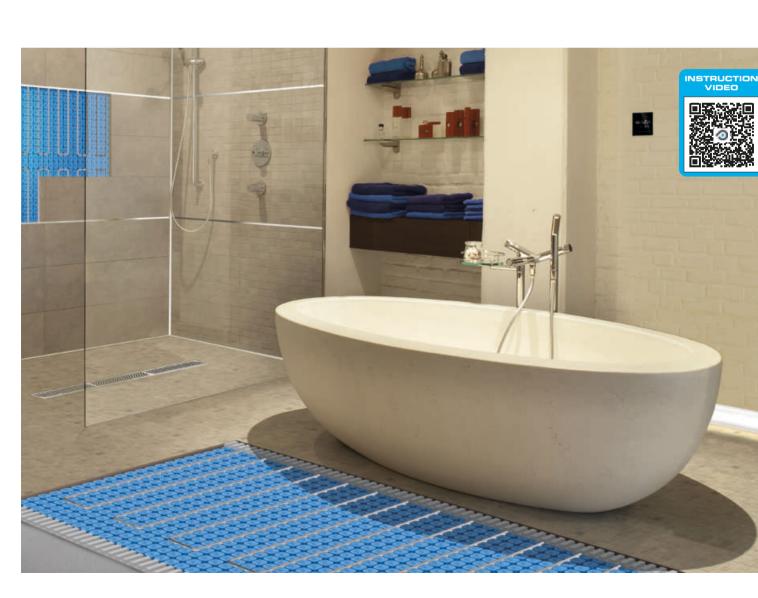

MEMBRANE AND PANELS



Uncoupling and waterproofing membrane in polypropylene with a thickness of 5.5 mm. The membrane is provided on top with pseudo-square reliefs which create channels for fixing the electric heating cable. On the back of the membrane there is a layer of adhesive which guarantees its fixing to the support, clean plywood, OSB, metal or old flooring.

PRODESO® HEAT STICK MEMBRANE

UNCOUPLING AND WATERPROOFING MEMBRANE

PRODESO® HEAT STICK MEMBRANE

	Article	H roll (m)	L roll (m)	Thickness (mm)	Rolls/Pallet	€/m	€/Roll	€/Pallet
\odot	PDESHST 151/E	1	15	5,5	6	26,13	391,95	2351,70
\bigcirc	PDESHST 051/E	1	5	5,5	15	27,62	138,10	2071,50





PRODESO® ECO / ECO STICK MEMBRANE is an uncoupling and waterproofing membrane in polyethylene with a thickness of 3.5 mm. The membrane is provided on top with dovetail square cavities and on bottom with a layer of adhesive which guarantees its fixing to the support, clean plywood, OSB, metal or old flooring. Thanks to its particular geometry PRODESO® ECO / ECO STICK MEMBRANE transfers loads directly to the support and guarantees the laying of any flooring and the waterproofing even in case of cracked and moisture-sensitive substrates. (*) available in the self-adhesive version PRODESO® ECO STICK for wood and ceramic substrates.

PRODESO® ECO / **PRODESO® ECO STICK** MEMBRANE

UNCOUPLING & WATERPROOFING MEMBRANE

PRODESO® ECO STICK MEMBRANE Thickness (mm) **Rolls/Pallet** H roll (m) L rol (m) Article €/m €/Roll €/Pallet PDESECST 3530/EN 30 3,5 6 19,56 586,80 3520,80 O PDESECST 3505/EN 5 3,5 30 3369,00 1

Thickness (mm)

3,5

3,5

22,46 112,30

€/m

16,30

18,71

Rolls/Pallet

6

30

PRODESO ECO	
V	
<	1933

PRODESO ECO STICK

L 30m L 30m WEBSITE PRODESO ECO PRODESO ECO STICK

€/Roll

489,00

93,55

€/Pallet

2934,00

2806,50

I = News 2023

🖈 = Production on demand with minimum quantity of 1000 lm Production delay 4/5 weeks. Price to be agreed

Prices are referred to whole packs.

PRODESO® ECO MEMBRANE

Article

PDESEC 3530/EN

PDESEC 3505/EN

H roll (m)

1

1

L roll (m)

30






MEMBRANE AND PANELS

Uncoupling and waterproofing system, particularly good for problematic screeds substrates.

PRODESO® MEMBRANE SYSTEM SECTION




1. Ceramic / Stone or Porcelain Tiles

- 2. Adhesive
- 3. PRODESO®
- 4. Adhesive 5. Screed, Plywood, OSB etc.

UNCOUPLING





WATERPROOFING



VAPOR AND MOISTURE MANAGEMENT FLOOR HEATING DISTRIBUTION



© 2023: All nights reserved by Progress Profiles. Printed in litely

UNCOUPLING



SUPPORT/LOAD DISTRIBUTION



It is an uncoupling and waterproofing membrane for problematic substrates, balconies, terraces and horizontal surfaces of any size without expansion joints in the screed before the laying of ceramic and natural stone. **PRODESO**[®] ensures the laying of the flooring and the waterproofing of the substrate also in case of old tiles, on cracked and not perfectly cured substrates, and therefore with possible vapour pressure.

MEMBRANE **UNCOUPLING & WATERPROOFING** MEMBRANE

I 5m

PRODESO®

L 30m

PRODESO® MEMBRANE

Article	H roll (m)	L roll (m)	Thickness (mm)	Rolls/Pallet	€/m	€/Roll	€/Pallet
PDES 3530/EN	1	30	3,5	8	19,29	578,70	4629,60
PDES 3505/EN	1	5	3,5	56	22,46	112,30	6288,80

WHY USE PRODESO® MEMBRANE SYSTEM

Time Efficient: PRODESO® Membrane reduces drastically the installation times because from the installation of the membrane up to the laying of flooring you can work without interruption.

Flexible: it is suitable for every types of subfloor including very large surfaces both indoor and outdoor.

Safe: it is suitable for substrates with cracks as it does not transmit tension of the substrate to the tile coverings and vice versa. It is also suitable on substrates not perfectly cured since it H 3.5 mm allows the vapour management.

WARNINGS

Do not lay tiles with a size less than 5 x 5 cm. The technical and application details can be found in the PRODESO® MEMBRANE SYSTEM brochure. For other informations not described in the brochure PRODESO® MEMBRANE SYSTEM, refer to the technical department.

PROBAND 150/250 is a waterproofing polyethylene tape with nonwoven polypropylene fabric on both side that guarantees high adhesion to the support

PROBAND 150/250

Article	H roll (m)	L roll (m)	Thickness (mm)	Rolls/Pallet	€/m	€/Roll	€/Pack.
PRBPE 1507	150	7,5	0,42	16	5,70	42,75	684,00
PRBPE 1530	150	30	0,42	6	4,18	125,40	752,40
PRBPE 2530	250	30	0,42	3	7,68	230,40	691,20



PROBAND

150/250ROLLS IN HDPE AND PP

MEMBRANE AND PANELS

For the indicative consumption of proband koll AB during the installation

of the PROBAND, consult the technical data sheet of PROBAND 150/250

AREA OF USE

All rights reserved by Progress Profiles. Printed in Itely

2028

• Use - Terraces, balconies and outside surfaces of any dimension, bathrooms, showers, swimming pools and tanks. To realize waterproofing joints between floor and wall and along two adjacent rolls of PROFOIL, PRODESO® MEMBRANE SYSTEM and PRODESO® HEAT/GRIP SYSTEM

• Don't use - On bituminous coverings, over thermal-insulating layer and lightweigh screed. With adhesives containing solvents. WARNINGS


Store in a cool and dry place avoiding direct sunlight and sources of heat. Read the data sheet before applying; in case of special applications call the technical department

RECOMMENDED ADHESIVES FOR THE LAYING OF PRODESO® MEMBRANE (grey color)





PREFORMED CORNERS



INTERNAL CORNER

Internal and external preformed corners in polyethylene provided on both side with nonwoven polypropylene fabric that guarantees its adhesion to the support.

PREFORMED CORNERS

P

	Article	H mm	L mm	Pc/Pack	€/Pc	€/Pack
0	PRBI	60	120	10	8,23	82,30
\odot	PRBE	60	120	10	8,23	82,30

EXTERNAL CORNER

PROBAND BU

BUTYLE TAPE



PROBAND KOLL

SINGLE-COMPONENT HYDROPHOBIC ADHESIVE



PROBAND KOLL AB

BICOMPONENT HYDROPHOBIC ADHESIVE



PROMEMBRANE KOLL

CEMENTITIOUS ADHESIVE



PROBAND FIX

MOISTURE-CURE SEALANT

MOISTURE-CURE SEALANT	
pack. of 12 cartridges - B (white) - G (grey))

Article	Cartridge Im	€/Pc	€/Pack.
PRBFXB	290	17,64	211,68
PRBFXG	290	17,64	211,68



Don't use - On bituminous coverings, over thermal-insulating layer and lightweigh screed. With adhesives containing solvents, adhesive.

PROBAND BU is an adhesive tape in butyle provided on one side with non-woven polypropylene that guarantees hight adhesion. use for the Realization of perimeter junctions in case of bituminous coverings, PVC, wood, polycarbonate, glass, plastic and metal on balconies, terraces and external surfaces of any size.

ROBAND BU	L		
Article	H Roll	L Roll	Thic

Article	H Roll (mm)	L Roll (m)	Thickness (mm)	Rolls/Pack	€/m	€/Roll	€/Pack
RBBU 7515	75	15	1	8	3,91	58,65	469,20

WARNINGS: Don't use - On dirty, incoherent and wet surfaces.

PROBAND KOLL is a single-component hygro-hardener adhesive for the sealing of PROBAND 150/250 on PRODESO® MEMBRANE

PROBAND KOLL						
Article	Kg/Pack	Pack/Pallet	kg/ Pallet	€/kg		
PPRKI	6	100	600	10 97		

65,82 6582,00 100 600 10.97 For the indicative consumption of proband koll during the installation of the PROBAND, consult the technical data sheet of PROBAND 150/250 AREA OF USE

• Use - For the sealing of the tape PROBAND 150/250 with PRODESO® MEMBRANE and PRODESO® HEAT/GRIP MEMBRANE on balconies, terraces, bathrooms, kitchens, saunas and external surfaces of any size.

• Don't use - On bituminous coverings, to glue tiles and to waterproof cement based support. Do not use outside with PRODESO® HEAT/GRIP MEMBRANE

PROBAND KOLL AB is a bicomponent hydrophobic adhesive for the sealing of PROBAND 150/250 on PRODESO® MEMBRANE and PRODESO® HEAT/GRIP MEMBRANE.

2023 All rights reserved by Progress Profiles. Printed in litely

	PROBAND KOL	L AB						
	Article	Kg/Pack	Pack/Pallet	kg/ Pallet	€/kg	€/Pack	€/Pallet	
٩	PRBKLAB	15	27	405	12,13	181,95	4912,65	
	For the indicative consumption of proband koll AB during the installation of the PROBAND, consult the technical data sheet of PROBAND 150/250							

AREA OF USE

• use - Balconies, terraces, bathrooms, kitchens, saunas and external surfaces of any size.

• Don't use - as waterproofing sheet, to glue tiles and PRODESO® family membranes, PROFOIL and PROFOIL PANEL.

PROMEMBRANE KOLL is a C2ES1 class cementitious adhesive, with high workability and prolonged adjustability, specially designed to bond all the membranes of the "PRODESO®" family, even overlapping and on floor heating systems and the PROFOIL membrane.

	PROMEMBRAN	JE KOLL					
	Article	Kg/Pack	Pack/Pallet	kg/ Pallet	€/kg	€/Pack	€/Palle
٩	PRMKL	25	25	625	1,45	36,25	906,25
	Cald and main also her the m	-					

Sold exclusively by the pallet.

WARNINGS: Do not use PROMEMBRANE KOLL for bonding natural or recomposed stone sensitive to moisture. Consult the technical data sheet before application; in case of particular applications, it's advisable to consult the technical department.

PROBAND FIX is a moisture-cure sealant with high adhesion and elasticity. It guarantees the adhesion of PROBAND 150/250 with aluminium frames, plastic and metal and between adjacent sheets of PROFOIL Don't use On bitumen membranes. To seal proband with PRODESO®.

GUN FOR MOISTURE-CURE SEALANT CARTRIDGE



MOISTURE-CURE SEALANT CARTRIDGE

pack. of 12 cartridges - B (white) - G (grey)							
Articolo	Cartuccia ml	€/PZ	€/scatola				
PRBFXUB	600	34,61	415,32				
PRBFXUG	600	34,61	415,32				

€/Pack

€/Pallet



Prices are referred to whole packs.

186

MEMBRANE AND PANELS



It is a membrane in high density polyethylene. It is covered on top with a polypropylene spunbond and on the back with a non-woven fabric in polypropylene. Both of them are thermo-welded to the polyethylene sheet to guarantee the adhesion of the membrane with the adhesive. PRODESO® SOUND is an uncoupling and soundproof membrane, with a thickness of 2,3 mm, which does not require any expansion joints before tiling with ceramic or natural stone. PRODESO® SOUND guarantees the laying of any flooring and the soundproofing up to 17dB in any indoor environment, even in the case of problematic supports and old tiles.

PRODESO[®] SOUND MEMBRANE

Article	H roll (m)	L roll (m)	Thickness (mm)	Rolls/Pallet	€/m	€/Roll	€/Pallet
PDSND 30	1	20	2,3	12	30,29	605,80	7269,60

AREA OF USE

• Use - Uncoupling and soundproof membrane also for cracked screeds. It can be laid on cement and gypsum based screed, old ceramic, natural stone floorings, concrete and wood structure. Very resistant to saline solutions, acids and alkalis, alcohol and oils. In case of particular products, contact our technical department.

• Don't use - On lightweight screeds not suitable for the laying of flooring. Do not lay with adhesives containing solvents.

WARNINGS

Article

PEF 550A

PEF 5100A

2028. All dights reserved by Progress Profiles. Printed in Itely

For the laying of PRODESO® SOUND use a C2S1 cement based adhesive. Tile immediately after the membrane laying to avoid damages. If it is not possible to tile immediately, the membrane must be protected using running boards. Do not use PRODESO® SOUND on substrates subject to continuous rising moisture. For information not included in the Technical Details, please contact our technical department.

PROECOFON is a roll of closed-cell polyethylene used as edging between the wall and screed or where there are expansion joints. It should be used in all floor-laying work to ensure long life of the floor.

Im/roll

25

100

€/lm

2.06

0,83

€/Pack

103,00

83,00

PROECOFON

EXPANDED POLYETHYLENE CLOSED - CELL WITH ADHESIVE



Adhesive junction tape for the membrane PRODESO® SOUND

CLOSED-CELL EXPANDED POLYETHYLENE WITH ADHESIVE - (PEF 550A - Pack 2 Pcs)

Thick. x H mm

5 X 50

5 X 100

PRODESO® SOUND TAPE - height 50 mm							
Article	lm/roll	Pc/Pack	Pc/box	€/roll	€/pack	€/box	
PDSNDTP 550	50	6	36	12,36	74,16	444,96	

PROSHOWER LATERAL AND VERTICAL DRAIN KIT are 2 central drain systems with lateral or vertical outflow equipped with a siphon, grate support, stainless steel grate, butyl double-sided ring for the fixing of the waterproof section, waterproof section and a protection cap with template function too that allows the correct positioning of the butyl ring and the waterproof section. LATERAL AND VERTICAL DRAIN KIT ensure a correct flow of rainwater.

Article	Description	Pc/Pack.	€/Pc
PSHLDK	PROSHOWER DRAIN LATERAL KIT	1	158,49
PSHVDK	PROSHOWER DRAIN VERTICAL KIT	1	133,13

AREA OF USE

• Use - Balconies, terraces, outdoor surfaces of any size, kitchens and showers.

• Don't use - In environments subject to heavy traffic and where washing with acidic and strong alkaline substances is foreseen

WARNINGS

After the drain installation, apply the protective cap. Before applying the butyl double-sided adhesive ring on the flange of the drain, thoroughly clean the flange of any dirt residue that may compromise its adhesion. Apply the butyl doublesided adhesive ring and the waterproofing section during the application of the waterproofing system.

PRODRIP is a perimeter drain in ASA (Modified ABS) equipped with wall-floor junction. The junction is covered with nonwoven polypropylene to ensure sealing with the used waterproofing system.

PERIMETER DRAIN

pack. per pallet = 192							
Article	Pcs/Pack.	€/Pc	€/Pack.				
PDRP	4	24,82	99,28				

AREA OF USE

• Use - To realise perimeter drains on balconies, terraces and outside horizontal surfaces of any size.

• Don't use - With bituminous waterproofing and as vertical drain.

WARNINGS

Do not heat with direct flames and do not use adhesive with solvents. Consult the data sheet prior to application in the case of special applications, we recommend that you consult the technical department.

PRODESO® SOUND TAPE



MEMBRANE AND PANELS

PROSHOWER DRAIN KIT

LATERAL AND VERTICAL DRAINS



PROSHOWER DRAIN LATERAL KIT PSHLDK



PRODRIP

SCARICO PERIMETRALE



PROGRESS®

RО




PRODESO® SOUND

L 20m

UNCOUPLING AND SOUNDPROOF MEMBRANE

PROFOIL is a waterproofing polyethylene membrabe with nonwoven polypropylene fabric on both side that guarantees high adhesion to the support.

PROFOIL PRO is a waterproofing elastic polyethylene membrane with nonwoven polypropylene fabric on both side that guarantees high adhesion to the support.

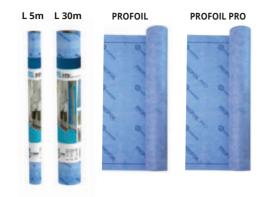

PROFOIL

ROLLS IN HDPE AND PP

PROFOIL PRO

Article	H roll (m)	L roll (m)	Thickness (mm)	Rolls/Pallet	€/m	€/Roll	€/Pallet
PFLO 0430	1	30	0,42	40	13,86	415,80	16632,00
PFLO 0405	1	5	0,42	154	19,29	96,45	14853,00
PROFOIL PRO MEMBRANE							
Article	H roll (m)	L roll (m)	Thickness (mm)	Rolls/Pallet	€/m	€/Roll	€/Pallet

PROFOIL PASTE is a ready to use thin-layer waterproofing elastic membrane with low emissions of volatile organic

€/Bucket €/Pallet

126,65 4559,40

3416 32

53.38

40

16,28

WARNINGS

technical department.

488,40

Don't use. For external application, on wet

surfaces or substrates subject to moisture

rising, in environments where water is always

present, pools and tanks. Store in a cool and

dry place avoiding direct sunlight and sources of heat. Read the data sheet before applying; in case of special applications please call the

0,42



19536,00

PROFOIL PASTE

WATERPROOFING ELASTIC MEMBRANE



PROBAND150/250

ELASTIC ROLLS IN HDPE AND PP

MEMBRANE AND PANELS



€/Kg.

12.74

12,09

PROBAND 150/250

WATERPROOFING ELASTIC MEMBRANE

4

10

PROFOIL MEMBRANE

1

Kg./Bucket Bucket/ Pallet

64

36

30

PFLOPR 0430

compounds.

Article

PFLOPST 04

PFLOPST 10

Article	H Roll (mm)	L Roll (m)	Thickness (mm)	Roll/Pack	€/m	€/Roll	€/Pallet
PRBPE 1507	150	7,5	0,42	16	5,70	42,75	684,00
PRBPE 1530	150	30	0,42	6	4,18	125,40	752,40
PRBPE 2530	250	30	0,42	3	7,68	230,40	691,20

Internal and external preformed corners and pipe collar in polyethylene provided on both side with nonwoven polypropylene fabric that guarantees its adhesion to the support.Use on Terraces, balconies and outside surfaces of any dimension, bathrooms, showers, swimming pools and tanks. To realize waterproofing joints between floor and wall and along two adjacent rolls of PROFOIL, PRODESO® MEMBRANE SYSTEM and PRODESO® HEAT/GRIP SYSTEM



POGRESS PROBAND

EXTERNAL CORNER PRBE INTERNAL CORNER PRBI PIPE COLLAR PRBT

PRODRAIN 10

DRAINING MEMBRANE



PREFORMED CORNERS AND PIPE COLLAR IN HDPE AND PP Thickness 0,42 mm

Articolo	H x L mm	€/PZ	€/conf.
💿 PRBI	60 x 120	8,23	82,30
PRBE	60 x 120	8,23	82,30
PRBT	125 x 125	7,29	72,90

WARNINGS

• **Don't use** - On bituminous coverings, over thermalinsulating layer and lightweigh screed. With adhesives containing solvents. adhesive.

PRODRAIN 10 is a drainage membrane composed by an high density polyethylene (HDPE) sheet provided with truncated cone reliefs. On the top of the reliefs a non-woven polypropylene fabric, in grey colour, permeable to water is thermowelded.

PRODRAIN 10 MEMBRANE Thickness (mm) H roll (m) Article L roll (m) **Rolls/Pallet** €/m €/Roll €/Pallet PDRI 10 10 15,04 188,00 1128,00 0,96 12,5 6

AREAS OF USE

• Use. Outside on concrete sloping suitably waterproofed such as terraces, balconies and pavements and in contact with waterproofed vertical structures such as foundation walls. Highly resistant to saline solutions, acid and alkaline, alcohol and oils. In case of special products consult the technical department.

• Don't use. On concrete waterproofed without adequate slope to the drained water runoff. As soundproof and thermalinsulating layer.





PROFOIL PANEL are high density extruded polystyrene panels covered on both sides with a steam- and waterproofing membrane. The membrane is waterproofing and the adhesive to fix them reinforces the panels for a quick and inexpensive laying.

PROFOIL PANEL

HIGH DENSITY EXTRUDED POLYSTYRENE PANEL


PROFOIL PANEL 2700 mm - high density extruded polystyrene 915 mm x 2700 mm = 2.470 m²


Article	Hmm	Pcs/pallet	Mq/pallet	€/Mq	€/Pc	€/Pallet
PFLPAN1327	12,70	60	148,20	48,04	118,66	6780,00
PFLPAN2527	25,00	30	74,10	57,75	142,64	4.279,20
PFLPAN5027	50,80	15	37,05	80,85	199,70	2.995,50

PROFOIL PANEL 1524 mm - high density extruded polystyrene 915 mm x 1524 mm = 1,394 m²

Article		Pcs/pallet	Mq/pallet	€/Mq	€/Pc	€/Pallet
PFLPAN6	6,35	85	118,49	37,80	52,69	4.478,65

THICKNSS PROFOIL PANEL

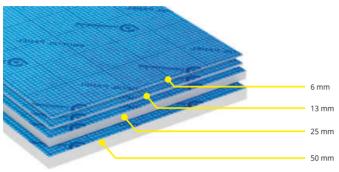

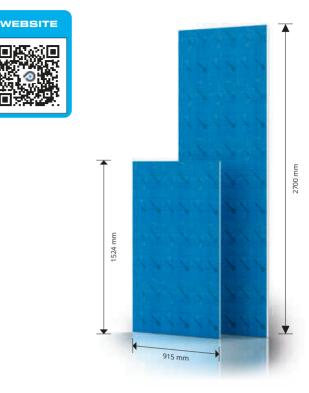

PROFOIL AND PROBAND DOWELS, WASHERS, SCREWS

STAINLESS STEEL/ZINC-COATED METAL/GLASS FIBER NET

All depts reserved by Progress Profiles. Publical in litely

2028

6

PROFOIL DOWELS - ZINC-COATED METAL - pack. 250 Pc

Article	L mm	€/Pc	€/Pack.
TZPFP 110	100	1,70	425,00
TZPFP 140	140	1,89	472,50
TZPFP 170	170	2,09	522,50
TZPFP 200	200	2,28	570,00

PROFOIL DOWELS - STAINLESS STEEL - pack. 250 Pc

Article	L mm	€/Pc	€/Pack.
TIPFP 110	110	3,28	820,00
TIPFP 140	140	3,53	882,50
TIPFP 170	170	3,79	947,50
TIPFP 200	200	4,04	1010,00
TIPFP 250	250	4,70	1175,00



PROFOIL WASHERS (ZINC-COATED METAL) - pack. 100 Pc

Article	Pcs/Pack.	ø mm	€/Pc	€/Pack.
RFPFP 36	100	35	0,32	32,00

PROFOIL SCREWS (ZINC-COATED METAL)

Article	Pcs/Pack.	L mm	€/Pc	€/Pack.
VACPFP 35	1000	35	0,04	4,00
VACPFP 55	1000	45	0,05	5,00
VACPFP 80	1000	80	0,10	10,00

PRO GOBOARD PANEL highdensity polyisocyanurate foam panel, covered on both sides with a fibre-glass reinforced cement-based waterproof coating to allow the laying of tiles. The panels, tested for a resistance long duration, are available in thickness of 6,25 / 12,5 / 25 and 50 mm, size of 92 x 152 cm and 122 x 244 cm and can be used on floors, false ceilings, walls, showers and ceilings.

PRO GOBOARD PANEL - highdensity polyisocyanurate foam

Article	Description	Pcs/pallet	m²/pallet	€/m²	€/Pc	€/Pallet
PGOBOR06	PRO GOBOARD H 6,25 mm - 92 cm x 152 cm - 1,40 m ²	75	105	40,75	57,05	4278,75
PGOBOR125	PRO GOBOARD H 12,5 mm - 92 cm x 152 cm - 1,40 m ²	60	84	45,28	63,39	3803,40
PGOBOR25	PRO GOBOARD H 25 mm - 122 cm x 244 cm - 2,98 m ²	30	89,4	80,84	240,90	7227,00
PGOBOR50	PRO GOBOARD H 50 mm - 122 cm x 244 cm - 2,98 m 2	15	44,70	125,52	374,05	5610,75

PRO GOBOARD PANEL

HIGH DENSITY POLYISOCYANURATE FOAM PANEL




PROGRESS®

189

Prices are referred to whole packs.



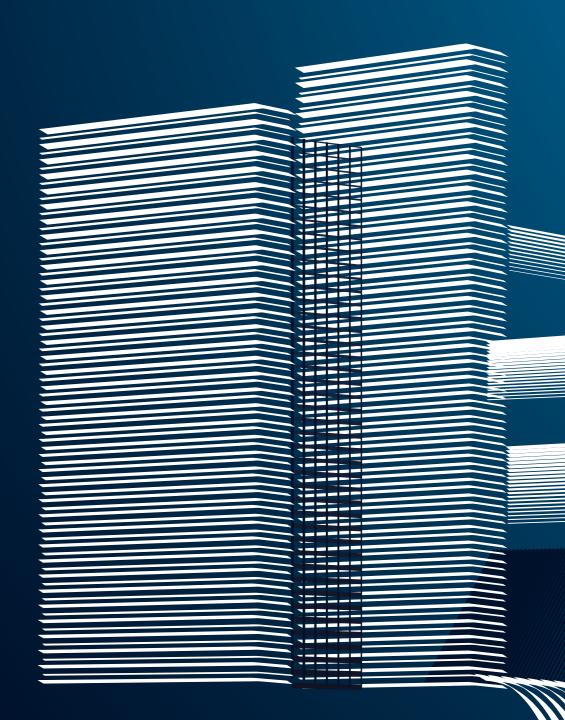



SHOWER AND DRAINAGE SYSTEMS

PROSHOWER LINEAR KIT SYSTEM

PROSHOWER LINEAR KIT SYSTEM is an innovative solution, which combines functionality and design to answer to all requirements of the shower.




Article		Description	Pc/Pack.	€/Pc
PSHPANEK	PROSHOWER LINEAR KIT BAS	E	1	450,09
Article		Kit components	Pc/Pack.	
PSHPAN	PROSHOWER PANEL in moul	ded polystyrene 120x120 cm with glued Profoil	1	
PRBFXB	PROBAND FIX white		2	
PRBPE 1507	ROLL PROBAND 150 - 7,5 lm		1	
PFLO 0405	PROFOIL ROLL - 5 Im		1	
PIAA 40212	ALUMINUM PROFILES (scree	d leveling profile) length 120 cm	2	
PRSPD 10	PVC TOWEL		1	
PATENTED			Э РКОВАНС	
	PANEL LINEAR HPAN	PROFOIL PFLO 0405	PROBAND 15 PRBPE 1507	D

PROSHOWER PANEL EXTENSION EXEMPLES OF LAYING PSHPAN PSHPAN PSHPAN CUTTING AREA

	man	
PROSHOWER PANEL LINE/ PSHPAN	R PROFOIL PFLO 0405	PROBAND 150 PRBPE 1507
	-	
PROBAND FIX PRBFXB	PVC TOWEL PRSPD 10	ALUMINUM PROFILES PIAA 40212
Article	Description	Pc/Pack. €/Pc
PSHPAN	Proshower panel in moulded polystyrene 120x120 cm with glued Profo	il 1 234,41
50 131 mm mm mm	Slope 2 %	→ 35 mm
↑ <u>+</u>	1200 mm	↑

Article	Description	Pc/Pack.	€/Pc
PSHPANXT 60120	PROSHOWER PANEL EXTENSION 120x60 cm for PROSHOWER PANEL LINEAR - Slope 2%	1	117,21
PSHPANXTL 60120	LATERAL PROSHOWER PANEL EXTENSION 60x120 cm for PROSHOWER PANEL LINEAR - Slope 2%	1	117,21

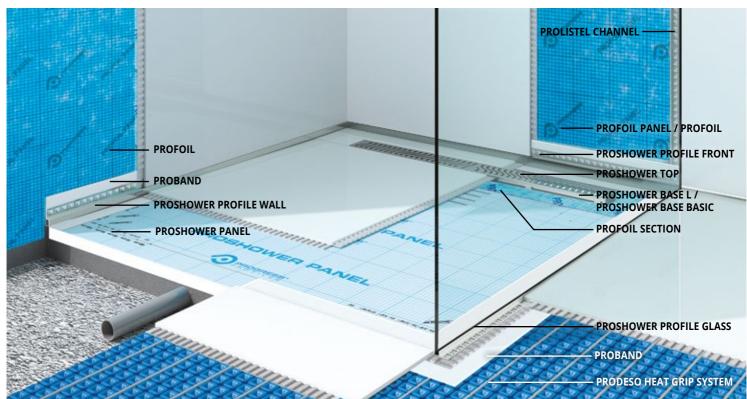



PROSHOWER BASE L is a channel body in stainless steel AISI 304/1.4301 - V2A steel for the realisation of floorlevel shower. The body channel, with an overall height of 85 mm, is completed by 6 different grids in stainless steel. **PROSHOWER BASE L** undergoes electro-polishing and subsequent passivation, which guarantees excellent resistence in any environment. Its low thickness combined with the fully adjustable siphon, the modularity and the high number of grids make it a much sought-after solution.


PROSHOWER **BASE L** SUPER POLISHED STAINLESS STEEL AISI 304/1.4301-V2A



* L 30 cm

DUCT BODY MADE OF AISI 304 STAINLESS STEEL

Article	Description	Pc/Pack.	€/Pc
PSHWDL 30	PROSHOWER BASE L-ACC-L 30 x 8 cm	1	333,01
PSHWDL 70	PROSHOWER BASE L-ACC-L 70 x 8 cm	1	424,42
PSHWDL 80	PROSHOWER BASE L-ACC-L 80 x 8 cm	1	450,53
PSHWDL 90	PROSHOWER BASE L-ACC-L 90 x 8 cm	1	476,66
PSHWDL 100	PROSHOWER BASE L-ACC-L 100 x 8 cm	1	502,77
PSHWDL 120	PROSHOWER BASE L-ACC-L 120 x 8 cm	1	568,07

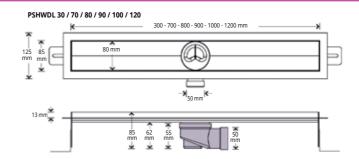

UPON REQUEST


PROSHOWER BASE L with vertical siphon complete of installed Profoil membrane (code ref. PSHWDVS...). Drain Ø 50 mm.

PROSHOWER BASE BASIC is a water collecting duct system in polypropylene for floor showers, available in several
lengths and grids.



GREY POLYPROPYLENE



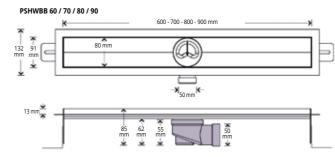

GREY POLYPROPYLENE DUCT BODY

Article	Description	Pc/Pack.	€/Pc
PSHWBB 60	PROSHOWER BASE BASIC - 60 x 8 cm PP	1	195,88
PSHWBB 70	PROSHOWER BASE BASIC - 70 x 8 cm PP	1	208,95
PSHWBB 80	PROSHOWER BASE BASIC - 80 x 8 cm PP	1	222,00
PSHWBB 90	PROSHOWER BASE BASIC - 90 x 8 cm PP	1	235,06

UPON REQUEST

PROSHOWER BASE BASIC with vertical siphon complete of installed Profoil membrane (code ref. PSHWBBVS...). Drain Ø 50 mm.

PROFOIL SECTION

HDPE E PP GUAINE

SHOWER SYSTEMIS

PROFOIL SECTION AND DOUBLE SIDED TAPE 3 Im

Article	L	Pc/Pack.	€/Pc
PSHANT 30	30 cm	1	19,59
PSHANT 60	60 cm	1	22,21
PSHANT 70	70 cm	1	24,82
PSHANT 80	80 cm	1	30,03
PSHANT 90	90 cm	1	35,26
PSHANT 100	100 cm	1	40,49
PSHANT 120	120 cm	1	47,01





PROSHOWER TOP

SUPER-POLISHED STAINLESS STEEL AISI 304 / 1.4301 - V2A

PROSHOWER TILE - tileable



PROSHOWER LINE

PSHWL 60/70/80/90/100/120



PROSHOWER DESIGN

PSHWD 30/60/70/80/90/100/120



PROSHOWER STRIPS

PSHWST 60/70/80/90/100/120

SHOWER SYSTEMS



PROSHOWER GRILL

PSHWGR 60/70/80/90/100/120



PROSHOWER SQUARE PSHWSO 60/70/80/90/100/120



PROSHOWER TILE - SUPER-POLISHED STAINLESS STEEL AISI 304 / 1.4301 - V2A - Pack. 1 Pc

	Article	Lenght cm	Width cm	€/Pc
3	PSHWT 30*	30	8	137,12
3	PSHWT 60**	60	8	156,71
3	PSHWT 70	70	8	163,23
3	PSHWT 80	80	8	169,76
۲	PSHWT 90	90	8	176,31
3	PSHWT 100*	100	8	195,88
٢	PSHWT 120*	120	8	215,47

*PSHWT 30,100,120 Provided only combined with Proshower Base L. **PSHWT 60 Provided only combined with Proshower Base Basic.

PROSHOWER LINE - SUPER-POLISHED STAINLESS STEEL AISI 304 / 1.4301 - V2A - Pack. 1 Pc

	Article	Lenght cm	Width cm	€/Pc			
3	PSHWL 60**	60	8	156,71			
۲	PSHWL 70	70	8	163,23			
۲	PSHWL 80	80	8	169,76			
۲	PSHWL 90	90	8	176,31			
۲	PSHWL 100*	100	8	195,88			
۲	PSHWL 120*	120	8	215,47			

*PSHWL 100,120 Provided only combined with Proshower Base L.

**PSHWL 60 Provided only combined with Proshower Base Basic.

PROSHOWER DESIGN - SUPER-POLISHED STAINLESS STEEL AISI 304 / 1.4301 - V2A - Pack. 1 Pc

Article	Lenght cm	Width cm	€/Pc
O PSHWD 30*	30	8	137,12
PSHWD 60**	60	8	156,71
O PSHWD 70	70	8	163,23
PSHWD 80	80	8	169,76
O PSHWD 90	90	8	176,31
O PSHWD 100*	100	8	195,88
PSHWD 120*	120	8	215,47

*PSHWD 30,100,120 Provided only combined with Proshower Base L. **PSHWD 60 Provided only combined with Proshower Base Basic.

PROSHOWER STRIPS - SUPER-POUSHED STAINIESS STEEL AISL 304 / 1 4301 - V2A - Pack 1 Pc

Article	Lenght cm	Width cm	€/Pc		
PSHWST 60**	60	8	156,71	*	
PSHWST 70	70	8	163,23	*	
PSHWST 80	80	8	169,76	*	
PSHWST 90	90	8	176,31	*	
PSHWST 100*	100	8	195,88	*	
PSHWST 120*	120	8	215,47	*	
	120	8		*	

*PSHWST 100,120 Provided only combined with Proshower Base L. ****PSHWST 60 Provided only combined with Proshower Base Basic.**

PROSHOWER GRILL - SUPER-POLISHED STAINLESS STEEL AISI 304 / 1.4301 - V2A - Pack. 1 Pc

Article	Lenght cm	Width cm	€/Pc	
PSHWGR 60**	60	8	156,71	*
PSHWGR 70	70	8	163,23	*
PSHWGR 80	80	8	169,76	*
PSHWGR 90	90	8	176,31	*
PSHWGR 100*	100	8	195,88	*
PSHWGR 120*	120	8	215,47	*

*PSHWGR 100,120 Provided only combined with Proshower Base L. **PSHWGR 60 Provided only combined with Proshower Base Basic.

PROSHOWER SQUARE - SUPER-POLISHED STAINLESS STEEL AISI 304 / 1.4301 - V2A - Pack. 1 Pc

Article	Lenght cm	Width cm	€/Pc	
PSHWSQ 60**	60	8	156,71	*
PSHWSQ 70	70	8	163,23	*
PSHWSQ 80	80	8	169,76	*
PSHWSQ 90	90	8	176,31	*
PSHWSQ 100*	100	8	195,88	*
PSHWSQ 120*	120	8	215,47	*

*PSHWSQ 100,120 Provided only combined with Proshower Base L. **PSHWSQ 60 Provided only combined with Proshower Base Basic.




🜟 = Production on demand with minimum quantity of 10 pcs. Production delay 4/5 weeks. Price to be agreed Prices are referred to whole packs.

S = News 2023


DRAIN REDUCTION

POLYPROPYLENE

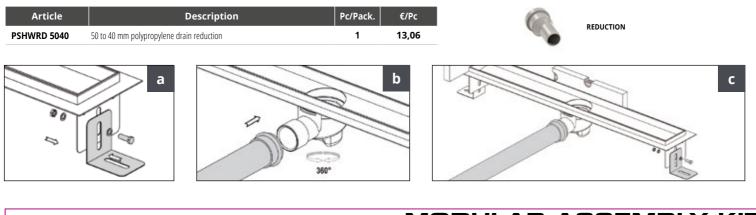

MODULAR ASSEMBLY KIT



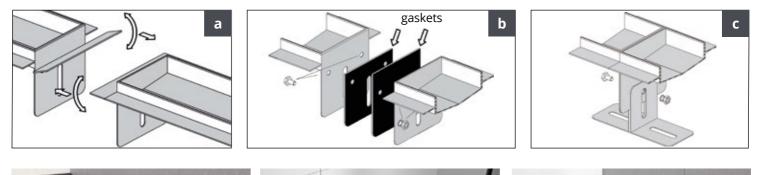





SHOWER SYSTEMS



PROSHOWER BASE L PRO

SUPER-POLISHED

STAINLESS STEEL AISI 316L / 1.4404 – V4A




DUCT BODY MADE OF A STAINLESS STEEL AISI 316L / 1.4404 - V4A

	Article	Description	Pc/Pack.	€/Pc
۲	PSHWP 30	PROSHOWER BASE L PRO - L 30 x 5,5 cm	1	170,89
٩	PSHWP 60	PROSHOWER BASE L PRO - L 60 x 5,5 cm	1	187,43
۲	PSHWP 70	PROSHOWER BASE L PRO - L 70 x 5,5 cm	1	198,45
٩	PSHWP 80	PROSHOWER BASE L PRO - L 80 x 5,5 cm	1	209,48
3	PSHWP 90	PROSHOWER BASE L PRO - L 90 x 5,5 cm	1	220,50
\odot	PSHWP 100	PROSHOWER BASE L PRO - L 100 x 5,5 cm	1	231,53

PROSHOWER BASE L PRO is a stainless steel AISI 316L / 1.4404 - V4A drain for the realisation of floor-level and

for wall shower drain. This drain is available in different lengths and equipped with different grids. The reduced thickness grid has excellent chemical resistance and is equipped with a 360° adjustable siphon.

Article	Kit components	Pc/Pack.
PSHWPNN	PROSHOWER BASE L PRO DUCT BODY	1
TASPRF	PROFOIL SECTION	1
SPSHWPT	POLYSTYRENE TEMPORARY CHANNEL PROTECTION	1

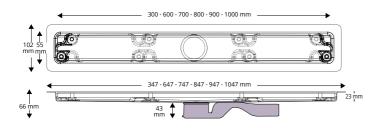





PROFOIL SECTION TASPRF...



POLYSTYRENE TEMPORARY CHANNEL PROTECTION SPSHWPT...

PROSHOWER TOP PRO

SUPER-POLISHED STAINLESS STEEL AISI 316L / 1.4404 - V4A

PROSHOWER TILE/LINE PRO



PROSHOWER TILE/LINE PRO - SUPER-POLISHED STAINLESS STEEL AISI 316L/1.4404-V4A - Pac	k. 1 Pc

Article	Lenght cm	Width cm	€/Pc		
O PSHWPLT 30	30	5,5	44,10		
PSHWPLT 60	60	5,5	66,15		
O PSHWPLT 70	70	5,5	71,66		
O PSHWPLT 80	80	5,5	77,17		
💿 PSHWPLT 90	90	5,5	82,69		
O PSHWPLT 100	100	5,5	88,20		

Sold only in combination with Proshower Base L PRO

PROSHOWER DESIGN PRO



Article	Lenght cm	Width cm	€/Pc
PSHWPD 30	30	5,5	55,13
PSHWPD 60	60	5,5	77,17
PSHWPD 70	70	5,5	82,69
O PSHWPD 80	80	5,5	88,20
💿 PSHWPD 90	90	5,5	93,71
O PSHWPD 100	100	5,5	99,23

Sold only in combination with Proshower Base L PRO







PROSHOWER BASE L PRO is also equipped with a wall drain box made of AISI 316L / 1.4404 - V4A stainless stel which recessed into the wall, allows to realize wall drains without compromising the water flow and the ease of cleaning.


WALL DRAIN BOX

	WALL DRAIN BOX STAINLESS STEEL AISI 316L/1.4404-V4A				
	Article	Description	Pc/Pack.	€/Pc	
٩	KBPSHWPAC 30	PROSHOWER BASE L PRO wall drain box 30 cm	1	143,33	
٩	KBPSHWPAC 60	PROSHOWER BASE L PRO wall drain box 60 cm	1	170,89	
٩	KBPSHWPAC 70	PROSHOWER BASE L PRO wall drain box 70 cm	1	181,91	
٢	KBPSHWPAC 80	PROSHOWER BASE L PRO wall drain box 80 cm	1	192,94	
٩	KBPSHWPAC 90	PROSHOWER BASE L PRO wall drain box 90 cm	1	231,53	
٩	KBPSHWPAC 100	PROSHOWER BASE L PRO wall drain box 100 cm	1	242,55	

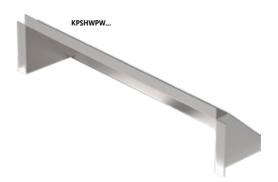

INSTALLATION SECTION OF THE WALL DRAIN PROSHOWER BASE L PRO

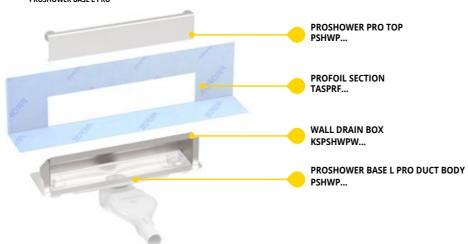

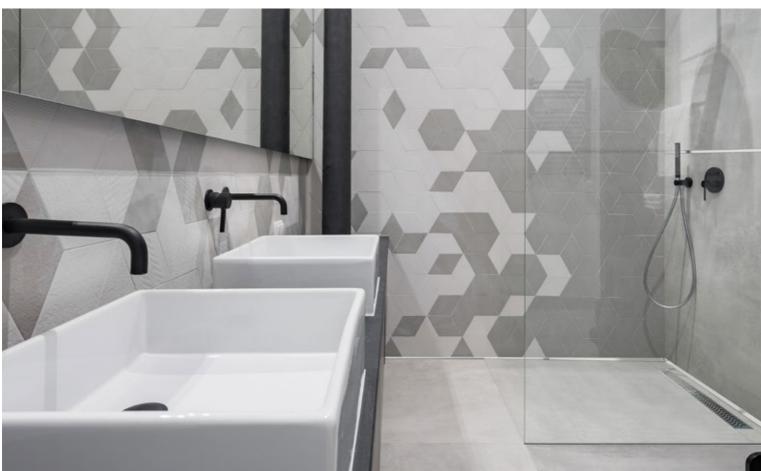



SHOWER SYSTEMS




L. E

PROSHOWER PROFILE GLASS

PROSHOWER PROFILE GLASS Suitable profile for fixing glass slabs in case of floor level showers with a a slope of 2%. Due to its particular shape and finish in satin-finish stainless steel AISI 304 / 1.4301 – V2A, it covers and decorates the visible side of the screed.

SATINED STAINLESS STEEL AISI 304 / 1.4301 - V2A

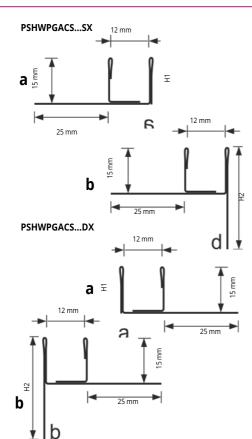






to be used with all kind of floor.

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS



1. Choose "PROSHOWER PROFILE GLASS" according to the desired length. 2. Cut "PROSHOWER PROFILE GLASS" to the desired length and apply the adhesive on the support where the profile will be laid. 3. Press the anchoring flange of "PROJOLLY SQUARE" into the adhesive. 4. Lay the tiles, aligning them with the profile leaving a 2 mm joint. Remove immediately all remains of adhesive from the surface of the profile. 5. Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile. 6. Insert the sheet of glass and seal.

SATINED STAINLESS STEEL AISI 304/1.4301-V2A - LEFT

H1 mm

15

15

15

SATINED STAINLESS STEEL AISI 304/1.4301-V2A - RIGHT degreased and passivated - thermo packed - Pack. 1 Pc

H1 mm

15

15

15

2% SLOPE

H2 mm

33

43

53

H2 mm

33

43

53

L cm

100

150

200

Lcm €/Pc

100 cm 125,00

150 cm 170,00

200 cm 225,00

€/Pc

125,00

170,00

225,00

degreased and passivated - thermo packed - Pack. 1 Pc

Article

PSHWPGACS 100SX

PSHWPGACS 150SX

PSHWPGACS 200SX

Article

PSHWPGACS 100DX

PSHWPGACS 150DX

PSHWPGACS 200DX

PSHWPGACS ... DX


h

PROSHOWER PROFILE is a profile for floor level showers in stainless steel for the protection of the floor edges and as decoration of the screed visible side. The profile has a 2% slope. Its specific shape makes it an easy to lay profile

PROSHOWER PROFILE

SATINED STAINLESS STEEL AISI 304 / 1.4301 - V2A

Contra and a second

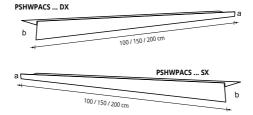

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS



SATINED STAINLESS STEEL AISI 304/1.4301-V2A - RIGHT degreased and passivated - thermo packed - Pack. 1 Pc

Article	H mm	H1 mm	H2 mm	L cm	€/Pc
PSHWPACS 1010DX	10	11	28	100	120,00
PSHWPACS 1015DX	10	11	38	150	140,00
PSHWPACS 1020DX	10	11	48	200	155,00
PSHWPACS 12510DX	12,5	13,5	30	100	120,00
PSHWPACS 12515DX	12,5	13,5	40	150	140,00
PSHWPACS 12520DX	12,5	13,5	50	200	155,00

SATINED STAINLESS STEEL AISI 304/1.4301-V2A - LEFT degreased and passivated - thermo packed - Pack. 1 Pc

Article	H mm	H1 mm	H2 mm	L cm	€/Pc
PSHWPACS 1010SX	10	11	28	100	120,00
PSHWPACS 1015SX	10	11	38	150	140,00
PSHWPACS 1020SX	10	11	48	200	155,00
PSHWPACS 12510SX	12,5	13,5	30	100	120,00
PSHWPACS 12515SX	12,5	13,5	40	150	140,00
PSHWPACS 12520SX	12,5	13,5	50	200	155,00

1. Choose "PROSHOWER PROFILE" according to the desired length. 2. Cut "PROSHOWER PROFILE" to the desired length and apply the adhesive on the support where the profile will be laid. 3. Press the anchoring flange of "PROJOLLY SQUARE" into the adhesive. 4. Lay the tiles, aligning them with the profile leaving a 2 mm joint. Remove immediately all remains of adhesive from the surface of the profile. 5. Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile. 6. Insert the sheet of glass and seal.

196

SHOWER SYSTEMS **PROSHOWER PROFILE FRONT** is a satin-finish stainless steel AISI 304/1.4301-V2A profile. It is suitable to cover and decorate the visible part of wall in front of the shower tray in case of floor level showers with slope.

PROSHOWER PROFILE FRONT

SATINED STAINLESS STEEL AISI 304 / 1.4301 - V2A

SATINED STAINLESS STEEL AISI 304/1.4301-V2A


degreased and passivated - thermo packed - Pack. TPC						
Article	Hmm	H1 mm	L cm	€/Pc		
PSHWPFACS 101028	10	28	100	77,00		
PSHWPFACS 101038	10	38	100	79,00		
PSHWPFACS 101048	10	48	100	81,00		
PSHWPFACS 101528	10	28	150	97,00		
PSHWPFACS 101538	10	38	150	100,00		
PSHWPFACS 101548	10	48	150	103,00		
PSHWPFACS 1251028	12,5	28	100	77,00		
PSHWPFACS 1251038	12,5	38	100	79,00		
PSHWPFACS 1251048	12,5	48	100	81,00		
PSHWPFACS 1251528	12,5	28	150	97,00		
PSHWPFACS 1251538	12,5	38	150	100,00		
PSHWPFACS 1251548	12,5	48	150	103,00		

1. Choose "PROSHOWER PROFILE FRONT" according to the desired length. 2. Cut "PROSHOWER PROFILE FRONT" to the desired length and apply the adhesive on the support where the profile will be laid. 3. Press the anchoring flange of "PROJOLLY SQUARE" into the adhesive. 4. Lay the tiles,

aligning them with the profile leaving a 2 mm joint. Remove


immediately all remains of adhesive from the surface of the profile. **5.** Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the

profile. 6. Insert the sheet of glass and seal.







100/150 cm









PROSHOWER PROFILE WALL Profile in satin-finish stainless steel AISI 304 / 1.4301 – V2A. It is suitable to cover and decorate the visible part of wall beside the shower tray in case of floor level showers with a slope of 2%.

SATINED STAINLESS STEEL AISI 304/1.4301-V2A - RIGHT degreased and passivated - thermo packed - Pack. 1 Pc

Article	Hmm	H1 mm	H2 mm	L cm	€/Pc
PSHWPLACS 1010DX	10	10	28	100	65,00
PSHWPLACS 1015DX	10	10	38	150	80,00
PSHWPLACS 1020DX	10	10	48	200	105,00
PSHWPLACS 12510DX	12,5	10	28	100	65,00
PSHWPLACS 12515DX	12,5	10	38	150	80,00
PSHWPLACS 12520DX	12,5	10	48	200	105,00

SATINED STAINLESS STEEL AISI 304/1.4301-V2A - LEFT degreased and passivated - thermo packed - Pack. 1 Pc

Article	Hmm	H1 mm	H2 mm	L cm	€/Pc
PSHWPLACS 1010SX	10	10	28	100	65,00
PSHWPLACS 1015SX	10	10	38	150	80,00
PSHWPLACS 1020SX	10	10	48	200	105,00
PSHWPLACS 12510SX	12,5	10	28	100	65,00
PSHWPLACS 12515SX	12,5	10	38	150	80,00
PSHWPLACS 12520SX	12,5	10	48	200	105,00

1. Choose "PROSHOWER PROFILE WALL" according to the desired length. 2. Cut "PROSHOWER PROFILE WALL" to the desired length and apply the adhesive on the support where the profile will be laid. 3. Press the anchoring flange of "PROJOLLY SQUARE" into the adhesive. 4. Lay the tiles, aligning them with the profile leaving a 2 mm joint. Remove immediately all remains of adhesive from the surface of the profile. 5. Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile. 6. Insert the sheet of glass and seal









EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS



PROSHOWER PROFILE WALL

SATINED STAINLESS STEEL AISI 304 / 1.4301 - V2A







SHOWER SYSTEMS

H2



25 mm


PROGRESS[®]

ILE


а

PROLISTEL **CHANNEL** STAINLESS STEEL AISI 304/1.4301-V2A

PLTCH... 08 - 10 - 11 -12,5




EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS



 Choose "PROLISTEL CHANNEL" according to the visible surface and desired finish. 2. Cut "PROLISTEL CHANNEL" to the desired length and apply the adhesive on the surface where the profile will be laid. 3. Press "PROLISTEL CHANNEL" into the desired length the basile basiles are added with the surface of the sur adhesive, aligning it with the tiles leaving a 2 mm. joint. Remove immediately all remains of adhesive from the surface of the in mediately an endiate of the profile and tiles with grout in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile.





PROLISTEL CHANNEL is a F-shaped strip in polished an satin-finish stainless steel AISI 304/1.4301-V2A

to decorate the wall coverings in ceramic tiles and natural stones. Its section allows the realization of a decorative joint which can also be used as a guide for the fixing of sheets of glass on floors and walls. Its particular section and the availability in two different finishes make **PROLISTEL CHANNEL** a much sought-after profile that allows an easy

POLISHED STAINLESS STEEL AISI 304/1.4301-V2A bar length 2,7 lm - pack. 1 Pc

workmanlike application.

Article	H mm	L mm	€/ml	€/Pc
PLTCHAC 0812	8	12	45,64	123,23
PLTCHAC 1012	10	12	48,18	130,09
PLTCHAC 1112	11	12	50,71	136,92
O PLTCHAC 12512	12,5	12	53,25	143,78

POLISHED STAINLESS STEEL AISI 304/1.4301-V2A bar length 2,7 lm - pack. 1 Pc

POLISHED STAINLESS STEEL AISI 304/1.4301-V2A

H mm

8

10

11

12,5

bar length 2,7 lm - pack. 1 Pc

Article

PLTCHAC 0810

O PLTCHAC 1010

O PLTCHAC 1110

O PLTCHAC 12510

	Article	H mm	L mm	€/ml	€/Pc	
3	PLTCHAC 0808	8	08	45,64	123,23	•
٩	PLTCHAC 1008	10	08	48,18	130,09	3
٩	PLTCHAC 1108	11	08	50,71	136,92	2
٩	PLTCHAC 12508	12,5	08	53,25	143,78	3

L mm

10

10

10

10

€/ml

45.64

48,18

50,71

53,25

€/Pc

123.23

SATIN-FINISH STAINLESS STEEL AISI 304/1.4301-V2A bar length 2,7 lm - pack. 1 Pc

Article	Hmm	L mm	€/ml	€/Pc
PLTCHACS 0812	8	12	49,44	133,49
PLTCHACS 1012	10	12	51,99	140,37
PLTCHACS 1112	11	12	54,52	147,20
PLTCHACS 12512	12,5	12	57,06	154,06


SATIN-FINISH STAINLESS STEEL AISI 304/1.4301-V2A bar length 2,7 lm - pack. 1 Pc

	Article	H mm	L mm	€/ml	€/Pc	
* 🧿	PLTCHACS 0808	8	08	49,44	133,49	*
* 🧿	PLTCHACS 1008	10	08	51,99	140,37	*
* 🧿	PLTCHACS 1108	11	08	54,52	147,20	*
* 🧿	PLTCHACS 12508	12,5	08	57,06	154,06	*


PROLISTEL

CHANNEL ANODIZED AND POLISHED ALUMINIUM

SHOWER



EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS



1. Choose "PROLISTEL CHANNEL" according to the visible surface and desired finish. 2. Cut "PROLISTEL CHANNEL" to the desired length and apply the adhesive on the surface where the profile will be laid. **3.** Press "PROLISTEL CHANNEL" into the adhesive, aligning it with the tiles leaving a 2 mm. joint. Remove immediately all remains of adhesive from the surface of the profile. **4.** Fill the joint between the profile and tiles with grout in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile.

PROGRESS[®]

ILE



ANODIZED SILVER ALUMINIUM th 2,7 lm - pack. 40 Pcs - 108 lm

Article	H mm	€/ml	€/Pc		
PLTCHAA 08	8	15,03	40,58		
PLTCHAA 10	10	16,33	44,09		
PLTCHAA 11	11	17,30	46,71		
PLTCHAA 125	12,5	18,28	49,36		

COLOURS

ANODIZED	POLISHED
AA - Anodized silver alum	BC - Polished chrome alum



POLISHED CHROME ALUMINIUM ar length **2,7 lm** - pack. **40 Pcs - 108 lm**


Article	Hmm	€/ml	€/Pc		
PLTCHBC 08	8	17,64	47,63		
PLTCHBC 10	10	18,94	51,14		
PLTCHBC 11	11	19,92	53,78		
PLTCHBC 125	12,5	20,89	56,40		

*


*

*


suitable

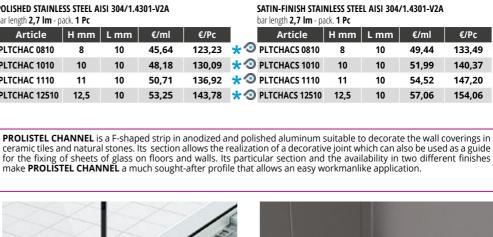

3 = News 2023





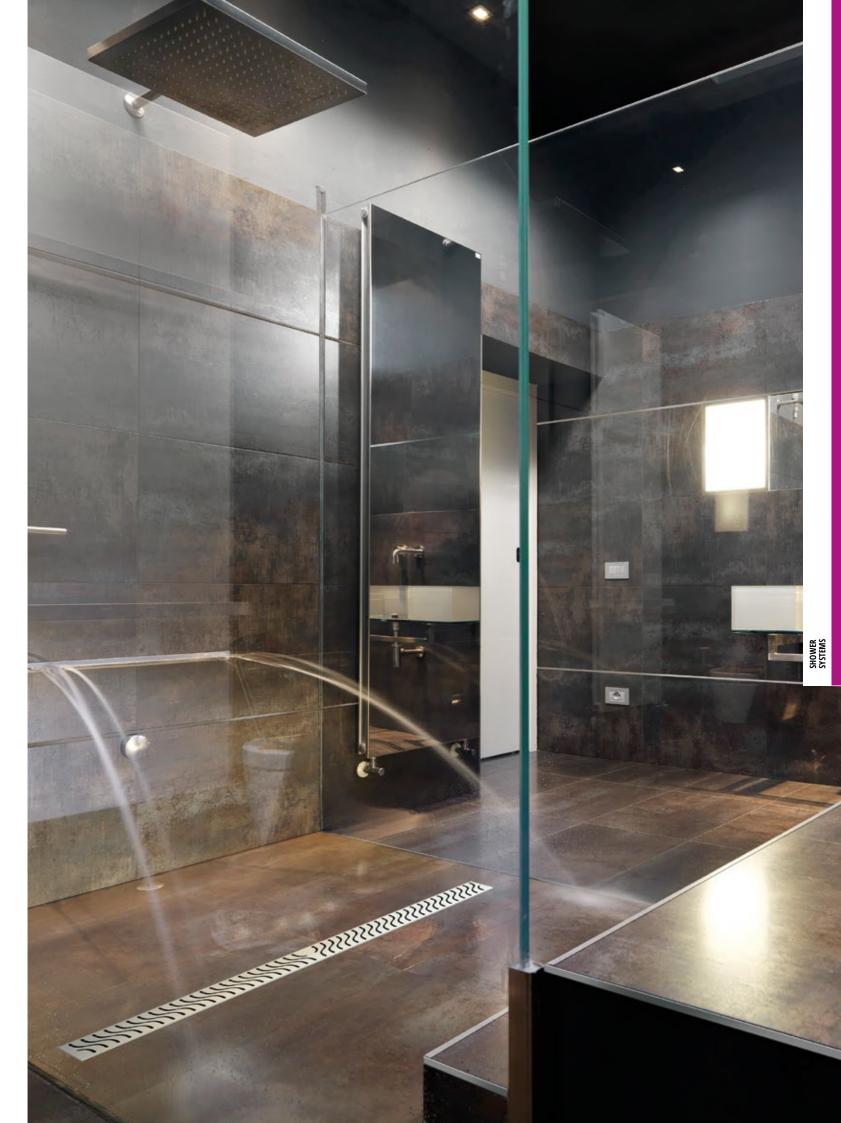

ER SYSTEM CENTRAL KIT

Article

PSHPANC

SHOWER SYSTEMS **PROSHOWER CENTRAL KIT SYSTEM** is an innovative solution, which combines functionality and design to answer to all requirements of the shower.

	answer to a	ll requirements of the shower			
	Article		Description	Pc/Pack.	€/Pc
2	PSHPANCEK	PROSHOWER CENTRAL KIT SYSTEM	Beschption	1	450,38
The					

Article	Kit components	Pc/Pack.
PSHPANC	PROSHOWER PANEL CENTRAL - moulded polystyrene 120 cm x 120 cm	1
PRBFXB	PROBAND FIX white	2
PRBPE 1507	PROBAND 150 - 7,5 lm	1
PFLO 0405	PROFOIL ROLL - 5 Im	1
PRSPD 10	PVC TOWEL	1
PSHLDK	PROSHOWER DRAIN LATERAL KIT	1

PATENTED PROSHOWER PANEL CENTRAL PSHPANC

Description

12001

15 mm 120 mm

PROSHOWER PANEL CENTRAL - moulded polystyrene 120 cm x 120 cm

F

Pc/Pack.

1

PROFOIL PFLO 0405

PROBAND 150 PRBPE 1507

€/Pc

223,38


26 n

PROBAND FIX PRBFXB

PVC TOWEL PRSPD 10



© 2023 All rights reserved by Progress Profiles. Printed in litely

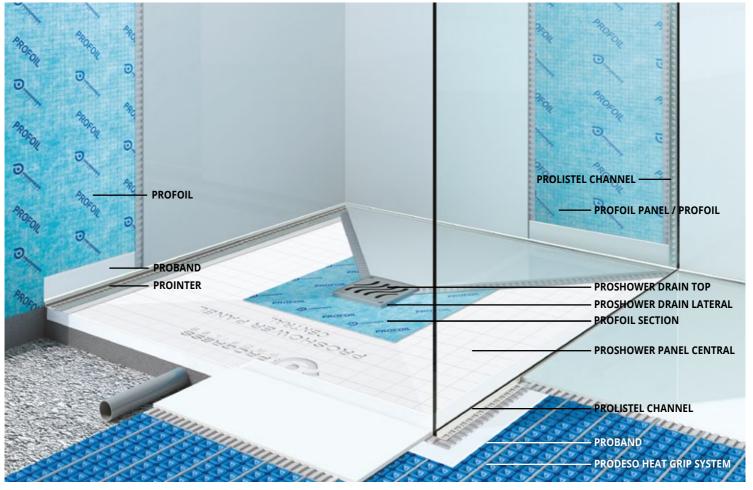

PROGRESS® PROFILES



PROSHOWER LATERAL DRAIN KIT are 2 central drain systems with lateral outflow equipped with a siphon, grate support, stainless steel grate, butyl double-sided ring for the fixing of the waterproof section, waterproof section and a protection cap with template function too that allows the correct positioning of the butyl ring and the waterproof section. LATERAL AND VERTICAL DRAIN KIT ensure a correct flow of rainwater.

Article Description Pc/Pack €/Pc PSHLDK PROSHOWER DRAIN LATERAL KIT 158,49 1

AREA OF USE

- Use PROSHOWER BASE L PRO it can be used in any indoor and outdoor environment.
- Don't use In environments where very aggressive substances are used and a high concentrated load is expected.



PROSHOWER DRAIN CENTRAL PRO is a 10x10 cm stainless steel AISI 316L / 1.4404 – V4A drain for the realisation of floor-level shower. This low thickness drain is equipped with a grid that can also be tiled for floor-level drains. PROSHOWER DRAIN CENTRAL PRO has excellent chemical resistance and is equipped with a 360 ° adjustable siphon.

PROSHOWER DRAIN CENTRAL PRO

PROSHOWER

DRAIN KIT

LATERAL AND VERTICAL DRAINS

LATERAL DRAIN

Article	Description	Pc/Pack.	€/Pc
PSHWCP	PROSHOWER DRAIN CENTRAL PRO	1	176,40

۲

© 2028 All rights reserved by Progress Profiles. Printed in Italy

• Use - Balconies, terraces, outdoor surfaces of any size, kitchens and showers.

• Don't use - In environments subject to heavy traffic and where washing with acidic and strong alkaline substances is foreseen.

WARNINGS

After the drain installation, apply the protective cap. Before applying the butyl double-sided adhesive ring on the flange of the drain, thoroughly clean the flange of any dirt residue that may compromise its adhesion. Apply the butyl double-sided adhesive ring and the waterproofing section during the application of the waterproofing system.








PROFOIL PANEL

HIGH DENSITY EXTRUDED POLYSTYRENE PANEL **PROFOIL PANEL** are high density extruded polystyrene panels covered on both sides with a steam- and waterproofing membrane. The membrane is waterproofing and the adhesive to fix them reinforces the panels for a quick and inexpensive laying.

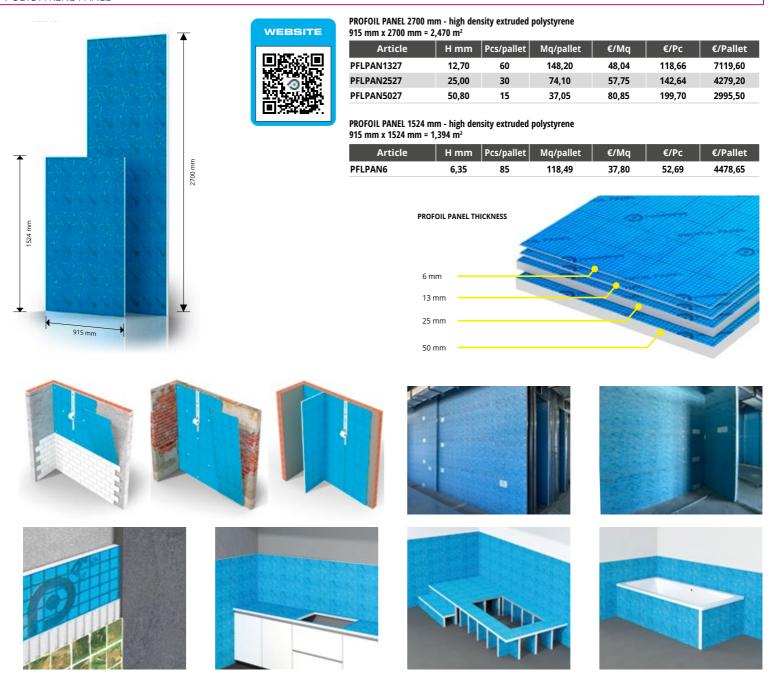

PROFOIL AND PROBAND DOWELS, WASHERS, SCREWS

STAINLESS STEEL/ZINC-COATED METAL/GLASS FIBER NET



SHOWER SYSTEMS

PROFOIL DOWELS - ZINC-COATED METAL - pack. 250 Pc

TZPFP 110 100 1,70 425,00 TZPFP 140 140 1,89 472,50 TZPFP 170 170 2,09 522,50 TZPFP 200 200 2,28 570,00	Article	L mm	€/Pc	€/Pack.
TZPFP 170 170 2,09 522,50	TZPFP 110	100	1,70	425,00
	TZPFP 140	140	1,89	472,50
TZPFP 200 200 2,28 570,00	TZPFP 170	170	2,09	522,50
	TZPFP 200	200	2,28	570,00

PROFOIL DOWELS - STAINLESS STEEL - pack. 250 Pc

Article	Lmm	€/Pc	€/Pack.
TIPFP 110	110	3,28	820,00
TIPFP 140	140	3,53	882,50
TIPFP 170	170	3,79	947,50
TIPFP 200	200	4,04	1010,00
TIPFP 250	250	4,70	1175,00

_	_		
_	_	_	
	_		
			_

PROFOIL PANEL SCREWS (ZINC-COATED METAL)

Article	Pcs/Pack.	L mm	€/Pc	€/Pack.
VACPFP 35	1000	35	0,04	40,00
VACPFP 55	1000	45	0,05	50,00
VACPFP 80	1000	80	0,10	100,00



202



PROFOIL PANEL NICHE are prefabricated built-in elements of PROFOIL PANEL to make indoor wall niches and support surfaces. The niches can be linked to the waterproofing systems PROFOIL and PROFOIL PANEL. The fixing of the shelf inside the niche is optional. The shelf, part of the, can be fixed at the needed height. It is available in 4 sizes.


HIGH DENSITY EXTRUDED POLYSTYRENE

PROFOIL PANEL NICHE


PFLPANICH 1212

PROFOIL PANEL NICHE	E - WATERPROOFING NICHE		
Article	Description	Pcs/Pack.	€/Pc
PFLPANICH 88	WATERPROOFING NICHE MADE OF PROFOIL PANEL of 12,5mm, Inside size of the niche 203,2 x 203,2 mm	1	69,67
PFLPANICH 1212	WATERPROOFING NICHE MADE OF PROFOIL PANEL of 12,5mm, Inside size of the niche 304,8 x 304,8 mm	1	81,01
PFLPANICH 821	WATERPROOFING NICHE MADE OF PROFOIL PANEL of 12,5mm, Inside size of the niche 203,2 x 533,4 mm	1	107,13
PFLPANICH 1221	WATERPROOFING NICHE MADE OF PROFOIL PANEL of 12,5mm, Inside size of the niche 304,8 x 533,4 mm	1	120,33


PFLPANICH 1221

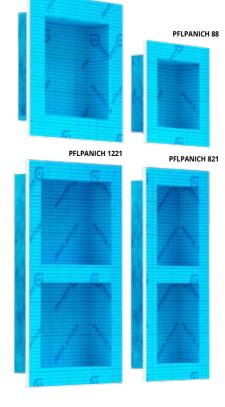


PFLPANICH 88



PFLPANICH 1212











SHOWER SYSTEMS PROFOIL PROFOIL PRO ROLLS IN HDPE AND PP **PROFOIL** is a waterproofing polyethylene membrabe with nonwoven polypropylene fabric on both side that guarantees high adhesion to the support.

PROFOIL PRO is a waterproofing elastic polyethylene membrane with nonwoven polypropylene fabric on both side that guarantees high adhesion to the support.

PROFOIL - ROLLS IN HDPE AND PP - Thickness 0,42 mm ROLLS IN HDPE AND PP - Thickness 0,42 mm							
Article	Width roll H x L lm	total m²	Rolls/pallet	€/m²	€/Roll	€/pallet	
PFLO 0430	1 x 30	30	40	14,55	436,50	17460,00	
PFLO 0405	1 x 5	5	154	20,25	101,25	15592,50	

PROFOIL PRO - ELASTIC ROLLS IN HDPE AND PP - Thickness 0,42 mm PP

Article	Width roll H x L lm	total m²	Rolls/pallet	€/m²	€/Roll	€/pallet
PFLOPR 0430	1 x 30	30	40	17,09	512,70	20508,00

AREAS OF USE

• Use. Waterproofing of substrates and vertical structures before the laying of ceramic in areas subject to occasional contact with water like bathrooms and kitchens, saunas and Turkish baths. **PROFOIL PRO** can also be used in environments with permanent contact with water like swimming pools and tanks. • **Don't use.** On bituminous coverings, over insulating panels and lightweigh screed.

WARNINGS

Store in a cool and dry place avoiding direct sunlight and sources of heat. Read the data sheet before applying; in case of special applications please call the technical department.





PROFOIL PASTE

WATERPROOFING ELASTIC MEMBRANE

and the second se	WATERPROOFING ELASTIC MEMBRANE						
	Article	Kg./ Bucket	Bucket/ Pallet	€/Kg.	€/ Bucket	€/Pallet	
	PFLOPST 04	4	64	12,74	53,38	3416,32	
PASTE	PFLOPST 10	10	36	12,09 1	126,65	4559,40	

PROFOIL PASTE is a ready to use thin-layer waterproofing elastic membrane with low emissions of volatile organic

AREAS OF USE • Use. Waterproofing for bathrooms, kitchens, showers, gypsum-based plasters, cement-based plaster and plasterboard walls.

• **Don't use.** For external application, on wet surfaces or substrates subject to moisture rising, in environments where water is always present, pools and tanks.

WARNINGS

Store in a cool and dry place avoiding direct sunlight and sources of heat. Read the data sheet before applying; in case of special applications please call the technical department.

SHOWER SYSTEMS

PROBAND150/250

ELASTIC ROLLS IN HDPE AND PP



ROLLS IN HDPE AND PP - Thickness 0,42 mm

Article	Roll width H mm x L lm	Rolls/ Pack.	€/Im	€/Roll	€/Pack.
PRBPE 1507	150 x 7,5	16	5,70	42,75	684,00
PRBPE 1530	150 x 30	6	4,18	125,40	752,40
PRBPE 2530	250 x 30	3	7,68	230,40	691,20

CORNERS and PIPE COLLAR

HDPE E PP

compounds.



PRBE PRBI

PREFORMED ELASTIC CORNERS AND PIPE COLLAR IN HDPE AND PP Thickness 0,42 mm

Article	H x L mm	€/Pc	€/Pack.
PRBI	60 x 120	8,23	82,30
PRBE	60 x 120	8,23	82,30
PRBT	125 x 125	7,29	72,90

PROBAND FIX

MOISTURE-CURE SEALANT



MOISTURE-CURE SEALANT

pack. of 12 callinges - D (while) - O (grey)				
Article Cartridge Im €/Pc €/Pack.				
PRBFXB	290	17,64	211,68	
PRBFXG	290	17,64	211,68	



GUN FOR MOISTURE-CURE SEALANT CARTRIDGE

Article	Pc/Pack	€/Pc
PRBFXGUN	1	352,60

PRBFXU...

MOISTURE-CURE SEALANT CARTRIDGE pack. of 12 cartridges - B (white) - G (grey)

Articolo	Cartridge Im	€/Pc	€/Pack.
PRBFXUB	600	34,61	415,32
PRBFXUG	600	34,61	415,32



204




 PROSHELF - STAINLESS STEEL AISI 316/1.4404-V4A TRIANGULAR TILEABLE SHELF

 Article
 Size
 Pc/Pack.
 €/Pc
 Asia


 O
 PRSHLFTP24
 170 mm x 240 mm
 1
 83,04

 O
 PRSHLFTP30
 212 mm x 300 mm
 1
 95,09

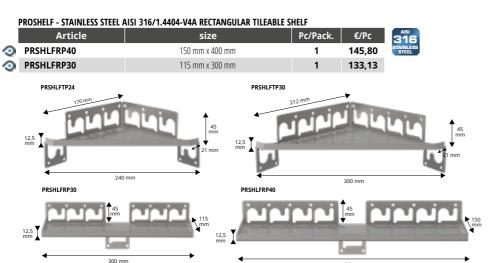

400 mr

PROSHELF - STAINLESS STEEL	AISI 316/1.4404-V4A TRIANGULAR SHELF			
Article	size	Pc/Pack.	€/Pc	AISI 316
PRSHLFTD24	170 mm x 240 mm	1	126,79	STAINLESS STEEL
PRSHLFTD30	212 mm x 300 mm	1	139,47	
	AISI 316/1.4404-V4A RECTANGULAR SHELF		<i>c</i> / b	AISI
Article	size	Pc/Pack.	€/Pc	316
PRSHLFRD40	150 mm x 400 mm	1	190,19	STAINLESS
PRSHLFRD30	115 mm x 300 mm	1	171,16	
PRSHLFTD24	PRSHLF		*	
3 mm	90 mm 3 mm	212 mm		

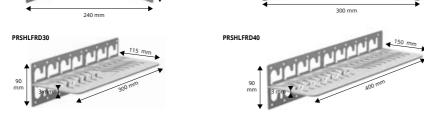

PRO GOBOARD PANEL highdensity polyisocyanurate foam panel, covered on both sides with a fibre-glass reinforced cement-based waterproof coating to allow the laying of tiles. The panels, tested for a resistance long duration, are available in thickness of 6,25 / 12,5 / 25 and 50 mm, size of 92 x 152 cm and 122 x 244 cm and can be used on floors, false ceilings, walls, showers and ceilings.

PRO GOBOARD PANEL - highdensity polyisocyanurate foam


Article	Description	Pcs/pallet	m²/pallet	€/m²	€/Pc	€/Pallet
PGOBOR06	PRO GOBOARD H 6,25 mm - 92 cm x 152 cm - 1,40 m ²	75	105	40,75	57,05	4278,75
PGOBOR125	PRO GOBOARD H 12,5 mm - 92 cm x 152 cm - 1,40 m ²	60	84	45,28	63,39	3803,40
PGOBOR25	PRO GOBOARD H 25 mm - 122 cm x 244 cm - 2,98 m ²	30	89,4	80,84	240,90	7227,00
PGOBOR50	PRO GOBOARD H 50 mm - 122 cm x 244 cm - 2,98 m ²	15	44,70	125,52	374,05	5610,75

PROSHELF

STAINLESS STEEL AISI 316/1.4404-V4A



1. Choose "PROSHELF" according to the desired shape and size. 2. apply the adhesive on the support where the shelf will be installed. 3. Press the anchoring flap into the adhesive; 4. Lay the tiles taking care to align them with the shelf. Immediately remove adhesive residues from the surface of the shelf. 5. Carefully seal the joints between the shelf and tiles with PROBAND FIX to avoid water stagnation. Remove any grout residue from the shelf surface.





PRO GOBOARD PANEL HIGH DENSITY POLYISOCYANURATE FOAM PANEL




SHOWER SYSTEMS

PROHEATER SYSTEM

PROHEATER is a wall porcelain stone tiled design heater that warms your bathroom with elegance and style

PROHEATER - WALL PORCELAIN STONE TILED HEATING SYSTEM

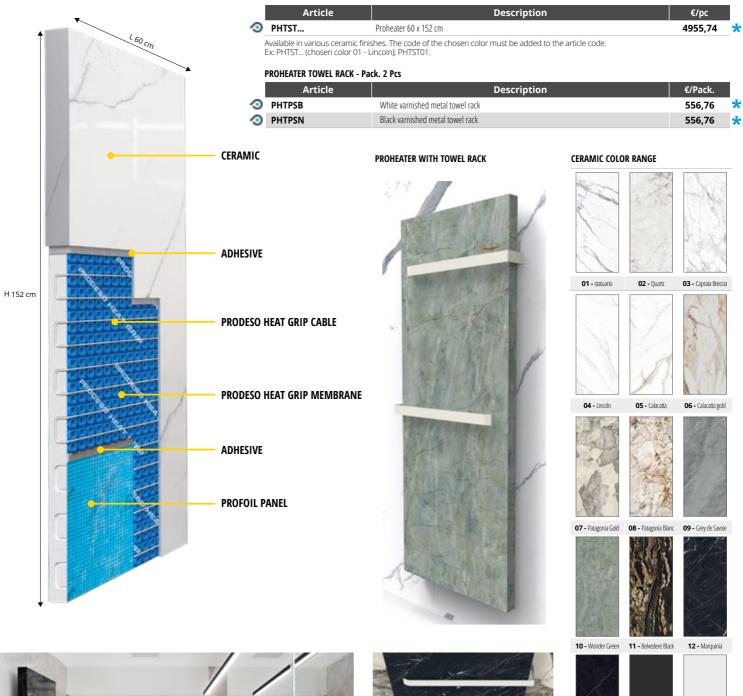

206



encode set of the set of the




15 - White

© 2023 All rights reserved by Progress Profiles. Printed in litely





An interpretation of: Grande Arche De la Défense, J. Otto von Spreckelsen, PARIS (France), 1989

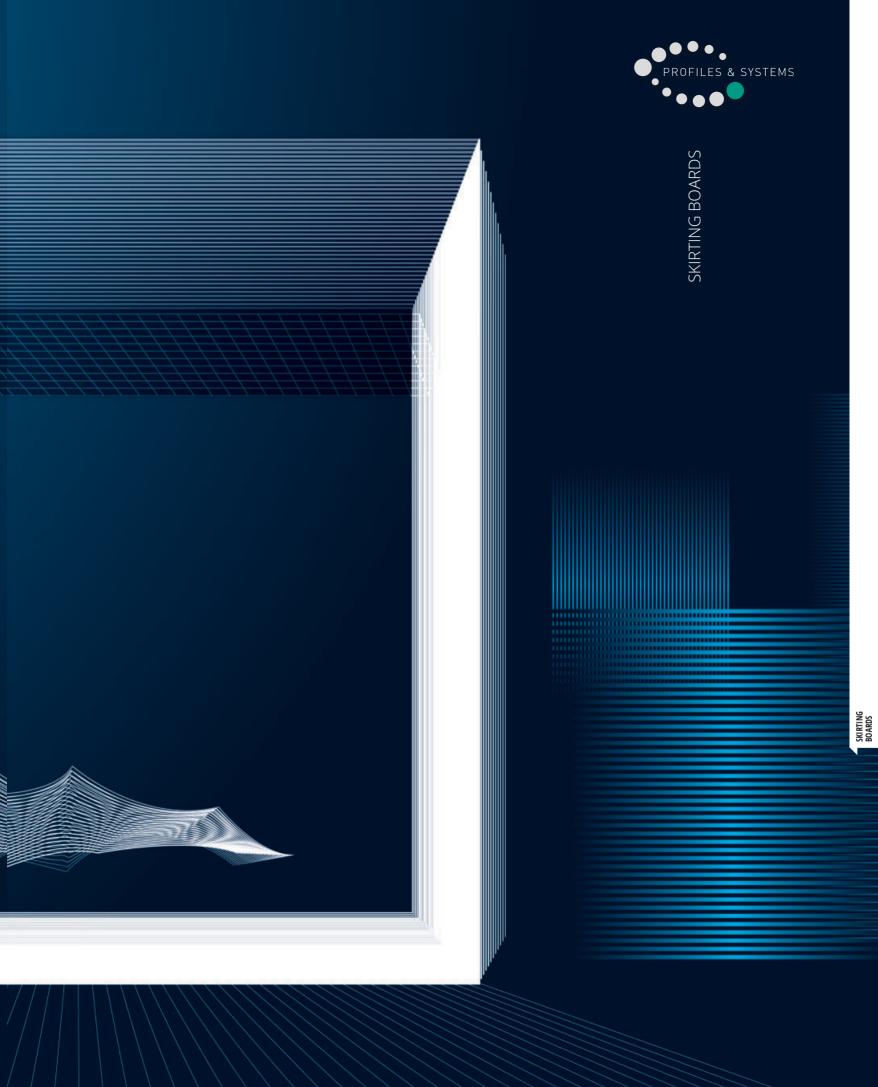






PROSKIRTING CHANNEL ANODIZED, BRUSHED, VARNISHED ALUMINIUM



EXAMPLES OF LAYING for instructions see the product below



SUPPORT/ PERFORATED BASE - ANODIZED SILVER ALUM. thermo packed - bar length 2 lm - pack. 20 Pcs - 40 lm Article H mm €/lm €/P

PKGCFAA 75	75	11,10	22,20
ORDER THE SU	JPPORT AND	THE TOP YOU V	VISH

VISIBLE TOP - ANODIZED, BRUSHED, WHITE VARNISHED ALUM. thermo packed bar length 2 Im - pack. 20 Pcs - 40 Im

Article	Hmm	€/lm	€/Pc
PKCHAA 55	55	10,77	21,54
PKCHBS 55	55	12,74	25,48
PKCHA 55-01	55	12 13	24.26


On demand may be realised in other finishes of the colour chart. Contact our customer service for minimum quantity, timing and price.

for instructions see the product below

EXTERNAL /INTERNAL BRUSHED, WHITE VAR	-		
Article	Hmm	€/Pack	
REPKCHAA 55/5	55	53,25	
REPKCHBS 55/5	55	62,44	
REPKCHA 55-01/5	55	62,44	

END CAPS - ANODIZED, BRUSHED, WHITE VARNISHED ALUM. - pack. 10 Pcs

	Article	H mm	€/Pack
0	TPKCHAA 55/10	60	88,12
0	TPKCHBS 55/10	60	105,86
\odot	TPKCHA 55-01/10	60	105,86

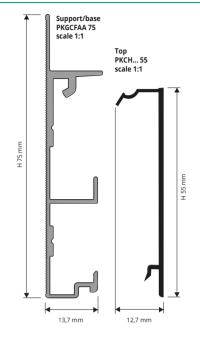


COLOURS

AA - Anodized silver	BS - Brushed silver	01 - White varnished alum.
aluminium	aluminium	(9016)

PROSKIRTING FLAT is the new innovative skirting designed with an integrated system for plasterboard walls, and devised to create a skirting flush to the wall for a modern and contemporary touch.



EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS



1. Fix the substrate/perforated base to the wall before laying the plasterboard, calculating all the heights and distances. 2. Lay the plasterboard aligning the lower part flush to the "PROSKIRTING CHANNEL" and/or FLAT. 3. Plaster and carry out the surface finishing on the plasterboard. 4. Choose the required Top "PROSKIRTING CHANNEL" and/or FLAT and/or FLAT and/or FLAT and/or FLAT finish, cut and lay the profile fitting the lower part and then the upper part by pressing gently. IMPORTANT: Pay attention to the external edges of the aluminium Proskirting. They must be protected against agents such as adhesives and sealants and against grinding or scraping actions.

SUPPORT/ PERFORATED BASE - ANODIZED SILVER ALUM. thermo packed - bar length 2 lm - pack, 20 Pcs - 40 lm					
Article H mm €/Im €/Pc					

Article	Hmm	€/lm	€/Pc
PKGCFAA 75	75	11,10	22,20

ORDER THE SUPPORT AND THE TOP YOU WISH

VISIBLE TOP - ANODIZED, BRUSHED, WHITE VARNISHED ALUM. thermo packed - bar length 2 Im - pack. 20 Pcs - 40 Im


Article	H mm	€/lm	€/Pc
PKFLAA 60	60	10,77	21,54
PKFLBS 60	60	12,74	25,48
PKFLA 60-01	60	12,74	25,48

On demand may be realised in other finishes of the colour chart. Contact our customer service for minimum quantity, timing and price.

EXTERNAL / INTERNAL CORNER - ANODIZED, BRUSHED, WHITE VARNISHED ALUM pack. 5 Pcs				
Article	Hmm	€/Pack		
REPKFLAA 60/5	60	53,25		
REPKFLBS 60/5	60	62,44	4	
REPKFLA 60-01/5	60	62,44		

END CAPS - ANODIZED, BRUSHED, WHITE VARNISHED


	ALUM pack. 10 Pcs		
	Article	Hmm	€/Pack
0	TPKCHAA 55/10	60	88,12
\odot	TPKCHBS 55/10	60	105,86
0	TPKCHA 55-01/10	60	105,86



PROSKIRTING

FLAT

SKI RTI NG BOARDS

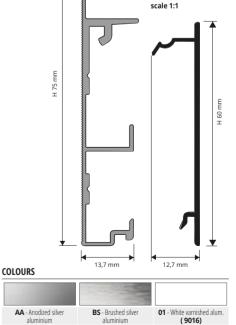




PROSKIRTING

PROSKIRTING INS is the new innovative skirting designed with an integrated system for plasterboard walls, and devised to create a recessed skirting for a modern and minimalist design in line with the latest trends.

ANODIZED SILVER ALUMINIUM

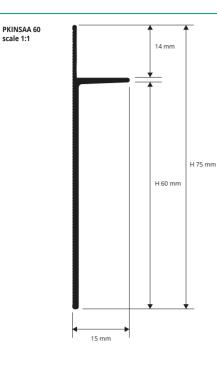



ANODIZED SILVER ALUMINIUM thermo packed bar length 2 Im - pack. 30 Pcs - 60 Im				
Article	H x L mm	€/Im	€/Pc	
PKINSAA 60	60 X 15	11,89	23,78	

ON DEMAND MAY BE REALISED IN OTHER FINISHES OF THE COLOUR CHART. CONTACT OUR CUSTOMER SERVICE FOR MINIMUM QUANTITY (MINIMUM QUANTITY ORDER OF 500 LM), TIMING AND PRICE.

COLOURS





EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

 Fix "PROSKIRTING INS" using screws (concealed part) and glue/ silicone (exposed side), before laying the plasterboard, calculating all the heights and distance. 2. Lay the plasterboard aligning the lower part flush to the "PROSKIRTING INS". 3. Plaster and carry out the surface finishing on the plasterboard.

USE PROBAND FIX FOR FIXING THE PROFILE TO THE WALL




PROSKIRTING LINE

PROSKIRTING LINE in the innovative skirting suitable for smoothed lime, marmorino, stucco, and Venetian coats on civil plaster or plasterboard.

ANODIZED SILVER ALUMINIUM

PKLIAA 60 scale 1:1

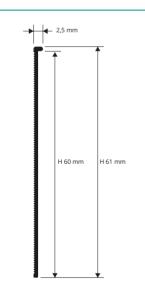




ANODIZED SILVER ALUMINIUM thermo packed bar length 2 Im - pack. 40 Pcs - 80 Im			
Article	H x L mm	€/lm	€/Pc
PKLIAA 60	61 x 2.5	10.32	20.64

ON DEMAND MAY BE REALISED IN OTHER FINISHES OF THE COLOUR CHART. CONTACT OUR CUSTOMER SERVICE FOR MINIMUM QUANTITY (MINIMUM QUANTITY ORDER OF 500 LM), TIMING AND PRICE.

COLOURS

AA - Anodized silver alum.



 Fix the "PROSKIRTING LINE" using glue/silicone (exposed side), before making the required coat, calculating all the heights and distances. 2. Carry out the surface finishing aligning the lower part flush to the "PROSKIRTING LINE".

USE PROBAND FIX FOR FIXING THE PROFILE TO THE WALL



212

SKI RTI NG BOARDS PROSKIRTING ISP is a joint, inspectional "cable duct" baseboard in aluminium, conceived and designed to hide and protect the passage of electric cables, the ones for computer, telephones and other plants as well, allowing an easy and quick access. The supports that are to be fixed on the wall consent accommodate different utility wires/ cables as well. Aesthetically pleasant, it is recommended for various public and private environments: offices, titanium and brushed titanium aluminium (H: 70 mm). In order to facilitate and to perfect the laying process, internal and external angles, plugs and junctions are recommended.

PROSKIRTING


PKISPAA 100 scale 1:1


SILVER ANODIZED ALUMINIUM, TITANIUM POLISHED AND BRUSHED ALUM. (H:70 MM)



SKIRTING ANODIZED SILVER ALUMINIUM thermo packed - bar length 2 Im - pack. 25 Pcs - 50 Im

Article	Hmm	€/lm	€/Pc
PKISPAA 70	70	10,65	21,30
PKISPAA 100	100	15,41	30,82



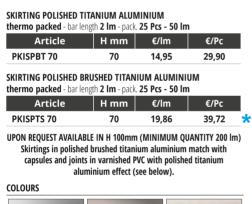






PUNCHED SUPPORT


upport length 2 cm - pack. 10 Pcs			
Article	Hmm	€/Pack.	C.
PKGS 55	55	3,55	
ARTICLES NO	L 20 mm		

1

€/lm

10.00





Article

It matches with CSPPK 80. Pag. 197.


PSPV


1. Choose "PROSKIRTING ISP" in the desired finish and height. 2.

Fix the punched support to the wall with screws every 50 cm. **3**. If expected, laying the low-voltage electric cables like web, computer, telephone and satellite TV. **4**. Attach the profile to the support

LAYING INSTRUCTIONS

applying low pressure.

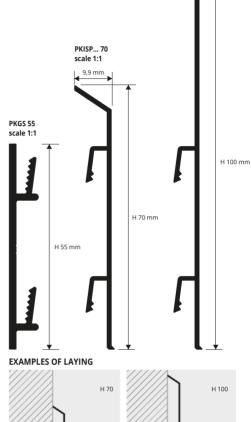



CORNERS, END CAPS and JOINTS

VARNISHED PLASTIC (finishes anodized silver, polished titanium)

IN/EXTERNAL CORNER - VARNISHED PLASTIC anod. silver - pack. 5 Pcs			
Article	H mm	€/Pack.	
PKIAGI/5	70/100	20,42	
PKIAGE/5	70/100	20,42	

JOINTS - VARNISHED PLASTIC anod. silver - pack. 10 Pcs			
Article	H mm	€/Pack.	
PKIGIN/10	70 / 100	40,82	

END CAPS R / L - VARNISHED PLASTIC ANODIZED silver pack. 10 Pcs (5 right and 5 left)

Article	Hmm	€/Pack.
PKITDSAA/5	70 / 100	40,82

IN/EXTERNAL CORNER - VARNISHED PLASTIC polished titanium - pack. 5 PCs				
Article	H mm	€/Pack.		
PKIAGIBT 70/5	70	32,20		
PKIAGEBT 70/5	70	32,20		

JOINTS - VARNISHED PLASTIC polished titanium - pack. 10 Pcs					
Article H mm €/Pack.					
PKIGINBT 70/10	70	64,41			

END CAPS R / L - VARNISHED PLASTIC poli. titanium - pack. 10 Pcs (5 right and 5 left) Article Hmm €/Pack.

PKITDSBT 70/5	70	64,41
Available on demand aluminium	n prewelded inter	nal and external

flush corners. Price to be agreed. Production delay 4/5 weeks.



🖈 = Production on demand with minimum quantity of 100 Pcs. Production delay 4/5 weeks. Price to be agreed Prices are referred to whole packs, 10% increase for minimum orders of 10 Pcs, 20% increase for orders of less than 10 Pcs.



PKIAGE.. 70 / 100

external corner

PKIGIN., 70 / 100

joint



PKIAGI.. 70 / 100 internal corner








213

6

PROSKIRTING LIST 40

ANODISED, BRUSHED, VARNISHED ALUMINIUM

PROSKIRTING LIST is a skirting/baseboard profile in different finishes anodized, polished, brusched, varnished aluminium, 40 mm high and 10 mm wide which can be fixed directly to the wall with adhesive (PKLT .. 40A non-inspectable version) or with aluminum supports (inspectable version PKLT .. 40). The aluminum supports, 20 mm long, are fixed with plugs to the wall, every about 50 cm. PROSKIRTING LIST 40 in aluminum is suitable in any indoor environment.



LAYING EXAMPLE



LAYING INSTRUCTIONS

LAYING INSTRUCTIONS 1. Choose "PROSKIRTING LIST" in the desired finish and height. 2. Fix the punched support to the wall with screws every 50 cm. 3. If expected, laying the low-voltage electric cables like web, computer, telephone and satellite TV. 4. Attach the profile to the support applying low pressure.



PROSKIRTING LIST 40 - ANODISED SILVER ALUMINIUM thermo packed - bar lenght 2 ml - pack. 20 PCS - 40 ml

Article	H mm	€/ml	€/Pcs
PKLTAA 40	40	9,51	19,02
PKLTAA 40A	40	12,36	24,72

"A" at the end of the product code = Item with adhesive

PROSKIRTING LIST 40 - VARNISHED ALUMNIUM WHITE thermo packed - bar lenght 2 ml - pack. 20 PCS - 40 ml

Article	H mm	€/ml	€/Pcs
PKLTA 40-01	40	11,28	22,56
PKLTA 40-01A	40	14,71	29,42

"A" at the end of the product code = Item with adhesive

COLOURS

01 - Aluminium	AA - Anodised silver	BS - Brushed silver
varnished white	aluminium	aluminium



PROSKIRTING LIST 40 - BRUSHED SILVER ALUMINIUM thermo packed - bar lenght 2 ml - pack. 20 PCS - 40 ml

Article	Hmm	€/ml	€/Pcs
PKLTBS 40	40	11,28	22,56
PKLTBS 40A	40	14,71	29,42
	-10	1-1,7-1	20,42

"A" at the end of the product code = Item with adhesive

PUNCHED SUPPORT - Natural aluminium - bar lenght 2 cm - pack. 10 PCS


Article		H mm	€/pack.
PKGS 37	37		3,55

COLOURS ON DEMAND 100 PCS / 200 LM



INTERNAL and EXTERNAL CORNERS, END CAPS

ANODISED, BRUSHED AND VARNISHED ALUMINIUM



INTERNAL / EXTERNAL CORNER - pack. 5 PCS	ANODISED SILVE	R ALUMINIUN
Article	Hmm	€/Pack
REPKLTAA 40/5	40	41,21
INTERNAL / EXTERNAL CORNER - pack. 5 PCS	BRUSHED SILVER	ALUMINIUM
Article	Hmm	€/Pack
REPKLTBS 40/5	40	49,44
INTERNAL / EXTERNAL CORNER - pack. 5 PCS	VARNISHED ALUN	
Article	Hmm	€/Pack
REPKLTA 40-01/5	40	49,44

END CAPS - ALL. ANODISED SILVER ALUMINIUM nack 4/10 PCS

Article	Hmm	€/Pack 4 Pcs	€/Pack 10 Pcs	
TPKLTAA 40/	40	27,70	65,93	*
END CAPS - BRUSHED SI pack. 4/10 PCS	VER ALUMINI	UM		-
Article	Hmm	€/Pack 4 Pcs	€/Pack 10 Pcs	
TPKLTBS 40/	40	33,29	79,24	*
END CAPS - VARNISHED pack. 4/10 PCS	ALUMINIUM V	VHITE		
Article	Hmm	€/Pack 4 Pcs	€/Pack 10 Pcs	
TPKLTA 40-01/	40	33,29	79,24	*
Choose the desired pac	kaging.			-

E.g.: TPKLTA... 40/4 (pack. 4 Pcs) TPKLTA... 40/10 (pack. 10 Pcs)





🛪 = Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed

Prices are referred to whole packs, 10% increase for minimum orders of 10 pcs, 20% increase for orders of less than 10 pcs.

214

SKI RTI NG BOARDS



PROSKIRTING LIST is a skirting/baseboard profile in different finishes anodized, polished, brusched, varnished aluminium, 80 mm high and 10 mm wide which can be fixed directly to the wall with adhesive (PKLT .. 80A non-inspectable version) or with aluminum supports (inspectable version PKLT .. 80). The aluminum supports, 20 mm long, are fixed with plugs to the wall, every about 50 cm. PROSKIRTING LIST 80 in aluminum is suitable in any indoor environment.

PROSKIRTING LIST 80 ANODISED, BRUSHED, VARNISHED

ALUMINIUM



PROSKIRTING LIST 80 - ANODISED SILVER ALUMINIUM thermo packed - bar lenght 2 ml - pack. 20 PCS - 40 ml

Article	H mm	€/ml	€/Pcs	
PKLTAA 80	80	13,88	27,76	
PKLTAA 80A	80	18,07	36,14	
"A" at the end of the product code = Item with adhesive				

PROSKIRTING LIST 80 - VARNISHED ALUMNIUM WHITE thermo






PROSKIRTING LIST 80 - BRUSHED SILVER ALUMINIUM thermo packed - bar lenght 2 ml - pack. 20 PCS - 40 ml

0	11	6/1	C/D
Article	H mm	€/ml	€/Pcs
PKLTBS 80	80	16,41	32,82
PKLTBS 80A	80	21,30	42,60
"A" at the end of the product code = Item with adhesive			

PUNCHED SUPPORT - Natural aluminium - bar lenght 2 cm - pack. 10 PCS

Article	H mm	€/pack.
PKGS 55	55	3,55

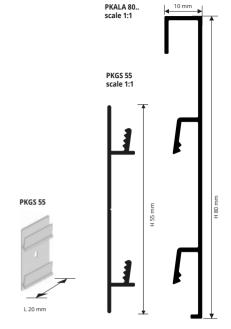

EXAMPLE FOR THE LAYING

01 - Aluminium varnished white AA - Anodised silver aluminium BS - Brushed silver aluminium

ISTRUZIONI TECNICHE DI POSA 1. Choose "PROSKIRTING LIST" in the desired finish and height. 2. Fix the punched support to the wall with screws every 50 cm. **3**. If expected, laying the low-voltage electric cables like web, computer, telephone and satellite TV. **4**. Attach the profile to the support applying low pressure.

End caps

TPKLT... 80



INTERNAL and EXTERNAL CORNERS, END CAPS

ANODISED, BRUSHED AND VARNISHED ALUMINIUM

INTERNAL / EXTERNAL CORNER - ANODISED SILVER ALUMINIUM pack. 5 PCS

um matt white

Article	Hmm	€/pack.		
REPKLTAA 80/5	80	55,47		
INTERNAL / EXTERNAL CORNER - BRUSHED SILVER ALUMINIUM pack. 5 PCS				
Article	H mm	€/pack.		
REPKLTBS 80/5	80	66,56		
INTERNAL / EXTERNAL CORNER - VARN pack. 5 PCS	ISHED ALUN	/INIUM WHITE		
Article	Hmm	€/pack.		

Article		e/pack.
REPKLTA 80-01/5	80	66,56

END CAPS - ALL. ANODISED SILVER ALUMINIUM pack. 4/10 PCS


Article	Hmm	€/pack. 4 Pcs	€/pack. 10 Pcs	
TPKLTAA 80/	80	37,27	88,76	*
END CAPS - BRUSHED SIL pack. 4/10 PCS	VER ALUMIN	IUM		
Article	Hmm	€/pack. 4 Pcs	€/pack. 10 Pcs	
TPKLTBS 80/	80	44.73	106,50	*
IFKLID3 80/	80	44,73	100,50	~
END CAPS - VARNISHED / pack. 4/10 PCS			100,50	~
END CAPS - VARNISHED			€/pack. 10 Pcs	~





Internal / external

corners REPKLT... 80

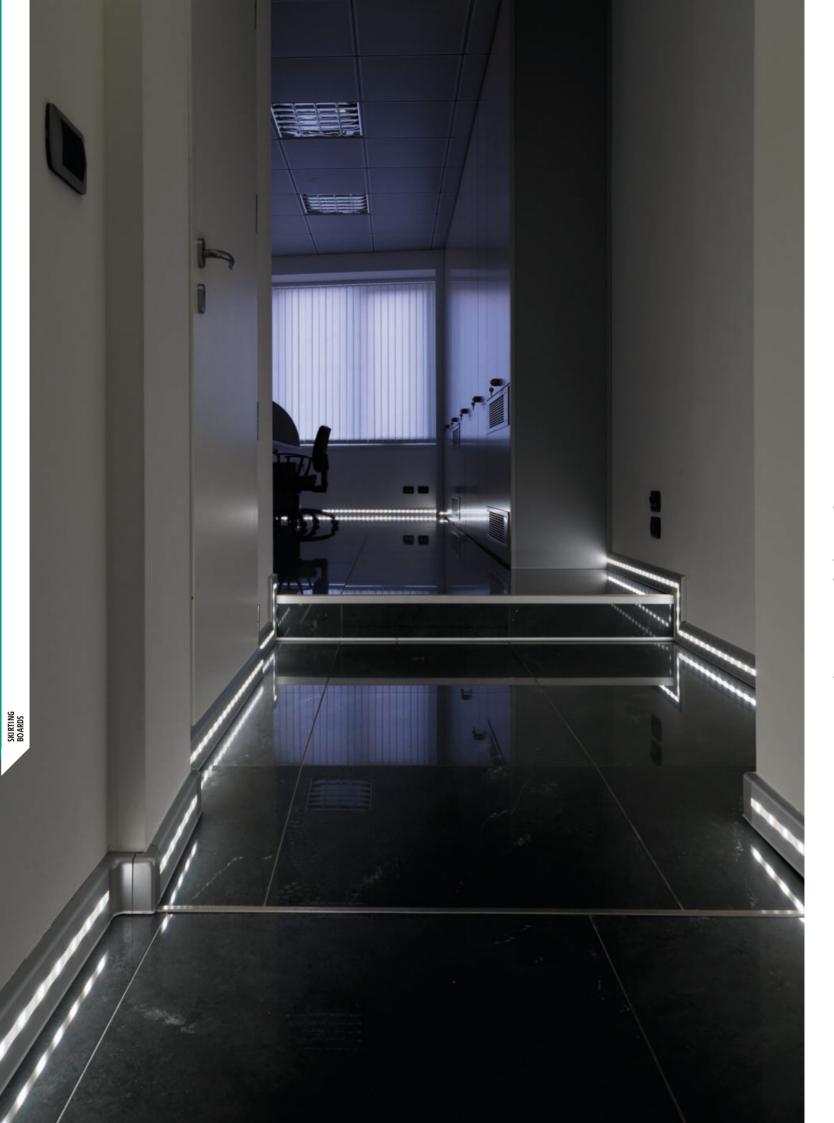

PROSKIRTING LED is an innovative patented baseboard called "cable duct" in anodized aluminium, with illumination led system incorporated. Conceived and designed to illuminate the passage zone such as corridors and house and office entrances as well. It generates soft and indirect light. Moreover, it solves many other problems such as the laying of the baseboard itself, the passage of the electric cables, the ones for PC, telephone and other plants as well. PROSKIRTING LED has been designed with double function and utility: 1- PROSKIRTING LED complete PKLEDAA 80 is an inspectional joint baseboard composed of PKGS 66 support for fixing it with screws on the wall and the PROSKIRTING LED PKLEDAA 80 at sight profile. 2- PROSKIRTING LED PKLEDAA 80 is a at sight baseboard profile to be fixed directly with silicone/ adhesive. It is not an inspectional one like PROSKIRTING LED complete, and is available also in auto adhesive version (PKLEDAA 80A).

PROSKIRTING LED

WITH LED AND POWER SUPPLY BOX



SKIRTING BOARD IN ANOD. SILVER ALU. WITHOUT ADHESIVE. ADAPTOR LED, LED & FLAT NOT INCLUDED (indicate the article) thermo packed - bar length 2 Im - pack. 10 Pcs - 20 Im

cherino puerteu bur lengar 2 mi	puch. IV I	C5 20 mm	
Article	H mm	€/lm	€/Pc
PKLEDAA 80	80	27,42	54,84

SKIRTING BOARD IN ANOD. SILVER ALUM. WITH ADHESIVE, ADAPTOR LED, LED & FLAT NOT INCLUDED (indicate the article) thermon packed, backgoth 2 Jm, pack 10 Proc. 20 Jm

uleilli	io packeu - bai		- pack. IV I	C3 - 20 IIII		
	Article	2	Hmm	€/Im	€/Pc	
PKLI	EDAA 80A		80	30,69	61,38	*

Please, specify in your order the code of the FLAT you choose : matt or gloss. Eg.: PKLEDAA 80 + PKGPIAL

A	POLYCARBONATE FLAT - bar length 2 im				
	Article	€/Im	€/Pc		
	PKGPIAL	5,23	10,46		
	PKGPIAO	5,23	10,46		

ADHESIVE FLEXIBLE LED COIL length 5 Im - nack 1 ROLL

paciel Paciel Rock		
Article	€/lm	€/Pack.
LEDN	22,47	112,35
LEDF	22,47	112,35
LEDC	22,47	112,35
"N" at the end of the product co	de = neutral light	

"F" at the end of the product code = head alight "C" at the end of the product code = hot light

"C" at the end of the product code = not light

 POWER SUPPLY BOX



SOCKET with FASTENING B	ASIS
Article	€/Pc
SPA 1820	21,45
LED POWER SUPPLY 7	5W - 12V
Article	€/Pc
ALL 7512	82.27



Article	Hmm	€/lm	€/Pc
CSPPK 80	70	5,69	11,38
UNCHED SUPPORT - N			
upport length 2 cm - pac	k. 10 Pcs	_	
upport length 2 cm - pac Article PKGS 66		€/Pack. 3,55	

COLOURS

- AA Anodized silver alum.
- On demand may be realised in other finishes of the colour chart. Contact our customer service for minimum quantity, timing and price.





Article€/PcSD 121016,09

VERTICAL CABLE DUCT PROFILE bar length 2,7 lm

Article €/lm PSPV 12.08

It matches with CSPPK 80.

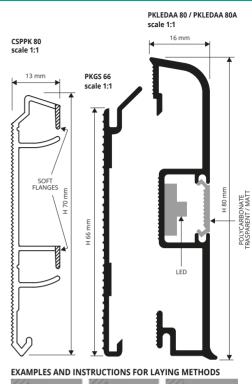



 Fix the support one the wall putting the screws and plugs every 50 cm (recommended). Make a test with "PROSKIRTING LED" in order to value the height and the correct position of supports. 2. Fix in the chosen spaces the socket' power supply box basis, switch box basis and, eventually, the junction box.
 Connect 220V supply to power/ transformer unit, and afterwards, connect the "PROSKIRTING LED" bar next to power unit. 4. Connect the pre-applied led bars inside the "PROSKIRTING LED" with the supplied cables/ wires in continuous way. 5. The power supply unit guarantees about 15 lm of led illumination, beyond that distance is necessary to add another power supply box/socket.


When fixing without support, clean the surface carefully so that it's dry and with no grass trace, apply the silicone on the knurled sides of the profile and lay down correctly, pressing uniformly and with no hammering. For the application of "PROSKIRTING LED" with adhesive, we recommend the temperature not below 15°.

CORNERS, END CAPS and JOINTS

🖈 = Production on demand with minimum quantity of 100 Pcs. Production delay 4/5 weeks. Price to be agreed

Prices are referred to whole packs, 10% increase for minimum orders of 10 Pcs, 20% increase for orders of less than 10 Pcs.

VARNISHED PLASTIC SILVER FINISH



IN/EXTERNAL	CORNER - VARNISHED	PLASTIC (SILVER FIN.)
pack. 5 Pcs		

Article	H x L mm	€/Pack.
PKAGI 80/5	80 X 40	24,66
PKAGE 80/5	80 X 40	24,66


OINTS - VARNISHED PLASTIC	C (SILVER FIN.) - pa	ck. 10 Pcs
Article	Hmm	£/Dack

Altere		c/ruck.					
PKGIN 80/10	80	40,07					
END CAPS R / L - VARNISHED PLASTIC (SILVER FIN.)							
END CAPS R / L - VARNISHED	PLASTIC (SILVER FI	N.)					
END CAPS R / L - VARNISHED pack. 10 Pcs (5 right and 5 left)	PLASTIC (SILVER FI	N.)					







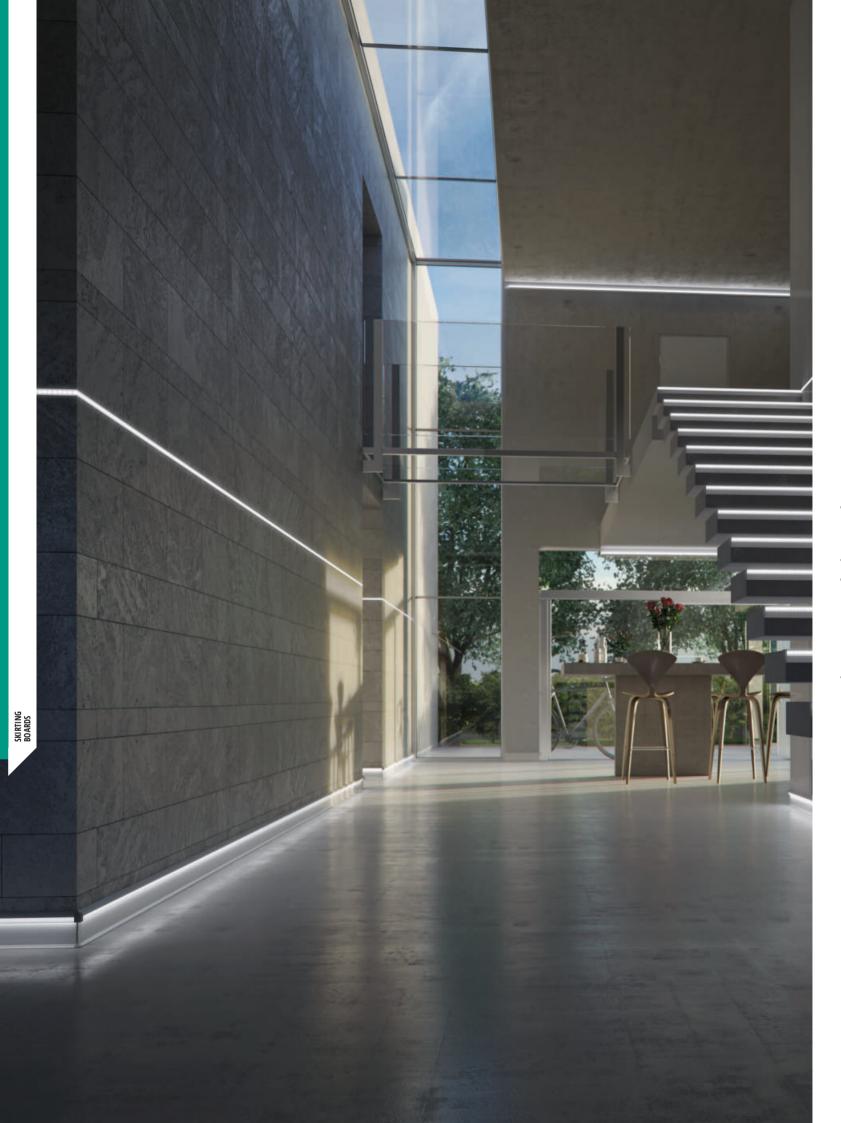

© 2023 All rights reserved by Progress Profiles. Printed in litely

PROSKIRTING GILED is an innovative profile in silver anodized aluminum and polished chrome, with 80 and 100 mm height, with a rigid vinyl resin TOP PROFILE, with a 17,5mm exposed surface, available in 9 different marmorised finishes, provided with an integrated LED lighting system generating a soft and indirect light. **PROSKIRTING GILED** can be used instead of the classic skirting board or rotated 180 degrees and installed along the ceiling edges, allowing to cover up to 15mm wide joints. The reflection of the LED light by the aluminum surface of the profile creates a modern atmosphere. **PROSKIRTING GILED** is equipped with all the trim pieces available such as inside and outside corner, joints, end caps and power supply box. *Conceived and designed by the designer Gilberto Toneguzzi*.

PROSKIRTING GILED ANODIZED ALUMINIUM POLISHED ALUMINIUM




SKIRTING H 80 mm IN ANOD. SILVER, POLI. CHROME ALUM. TOP PROFILE NOT INCLUDED (indicate the article) thermo packed - bar length 2 lm - pack. 20 Pcs - 40 lm

Article	Hmm	€/lm	€/Pc	
PKGLEDAA 80	80	16,65	33,30	
PKGLEDBC 80	80	18,94	37,88	*
PKGLEDAA 80A	80	20,56	41,12	
PKGLEDBC 80A	80	22,86	45,72	*
PKGLEDAA 80F	80	18,61	37,22	*
PKGLEDBC 80F	80	20,89	41,78	*

"F" at the end of the product code = Punched Item

USE PROBAND FIX FOR FIXING THE PROFILE TO THE WALL



SKIRTING COLOURS

2028. All dights reserved by Progress Profiles. Printed in litely



SKIRTING H 100 mm IN ANOD. SILVER, POLI. CHROME ALUM. TOP PROFILE NOT INCLUDED (indicate the article) thermo packed, backgroup 21 m, pack 20 Proc. 40 lm

thermo packed - bar length 2 mil - pack. 20 PCS - 40 mil						
Article	H mm	€/Im	€/Pc			
PKGLEDAA 100	100	18,28	36,56			
PKGLEDBC 100	100	21,87	43,74	*		
PKGLEDAA 100A	100	22,21	44,42			
PKGLEDBC 100A	100	25,79	51,58	*		
PKGLEDAA 100F	100	20,25	40,50	*		
PKGLEDBC 100F	100	23,84	47,68	*		

"A" at the end of the product code = Item with adhesive

"F" at the end of the product code = Punched Item

ADHESIVE FLEXIBLE LED COIL

puck. I Kor	-	
Article	€/lm	€/Pack.
LEDN	22,47	112,35
LEDF	22,47	112,35
LEDC	22,47	112,35
WN W at the a second a fitter a second	dust codo – poutral light	

"N" at the end of the product code = neutral light "F" at the end of the product code = cold light "C" at the end of the product code = hot light

LED ADAPTOR AC/DC 75W - 12V (15 lm) LED ADAPTOR AC/DC 25W - 12V (5 lm)

Article	€/Pc
ALL 7512	82,27
ALL 2512	56,42

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

1. Choose "PROSKIRTING GILED" depending on the desired finish and fixing system; 2. If you are installing the version with adhesive: clean the surface on which the profile is to be laid, ensuring that it is dry. Remove the protective film and place the profile, applying adequate pressure on it. If you are installing the punched version, drill the surface on which the profile is to be laid using a drill with 5mm diameter and insert the 5x 25mm screws. Screw the profile; 3. Connect the 12/24 V adaptor; 4. Fix the LED light to the inclined side of the aluminum profile or to the vinyl resin support and install electrical wiring; 5. Apply the rigid vinyl resin insert to the aluminum profile.

CORNERS, END CAPS and JOINTS

VARNISHED PLASTIC

FLUSH CORNERS - varnished plastic

AA - Anodized silver alum. BC - Polished chrome alum.

IN/EXTERNAL CORNER - FLUSH CORNERS

	VARNISHED PLASTIC ANOD. SILVER, POLI. CHROME - pack. 5 Pcs						
Article H x L mm €/Pack.							
	REPKGLEDAA 80/5		80 x 10	25,80			
	RIPKGLEDAA 80/5		80 x 10	25,80			
	REPKGLEDBC 80/5		80 x 10	35,94	*		
	RIPKGLEDBC 80/5		80 x 10	35,94	*		

FLUSH JOINT -	VARNISHED	PLASTIC ANOD	. SILVER,	POLI.	CHROME
pack. 5 Pcs					

Article	Hmm	€/Pack.	
GIPKGLEDAA 80/5	80	21,56	-
GIPKGLEDBC 80/5	80	31,01	*

FLUSH END CAPS R / L - VARNISHED PLASTIC ANOD. SILVER, POLI. CHROME - pack. 6 Pcs (3 right and 3 left)

FOLL. CIRCOME - pack. O FCS (S fight and S felt)						
Article	Hmm	€/Pack.				
TPKGLEDAA 80/3	80	25,86				
TPKGLEDBC 80/3	80	37,20	*			

FLUSH CORNERS - varnished plastic

 IN/EXTERNAL CORNER - FLUSH CORNERS

 VARNISHED PLASTIC ANOD. SILVER, POLI. CHROME - pack. 5 Pcs

 Article
 H x L mm
 €/Pack.

 REPKGLEDAA 100/5
 100 x 10
 29,41

RIPKGLEDBC 100/5	100 x 10	39,18
REPKGLEDBC 100/5	100 x 10	39,18
RIPKGLEDAA 100/5	100 x 10	29,41


FLUSH JOINT - VARNISHED PLASTIC ANOD. SILVER, POLI. CHROME pack. 5 Pcs

۰.	-	1	•••			
					Λ.	

Article	Hmm	€/Pack.	
GIPKGLEDAA 100/5	100	24,78	
GIPKGLEDBC 100/5	100	35,25	*
FLUSH END CAPS R / L - VARNISHED PLA	STIC ANOD.	SILVER.	

POLI. CHROME - pack. 6 Pcs (3 right and 3 left)

Article	Hmm	€/Pack.	
TPKGLEDAA 100/3	100	29,75	
TPKGLEDBC 100/3	100	42,29	*

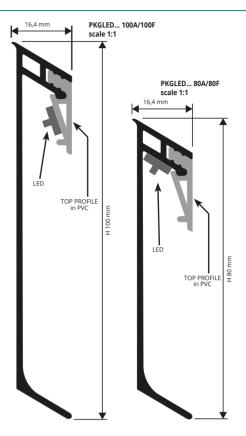






*

🛪 = Production on demand with minimum quantity of 100 Pcs. Production delay 4/5 weeks. Price to be agreed

Prices are referred to whole packs, 10% increase for minimum orders of 10 Pcs, 20% increase for orders of less than 10 Pcs.

PROSKIRTING

ANODIZED SILVER ALUMINIUM

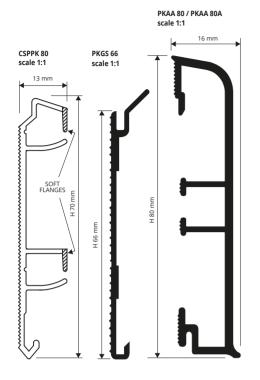

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS



1. Choose the system with or without support 2. Fix the support to the wall with screws and screw anchors at 50 cm intervals (recommended). 3. When laying without support, thoroughly clean (recommended). 3. When laying without support, thoroughly clean the surface ensuring that it is grease-free and dry, apply the silicone on the knurled sides of the profiles and lay correctly by applying pressure evenly over the whole profile without using a hammer. 4. For the "PROSKIRTING" with adhesive, application is recommended at a temperature of at least 15°. Always use the inside/outside corner linking elements and end caps for impeccable, faultless laying.



ONLY SKIRTING (for sale singly) - ANODIZED SILVER ALUMINIUM thermo packed - bar length 2 Im - pack. 10 Pcs - 20 Im

Article	H mm	€/Im	€/Pc	
PKAA 80	80	15,24	30,48	
PKAA 80A	80	20,03	40,06	
"A" at the end of the product code = Item with adhesive				

USE PROBAND FIX FOR FIXING THE PROFILE TO THE WALL



Advantages: profile to be glued. Aesthetically superior thanks to the HI-TECH design with rounded shell-shape top and bottom edges that are easy to clean. PROSKIRTING is made in anodized aluminium with silver finish; the anodizing layer is approx. 15/20 micron. Recommended for indoor and outdoor use thanks to its good anti-oxidation properties. • Single visible skirting profile, which may be inspectable or • Minimum stock investment with just 2 products for three • Easy to install and clean

POWER SUPPLY BOX

SPA 1820

SWITCH BOX

with BOX BASIS

SI 1410

SOCKET with FASTENING BASIS

€/Pc

21,45

€/Pc

18,10

Article

Articl

- Easy to install and clean
- Patented innovative HI-TECH design
- Inside-outside corners-end caps and joints varnished in the
- The PROSKIRTING profile is antistatic and stops
- electromagnetic and electrostatic discharge



CABLE RACEWAY/ SUPPORT- COEXTRUDED PVC bar length 2 Im - pack. 20 Pcs - 40 Im



COLOURS

PROSKIRTING is an innovative patented "cable channel" skirting in anodized aluminium. Studied and designed to resolve

various problems related to the installation of skirting and to the laying of electrical, computer and telephone cables and other service systems. **PROSKIRTING** has been designed to offer a dual function: 1- **PROSKIRTING** complete PKAA 80 is a snap-on inspectable skirting consisting of a support PKGS 66 to be screwed to the wall and the visible profile PROSKIRTING PKAA 80. 2- PROSKIRTING PKAA 80 is the visible skirting profile to be fixed directly with silicone/adhesive. It is not inspectable like PROSKIRTING complete; it is also available in a self-adhesive version (PKAA 80A).

AA - Anodized silver alum.

12.08

© 2028 All rights reserved by Progress Profiles. Printed in Italy

It matches with CSPPK 80

VARNISHED PLASTIC SILVER FINISH.

Article

JUNCTION BOX

SD 1210

PSPV

bar length 2,7 lm

with FASTENING BASIS

Article



PKAGI 80 internal corne



PKGIN 80

JOINT



PKAGE 80 external corne



PKTDSAA 80/5 end caps

PROGRESS®

OFILES

_____ ··· · · · ·

IN/EXTERNAL CORNER - VARNISHED PLASTIC (silver finish.) pack. 5 Pcs					
Article	H x L mm	€/Pack.			
PKAGI 80/5	80 x 40	24,66			
PKAGE 80/5	80 x 40	24,66			
JOINTS - VARNISHED PLASTIC (silv Article	er finish.) - pack. H mm	10 Pcs €/Pack.			
PKGIN 80/10	80	40,07			
END CAPS R / L - VARNISHED PLASTIC (silver finish.) pack. 10 Pcs (5 right and 5 left)					
Article	H mm	€/Pack.			
Article H mm €/Pack. PKTDSAA 80/5 80 40.07					

PKAGE 80 xternal corn

CORNERS, END CAPS and JOINTS














PROSKIRTING 40

ANODIZED SILVER ALUMINIUM



Article	Hmm	€/Im	€/Pc
PKAA 40	40	7,96	15,92
		10.20	20,76
PKAA 40A "A" at the end of the pr			
	oduct code = Item NATURAL ALUMIN	with adhesi	
"A" at the end of the pr PUNCHED SUPPORT - I	oduct code = Item NATURAL ALUMIN ck. 10 Pcs	with adhesi	



CORNERS, END CAPS and JOINTS

AA - Anodized silver alum.

VARNISHED PLASTIC (SILVER FINISH)

IN/EXTERNAL CORNERS - VARNISHED PLASTIC (silver finish.)

pack. 5 Pcs		
Article	Hmm	€/Pack.
PKAGI 40/5	40	24,66
PKAGE 40/5	40	24,66

OINTS - VARNISHED PLASTIC (silver finish.) - pack. 10 Pcs				
Article	Hmm	€/Pack.		
PKGIN 40/10 40 40.07				
	ilver finish.) - pack. 10 P	cs (5 right and 5 left)		
END CAPS R / L - VARNISHED PLASTIC (s Article	ilver finish.) - pack. 10 P H mm	cs (5 right and 5 left) €/Pack.		



PROSKIRTING

ANODIZED SILVER ALUMINIUM

SHELL

litelly 2028 All rights reserved by Progress Profiles. Printed In 0



SKIRTING - ANODIZED SILVER ALUMINIUM thermo packed bar length 2 Im - pack. 25 Pcs - 50 Im

Article	H mm	€/lm	€/Pc
PKSHAA 70	70	14,64	29,28
PKSHAA 70A	70	19,34	38,68


"A" at the end of the product code = Item with adhesive

USE PROBAND FIX FOR FIXING THE PROFILE TO THE WALL




PUNCHED SUPPORT - NATURAL ALUMINIUM

support length 2 cm - pack. 10 Pcs



ARTICLES NOT FOR SALE SINGLY

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS 1. Choose the right version of "PROSKIRTING SHELL" depending on the desired fixing solution; **2.** If you want to build low tension electrical cables (e.g. internet, phone, TV and satellite cables) into the profile, fasten the punched flanges to the wall using dowels at 50cm distance From each other, **3**. Install electrical wiring and fasten "PROSKIRTING SHELL" to the flanges; **4**. If you are installing the version with adhesive, first clean and the surface where the profile will be installed, then apply the silicone once the surface is dry. Remove the protective film and lay the profile, applying adequate pressure on it.

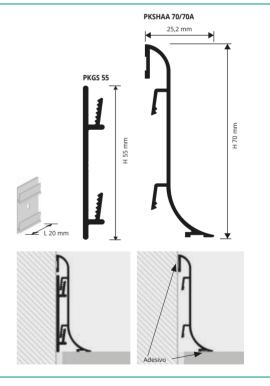

CORNERS, END CAPS and JOINTS

VARNISHED PLASTIC (SILVER FINISH)

EDGE COVER CORNERS

AA - Anodized silver alum.

IN/EXTERNAL CORNER - EDGE COVER VARNISHED PLASTIC (silver finish.) - pack. 5 Pcs					
Article H x L mm €/Pack.					
RIPKSHAA 70/5	70 x 20	20,54			
REPKSHAA 70/5 70 x 20 20,54					

JOINT - EDGE COVER - VARNISHED pack. 5 Pcs	PLASTIC (silver	finish.)
Article	Hmm	€/Pack.
GIPKSHAA 70/5	70	20,54
END CAPS R / L - EDGE COVER VARNISHED PLASTIC (silver finish.)	pack. 6 Pcs (3 righ	t and 3 left)
Article	Hmm	€/Pack.
TPKSHAA 70/3	70	24,65



Prices are referred to whole packs, 10% increase for minimum orders of 10 Pcs, 20% increase for orders of less than 10 Pcs.

SKI RTI NG BOARDS






POLISHED AND BRUSHED STAINLESS STEEL AISI 304/1.4301-V2A SKIRTING 40 made in stainless steel AISI 304/1.4301-V2A in height 40 mm. Available with or without adhesive Superior aesthetic quality, extremely strong and easy to lay, it is ideal for all public and private environments that require high standards of hygiene and image. Used increasingly more often in contrast combinations with wood, carpeted floors, etc. for an unmistakeable hi-tech effect. In order to facilitate and to perfect the laying process, internal and external angles, plugs and junctions are recommended.



EXAMPLES OF LAYING





POLISHED STAINLESS STEEL AISI 304/1.4301-V2A with protective film - bar length 2 lm - pack. 25 Pcs - 50 lm

Article Hmm €/lm

40

40

Choose the "SKIRTING 40" also choose with or without adhesive.
 Cut the profile to the required length, taking care to calculate the width of the inside-outside corner joints.
 For the self-adhesive version, the surface must be smooth, grease-free and not porous. It is not recommended for plaster and mortar surfaces (version without adhesive is better, using fast-setting cordinations).

acrylic silicone which is suitable for fixing aluminium to morta

- plaster, etc.). 4. Use the corner linking elements-joints and right

€/Pc 10.08 20.14 BTACS 40A 9,19 18,38 BTACS 40

"A" at the end of the product code = Item with adhesive

SUITABLE FOR USE IN CONTACT WITH FOODSTUFFS



BRUSHED STAINLESS STEEL AISI 304/1.4301-V2A

COLOURS



CORNERS, END CAPS AND JOINTS

STEEL and VARNISHED METAL

VARNISHED METAL - EDGE COVER CORNERS - articles not for

BTAC 40A

BTAC 40

LAYING INSTRUCTIONS

and left end caps to facilitate laying.

INTERNAL/EXTERNAL CORNER - EDGE COVER VARNISHED METAL POLISHED STEEL EFFECT				
Article HxL mm €/pack. 2Pcs €/pack. 5Pcs				
RIZCTAC 40/	40 x 20	29,40	66,81	
REZCTAC 40/	40 x 20	29.40	66.81	

IOINT - EDGE COVER

VARNISHED METAL POLISHED STEEL EFFECT				
Article HxL mm €/pack. 2Pcs €/pack. 5Pcs				
GIZCTAC 40/	40	28,54	64,85	

Choose the desired packaging. E.g.: RIZCTAC 40/2 (pack. 2 Pcs) - RIZCTAC 40/5 (pack. 5 Pcs)

END CAPS R / L - EDGE COVER - VARNISHED METAL POLISHED STEEL EFFECT - pack. 4Pcs (2 R + 2 L) / 10Pcs (5 R + 5 L)

Article	H mm	€/pack. 4Pcs	s €/pack. 10Pcs		
TPZCTAC 40/	40	57,07	129,70		
Choose the desired packaging.					

E.g.: TPCCTAC 40/2 (pack. 4 Pcs: 2 right + 2 left) TPCCTAC 40/5 (pack. 10 Pcs: 5 right + 5 left)

for sale singly				
INTERNAL/EXTERNAL CORNER - EDGE COVER VARNISHED METAL BRUSHED STAINLESS ST. EFFECT				
Article	HxL mm	€/pack. 2Pcs	€/pack. 5Pcs	
RIZCTACS 40/	40 x 20	29,40	66,81	
REZCTACS 40/	40 x 20	29,40	66,81	

IOINT - EDGE COVER

VARNISHED METAL BRUSHED STAINLESS ST. EFFECT

Article	H mm	€/pack. 2Pcs	€/pack. 5Pcs
GIZCTACS 40/	40	28,54	64,85

Choose the desired packaging. E.g.: RIZCTACS 40/2 (pack. 2 Pcs) - RIZCTACS 40/5 (pack. 5 Pcs)

END CAPS R / L - EDGE COVER - VARNISHED METAL BRUSHED STAINLESS ST. EFFECT - pack. 4Pcs (2 R + 2 L) / 10Pcs (5 R + 5 L)

Article	Hmm	€/pack. 4Pcs	€/pack. 10Pcs
TPZCTACS 40/	40	57,07	129,70
Choose the desired packa			

E.g.: TPCCTACS 40/2 (pack. 4 Pcs: 2 right + 2 left) TPCCTACS 40/5 (pack. 10 Pcs: 5 right + 5 left)

PRF-WFI DFD

EDGE COVER VARNISHED METAL

REZCT... 40/..

external corner

TPZCT... 40/..

end caps

PE 40/



internal corner



RIZCT... 40/...

Internal corner



PI 40/





STEEL AISI 304/1.4301-V2A - FLUSH CORNERS - articles not for sale singly **INTERNAL/EXTERNAL CORNER**

FLUSH PRE-WELDED - POLISHED STEEL EFFECT					
Article HxLmm €/pack. 2Pcs €/pack. 5P					
RIAC 40/	40 x 50	46,77	106,31		
REAC 40/	40 x 50	46,77	106,31		

Choose the desired packaging. E.g.: RIAC 40/2 (pack. 2 Pcs) - RIAC 40/5 (pack. 5 Pcs)

INTERNAL/EXTERNAL CORNER

	FLUSH PRE-WELDED - BRUSHED STAINLESS STEEL				
	Article	HxL mm	€/pack. 2Pcs	€/pack. 5Pcs	
	RIACS 40/	40 x 50	49,56	112,65	
	REACS 40/	40 x 50	49,56	112,65	

Choose the desired packaging. E.g.: RIACS 40/2 (pack. 2 Pcs) - RIACS 40/5 (pack. 5 Pcs)

€/Pc

23.50

21,46

224 **PROGRESS®** OFILES

USE PROBAND FIX FOR FIXING THE PROFILE TO THE WALL PROGRESS

SKIRTING 40 made in anodized, polished and brushed aluminium in height 40 mm. Available with or without adhesive. Superior aesthetic quality and easy to lay, it is ideal for all public and private environments. Can be used with all types of flooring. In order to facilitate and to perfect the laying process, internal and external angles, plugs Please contact the technical department for informations concerning the skirting bending radius.

SKIRTING 40

ANODIZED, POLISHED, VARNISHED and BRUSHED ALUMINIUM



ANODIZED SILVER ALUMINIUM thermo packed bar length 2 im - pack. 40 Pcs - 80 im

Article	Hmm	€/lm	€/Pc				
BTAA 40A	40	8,44	16,88				
BTAA 40	40	7,37	14,74				
"A" at the end of the product coo	"A" at the end of the product code = Item with adhesive						
POLISHED TITANIUM ALUMINIUM thermo packed							
bar length 2 lm - pack. 40 Pcs - 80 lm							
Article	H mm	€/lm	€/Pc				

BTBT 40A 40 24,68 12.34 BTBT 40 40 10.99 21,98

"A" at the end of the product code = Item with adhesive VARNISHED SEMIGLOSSY AND MATT WHITE ALUMINIUM

thermo packed - bar length 2 im - pack 40 Pcs - 80 im

bar lenger = in	· pacia · ·		
Article	H mm	€/lm	€/Pc
BTA 40-01A	40	10,13	20,26
BTA 40-01	40	8,85	17,70
BTA 40-01OA	40	10,13	20,26
BTA 40-010	40	8,85	17,70

"A" at the end of the product code = Item with adhesive

POLISHED

AA - Anodized silver alum. BT - Polished titanium alum. BS - Brushed silver alum.

MATT

© 2028. All rights reserved by Progress Profiles. Printed in Italy

COLOURS ANODIZED

SEMIGLOSSY

		/	1
	/		
	1		
	1		
	1		

BRUSHED ALUMINIUM (silver-copper-titanium) thermo packed - bar length 2 lm - pack. 40 Pcs - 80 lm

Article	Hmm	€/Im	€/Pc	
BTBS 40A	40	12,34	24,68	
BTBS 40	40	10,99	21,98	
BTRS 40A	40	13,68	27,36	*
BTRS 40	40	12,34	24,68	*
BTTS 40A	40	13,68	27,36	
BTTS 40	40	12,34	24,68	

"A" at the end of the product code = Item with adhesive

STONE LINE ALUMINIUM

t	thermo packed - bar length 2 lm - pack. 40 Pcs - 80 lm						
	Article	Hmm	€/Im	€/Pc			
0	BTA 40-SL01A	40	13,19	26,38	**		
3	BTA 40-SL01	40	11,50	23,00	**		
0	BTA 40-SL08A	40	13,19	26,38	**		
0	BTA 40-SL08	40	11,50	23,00	**		
0	BTA 40-SL12A	40	13,19	26,38	**		
3	BTA 40-SL12	40	11,50	23,00	**		

(There aren't combinations for the finish alu, RS)

On demand may be realised in other

finishes of the colour chart. Contact our


customer service for minimum quantity

timing and price.

"A" at the end of the product code = Item with adhesive

RT 40/404 scale 1:1 H 40 mn 110

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS



1. Choose the "SKIRTING 40" also choose with or without adhesive. Choose the "SKIRLING 40" also choose with or with out database.
 Cut the profile to the required length, taking care to calculate the width of the inside-outside corner joints. 3. For the self-adhesive and not portugate the self-adhesive in the self-adhesiv version, the surface must be smooth, grease-free and not porous. It is not recommended for plaster and mortar surfaces (version without adhesive is better, using fast-setting acrylic silicone which is suitable for fixing aluminium to mortar - plaster, etc.). 4. Use the corner linking elements-joints and right and left end caps to facilitate laying.

USE PROBAND FIX FOR FIXING THE PROFILE TO THE WALL



ON DEMAND ON DEMAND ON DEMAND ON DEMAND 01 - White varnished alum. 010 - White hed alum SLO8 - Stone antradark SLO1 - Stone white SL12 - Stone black (9016) (9016)

CORNERS, END CAPS AND JOINTS

BRUSHED

ON DEMAND

STONE LINE

RS - Brushed copper alum. TS - Brushed titanium alum.

VARNISHED METAL and VARNISHED PLASTIC

	INTERNAL/EXTERNAL CORNER - EDGE COVER - VARNISHED METAL, ANODIZED, POLISHED STONE LINE - H 40 MM - L 20 MM						
Article €/pack. 2Pcs €/pack. 5							
	RIZCTAA 40/	14,18	32,20				
	REZCTAA 40/	14,18	32,20				
	RIZCTBT/BS/TS/RS 40/	29,40	66,81				
	REZCTBT/BS/TS/RS 40/	29,40	66,81				
	RIZCT01/01O 40/	28,54	64,85				
	REZCT01/01O 40/	28,54	64,85				
0	RIZCTA 40-SL/	37,10	84,30				
Ō	REZCTA 40-SL/	37,10	84,30				

Choose the desired packaging. E.g.: RIZCTAA 40/2 (pack. 2 Pcs) - RIZCTAA 40/5 (pack. 5Pcs)

INTERNAL/EXTERNAL CORNER - EDGE COVER VARNISHED PLASTIC ANODIZED SILVER. POLISHED AND TITANIUM

VARIATSTILD I LASTIC ANODIZED STEVER, I OLISTIED AND THANTON				
Article	HxL mm	€/pack. 2Pcs	€/pack. 5Pcs	
RICTAA 40/	40 x 20	9,25	21,04	
RECTAA 40/	40 x 20	9,25	21,04	
RICTBT 40/	40 x 20	14,18	32,20	
RECTBT 40/	40 x 20	14,18	32,20	

Choose the desired packaging

E.g.: RICTAA 40/2 (pack. 2 Pcs) - RICTAA 40/5 (pack. 5 Pcs)

Available on demand aluminium prewelded internal and external flush corners. Finishing: 01 - 010 - AA - BT - BS - RS - TS. Price to be agreed. Production delay 4/5 weeks.

	JOINT - EDGE COVER				
	VARNISHED METAL ANODIZED, POLISHED, STONE LINE				
	Article	Hmm	€/pack. 2pc	€/pack. 5pc	
	GIZCTAA 40/	40	14,18	32,20	
	GIZCTBT/BS/TS/RS 40/	40	28,54	64,85	
	GIZCT01/01O 40/	40	28,54	64,85	
\odot	GIZCTA 40-SL/	40	37,10	84,30	

END CAPS R / L - EDGE COVER - VARNISHED METAL ANODIZED, POLISHED, STONE LINE - pack. 4Pcs (2 R + 2 L) / 10Pcs (5 R + 5 L)

	Article	Hmm	€/pack. 4pc	€/pack. 10pc
	TPZCTAA 40/	40	28,33	64,41
	TPZCTBT/BS/TS/RS 40/	40	57,07	129,70
	TPZCT01/01O 40/	40	57,07	129,70
\odot	TPZCTA 40-SL/	40	74,18	168,63


VARNISHED PLASTIC ANODIZED SILVER, POLISHED AND TITANIUM Article H mm €/pack. 2pc €/pack. 5pc

GICTAA 40/	40	9,25	21,04
GICTBT 40/	40	14,18	32,20
END CAPS R / L - EDGE COVI POLISHED AND TITANIUM -			,
Article	Hmm	€/pack. 4pc	€/pack. 10pc
TPCTAA 40/	40	18,52	42,09
TPCTBT 40/		28.33	64.41

I = News 2023

Choose the desired packaging. E.g.: TPCTAA 40/2 (pack. 4 Pcs: 2 right + 2 left)





225

SKIRTING BOARDS

Prices are referred to whole packs, 10% increase for minimum orders of 10 Pcs, 20% increase for orders of less than 10 Pcs.

POLISHED and Brushed STAINLESS STEEL AISI 304/1.4301-V2A

BTAC/S 60/60A scale 1:2 H 60 mm EXAMPLES OF LAYING 11.4 mm

SKIRTING 60 made in stainless steel AISI 304/1.4301-V2A in height 60 mm. Available with or without adhesive. Superior aesthetic quality, extremely strong and easy to lay, it is ideal for all public and private environments that require high standards of hygiene and image. Used increasingly more often in contrast combinations with wood, carpeted floors, etc. for an unmistakeable hi-tech effect. In order to facilitate and to perfect the laying process, internal and external angles, plugs and junctions are recommended.



POLISHED STAINLESS STEEL AISI 304/1.4301-V2 with protective film - bar length 2 lm - park 25 Pcs - 50 lm

building building and an length 2 million pack. 251 CS 50 million				
Article	Hmm	€/lm	€/Pc	
BTAC 60A	60	14,89	29,78	
BTAC 60	60	12,14	24,28	
"A" at the end of the pro	oduct code = Item wit	h adhasiva		

nd of the product code = Item with ad



Brushed STAINLESS STEEL AISI 304/1.4301-V2A ack 2E Dec EO Im rtivo film th 2 lm

with protective min - bar length 2 mi - patk. 25 Pts - 50 mi				
Article	H mm	€/lm	€/Pc	
BTACS 60A	60	17,61	35,22	
BTACS 60	60	15,27	30,54	
"A" at the end of the product coo	ha = Itam with	n adhasiva		

end of the product code = Item with ad

SUITABLE FOR USE IN CONTACT WITH FOODSTUFFS

LAYING INSTRUCTIONS 1. Choose the "SKIRTING 60" also choose with or without adhesive. 2. Cut the profile to the required length, taking care to calculate the width of the inside-outside corner joints. 3. For the self-adhesive version, the surface must be smooth, grease-free and not porous. It is not recommended for plaster and mortar surfaces (version without adhesive is better, using fast-setting acrylic silicone which is suitable for fixing aluminium to mortar plaster, etc.). 4. Use the corner linking elements-joints and right and left end caps to facilitate laying.

COLOURS



USE PROBAND FIX FOR FIXING THE PROFILE TO THE WALL



60 x 20

60 x 20

Hmm

60

Choose the desired packaging. E.g.: RIZCTACS 60/2 (pack. 2 Pcs) - RIZCTACS 60/5 (pack. 5 Pcs)

STAINLESS ST. EFFECT - pack. 4Pcs (2 R + 2 L) / 10Pcs (5 R + 5 L)

END CAPS R / L - EDGE COVER - VARNISHED METAL BRUSHED

60

CORNERS, END CAPS AND JOINTS

STEEL and VARNISHED METAL

29.40

29,40

28.54

H mm €/pack. 4Pcs €/pack. 10Pcs

57.07

€/pack. 2Pcs €/pack. 5Pcs

66,81

66,81

64.85

129.70

VARNISHED METAL - EDGE COVER CORNERS - articles not for sale singly

NTERNAL/EXTERNAL CORNER - EDGE COVER /ARNISHED METAL POLISHED STEEL EFFECT					
Article	HxL mm	€/pack. 2Pcs	€/pack. 5Pcs		
RIZCTAC 60/	60 x 20	29,40	66,81		
REZCTAC 60/	60 x 20	29,40	66,81		

JOINT - EDGE COVER

VARNISHED METAL POLISHED STEEL EFFECT			
Hmm	€/pack. 2Pcs	€/pack. 5Pcs	
60	28,54	64,85	
	Hmm	H mm €/pack. 2Pcs	

E.g.: RIZCTAC 60/2 (pack. 2 Pcs) - RIZCTAC 60/5 (pack. 5 Pcs)

END CAPS R / L - EDGE COVER - VARNISHED METAL POLISHED STEEL EFFECT - pack. 4Pcs (2 R + 2 L) / 10Pcs (5 R + 5 L)

H mm €/pack. 4Pcs		€/pack. 10Pcs
60	57,07	129,70
		•

E.g.: TPCCTAC 60/2 (pack. 4 Pcs: 2 right + 2 left) TPCCTAC 60/5 (pack. 10 Pcs: 5 right + 5 left)

STEEL AISI 304/1.4301-V2A - FLUSH CORNERS - articles not for sale singly

INTERNAL/EXTERNAL CORNER

FLUSH PRE-WELDED - POLISHED STEEL EFFECT				
Article	HxL mm	€/pack. 2Pcs	€/pack. 5Pcs	
RIAC 60/	60 x 50	50,02	113,66	
REAC 60/	60 x 50	50,02	113,66	
Choose the desired pack	aging.			

E.g.: RIAC 60/2 (pack, 2 Pcs) - RIAC 60/5 (pack, 5 Pcs)

Choose the desired packaging. E.g.: TPCCTACS 60/2 (pack. 4 Pcs: 2 right + 2 left) TPCCTACS 60/5 (pack. 10 Pcs: 5 right + 5 left)

INTERNAL/EXTERNAL CORNER - EDGE COVER VARNISHED METAL BRUSHED STAINLESS ST. EFFECT

VARNISHED METAL BRUSHED STAINLESS ST. EFFECT

Article RIZCTACS 60/...

REZCTACS 60/...

GIZCTACS 60/....

TPZCTACS 60/...

JOINT - EDGE COVER

Article

Article

INTERNAL/EXTERNAL CORNER FLUSH PRE-WELDED - BRUSHED STAINLESS STEEL

Article	HxL mm	€/pack. 2Pcs	€/pack. 5Pcs
RIACS 60/	60 x 50	52,81	120,00
REACS 60/	60 x 50	52,81	120,00
Choose the desired packa	aging.		

E.g.: RIACS 60/2 (pack. 2 Pcs) - RIACS 60/5 (pack. 5 Pcs)

EDGE COVER VARNISHED METAL



RIZCT... 60/.. internal corner



GIZCT 60/ joint

corner







REZCT... 60/.

end caps

al corner














external corner



ANODIZED, POLISHED, VARNISHED and BRUSHED ALUMINIUM



ANODIZED SILVER ALUMINIUM thermo packed bar length 2 lm - pack. 40 Pcs - 80 lm

Article	Hmm	€/lm	€/Pc	
BTAA 60A	60	11,06	22,12	
BTAA 60	60	9,05	18,10	
"A" at the end of the product code = Item with adhesive				

POLISHED TITANIUM ALUMINIUM thermo packed bar length 2 lm - pack. 40 Pcs - 80 lm

Article	Hmm	€/lm	€/Pc		
BTBT 60A	60	15,03	30,06		
BTBT 60	60	12,75	25,50		
"A" at the end of the product code = Item with adhesive					

VARNISHED SEMIGLOSSY AND MATT WHITE ALUMINIUM

thermo packed - bar length 2 lm - pack. 40 Pcs - 80 lm				
Article	Hmm	€/lm	€/Pc	
BTA 60-01A	60	13,26	26,52	_
BTA 60-01	60	10,85	21,70	
BTA 60-010A	60	13,26	26,52	1
BTA 60-010	60	10,85	21,70	1
A" at the end of the product code = Item with adhesive				

AA - Anodized silver alum. BT - Polished titanium alum. BS - Brushed silver alum.

COLOURS

BTA 60-SL12 60 14,11 "A" at the end of the product code = Item with adhesive ANODIZED POLISHED BRUSHED SEMIGLOSSY MATT On demand

RS - Brushed copper alum. TS - Brushed titanium alum. (9016) alum. (9016) CORNERS, END CAPS AND JOINTS VARNISHED METAL and VARNISHED PLASTIC

INTERNAL/EXTERNAL CORNER - EDGE COVER - VARNISHED METAL ANODIZED POLISHED STONE LINE - H 60 X I 20

	ANODIZED, I OLISITED, STONE LINE - II 00 X E 20					
	Article	€/pack. 2pc	€/pack. 5pc			
	RIZCTAA 60/	14,18	32,20			
	REZCTAA 60/	14,18	32,20			
	RIZCTBT/BS/TS/RS 60/	29,40	66,81			
	REZCTBT/BS/TS/RS 60/	29,40	66,81			
	RIZCT01/01O 60/	28,54	64,85			
	REZCT01/01O 60/	28,54	64,85			
)	RIZCTA 60-SL/	37,10	84,30			
)	REZCTA 60-SL/	37.10	84.30			

2

Choose the desired packaging. E.g.: RIZCTAA 60/2 (pack. 2 Pcs) - RIZCTAA 60/5 (pack. 5 Pcs)

INTERNAL/EXTERNAL CORNER - EDGE COVER

VARNISHED PLASTIC ANODIZED SILVER, POLISHED AND TITANIUM			
Article	HxL mm	€/pack. 2pc	€/pack. 5pc
RICTAA 60/	60 x 20	9,25	21,04
RECTAA 60/	60 x 20	9,25	21,04
RICTBT 60/	60 x 20	14,18	32,20
RECTBT 60/	60 x 20	14,18	32,20

IOINT - EDGE COVER

VARNISHED PLASTIC ANODIZED SILVER, POLISHED AND TITANIUM					
Article	Hmm	€/pack. 2pc	€/pack. 5pc		
GICTAA 60/	60	9,25	21,04		
GICTBT 60/	60	14,18	32,20		

END CAPS R / L - EDGE COVER - VARNISHED PLASTIC ANODIZED S	SILVER
POLISHED AND TITANIUM - pack. 4Pcs (2 R + 2 L) / 10Pcs (5 R + 5 L)	

Article	Hmm	€/pack. 4pc	€/pack. 10pc
TPCTAA 60/	60	18,52	42,09
TPCTBT 60/	60	28,33	64,41

JOINT - EDGE COVER	
VARNISHED METAL ANODIZED, POLISHED, STONE LINE	

BRUSHED ALUMINIUM (silver-copper-titanium) thermo packed - bar length 2 Im - pack. 40 Pcs - 80 Im

"A" at the end of the product code = Item with adhesive

thermo packed - bar length 2 Im - pack. 40 Pcs - 80 Im

Hmm

60

60

60

60

60

60

Hmm

60

60

60

60

60

€/Im

15,03

12,75

17,09

15.62

17.09

15.62

€/lm

17,24

14.11

17.24

14,11

17.24

010 - White varnished

€/Pc

30,06

25,50

34,18

34.18

31,24

€/Pc

34,48

34.48

28,22

34.48

28,22

On demand

SL01 - Stone white

28 22

**

**

**

**

**

**

STONE LINE

On demand

31,24 *

Article

STONE LINE ALUMINIUM

Article

BTBS 60A

BTRS 60A

BTRS 60

BTTS 60A

BTTS 60

BTA 60-SL01A

BTA 60-SL01

BTA 60-SL08A

BTA 60-SL08

BTA 60-SL12A

BTBS 60

	VARNISHED WETAL ANODIZED, POLISHED, STONE LINE			
	Article	H mm	€/pack. 2pc	€/pack. 5pc
	GIZCTAA 60/	60	14,18	32,20
	GIZCTBT/BS/TS/RS 60/	60	28,54	64,85
	GIZCT01/01O 60/	60	28,54	64,85
\odot	GIZCTA 60-SL/	60	37,10	84,30
	ANODIZED, (5 R + 5 L)			
	Article	H mm	€/pack. 4pc	€/pack. 10pc
	TD7CTAA CO/	C 0	20.22	C A A A

	IPZCIAA 60/	60	28,33	64,41
	TPZCTBT/BS/TS/RS 60/	60	57,07	129,70
	TPZCT01/01O 60/	60	57,07	129,70
۲	TPZCTA 60-SL/	60	74,18	168,63
-	Choose the desired nackagin	σ		

E.g.: TPCCTAA 60/2 (pack. 4 Pcs: 2 right + 2 left)

INTERNAL/EXTERNAL CORNER - FLUSH

VARNISHED PLASTIC ANODIZED SILVER, POLISHED AND TITANIUM				
Article	HxL mm	€/pack. 2pc	€/pack. 5pc	
RIBAA 60/	60 x 25	9,25	21,04	
REBAA 60/	60 x 25	9,25	21,04	
RIBBT 60/	60 x 25	14,18	32,20	
REBBT 60/	60 x 25	14,18	32,20	


IOINT - FLUSH


VARNISHED PLASTIC ANODIZED SILVER, POLISHED AND TITANIUM				
Article	Hmm	€/pack. 2pc	€/pack. 5pc	
GIBAA 60/	60	9,25	21,04	
GIBBT 60/	60	14,18	32,20	

END CAPS R / L - FLUSH - VARNISHED PLASTIC ANODIZED SILVER,	
POLISHED AND TITANIUM - pack. 4Pcs (2 R + 2 L) / 10Pcs (5 R + 5 L)	

Article	Hmm	€/pack. 4pc	Elnack 10nc
AITICIE		erpack. 4pc	erpack. Topc
TPBAA 60/	60	18,52	42,09
TPBBT 60/	60	28,33	64,41

Available on demand aluminium prewelded internal and external flush corners. Finishing: 01 - 010 - AA - BT - BS - RS - TS. Price to be agreed. Production delay 4/5 weeks





USE PROBAND FIX FOR FIXING THE PROFILE TO THE WALL

SL08 - Stone antradark SL12 - Stone black

* Corners, end caps and joints of the on demand profiles are also on demand

On demand




PLASTIC EDGE COVER



R


OFILES




PROGRESS® 227

POLISHED AND BRUSHED STAINLESS STEEL AISI 304/1.4301-V2A

SKIRTING 80 made in stainless steel AISI 304/1.4301-V2A in height 80 mm. Available with or without adhesive. Superior aesthetic quality, extremely strong and easy to lay, it is ideal for all public and private environments that require high standards of hygiene and image. Used increasingly more often in contrast combinations with wood, carpeted floors, etc. for an unmistakeable hi-tech effect. In order to facilitate and to perfect the laying process, internal and external angles, plugs and junctions are recommended.



EXAMPLES OF LAYING





POLISHED STAINLESS STEEL AISI 304/1.4301-V2 with protective film - bar length 2 lm - pack. 25 Pcs - 50 lm Article H mm €/lm €/Pc

		-	
BTAC 80A	80	19,30	38,60
BTAC 80	80	17,24	34,48
"A" at the end of the product cor	de = Item wit	h adhesive	

LAYING INSTRUCTIONS 1. Choose the "SKIRTING 80" also choose with or without

1. Choose the "SKIRTING 80" also choose with or without adhesive. 2. Cut the profile to the required length, taking care to calculate the width of the inside-outside corner joints. 3. For the self-adhesive version, the surface must be smooth, grease-free and not porous. It is not recommended for plaster and mortar surfaces (version without adhesive is better, using fast-setting acrylic silicone which is suitable for fixing aluminium to mortar - plaster, etc.). 4. Use the corner linking elements-joints and right and left end cans to facilitate lawing.

and left end caps to facilitate laying.



Brushed STAINLESS STEEL AISI 304/1.4301-V2A E0 lm in fil ck 25 Dec

with protective min - bar length z min - patk. z3 Fts - 30 min				
Article	H mm	€/lm	€/Pc	
BTACS 80A	80	22,04	44,08	
BTACS 80	80	20,37	40,74	
"A" at the end of the product coc	le = Item with	h adhesive		

SUITABLE FOR USE IN CONTACT WITH FOODSTUFFS

COLOURS



USE PROBAND FIX FOR FIXING THE PROFILE TO THE WALL



CORNERS, END CAPS AND JOINTS STEEL and VARNISHED METAL

EDGE COVER VARNISHED METAL

11 21	
RIZCT 80 internal corner	




TP7CT 80/3

end caps

GI7CT 80

joint

PRE-WELDED



INTERNAL/EXTERNAL CORNER - EDGE COVER VARNISHED METAL POLISHED STEEL EFFECT

Article	HxL mm	€/pack. 2Pcs	€/pack. 5Pcs
RIZCTAC 80/	80 x 20	29,40	66,81
REZCTAC 80/	80 x 20	29,40	66,81

JOINT - EDGE COVER VARNISHED METAL POLISHED STEEL EFFECT

Article	Hmm	€/pack. 2Pcs	€/pack. 5Pc
GIZCTAC 80	80	28,54	64,85

E.g.: RIZCTAC 80/2 (pack. 2 Pcs) - RIZCTAC 80/5 (pack. 5 Pcs) END CAPS R / L - EDGE COVER - VARNISHED METAL POLISHED

Article	Hmm	€/pack. 4Pcs	€/pack. 10Pc
TPZCTAC 80/	80	57,07	129,70

E.g.: TPCCTAC 80/2 (pack. 4 Pcs: 2 right + 2 left) TPCCTAC 80/5 (pack. 10 Pcs: 5 right + 5 left)

VARNISHED METAL - EDGE COVER CORNERS - articles not for sale singly

INTERNAL/EXTERNAL CORNER - EDGE COVER VARNISHED METAL BRUSHED STAINLESS ST. EFFECT			
Article	HxL mm	€/pack. 2Pcs	€/pack. 5Pcs
RIZCTACS 80/	80 x 20	29,40	66,81
REZCTACS 80/	80 x 20	29,40	66,81

JOINT - EDGE COVER

VARNISHED METAL BRUSH	IED STAINLES	S ST. EFFECT	
Article	H mm	€/pack. 2Pcs	€/pack. 5Pcs
GIZCTACS 80/	80	28,54	64,85
a			

Choose the desired packaging. E.g.: RIZCTACS 80/2 (pack. 2 Pcs) - RIZCTACS 80/5 (pack. 5 Pcs)

END CAPS R / L - EDGE COVER - VARNISHED METAL BRUSHED STAINIESS ST EFFECT - nack APrs (2 R + 21) / 10Prs (5 R + 1

STAINLESS ST. EFFECT - pack. 4FCS (2 K + 2 L) 7 TOFCS (5 K + 5 L)			
Article	Hmm	€/pack. 4Pcs	€/pack. 10Pcs
TPZCTACS 80/	80	57,07	129,70
Choose the desired package E.g.: TPCCTACS 80/2 (package)		t + 2 left)	

TPCCTACS 80/5 (pack, 10 Pcs; 5 right + 5 left)

STEEL AISI 304/1.4301-V2A - FLUSH CORNERS - articles not for sale singly

INTERNAL/EXTERNAL CORNER FLUSH PRE-WELDED - POLISHED STEEL EFFECT

Article	HxL mm	€/pack. 2Pcs	€/pack. 5Pcs			
RIAC 80/	80 x 50 55,93		127,10			
REAC 80/	80 x 50	55,93	127,10			
Choose the desired packaging.						

E.g.: RIAC 80/2 (pack, 2 Pcs) - RIAC 80/5 (pack, 5 Pcs)

INTERNAL/EXTERNAL CORNER					
FLUSH PRE-WELDED - BRUSHED STAINLESS STEEL					
Article HxL mm €/pack. 2Pcs €/pack. 5					
RIACS 80/	80 x 50	58,72	133,44		
REACS 80/	80 x 50	58,72	133,44		
Choose the desired packaging.					

E.g.: RIACS 80/2 (pack. 2 Pcs) - RIACS 80/5 (pack. 5 Pcs)

228

SKIRTING 80 made in anodized, polished and brushed aluminium in height 80 mm. Available with or without adhesive. Superior aesthetic quality and easy to lay, it is ideal for all public and private environments. Can be used with all types of flooring. In order to facilitate and to perfect the laying process, internal and external angles, plugs and junctions are recommended. Please contact the technical department for informations concerning the skirting bending radius.

SKIRTING 80

ANODIZED, POLISHED, VARNISHED and BRUSHED ALUMINIUM



ANODIZED SILVER ALUMINIUM thermo packed bar length 2 lm - pack. 25 Pcs - 50 lm

Article	Hmm	€/lm	€/Pc
BTAA 80A	80	13,61	27,22
BTAA 80	80	11,52	23,04

POLISHED TITANIUM ALUMINIUM thermo packed bar length 2 im - pack. 25 Pcs - 50 im

Article	Hmm	€/lm	€/Pc
BTBT 80A	80	18,66	37,32
BTBT 80	80	16,37	32,74

VARNISHED SEMIGLOSSY AND MATT WHITE ALUMINIUM

thermo packed - bar length 2 lm - pack. 25 Pcs - 50 lm					
Hmm	€/lm	€/Pc	🗿 BTA		
80	16,33	32,66	🕘 BTA		
80	13,85	27,70	📀 BTA		
80	16,33	32,66	📩 🔿 BTA		
80	13,85	27,70	📩 🔿 BTA		
	H mm 80 80 80	H mm €/Im 80 16,33 80 13,85 80 16,33	H mm €/Im €/Pc 80 16,33 32,66 80 13,85 27,70 80 16,33 32,66		




BRUSHED ALUMINIUM (silver-copper-titanium)

thermo packed - bar length 2 Im - pack. 25 Pcs - 50 Im					
Article	Hmm	€/lm	€/Pc		
BTBS 80A	80	18,66	37,32		
BTBS 80	80	16,37	32,74		
BTRS 80A	80	22,53	45,06	*	
BTRS 80	80	20,52	41,04	*	
BTTS 80A	80	22,53	45,06		
BTTS 80	80	20,52	41,04		
BTRS 80A BTRS 80 BTTS 80A	80 80 80	22,53 20,52 22,53	45,06 41,04 45,06		

STONE LINE ALLIMINIUM

'4		thermo packed - bar length 2 lm - pack. 40 Pcs - 80 lm						
		Article	H mm	€/lm	€/Pc			
	0	BTA 80-SL01A	80	21,22	42,44	**		
с	0	BTA 80-SL01	80	18,01	36,02	**		
6	0	BTA 80-SL08A	80	21,22	42,44	**		
0	0	BTA 80-SL08	80	18,01	36,02	**		
6	*0	BTA 80-SL12A	80	21,22	42,44	**		
0	*0	BTA 80-SL12	80	18,01	36,02	**		



BT... 80/80A

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS



USE PROBAND FIX FOR FIXING THE PROFILE TO THE WALL

Ì	
n a	
100	
it had	
ē,	
ġ	
ð,	
8	
Ľ	
<u></u>	
J AG	
10	
Š	
×	
S S S S S S S S S S S S S S S S S S S	
Ē	
Dat	
ৰ	

0 2028 /

COLOURS	

ANODIZED	POLISHED		BRUSHED		SEMIGLOSSY	MATT		STONE LINE	
									On demand
AA - Anodized silver alum.	BT - Polished titanium alum.	BS - Brushed silver alum.	RS - Brushed copper alum.	TS - Brushed titanium alum.	01 -White varnished alum. (9016)	010 - White varnished alum. (9016)	SLO1 - Stone white	SLO8 - Stone antradark	SL12 - Stone black

CORNERS, END CAPS AND JOINTS VARNISHED METAL and VARNISHED PLASTIC

INTERNAL/EXTERNAL CORNER - EDGE COVER - VARNISHED METAL ANODIZED POLISHED STONE LINE - H 80 X L 20

	Article	€/pack. 2pc	€/pack. 5pc					
	RIZCTAA 80/	14,18	32,20					
	REZCTAA 80/	14,18	32,20					
	RIZCTBT/BS/TS/RS 80/	29,40	66,81					
	REZCTBT/BS/TS/RS 80/	29,40	66,81					
	RIZCT01/01O 80/	28,54	64,85					
	REZCT01/01O 80/	28,54	64,85					
0	RIZCTA 80-SL/	37,10	84,30					
0	REZCTA 80-SL/	37,10	84,30					

Choose the desired packaging. E.g.: RIZCTAA 80/2 (pack. 2 Pcs) - RIZCTAA 80/5 (pack. 5 Pcs)

INTERNAL/EXTERNAL CORNER - EDGE COVER

VARNISHED PLASTIC ANODIZED SILVER, POLISHED AND TITANIUM					
Article	HxL mm	€/pack. 2pc	€/pack. 5pc		
RICTAA 80/	80 x 20	9,25	21,04		
RECTAA 80/	80 x 20	9,25	21,04		
RICTBT 80/	80 x 20	14,18	32,20		
RECTBT 80/	80 x 20	14.18	32.20		

IOINT - FDGE COVER

VARNISHED PLASTIC ANODIZED SILVER, POLISHED AND TITANIUM					
Article	Hmm	€/pack. 2pc	€/pack. 5pc		
GICTAA 80/	80	9,25	21,04		
GICTBT 80/	80	14,18	32,20		

END CAPS R / L - EDGE COVER - VARNISHED PLASTIC ANODIZED SILVER, POLISHED AND TITANIUM - pack. 4Pcs (2 R + 2 L) / 10Pcs (5 R + 5 L)

Article	Hmm	€/pack. 4pc	€/pack. 10pc
ТРСТАА 80/	80	18,52	42,09
TPCTBT 80/	80	28,33	64,41

	JUINT - EDGE COVER					
VARNISHED METAL ANODIZED, POLISHED, STONE LINE						
	Article	H mm	€/pack. 2pc	€/pack. 5pc		
	GIZCTAA 80/	80	14,18	32,20		
	GIZCTBT/BS/TS/RS 80/	80	28,54	64,85		
	GIZCT01/01O 80/	80	28,54	64,85		
\odot	GIZCTA 80-SL/	80	37,10	84,30		

END CAPS R / L - EDGE COV POLISHED, STONE LINE - par			
Article	Hmm	€/pack. 4pc	€/pack. 10pc
ΤΡΖΟΤΔΔ 80/	80	28 33	64 41

	TPZCTBT/BS/TS/RS 80/	80	57,07	129,70
	TPZCT01/01O 80/	80	57,07	129,70
\odot	TPZCTA 80-SL/	80	74,18	168,63
	Choose the desired packagin	a		

E.g.: TPCCTAA 80/2 (pack. 4 Pcs: 2 right + 2 left)

INTERNAL/EXTERNAL CORNER - FLUSH

VARNISHED PLASTIC ANODIZED SILVER, POLISHED AND TITANIUM				
Article	HxL mm	€/pack. 2pc	€/pack. 5pc	
RIBAA 80/	80 x 25	9,25	21,04	
REBAA 80/	80 x 25	9,25	21,04	
RIBBT 80/	80 x 25	14,18	32,20	
REBBT 80/	80 x 25	14.18	32.20	

JOINT - FLUSH

VARNISHED PLASTIC ANO	DIZED SILVE	R, POLISHED A	ND TITANIUM
Article	Hmm	€/pack. 2pc	€/pack. 5pc

GIBAA 80/	80	9,25	21,04
GIBBT 80/	80	14,18	32,20

END CAPS R / L - FLUSH - VARNISHED PLASTIC ANODIZED SILVER, POLISHED AND TITANIUM - pack. 4Pcs (2 R + 2 L) / 10Pcs (5 R + 5 L)

Article	H mm	€/pack. 4pc	€/pack. 10pc
TPBAA 80/	80	18,52	42,09
TPBBT 80/	80	28,33	64,41

Available on demand aluminium prewelded internal and external flush corners. Finishing: 01 - 010 - AA - BT - BS - RS - TS. Price to be agreed. Production delay 4/5 weeks



RICT... 80 internal

cornei

* Corners, end caps and joints of the on demand profiles are also on demand













SKIRTING BOARDS

SKIRTING 100 SKIRTING 150

POLISHED AND BRUSHED STAINLESS STEEL AISI 304/1.4301-V2A SKIRTING 100 and SKIRTING 150 made in stainless steel AISI 304/1.4301-V2A in height 100 and 150 mm. Available with or without adhesive. Superior aesthetic quality, extremely strong and easy to lay, it is ideal for all public and private environments that require high standards of hygiene and image. Used increasingly more often in contrast combinations with wood, carpeted floors, etc. for an unmistakeable hi-tech effect. In order to facilitate and to perfect the laying process, internal and external angles, plugs and junctions are recommended.

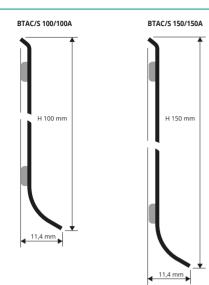

EXAMPLES OF LAYING





POLISHED STAINLESS STEEL AISI 304/1.4301-V2 with protective film - bar length 2 lm - pack 20 Pcs - 40 lm

Article	Hmm	€/Im	€/Pc
BTAC 100A	100	21,46	42,92
BTAC 100	100	19,30	38,60

Brushed STAINLESS STEEL AISI 304/1.4301-V2A

with protective film - bar length 2 im - pack. 20 PCS - 40 im				
Article	H mm	€/lm	€/Pc	
BTACS 100A	100	23,12	46,24	
BTACS 100	100	21,33	42,65	

"A" at the end of the product code = Item with adhesive

SUITABLE FOR USE IN CONTACT WITH FOODSTUFFS

LAYING INSTRUCTIONS

1. Choose the "SKIRTING 100 -150" also choose with or without adhesive. 2. Cut the profile to the required length, taking care to calculate the width of the inside-outside corner joints. 3. For the self-adhesive version, the surface must be smooth, grease-free and not porous. It is not recommended for plaster and mortar surface functions. surfaces (version without adhesive is better, using fast-setting acrylic silicone which is suitable for fixing aluminium to mortar - plaster, etc.). 4. Use the corner linking elements-joints and right and left end caps to facilitate laying.



POLISHED STAINLESS STEEL AISI 304/1.4301-V2 ath 2 Im nack 20 Pcc - 40 Im o film harle

with protective min - bar length 2 mi - pack. 20 r cs - 40 mi				
Article	Hmm	€/lm	€/Pc	
BTAC 150A	150	30,48	60,96	
BTAC 150	150	28,60	57.20	

Brushed STAINLESS STEEL AISI 304/1.4301-V2A

with protective film - bar length 2 lm - pack. 20 Pcs - 40 lm				
Article	H mm	€/lm	€/Pc	
BTACS 150A	150	32,34	64,68	
BTACS 150	150	30,10	60,21	

"A" at the end of the product code = Item with adhesive

USE PROBAND FIX FOR FIXING THE PROFILE TO THE WALL



COLOURS ACS - Brushed stainless steel AISI 304/1.4301-V2A AC - Polished stainless steel AISI 304/1.4301-V2A

CORNERS, END CAPS AND JOINTS

EDGE COVER VARNISHED METAL







RE... 100 / 150

external corner

STEEL PRE-WELDED







STEEL and VARNISHED METAL

VARNISHED METAL - EDGE COVER CORNERS H100 - articles not for sale singly

INTERNAL/EXTERNAL CORNER - EDGE COVER VARNISHED METAL POLISHED STEEL EFFECT				
Article	HxL mm	€/pack. 2Pcs	€/pack. 5Pcs	
RIZCTAC 100/	100 x 20	29,40	66,81	
REZCTAC 100/	100 x 20	29,40	66,81	

JOINT - EDGE COVER

VARNISHED METAL POLISHED STEEL EFFECT				
Article H mm €/pack. 2Pcs €/pack. !				
GIZCTAC 100/	100	28,54	64,85	
Choose the desired nack:	aging			

E.g.: RIZCTAC 100/2 (pack. 2 Pcs) - RIZCTAC 100/5 (pack. 5 Pcs)

END CAPS R / L - EDGE COVER - VARNISHED METAL POLISHED STEEL EFFECT - pack. 4Pcs (2 R + 2 L) / 10Pcs (5 R + 5 L)				
Article	Hmm	€/pack. 4Pcs	€/pack. 10Pcs	
TPZCTAC 100/	100	57,07	129,70	

TPZCTAC 100/... 100 57,07 Choose the desired packaging E.g.: TPCCTAC 100/2 (pack. 4 Pcs: 2 right + 2 left) TPCCTAC 100/5 (pack. 10 Pcs: 5 right + 5 left)

STEEL AISI 304/1.4301-V2A - FLUSH CORNERS H100 articles not for sale singly

INTERNAL/EXTERNAL CORNER - FLUSH PRE-WELDED

POLISHED-BRUSHED STAINLESS STEEL EFFECT						
Article HxL mm €/pack. 2Pcs €/pack. 5						
RIAC 100/	100 x 50	61,80	140,48			
REAC 100/	100 x 50	61,80	140,48			
RIACS 100/	100 x 50	64,60	146,82			
REACS 100/	100 x 50	64,60	146,82			
Thoose the desired packaging						

E.g.: RIAC 100/2 (pack. 2 Pcs) - RIAC 100/5 (pack. 5 Pcs)



VARIAISTILD WILTAL DROSTIL			
Article	HxL mm	€/pack. 2Pcs	€/pack. 5Pcs
RIZCTACS 100/	100 x 20	29,40	66,81
REZCTACS 100/	100 x 20	29,40	66,81

JOINT - EDGE COVER

VARNISHED METAL BRUSHED STAINLESS ST. EFFECT					
Article	Hmm	€/pack. 2Pcs	€/pack. 5Po		
GIZCTACS 100/	100	28,54	64,85		

Choose the desired packaging. E.g.: RIZCTACS 100/2 (pack. 2 Pcs) - RIZCTACS 100/5 (pack. 5 Pcs)

0	4	,		· · ·		
END CAPS R /	L - EDGE (COVER - VA	RNISHED MET	AL BRUSHED		
STAINLESS ST. EFFECT - pack. 4Pcs (2 R + 2 L) / 10Pcs (5 R + 5 L)						

Article	Hmm	€/pack. 4Pcs	€/pack. 10Pcs
TPZCTACS 100/	100	57,07	129,70
Choose the desired packs	nging		

E.g.: TPCCTACS 100/2 (pack. 4 Pcs: 2 right + 2 left) TPCCTACS 100/5 (pack. 10 Pcs: 5 right + 5 left)

STEEL AISI 304/1.4301-V2A - FLUSH CORNERS H150 articles not for sale singly

INTERNAL/EXTERNAL CORNER - FLUSH PRE-WELDED POLISHED-BRUSHED STAINLESS STEEL EFFECT

Article	HxL mm	€/pack. 2Pcs	€/pack. 5Pcs
RIAC 150/	150 x 50	93,19	211,81
REAC 150/	150 x 50	93,19	211,81
RIACS 150/	150 x 50	96,26	218,77
REACS 150/	150 x 50	96,26	218,77

Choose the desired packaging. E.g.: RIACS 150/2 (pack. 2 Pcs) - RIACS 150/5 (pack. 5 Pcs)

SKIRTING 100 made in anodized, polished and brushed aluminium in height 100 mm. Available with or without adhesive. Superior aesthetic quality and easy to lay, it is ideal for all public and private environments. Can be used with all types of flooring.

In order to facilitate and to perfect the laying process, internal and external angles, plugs and junctions are recommended. Please contact the technical department for informations concerning the skirting bending radius.

SKIRTING 100

ANODIZED, POLISHED, VARNISHED and BRUSHED ALUMINIUM



ANODIZED SILVER ALUMINIUM thermo packed bar length 2 Im - pack. 20 Pcs - 40 Im

Article	Hmm	€/lm	€/Pc
BTAA 100A	100	17,57	35,14
BTAA 100	100	15,23	30,46

POLISHED TITANIUM ALUMINIUM thermo nacked

bar length 2 lm - pack. 20 Pcs - 40 lm					
	Article	Hmm	€/Im	€/Pc	
	BTBT 100A	100	22,26	44,52	*
	BTBT 100	100	19,98	39,96	*

VARNISHED SEMIGLOSSY AND MATT WHITE ALLIMINIUM thermo packed - bar length 2 Im - pack. 20 Pcs - 40 Im

Article	Hmm	€/lm	€/Pc	
BTA 100-01A	100	21,07	42,14	
BTA 100-01	100	18,27	36,54	
BTA 100-01OA	100	21,07	42,14	*
BTA 100-010	100	18,27	36,54	7



BRUSHED ALUMINIUM (silver-copper-titanium)

thermo packed - bar length 2 im - pack. 20 PCS - 40 im						
Article	Hmm	€/lm	€/Pc			
BTBS 100A	100	22,26	44,52			
BTBS 100	100	19,98	39,96			
BTRS 100A	100	26,37	52,74	*		
BTRS 100	100	25,28	50,56	*		
BTTS 100A	100	26,37	52,74			
BTTS 100	100	25,28	50,56			

STONE LINE ALUMINIUM ath 2 lm nack 40 Dec 90 lm

	ulerino packeu - Dar lengui z II	II - pack. 40 r	15 - 00 111		
	Article	Hmm	€/Im	€/pc	
0	BTA 100-SL01A	100	27,38	54,76	*
0	BTA 100-SL01	100	23,75	47,50	*
٩	BTA 100-SL08A	100	27,38	54,76	*
\odot	BTA 100-SL08	100	23,75	47,50	**
0	BTA 100-SL12A	100	27,38	54,76	**
0	BTA 100-SL12	100	23,75	47,50	**



BT... 100/100A

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS



USE PROBAND FIX FOR FIXING THE PROFILE TO THE WALL

COLOURS

2

2028 All atomic reserved by Progress Profiles. Painted in Italy

COLOURS									
ANODIZED	POLISHED	BRUSHED		BRUSHED		MATT	STONE LINE		
				State of the state		On demand	On demand	On demand	On demand
AA - Anodized silver alum.	BT - Polished titanium	BS - Brushed silver alum.	RS - Brushed copper	TS - Brushed titanium	01 -White varnished alum.	010 - White varnished	SL01 - Stone white	SLO8 - Stone antradark	SL12 - Stone black

CORNERS, END CAPS AND JOINTS

VARNISHED METAL and VARNISHED PLASTIC

INTERNAL/EXTERNAL CORNER - EDGE	COVER - VARNISHED METAL,
ANODIZED, POLISHED STONE LINE - H	
Article	€/nack 2Pcs €/nack 5Pcs

	Aluce	t/pack. 2rts	E/pack. JPCS
	RIZCTAA 100/	14,18	32,20
	REZCTAA 100/	14,18	32,20
	RIZCTBT/BS/TS/RS 100/	29,40	66,81
	REZCTBT/BS/TS/RS 100/	29,40	66,81
	RIZCT01/01O 100/	28,54	64,85
	REZCT01/01O 100/	28,54	64,85
)	RIZCTA 100-SL/	37,10	84,30
D	REZCTA 100-SL/	37,10	84,30

Choose the desired packaging. E.g.: RIZCTAA 100/2 (pack. 2 Pcs) - RIZCTAA 100/5 (pack. 5Pcs)

INTERNAL/EXTERNAL CORNER - EDGE COVER

Article RICTAA 100/...

RECTAA 100/...

RICTBT 100/..

RECTBT 100/.

VARNISHED PLASTIC ANODIZED SILVER, POLISHED AND TITANIUM

100 x 20

100 x 20

100 x 20

100 x 20

Available on demand aluminium prewelded internal and external flush

corners. Finishing: 01 - 010 - AA - BT - BS - RS - TS. Price to be agreed.

Production delay 4/5 weeks.

Choose the desired packaging. E.g.: RICTAA 100/2 (pack. 2 Pcs) - RICTAA 100/5 (pack. 5 Pcs)

HxL mm €/pack. 2Pcs€/pack. 5Pcs

9 25

9,25

14,18

14.18

JOINT - EDGE COVER VARNISHED METAL ANODIZED, POLISHED, STONE LINE H mm | €/pack. 2pc | €/pack. 5pc Article GIZCTAA 100/. 32.20 100 14.18 GIZCTBT/BS/TS/RS 100/... 100 28,54 64,85 GIZCT01/01O 100/... 100 28,54 64.85 \odot GIZCTA 100-SL ... / ... 100 37.10 84.30 END CAPS R / L - EDGE COVER - VARNISHED METAL ANODIZED, POLISHED, STONE LINE - pack. 4Pcs (2 R + 2 L) / 10Pcs (5 R + 5 L) Article H mm | €/pack. 4pc |€/pack. 10pc TPZCTAA 100/. 28,33 64,41 100 TPZCTBT/BS/TS/RS 100/... 100 57.07 129,70 TP7CT01/01O 100/ 100 57 07 129 70 TPZCTA 100-SL.../.. 100 74.18 168.63

VARNISHED PLASTIC ANODIZED SILVER, POLISHED AND TITANIUM

100

100

END CAPS R / L - EDGE COVER - VARNISHED PLASTIC ANODIZED SILVER,

100

100

Article H mm €/pack. 4pc €/pack. 10pc

POLISHED AND TITANIUM - pack. 4Pcs (2 R + 2 L) / 10Pcs (5 R + 5 L)

H mm €/pack. 2pc €/pack. 5pc

9.25

14,18

18.52

28.33

21.04

32,20

42 09

64.41

\star Corners, end

caps and joints of the on demand profiles are also on demand						
METAL EDGE COVER						
			R			
RIZCT 100 internal corner	REZCT 100 external corner	GIZCT 100 joint	TPZCT 100/3 end caps			

PLASTIC EDGE COVER RECT... 100 external TPCT... 100/3 end caps RICT... 100 internal GICT... 100 ioint

Choose the desired packaging. E.g.: TPCTAA 100/2 (pack. 4 Pcs: 2 right + 2 left)

JOINT - EDGE COVER

GICTAA 100/.

GICTBT 100/..

TPCTAA 100/...

TPCTBT 100/...

Article



231

Т

21.04

21,04

32,20

32 20

🛠 = Production on demand with minimum quantity of 100 Pcs. Production delay 4/5 weeks. Price to be agreed 🧔 = News 2023


Prices are referred to whole packs, 10% increase for minimum orders of 10 Pcs, 20% increase for orders of less than 10 Pcs.



PROMULTISKIRT SQUARE

FOAMED VINYL RESIN

PROMULTISKIRT SQUARE is an expanded vinyl resin profile covered with a vinyl resin film available in white, black, silver and wood finishes. The profile has a good resistance to chemical agents and can be secured to the wall with plastic supports fixed with screws or silicone. The skirting height is 100 mm, it can be cut to 80 and 60 mm heights thanks to the pre-incisions on the back. PROMULTISKIRT SQUARE in expanded vinyl resin coated with vinyl resin film is suitable for any indoor environment.

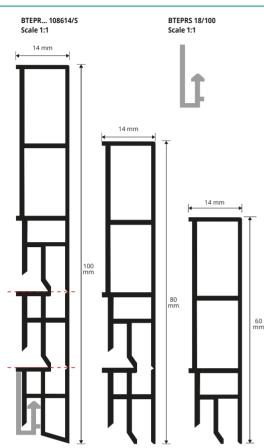

FOAMED VINYL RESIN (wood finishes - black - white and silver) bar length 2,4 im - pack. 20 Pcs - 48 im

-	Article	Article H mm		€/рс	
\odot	BTEPR 108614/S	100/80/60	8,81	21,14	

Available in the finishes: 29W - 30W - 34W - B - N - AA. The code of the selected colour must be added to the article code E.g.: BTEPR... 108614/S (chosen finish Havana oak) BTEPR34W 108614/S



SUPPORT / FIXING CLIP - PLASTIC nack 100 Pcs

Article	H mm	€/pack.	
OBTEPRS 18	16,5	12,68	

Order the SUPPORT and choose the SKIRTING in the desired finish.

USE PROBAND FIX FOR FIXING THE PROFILE TO THE WALL





On request it is possible to realize other finishes of the color range: minimum order 400 pcs. Production delay 4/5 weeks. Price to be agreed. For sample finishes, contact the sales office for minimum quantities, timing and costs.

LAYING INSTRUCTIONS

1. Choose "PROMULTISKIRT SQUARE" according to the chosen colour. 2. Cut "PROMULTISKIRT SQUARE" to the required length. 3. if necessary cut "PROMULTISKIRT SQUARE" to the required height. * 4. Carefully clean the substrate on which the profile will be placed from oil, grease and dirt residues in general. Laying with adhesive only:

5a. With dry surface apply the Proband Fix. 6a. Press the profile against the wall with the correct pressure.

 Laying with adhesive and support:
 5b. Fix the plastic supports to the wall every 50mm with screws.
 6b. Apply Proband Fix only to the back upper part of the skirting board. 7b. Fix the profile to the supports and press it against the wall with correct pressure.

***CUT INSTRUCTIONS**



Option 1A: Cut to have the height 80 mm. Cut along the first pre-incision on the back of the skirting;

Option 1B: Cut to have the height 60 mm. Cut along the second pre-incision on the back of the skirting;




2. Cut the skirting on the front side at the cut previously made



3. Remove the excess part.

SKIRTING BOARDS



CORNERS, END CAPS AND JOINTS

on the back;

FOAMED VINYL RESIN



EXTERNAL CORNER KIT





IN/EXTERNAL	CORNERS	and E	ND CAPS	KIT
(wood finishes.	hlack - wl	hite and	l silver)	

Article	H mm	€/KIT
KBTEPR108614/SI	100/80/60	16,41
KBTEPR108614/SE	100/80/60	16,41

Available in the finishes: 29W - 30W - 34W - B - N - AA. The code of the selected colour must be added to the article code. E.g.: KBTEPR...108614/S (chosen finish Havana oak) KBTEPR34W 108614/5

KIT BTEPR ... 108614/SI

KIT BTEPR ... 108614/SE





PROMULTISKIRT ROUND is an expanded vinyl resin profile covered with a vinyl resin film available in white, black, silver and wood finishes. The profile has a good resistance to chemical agents and can be secured to the wall with plastic supports fixed with screws or silicone. The skirting height is 100 mm, it can be cut to 80 and 60 mm heights thanks to the pre-incisions on the back. PROMULTISKIRT ROUND in expanded vinyl resin coated with vinyl resin film is suitable for any indoor environment.

PROMULTISKIRT ROUND

FOAMED VINYL RESIN




residues in general

3 2028 All rights reserved by Progress Profiles. Printed in Italy.



COLOURS





Option 1A: Cut to have the height 80 mm. Cut along the first pre-incision on the back of the skirting

Option 1B: Cut to have the height 60 mm Cut along the second pre-incision on the back of the skirting




2. Cut the skirting on the front side at the cut previously made on the back;



3. Remove the excess part.





CORNERS, END CAPS AND JOINTS

FOAMED VINYL RESIN

108614/5

	IN/EXTERNAL CORNERS and END CAPS KIT (wood finishes - black - white and silver)				
		Article	H mm	€/KIT	
Available in the finishes: $29W - 30W - 34W - B - N - AA$. The code of the selected colour must be added to the article code.		KBTEPR108614/RI	100/80/60	16,41	
E.g.: KBTEPR108614/S (chosen finish Havana oak) KBTEPR34W	0	KBTEPR108614/RE	100/80/60	16,41	







KIT BTEPR ... 108614/RI

INTERNAL CORNER KIT

KIT BTEPR ... 108614/RE

233

EXTERNAL CORNER KIT



SKIRTING BOARDS

SKIRTING 7016

FOAMED VINYL RESIN

SKIRTING 7016 is a vinyl resin foam profile with a height of 70 mm. available wooden finishes and finishes in solid colour that could be matched with the PROINSERT SYSTEM's profiles. The profile, suitable like skirting for floating and glued wood floor, laminate and LVT, could be laid with suitable adhesive, nails, screws or using the pre-punched support fixed to the wall with screws every 57 cm. Its special section, that allows to cover a 16 mm sperimetral joint, and wide range of finishes make it a very requested, elegant and econimic skirting profile.

PTEPR... 7016 Scale 1:1 Tomm Tomm



FOAMED VINYL RESIN (wood finIshes - black - white and silver) Length = 2,5 m - Pack 20 pcs - 50 lm

Article	H mm	€/lm	€/pc
BTEPR 7016	70	4,64	11,60

USE PROBAND FIX FOR FIXING THE PROFILE TO THE WALL

CO PROPERSO



SUPPORT / FIXING CLIP - PLASTIC support Length 5 cm

Article	H mm	€/pack.
BTEPRS 385	37,5	12,68

Order the SUPPORT and choose the SKIRTING in the desired finish.

IN/EXTERNAL CORNERS and END CAPS KIT


(Wood finishes - black - White and sliver)					
Article	H mm	€/KIT			
KIT BTEPR7016I	70	11,69			
KIT BTEPR7016E	70	11,69			
KIT BTEPR7016I INTERNAL CORNER KIT		PR7016E CORNER KIT			




EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS 1. Choose "Skirting 7016" in the desired finish. 2. Fix the pre-punched support to the wall with screws every 50 cm. 3. Attach the profile to the support applying low pressure. 4. Alternatively fix the profile using a suitable fast adhesive, nails or screws

								-	
COLOURS				(For a pi	recise assessn	nent of colour	s request the	wood finishes :	sample range)
							100		
04W - Dark oak	05W - Light oak	13W - Teak indonesia	18W - Light Zerbano	21W - Powder Oak	25W - Bleached fir	29W - White oak	30W - Gray oak	31W - Victoria oak	33W - Sawed oak
34W - Havana oak	35W - Edimburgo oak	36W - American oak	37W - Carvi oak	38W - Queens oak	39W - Grey elm	41W - Ice oak	42W - Grace oak	45W - Morocco oak	46W - Black decape
1									
53W	54W	55W	B - White	N - Black	AA - Silver				


On request it is possible to realize other finishes of the color range: minimum order 400 pcs. Production delay 4/5 weeks. Price to be agreed. For sample finishes, contact the sales office for minimum quantities, timing and costs.

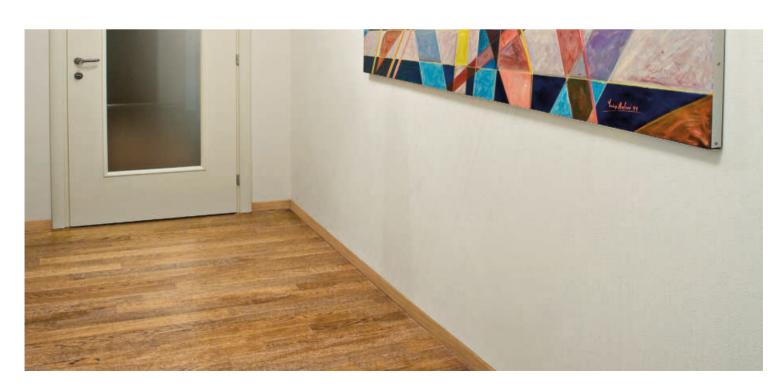



SKIRTING 7011

FOAMED VINYL RESIN

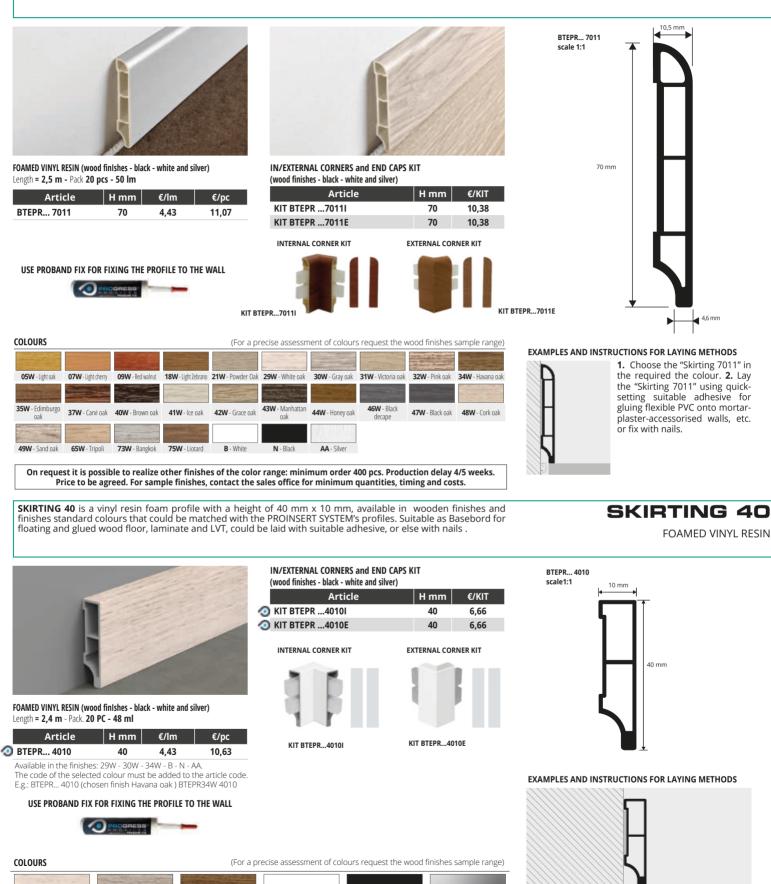

 Choose the "Skirting 40" in the required the colour.
 Lay the "Skirting 40" using quick-setting suitable adhesive for gluing flexible PVC onto mortar-plasteraccessorised walls, etc. or fix with nails.

34W - Havana oak

On request it is possible to realize other finishes of the color range: minimum order 400 pcs. Production delay 4/5 weeks. Price to be agreed. For sample finishes, contact the sales office for minimum quantities, timing and costs.

B - White

N - Black

AA - Silver

© 2028. All rights reserved by Progress Profiles. Printed in Italy

29W - White oak


30W - Grev oak



SKIRTING 60 SKIRTING 120

NON-TOXIC FLEXIBLE VINYL RESIN IN 6 COLOURS

PVC FLEXIBLE SKIRTING 60/120 height 60 mm and 120 mm, is a very strong profile ideal for easily achieving special, attractive, superior finishes. Installation recommended with glue or silicone. Easy to install, the shaped edges ensure perfect adhesion to the surface. The projecting rounded flange covers the terminal expansion joint.

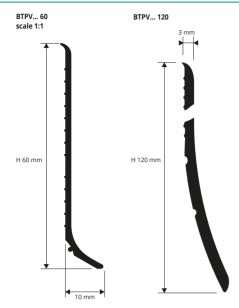

ATTENTION: IN ORDER TO USE, LAY AND FIX PROPERLY THIS PRODUCT PLEASE LOOK AT OUR WEBSITE OR APP LAYING / FIXING VIDEO FOR CORRECT INSTALLATION.





NON-TOXIC FLEXIBLE VINYL RESIN th EO los

TOUS IEUgui So IIII			
Article	H mm	€/lm	€/roll
BTPV 60	60	2,14	107,00
BTPV 120	120	5,09	254,50

Available in the colours: B - GC - GS - T - M - N. The code of the selected colour must be added to the article code E.g.: BTPV... 60 (chosen finish light gray) BTPVGC 60

NON-TOXIC FLEXIBLE VINYL RESIN - ADHESIVE

Article	Hmm	€/lm	€/roll
BTPV 60A	60	3,58	179,00
BTPV 120A	120	8,11	405,50

Available in the colours: B - GC - GS - T - M - N. The code of the selected colour must be added to the article code. E.g.: BTPV... 60 (chosen finish light gray) BTPVGC 60.


COLOURS



SKIRTING 62F

FLEXIBLE VINYL RESIN IN 6 COLOURS

SKIRTING 62F is a new 62 mm skirting board made of non-toxic, flexible vinyl resin. This profile is very resistant and particularly suited for providing highly aesthetic perimeter skirting of excellent quality at reasonable prices. It differs from the BTPV.. 60 skirting board in that it is provided with a bottom flange that allows it to be placed perpendicularly (90°) to the wall/lining and welded to PVC floors. In addition, the horizontal flange covers the floor's perimeter expansion joint. We recommend applying the skirting using glue/adhesive/Bostik/mastic. Alternatively, you can choose the self-adhesive version for quick, effortless installation.

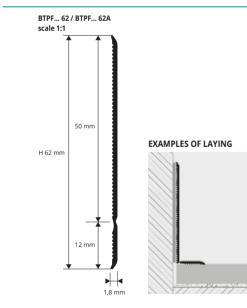



LAYING INSTRUCTIONS 1. Choose the colour of the "SKIRTING 62F" board, indicating whether you want it with or without a self-adhesive backing. 2. Cut the "SKIRTING 62F" to length, taking into account the width of the internal and external connections. 3. Self-adhesive skirting is recommended only for surfaces that are perfectly smooth, non-oily and non-porous. On plaster and mortar surfaces, use a set of back user is a cold to back the kitter using any direktering arolic eliformatic set of back the set of the set of the kitter using any direktering arolic eliformatic set of back the kitter using any set of the set of the set of the set of the kitter using any set of the set of non-adhesive version and apply the skirting using quick-setting acrylic silicone suitable for gluing aluminium to mortar, plaster, etc.

ATTENTION: IN ORDER TO USE, LAY AND FIX PROPERLY THIS PRODUCT PLEASE LOOK AT OUR WEBSITE OR APP LAYING / FIXING VIDEO FOR CORRECT INSTALLATION

FLEXIBLE VINYL RESIN rolls length 50 Im with or without adhesive

Article	Hmm	€/lm	€/roll
BTPF 62	62	2,02	101,00
Available in the colours: P. C.	CCSTM	NI	

Available in the colours: B - GC - GS - T - M - N. The code of the selected colour must be added to the article code. E.g.: BTPF...62 (chosen finish light gray) BTPFGC 62

FLEXIBLE VINYL RESIN


rolls length 50 Im with or without adhesive

Article		Hmm €/lm		€/roll	
BTPF 62A		62	3,42	171,00	

Available in the colours: B - GC - GS - T - M - N. The code of the selected colour must be added to the article code. E.g.: BTPF...62 (chosen finish light gray) BTPFGC 62.


As regards the items with adhesive, the adhesive roll is sold separately (50 lm)

COLOURS



236

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS



1. Choose the "SKIRTING 60 - 120" of the required height 60/120mm and choose the colour. 2. Lay the "SKIRTING 60 - 120" using an adhesive suitable for gluing flexible PVC onto mortar, plaster, accessorised walls, etc. or fix with screws/nails.

As regards the items with adhesive, the adhesive roll is sold separately (50 lm for H:60), (50 lm for H:120)



SKIRTING in PVC foam height 70 mm in 4 semi-matt colours and 8 wood finishes to be matched with the PROINSERT SYSTEM profiles for floating laminated wood floors and traditional parquet floors. Laying is done by gluing (acetic silicone -acrylic-mastic) or using screws or nails. Attractive, strong, hardwearing and economic, it is easy to lay and ideal for many public premises (hospitals, schools, gymnasiums, rest homes and creative areas) and private environments.

SKIRTING

EXPANDED VINYL RESIN

Skirting



EXPANDED RIGID VINYL RESIN (black - light and dark grey - white) bar length 2 Im - pack. 60 Pcs - 120 Im

Article	Hmm	€/Im	€/Pc	€/Pack.
BTPR 70	70	1,27	2,54	152,40

Available in the wood finishes: B - GC - GS - N - 04W - 05W - 06W - 07W - 08W - 09W - 10W - M. The code of the selected colour must be added to the article code. E.g.: BTPR... 70 (chosen colour black) BTPRN 70.

USE PROBAND FIX FOR FIXING THE PROFILE TO THE WALL





B - White	GC - Light grey	GS - Dark grey	N - Black	04W - Dark beech	05W - Light oak (strip)
		and the second	1000		
OGW - Dark oak O (walnut)	ITW - Light cherry (strip)	08W - Dark cherry (board)	09W - Red walnut (merbau-apple-walnut)	10W - Wengé (panga panga-wengè)	M - Mogano

The shade of the wooden finish in rigid expanded vinyl resin/PVC results slightly different from the film usually applied on the profiles in aluminium.



EXPANDED RIGID VINYL RESIN (8 wood finishes) bar length 2 lm - pack. 60 Pcs - 120 lm


Article	Hmm	€/Im	€/Pc	€/Pack.
BTPR 70	70	1,33	2,66	159,60

10 mr

BTPR...70

H 70 mm

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS



1. Choose the "SKIRTING" in the required the colour. 2. Lay the "SKIRTING" using quick-setting acrylic silicone, mastic or bostik, suitable for gluing flexible PVC onto mortar-plaster-accessorised walls, etc. or fix with screws/nails.

ANGLE BAR produced in expanded PVC in 4 semi-matt colours and 8 wood finishes used to protect angles. Laying is done by gluing (acetic silicone - acrylic-mastic) or using screws or nails. Attractive, strong, hardwearing and economic, it is easy to lay and ideal for many public premises (hospitals, schools, gymnasiums, rest homes and creative areas) and private environments.



EXPANDED VINYL RESIN

SKIRTING BOARDS



EXPANDED RIGID VINYL RESIN (black - light and dark grey - white) bar ler

bar length 2,7 Im - pack. 40 Pcs - 108 Im			bar length 2,7 lm - pack. 40 Pcs - 108 lm						
	Article	L x H mm	€/lm	€/Pc		Article	L x H mm	€/Im	€/Pc
AGE	. 25	25 x 25	1,13	3,05		AGE 25	25 x 25	1,17	3,16

Available in the wood finishes: B - GC - GS - 11- 04W - 05W - 06W - 07W - 08W - 09W - 10W - M. The code of the selected colour must be added to the article code. E.g.: AGE... 25 (chosen finish black) AGE11 25.

USE PROBAND FIX FOR FIXING THE PROFILE TO THE WALL






EXPANDED RIGID VINYL	RESIN (8 wood finishes)	
bar length 2,7 lm - pack. 40	Pcs - 108 lm	

The shade of the wooden finish in rigid expanded vinyl resin/ PVC results slightly different from the film usually applied on the profiles in aluminium.

AGE...25 25 mm edge guard scale 1:1 H 25 mm

EXAMPLES OF LAYING







Prices are referred to whole packs, 10% increase for minimum orders of 10 Pcs, 20% increase for orders of less than 10 Pcs.

PROSEAL WOOD

EXPANDED PVC 2 WOOD FINISHING AND 4 MATCHING COLOURS **PROSEAL WOOD** is a new inner connector square suitable for creating a concave skirting for wood / rolled-melamime floating wood / ceramic / marble tiles to reduce the floor /covering detachment. The particular material used allows to resist to the main chemical agents ant to small breakages. **PROSEAL WOOD**'s dimensions allow the necessary expansion of the outer joint. Ideal for public (schools, rest homes, recreational area) and private places. In expanded PVC, in 2 wood finishes 4 in matching colours to combine with various wood finishes. Easy to lay with fixing silicone.



EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS



1. Choose "PROSEAL WOOD" color and/or wood finish required. 2. The laying must be carried out using fast fixing acrylic silicone, mastic, bostik suitable for gluing PVC with mortar - plaster - wall units etc., or fix using screws/nails.



EXPANDED PVC - 2 WOOD FINISHING bar length 2,5 lm - pack. 40 Pcs - 100 lm

Article L x H mm €/lm €/Pc PSAW... 20 21 x 21 0,98 2,45

Available in the wood finishes: 05W - 10W, and colours: B - GC - GS - N.



EXPANDED PVC - 4 COLOURS

oar length 2,5 lm - pack. 40 Pcs - 100 lm						
Article	L x H mm	€/lm	€/Pc			
PSAW 20	21 x 21	0,91	2,27			

The code of the selected colour must be added to the article code. E.g.: PSAW...20 (chosen finish black) PSAWN 20.




COLOURS



The shade of the wooden finish in rigid expanded vinyl resin/PVC results slightly different from the film usually applied on the profiles in aluminium.

PROANGLE WOOD

EXPANDED PVC 2 WOOD FINISHING AND 4 MATCHING COLOURS



SKIRTING BOARDS

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS



1. Choose "PROANGLE WOOD" color and/or wood finish required The laying must be carried out using fast fixing acrylic silicone, mastic, bostik, suitable for glueing PVC with mortar-plaster-wall units etc., or fix using screws/nails.

PROANGLE WOOD is a new inner connector square suitable for creating a convex skirting for wood / rolledmelamime floating wood / ceramic / marble floor to reduce the floor /covering detachment. The particular material used allows to resist to the main chemical agents and to small breakages. **PROANGLE WOOD**'s dimensions allow the necessary expansion of the outer joint. Ideal for public (schools, rest homes, recreational area) and private places. In expanded PVC, in 2 wood finishes 4 in matching colors to combine with various wood finishes. Easy to lay with fixing silicone.



EXPANDED PVC - 2 WOOD FINISHING bar length 2,5 Im - pack. 40 Pcs - 100 Im							
Article	L x H mm	€/lm	€/Pc				
PGAW 15	15 x 15	0,74	1,85				

		/	1
	/		
	A	11	
1		3/1	11

EXPANDED PVC - 4 COLOURS bar length 2.5 lm - pack. 40 Pcs - 100 lm

Article	L x H mm	€/lm	€/Pc
PGAW 15	15 x 15	0,67	1,68

Available in the wood finishes: 05W - 10W, and colours: - GC - GS - N. The code of the selected colour must be added to the article code. E.g.: PGAW...15 (chosen finish black) PGAWN 15.

USE PROBAND FIX FOR FIXING THE PROFILE TO THE WALL



COLOURS

B - White	GC - Light gray	GS - Dark gray	N - Black	05W - Light oak (strip)	10W - Wengé (panga panga-wengè)

The shade of the wooden finish in rigid expanded vinyl resin/PVC results slightly different from the film usually applied on the profiles in aluminium.







FLEXIBLE

SEMIRIGIC

8,5 mm



NON-TOXIC FLEXIBLE CO-EXTRUDED VINYL RESIN - bar length 2,50 Im Pack H 60 mm / 40 Pcs - H 80 mm /30 Pcs - H 100 mm / 20 Pcs

Article	Hmm	Pcs/Pack.	€/lm	€/Pc	€/Pack.		
BTVCC 60	60	40	4,83	12,08	483,20		
BTVCC 80	80	30	5,09	12,73	381,90		
BTVCC 100	100	20	5,34	13,35	267,00		


Available in the colours: B - GC - GS - T - M - N. E.g.: BTVCC... 60 (chosen colour white) BTVCCB 60.

Adhesive version: add the letter A after the article. As regards the items with adhesive, the adhesive roll is sold separately.



EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS 1. Select the "SKIRTING COVECAP" of the desired color and height. 2. Using a utility knife cut the "SKIRTING COVECAP" to the desired length. $\ensuremath{\mathbf{3}}$. Apply the proper adhesive or glue/mastic and install the profile

ATTENTION: THE INSTALLATION OF THIS PROFILES IS **RECOMMENDED FOR AN EXPERT INSTALLER OF VINYL FLOORINGS**

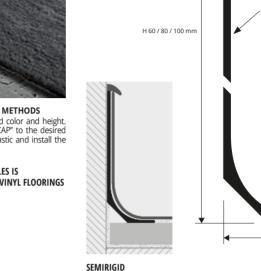

Black

PRCPS

BTVCC... 80

COLOURS - FLEXIBLE PART

COLOUND TELAIDEE I						36
B - White	GC - Light gray	GS - Dark gray	T - Dark brown	M - Brown	N - Black	

PROCAP is a non-toxic co-extruded flexible vinyl resin profile that in combination with PROSEAL FLEX allows a correct application and finishing of vinyl flooring and carpet along the wall-floor joint. The visible surface of the profile is available in white, light gray, dark gray, dark brown, brown and black. Its ease of application makes it a very practical profile for the finishing of vinyl and carpet flooring



NON-TOXIC CO-EXTRUDED FLEXIBLE VINYL RESIN

28 mm



PROCAP S - NON-TOXIC FLEXIBLE CO-EXTRUDED VINYL RESIN bar length 2,50 - pack. 20 Pcs - 50 Im

Article	HxLmm	€/lm	€/Pc
PRCPS	31 x 5,3	1,96	4,90


Available in the colours: B - GC - GS - T - M - N. The code of the selected colour must be added to the article code. E.g.: PRCPL... (chosen colour white) PRCPLB





PROSEAL FLEX - FLEXIBLE BLACK NON-TOXIC VYNIL RESIN bar length 2,5 lm - pack. 40 Pcs - 100 lm

p			
Article	L X H mm	€/lm	€/Pc
PSF 15-11	15x15	1,30	3,25
PSF 20-11	20x20	1,58	3,95
PSF 25-11	25x25	1.96	4 90

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

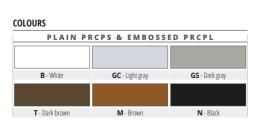





Choose "PROCAP S" according to height and desired colour.
 Cut "PROCAP S" to the right lengt. 3. Apply a suitable adhesive and lay the profile. 4. Lay the desired resilient flooring.


Lmm

239

SKIRTING BOARDS



An interpretation of: Bosjes Chapel, Steyn Studio, CAPE TOWN (South Africa), 2016

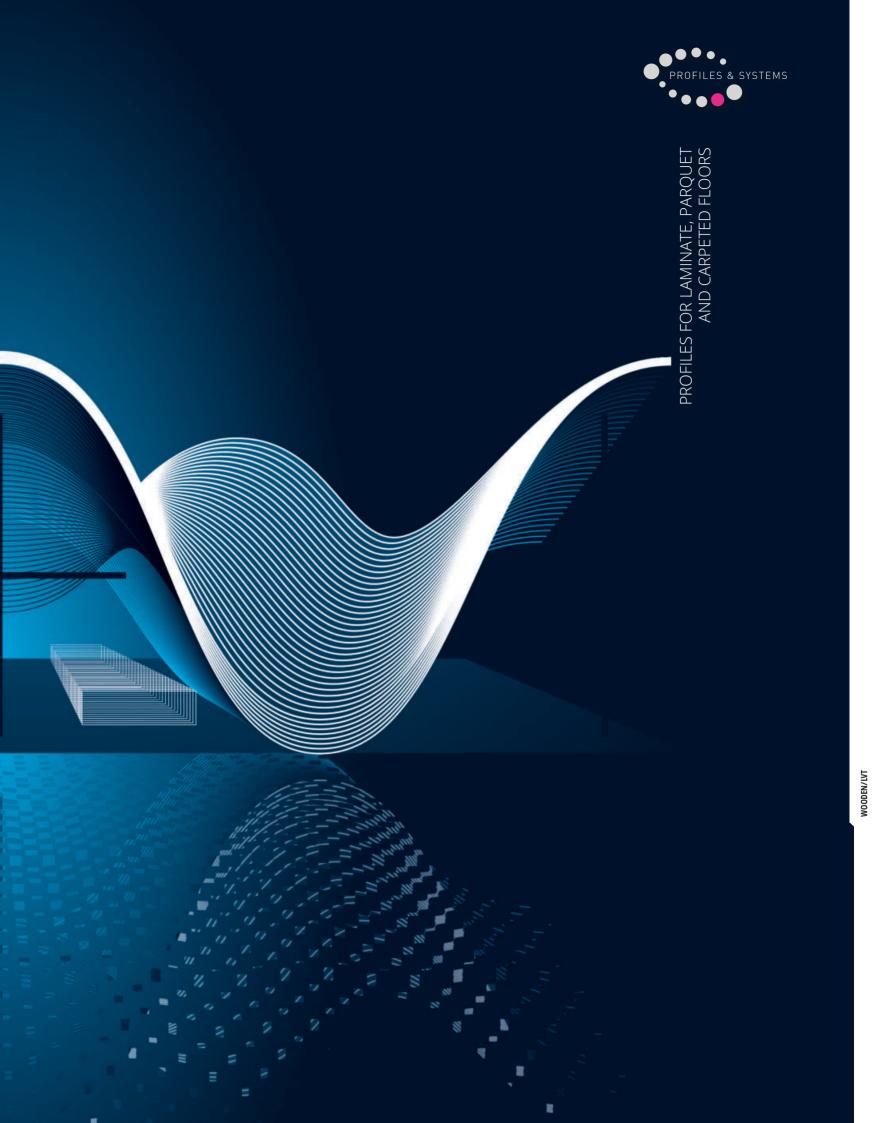

WOODEN/LVT



COLOURS STANDARD AND ON DEMAND

For a precise assessment of colours request the wooden finishes sample range. For sample finishes, contact the sales office for minimum quantities, timing and costs.

WOOD CO	LOURS														inple inits	163, 6	ontact	the s	baies	onnee			iiuiii	quan	inne	3, tin	1116	ina co	JSLS.
wooden finishes	Promultifix	SOL 40P Zero Curve Terminal Pin	Terminal	Style Stair	Style Stair L	ГЛТ	Prowalk	SOL 30	Procover wood	Profixer line	7016	7011	Multiskirting round/square	Skirting 40	wooden finishes	Promultifix	SOL 40P Zero Curve Terminal Pin	Terminal	Style Stair	Style Stair L	LVT	Prowalk	SOL 30	Procover wood	Profixer line	7016	7011	Multiskirting round/square	Skirting 40
04W	*		*	*		*	*	*	*			*	*	*	59W	*	*	*	*	*	*	*	*	*	*	*	*	*	*
05W							*						*	*	60W	*	*	*	*	*	*	*	*	*	*	*	*	*	*
06W	*	*	*	*	*	*	*	*	*	*	*	*	*	*	61W	*	*	*	*	*	*	*	*	*	*	*	*	*	*
07W			*		*	*	*	*	*		*		*	*	62W	*	*	*	*	*	*	*	*	*	*	*	*	*	*
08W	*	*	*	*	*	*	*	*	*	*	*	*	*	*	63W	*	*	*	*	*	*	*	*	*	*	*	*	*	*
09W					*		*		*		*		*	*	64W	*	*	*	*	*	*	*	*	*	*	*	*	*	*
10W	*	*	*	*	*	*	*	*	*	*	*	*	*	*	65W	•	•	*	•	*	*	*	*	*	•	*	•	*	*
11W	*	*	*	*	*	*	*	*		*	*	*	*	*	66W	*	*	*	*	*	*	*	*	*	*	*	*	*	*
13W	*		*	*	•	•	*	•	*	•	•	*	*	*	67W	*	*	*	*	*	*	*	*	*	*	*	*	*	*
18W							*		*				*	*	68W	*	*	*	*	*	*	*	*	*	*	*	*	*	*
21W	•		•	•	•	•	*	•	*			•	*	*	69W	*	*	*	*	*	*	*	*	*	*	*	*	*	*
25W	*		*	*			*		*			*			70W	*	*	*	*	*	*	*	*	*	*	*	*	*	*
28W	*	*	*	*	*	*	*	*		*	*	*	*	*	71W	*	*	*	*	*	*	*	*	*	*	*	*	*	*
29W							*								72W	*	*	*	*	*	*	*	*	*	*	*	*	*	*
30W							*	*	•				•	•	73W	•	•	*	•	*	*	*	*	*	•	*	•	*	*
31W			•			•	*	*	*				*	*	74W	*	*	*	*	*	*	*	*	*	*	*	*	*	*
32W	•		*	•		*	*	*	*			•	*	*	75W	•	•	*	•	*	*	*	*	*	•	*		*	*
33W	*		*	*			*	*	*			*	*	*	76W	*	*	*	*	*	*	*	*	*	*	*	*	*	*
34W			•				*	*	*						77W	*	*	*	*	*	*	*	*	*	*	*	*	*	*
35W			*			*	*	*	*				*	*	78W	*	*	*	*	*	*	*	*	*	*	*	*	*	*
36W	*		*	*			*	*	*			*	*	*	79W	*	*	*	*	*	*	*	*	*	*	*	*	*	*
37W	- Ala			- Alla			*	*	*				*	*	80W	*	*	*	*	*	*	*	*	*	*	×	*	*	*
38W	*		*	*			*	*	*			*	*	*	81W	*	*	*	*	*	*	*	*	*	*	*	*	*	*
39W 40W	*	*	*		- Ala	Ala	*	*	*	alla				*	82W 83W	*	*	*	*	*	*	*	*	*	*			*	*
40W							~ 	L	~ ~				~ ~	*	84W	*	*	*	*	*	*	~ 	~	~ 	*	~	~ 	*	*
42W							L L	- -	^ -				*	*	85W	*	*	*	*	*	L L	L	Т Т	*	*	~ ~	L L	*	*
43W	*	4	4	4	4		4	4	4	4	4		4	*	86W	*	*	4	4	4	4	4	4	4	4	4	4	4	
44W							4	*	*				*	*	87W	*	*	*	*	*	*	*	*	*	*	*	4	*	*
45W	*		*	*			*	*	*			*	*	*	88W	*	*	*	*	*	*	*	*	*	*	*	*	*	*
46W					*		*	*	*		*		*	*	89W	*	*	*	*	*	*	*	*	*	*	*	*	*	*
47W	*	*	*	*	*		*	*	*	*	*		*	*	90W	*	*	*	*	*	*	*	*	*	*	*	*	*	*
48W			*		*		*	*	*		*		*	*	91W	*	*	*	*	*	*	*	*	*	*	*	*	*	*
49W			*		*		*	*	*		*		*	*	93W		*	*	*	*		*	*	*	*	*	*	*	*
50W	*	*	*	*	*	*	*	*	*	*	*	*	*	*	94W	*	*	*	*	*	*	*	*	*	*	*	*	*	*
51W	*	*	*	*	*	*	*	*	*	*	*	*	*	*	95W	*	*	*	*	*	*	*	*	*	*	*	*	*	*
52W	*	*	*	*	*	*	*	*	*	*	*	*	*	*	97W	*	*	*	*	*	*	*	*	*	*	*	*	*	*
53W	*		*	*		*	*	*	*			*	*	*	AA	X	x	x	X	x	x	x	x	*	*				
54W	*		*	*		*	*	*	*			*	*	*	В	X	X	x	x	x	x	x	x	x	x				
55W	*		*	*		*	*	*	*			*	*	*	N	Х	X	х	х	х	х	х	х	х	х		*		
56W	*	*	*	*	*	*	*	*	*	*	*	*	*	*															
57W	*	*	*	*	*	*	*	*	*	*	*	*	*	*															
						4.4	4.4	4.4			4.4																		

PROGRESS® PROFILES

*

* *

* * * *

* * * * *

= Available finishes X = Not available finishes * = minimum order 200 pcs. Production delay 4/5 weeks. Price to be agreed.

Prices are referred to whole packs, 10% increase for minimum orders of 10 pcs, 20% increase for orders of less than 10 pcs.

58W

* *



COLOURS STANDARD AND ON DEMAND

For a precise assessment of colours request the wooden finishes sample range. For sample finishes, contact the sales office for minimum quantities, timing and costs.

WOOD COLOURS								
				1				
04W - Dark beech	05W - Light oak (strip)	06W - Dark oak (Walnut)	07W - Light cherry (strip)	08W - Dark cherry (board)	09W - Red walnut	10W - Wengè	11W - Decapè bleached	13W - Indonesian teak
18W - Light zerbano	21W - Oak powder	25W - Bleached fir	28W - Aspen oak	29W - White oak	30W - Grey oak	31W - Victoria oak	32W - Pink oak	33W - Sawed oak
34W - Havana oak	35W - Edinburgh oak	36W - American oak	37W - Carvi oak	38W - Queens oak	39W - Grey elm	40W - Brown oak	41W - Ice oak	42W - Grace oak
43W - Manhattan oak	44W - Honey oak	45W - Marocco oak	46W - Black decape'	47W - Black oak	48W - Cork oak	49W - Sand oak	50W	51W
52W	53W	54W	55W	56W	57W	58W	59W	60W
		and the second s						
61W	62W	63W	64W	65W - Tripoli	66W	67W	68W	69W
	Property and							12 to d
70W	71W	72W	73W - Bangkok	74W	75W - Liotard	76W	77W	78W
Section ?	Contraction of the second			A Station and Street				
79W	80W	80W	82W	83W	84W	85W	86W	87W
The second								
88W	89W	90W	93W - New white	94W	95W	97W		

EXTRUDED EXPANDED PVC COLOURS

© 2028. All dights reserved by Progress Profiles. Printed in Italy

*

B - White	GC - Light grey	GS - Dark grey	N - Black
04W - Dark beech	05W - Light Oak	OGW - Dark Oak	07W - Light cherry
08W - Dark cherry	09W - Red Walnut	10W - Wengè	M - Mahogany

Extruded Expanded PVC	Proseal wood	Proangle wood	Skirting	Angle bar
B (White)		٠	٠	
GC (Light Grey)				
GS (Dark Grey)	٠			
N (Black)				
04W (Dark Beech)	х	х		
05W (Light Oak)				
06W (Dark Oak)	х	х		
07W (Light cherry)	х	х		
08W (Dark cherry)	х	х		
09W (Red Walnut)	х	х		
10W (Wengè)		•	•	•
M (Mahogany)	х	х		

ANODIZED COLOURS

AO - Anod. gold aluminium	AA - Anod. silver aluminium	AB - Anod.bronze aluminium	AT - Anod. titanium aluminium
CH - Anod. champagne alum.	SB - Anod. sand aluminium		

Anodized Aluminium Colours	Promultifix	SOL 40P Zero Curve Terminal Pin	Terminal	Style Stair	Style Stair L	LVT	Prowalk	Prostep ins	SOL 30	Profixer line	Proscrew
AO (anod. gold)											
AA (anod. silver)								х	*		*
AB (anod. bronze)								х	*		*
AT (anod. titanium)	*	*	*	*	*	*	*	х	*	*	*
CH (anod. champagne)	*	*	*	*	*	*	*	х	*	*	*
SB (anod. sand)	*	*	*	*	*	*	*	х	*	*	*

= Available finishes	X = Not available finishes
= minimum order 200 pcs. Production delay 4/5	weeks. Price to be agreed.



PROMULTIFIX **SYSTEM®**



INSTRUCTIONS FOR LAYING

PROGRESS PROFILES® has filed an innovative patent PROMULTIFIX SYSTEM® in respect of a wide range of aluminum profiles covered with very strong films in wooden

finishes, plus anodized finishes. The PROMULTIFIX SYSTEM[®] system is a multipurpose profile for finishing laminate, melamine-coated, parquet and wood floating floors. **FIXING:** it can be fixed with adhesive, nylon anchors, glue, flatten down base and screws.

STANDARD Wooden FINISHES: Light oak (strip), Light cherry (strip), Red walnut (merbau-apple-walnut), Light zerbano, Oak powder, White oak, Grey oak, Victoria oak, Pink oak, Havana oak, Edinburgh oak, Carvi oak, Grace oak, Grace oak, Honey oak, Black decape', Cork oak, Sand oak, Tripoli, Bangkok, Liotard, New white. STANDARD ALUMINUM FINISHES: anodized Silver, Gold and Bronze.



WOODEN COLOURS

WOODEN COLOURS					essment of colours re	s request the wooden finishes sample ra						
05W - Light oak (strip)	07W - Light cherry (strip)	09W - Red walnut (merbau-apple-walnut)	18W - Light zerbano	21W - Oak powder	29W - White oak	30W - Grey oak	31W - Victoria oak	32W - Pink oak	34W - Havana oak			
				S RECEI								
35W - Edinburgh oak	37W - Carvi oak	41W - Ice oak	42W - Grace oak	44W - Honey oak	46W - Black decape'	48W - Cork oak	49W - Sand oak	65W - Tripoli	73W - Bangkok			
75W - Liotard	93W - New white											

* WOODEN COLOURS ON DEMAND

04W	06W	08W	10W	11W	13W	25W	28W	33W		38W			_	47W	50W	52W	54W			57W	58W	59W	60W	61W	62W	63W
64W	66W	67W	68W	69W	70W	71W	72W	74W	76W	77W	78W	79W	80W	-	Concession in which the		 87W	100 million (100 million)	89W	90W	94W	95W	97W			

On request it is possible to realize other finishes of the color range: minimum order 200 pcs. Production delay 4/5 weeks. Price to be agreed. For sample finishes, contact the sales office for minimum quantities, timing and costs.

PROMULTIFIX SYSTEM

PROMULTIFIX SYSTEM is composed of an aluminium profile with adhesive, with a lengthwise groove in form of dovetail, where nylon anchors can be inserted, or a punched aluminium flatten down base for an easy and invisible fixing.

NYLON SCREW ANCHORS



PERIMETRIC SUPPORTS

W00DEN/LVT



FLATTEN DOWN BASE













It is a system composed of a special TOP with adhesive, with a visible surface of 44.7 mm, anodized aluminium or covered with wooden film. The aluminium TOP can be fixed to the floor in different ways: with adhesive, with nylon anchors, support with removable spacers, flatten down base. PROMULTIFIX SYSTEM ALUMINIUM PROFILES FIXING KIT





TOP IN ANOD. ALUMINIUM with adhesive (6 finishes of which 3 on demand) n.3 KIT (15 screws, 12 perimeter pins, 6 joints) thermo packed - bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	Lmm	€/Im	€/Pc
PMPFX 42A	44,7	8,81	23,79

TOP IN ANOD. ALUMINIUM with adhesive (6 finishes of which 3 on demand) + n.1 KIT (5 screws, 4 perimeter pins, 2 joints) thermo packed - bar length 0.90 lm - 15 Pcs

bar lengar engar		
Article	Lmm	€/Pc
PMPFX 42090AS	44,7	9,25





TOP IN ALUM. COVERED with adhesive (80 wooden finishes of which 59 on demand) + n.3 KIT (15 screws, 12 perimeter pins, 6 joints)

thermo packed - bar length 2,7 im -	thermo packed - bar length 2,7 im - pack. 20 PCS - 54 im										
Article	Lmm	€/Im	€/Pc								
PMPFX 42A	44.7	12.61	34.05								

TOP IN ALUM. COVERED with adhesive (80 wooden finishes of which 59 on demand) + n.1 KIT (5 screws, 4 perimeter pins, 2 joints) thermo packed - bar length 0.90 lm - 15 Pcs

Article	L mm	€/Pc
PMPFX 42090AS	44,7	13,25

Available in the colours: AO - AA - AB (AT, CH and SB on demand with a minimum quantity order of 200 pcs) and in the wooden finishes: 05W - 07W - 09W -18W - 21W - 29W - 30W - 31W - 32W - 34W - 35W - 37W - 41W - 42W - 44W - 46W - 48W - 49W - 65W - 73W - 75W - 93W. The code of the selected colour must be added to the article code. E.g.: PMPFX... 42A (chosen finish anod. gold) PMPFXAO 42A.

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

All depts reserved by Progress Profiles. Publical in litely

2028 6

Choose the profile of the required finish, if necessary cut the TOP in the required length.
 Clean, remove the grease and dry the substrate: the temperature should be at least of 15° C

Fixing with biadhesive tape:
 Remove the paper protection from the adhesive and lay the TOP with a vertical pressure without moving the profile.
 Fixing with screw anchors:

Fixing with screw ancnors: 3. Drill the substrate with a 6 mm bit, 5 holes per linear meter. **4.** Remove the paper protection from the adhesive. **5.** Insert the screw anchors in the profile dovetail groove. **6.** Beat with a rubber/pvc hammer to insert the screw anchors into the holes. **Fixing of the aluminium flatten down base:** 3. Cut the flatten down base to the requested length. **4.** Remove the paper protection from the adhesive. **5.** insert the base into the profile groove dovetail, then fix or glue the base to the floor. **6.** Make a uniform pressure on the profile with the hands or a rubber hammer.

Remove the paper protection from the adhesive. 4. Cut the perimetric pins according to the thckness of the floor. 5. Insert the perimetric pins into the profile groove dovetail using 4 supports per linear meter. 6. Fix the profil making a uniform pressure on the profile with the hands, but do not move the profile.

One fixing kit is composed of: 5 screws, 4 perimetric pins, 2 joints




SCREWS AND SCREW ANCHORS, TAP-DOWN BASE

bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article






PMFIXBSAN 2	23	23	6,74	18,20
23 mm		5		
		$\leq \ll$		

PROFIXER TAP-DOWN BASE - ALUM. PUNCHED/PERFORED

Hmm

€/lm

€/Pc

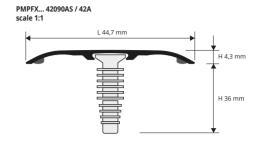

PMPFX... 42090AS / 42A scale 1:1




PMPFX... 42090AS / 42A + PMFIXBSAN 23






MINIMUM HEIGHT 4,5 MM





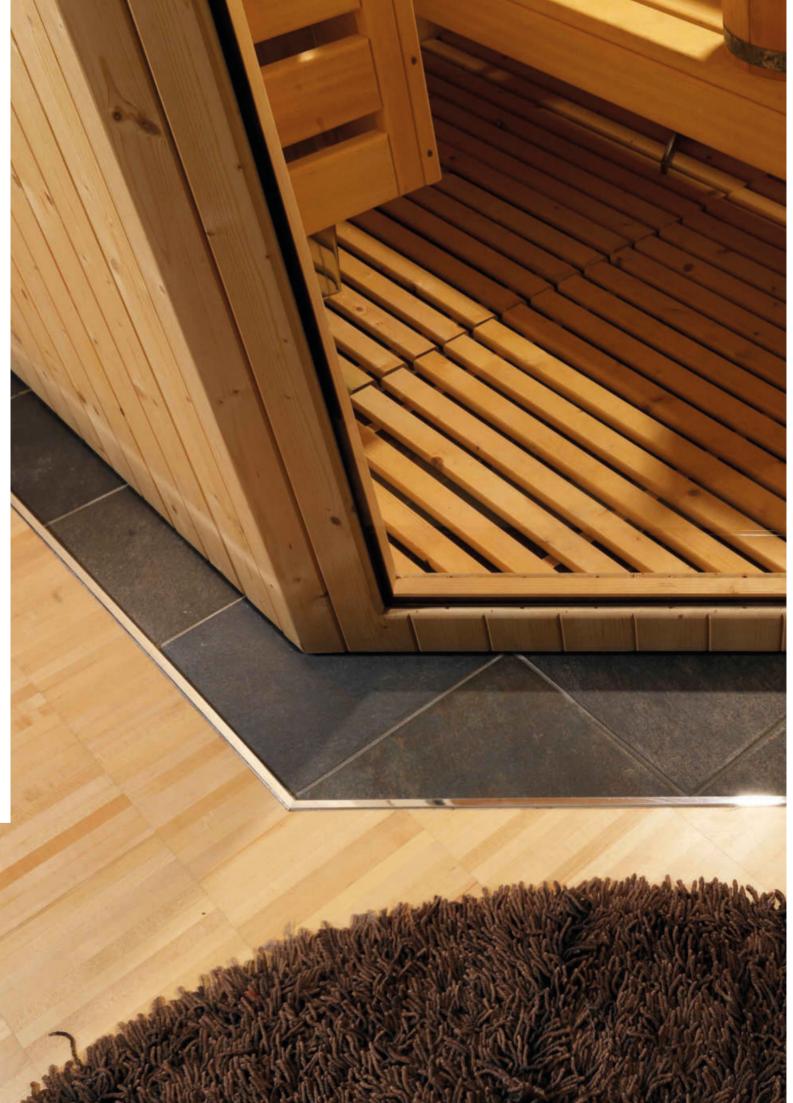




PROINSERT SYSTEM®

INSTRUCTIONS FOR LAYING

PROGRESS® PROFILES has filed an innovative patent PROINSERT SYSTEM in respect of a wide range of aluminum profiles covered with very strong films in 77 wooden finishes are available, plus 6 anodized finishes.

The **PROINSERT** SYSTEM system comprises a complete set of profiles for finishing laminate, melamine-coated, parquet and wood floating floors. INTERCHANGEABLE INSERTS in 7 heights: (H 07, 09, 11, 13, 15, 17 and 19 mm). PROFILES COVERED with film: resistant to wear and UV rays (classe AC1). TWO VERSATILE VERSIONS OF BASES: available for fixing with glue or screws.

INSTRUCTIONS FOR LAYING:



1) Choose between the two types of aluminum base.




2) Fix and/or glue the base to the floor.





3) Lay the floor correctly leaving between 3 and 10 mm gap for the natural expansion of the wood.

© 2028. All dights reserved by Progress Profiles. Printed in Italy



4) Choose the vinyl resin insert according to the clear height and thickness of the floor.



5) Keep the profile with the groove for insertion facing upwards and slot in the insert from the top downwards (if it does not slide easily, lubricate with water, silicone spray or vegetable oil).



6) Place the profile over the "U" shaped channel.



7) With the help of a wooden tapping block, apply pressure evenly over the whole Length of the profile using a hammer. If tapping is done correctly, a "click" will be heard when the profile slots into place.





THESE PROFILES ARE APPLIED TO CREATE:

- Threshold covers and expansion joints (SOL 30, SOL 40P and SOL 50)
 Transition joints for differences in level and floors in differing materials and thickness (ZERO CURVE)
 Perimeter joints or terminal expansion pieces (TERMINAL PIN)
 Corner joints and step nosings (serie STYLE STAIR)

SOL 30, SOL 40P AND SOL 50



ZERO CURVE



TERMINAL PIN



STYLE STAIR / STYLE STAIR L

















PROFIXER LINE SYSTEM

The PROFIXER LINE SYSTEM comprises an assortment of profiles in aluminum with a longitudinal dovetail groove/channel into which the anchors or the tap-down punched/perforated aluminum profile may be inserted for easy and invisible fixing.

NYLON SCREW ANCHORS



TAP-DOWN BASE











© 2023 All rights reserved by Progress Profiles. Printed in Italy



WOODEN/LVT

SOL 40P range comprises a large assortment of universal jointing profiles in aluminium covered with film that is highly resistant to pedestrian traffic, wear, UV rays and commonly used floor cleaning products. Thanks to the insert in rigid PVC (non-conducting) between the base and the top, the new **SOL 40P** stops and eliminates electrostatic charges and magnetic fields and whatever else may be transmitted between two floors (e.g.: heated floors). available in wooden finishes, plus anodized finishes. Any insert of height H 7, 9, 11, 13, 15, 17 and 19 mm may be used with either the punched/perforated base for screwing or for gluing. Covering width 40 mm.



ALUM. TOP + PIN INSERT + ALUM. BASE 45 PUNCHED/PERFORED (6 anod. alum. finishes of which 3 on demand) thermo packed bar length 2,7 lm - pack. 20 Pcs - 54 lm (PIN 17, 19 - 40,5 lm)

Article	Hmm	€/lm	€/Pc
PISPC 407 (PIN 07)	7 / 10	15,14	40,88
PISPC 409 (PIN 09)	9 / 12	15,28	41,26
PISPC 4011 (PIN 11)	11 / 14	15,41	41,61
PISPC 4013 (PIN 13)	13 / 16	15,56	42,01
PISPC 4015 (PIN 15)	15 / 18	15,71	42,42
PISPC 4017 (PIN 17)	17 / 20	15,96	43,09
PISPC 4019 (PIN 19)	19 / 22	16,16	43,63
	COMPLETE		

ALUM. TOP + PIN INSERT + ALUM. BASE 45 PUNCHED/PERFORED (6 anod. alum. finishes of which 3 on demand) thermo packed length 0,90 lm - 15 Pcs (PIN 13, 15, 17, 19 - 10 Pcs)

,	e Princi
H mm	€/Pc
7 / 10	15,48
9 / 12	15,70
11 / 14	15,95
13 / 16	16,23
15 / 18	16,51
17 / 20	16,94
19 / 22	17,37
	H mm 7 / 10 9 / 12 11 / 14 13 / 16 15 / 18 17 / 20



ALUM. TOP COVERED + PIN INSERT + ALUM. BASE 45 PUNCHED/PERFORED (80 wooden finishes of which 49 on demand) thermo packed bar length 2,7 lm - pack. 20 Pcs - 54 lm (PIN 17, 19 - 40,5 lm)

· · · · · · · · · · · · · · · · · · ·	· ·		
Article	H mm	€/lm	€/Pc
PISPC 407 (PIN 07)	7 / 10	21,04	56,81
PISPC 409 (PIN 09)	9 / 12	21,20	57,24
PISPC 4011 (PIN 11)	11 / 14	21,34	57,62
PISPC 4013 (PIN 13)	13 / 16	21,46	57,94
PISPC 4015 (PIN 15)	15 / 18	21,63	58,40
PISPC 4017 (PIN 17)	17 / 20	21,92	59,18
PISPC 4019 (PIN 19)	19 / 22	22,26	60,10
-			

COMPLETE

ALUM. TOP COVERED + PIN INSERT + ALUM. BASE 45 PUNCHED/PERFORED (80 wooden finishes of which 49 on demand) thermo packed SELF

length 0,90 lm - 15 PCS (PIN 13, 15, 17, 19 - 1	10 PCS)	PACK
Article	Hmm	€/Pc
PISPC 4079S (PIN 07)	7 / 10	20,87
PISPC 4099S (PIN 09)	9 / 12	21,16
PISPC 40119S (PIN 11)	11 / 14	21,42
PISPC 40139S (PIN 13)	13 / 16	21,71
PISPC 40159S (PIN 15)	15 / 18	22,00
PISPC 40179S (PIN 17)	17 / 20	22,44
PISPC 40199S (PIN 19)	19 / 22	22,88

Available in the finishes: AO - AA - AB (AT, CH and SB available on demand with a minimum quantity order of 200 pcs) and in the wooden finishes: 04W - 05W - 07W - 09W - 13W - 18W - 21W - 25W - 29W - 30W - 31W - 32W - 33W - 34W - 35W - 36W - 37W - 38W - 39W - 41W - 42W - 44W - 45W - 46W - 48W - 49W - 53W - 54W - 55W - 65W - 73W - 75W. The code of the selected colour must be added to the article code. E.g.: PISPC... 4079S (chosen finish anod. gold) PISPCAO 4079S


* ANODIZED COLOURS ON DEMAND ANODIZED COLOURS AB - Anodized bronze AO - Anodized gold aluminium AA - Anodized silver AT - Anodized titanium CH - Anodized champagne SB - Anodized sand


SELF



universal joints


TOP IN WOODEN OR ANODIZED FINISHES + PIN INSERT + ALUMINIUM BASE







PISPC...4017 AVAILABLE in H17/20



WOODEN COLOURS



* WOODEN COLOURS ON DEMAND

																-											5%		
06W	08W	10W	11W	28W	40W	43W	47W	50W	51W	52W	56W	57W	58W	59W	60W	61W	62W	63W	64W	66W	67W	68W	69W	70W	71W	72W	74W	76W	77W
78W	79W	80W	80W	82W	83W	84W	85W	86W	87W	88W	89W	90W	93W	94W	95W	97W					range:	minimu	ım orde	er 200 j	realize o ocs. Pro ole finis	ductior	n delay	4/5 we	eks.

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS



1. Fix and/or glue the base to the floor. 2. Lay the floor leaving from 3 to 10 mm between the floor and the insert. 3. Choose the desired profile, if necessary cut TOP, PIN and BASE at the needed length and then insert the PIN in the TOP in the specific "dovetail" seat. The position the profile above the U-shaped snap-in seat of the base. 4. With the aid of a board, hammer the TOP to the desired fitting level.


(ltelly



ZERO CURVE

The ZERO CURVE range comprises a large assortment of terminal transition profiles for joining floors at different levels and with different thickness varying from 7 to 20 mm. wooden finishes are available, plus anodized finishes. There is a profile (top) and an insert (pin) for each height, while the base (punched or perforated) allows fixing by screwing or gluing.

TOP IN WOODEN FINISHES AND ANODIZED FINISHES + PIN INSERT + ALUMINIUM BASE

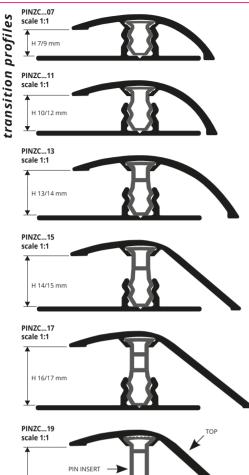



ALUM. TOP + PIN INSERT + ALUM. BASE 45 PUNCHED/PERFORED (6 anod. alum. finishes of which 3 on demand) thermo packed . har length 2 7 lm - nack 20 Pcs - 54 lm - (PIN 15, 17 - 40 5 lm) (PIN 19 - 27 lm)

	11 13, 17 1	o, 5 mi) (i m	12 27 1111
Article	H mm	€/Im	€/Pc
PINZC 07 (top PINZ 07 + PIN 07)	7/9	14,63	39,50
PINZC 11 (top PINZ 07 + PIN 11)	10 / 12	15,33	41,39
PINZC 13 (top PINZ 09 + PIN 13)	13 / 14	15,54	41,96
PINZC 15 (top PINZ 13 + PIN 15)	14 / 15	15,75	42,53
PINZC 17 (top PINZ 13 + PIN 17)	16 / 17	16,17	43,66
PINZC 19 (top PINZ 15+ PIN 19)	18 / 20	16,71	45,12

COMPLETE

ALUM. TOP + PIN INSERT + ALUM. BASE 45 PUNCHED/PERFORATED (6 anod. alum. finishes of which 3 on demand) thermo packed SELF I 0.00 m - 15 Pcc (DIN 12 15 17 10 - 10 Pcc)

L. 0,30 IIII - 13 FC3 (FIN 13, 13, 17, 19 - 10	rusj	PACK
Article	H mm	€/Pc
PINZC 07S (top PINZ 07 + PIN 07)	7/9	14,32
PINZC 11S (top PINZ 07 + PIN 11)	10 / 12	15,30
PINZC 13S (top PINZ 09 + PIN 13)	13 / 14	15,53
PINZC 15S (top PINZ 13 + PIN 15)	14 / 15	15,75
PINZC 17S (top PINZ 13 + PIN 17)	16 / 17	16,15
PINZC 19S (top PINZ 15+ PIN 19)	18 / 20	16,56



ALUM. TOP COVERED + PIN INSERT + ALUM. BASE 45 PUNCHED/PERFORED (80 wooden finishes of which 49 on demand) thermo packed th 2 7 lm - nack 20 Pcc - 54 lm - (PIN 15 17 - 40 5 lm) (PIN 10 - 27 lm)

Dar length 2,7 im - pack. 20 PCS - 54 im - (PIN	15, 17 - 40,	5 IM) (PIN 1	9 - 27 IM)
Article	H mm	€/lm	€/Pc
PINZC 07 (top PINZ 07 + PIN 07)	7/9	21,15	57,10
PINZC 11 (top PINZ 07 + PIN 11)	10 / 12	21,73	58,67
PINZC 13 (top PINZ 09 + PIN 13)	13 / 14	22,00	59,40
PINZC 15 (top PINZ 13 + PIN 15)	14 / 15	22,29	60,18
PINZC 17 (top PINZ 13 + PIN 17)	16 / 17	22,56	60,91
PINZC 19 (top PINZ 15+ PIN 19)	18 / 20	23,07	62,29
COMPL			

COMPLETE

ALUM. TOP COVERED + PIN INSERT + ALUM. BASE 45 PUNCHED/PERFORED (80 wooden finishes of which 49 on demand) thermo packed SEL F

L. 0,90 lm - 15 Pcs (PIN 13, 15, 17, 19 - 10 Pcs)							
H mm	€/Pc						
7/9	20,82						
10 / 12	21,70						
13 / 14	22,00						
14 / 15	22,26						
16 / 17	22,55						
18 / 20	22,93						
	H mm 7/9 10/12 13/14 14/15 16/17						

for minimum quantities, timing and costs.

Available in the finishes: AO - AA - AB (AT, CH and SB available on demand with a minimum quantity order of 200 pcs) and in the wooden finishes: 04W - 05W - 07W - 09W - 13W - 18W - 21W - 25W - 29W - 30W - 31W - 32W - 33W - 34W - 35W - 36W - 37W - 38W - 39W - 41W - 42W - 44W - 45W - 46W - 48W - 49W - 53W - 55W - 55W - 65W - 73W - 75W. Τł

he code of the selected colour must be added to the article code. E.g.: PINZC 07S (chosen finish anod. goli	ld) PINZCAO 07S.
---	------------------



WOODEN COLOURS

W00DEN/LVT

H 18/20 mm

BASE 4

45 mm

05W - Light oak (strip)	07W - Light cherry (strip)	09W - Red walnut	13W - Indonesian teak	18W - Light zerbano	21W - Oak powder	25W - Bleached fir	29W - White oak	30W - Grey oak	31W - Victoria oal
			and the second second						
33W - Sawed oak	34W - Havana oak	35W - Edinburgh oak	36W - American oak	37W - Carvi oak	38W - Queens oak	39W - Grey elm	41W - Ice oak	42W - Grace oak	44W - Honey oal
			THE REAL PROPERTY OF				1		
46W - Black decape'	48W - Cork oak	49W - Sand oak	53W	54W	55W	65W - Tripoli	73W - Bangkok	75W - Liotard	
	33W - Sawed oak	05W - Light oak (strip) 33W - Sawed oak 34W - Havana oak	05W - Light coak (strip) 07W - Light cherry (strip) 09W - Red walnut 33W - Sawed oak 34W - Havana oak 35W - Edinburgh oak	05W - Light coak (strip) 07W - Light cherry (strip) 09W - Red walnut 13W - Indonesian teak 33W - Sawed oak 34W - Havana oak 35W - Edinburgh oak 36W - American oak	05W - Light oak (strip) 07W - Light cherry (strip) 09W - Red walnut 13W - Indonesian teak 18W - Light zerbano 33W - Sawed oak 34W - Havana oak 35W - Edinburgh oak 36W - American oak 37W - Carvi oak	05W - Light oak (strip) 07W - Light cherry (strip) 09W - Red walnut 13W - Indonesian teak 18W - Light zerbano 21W - Oak powder 33W - Sawed oak 34W - Havana oak 35W - Edinburgh oak 36W - American oak 37W - Carvi oak 38W - Queens oak	05W - Light oak (strip) 07W - Light cherry (strip) 09W - Red walnut 13W - Indonesian teak 18W - Light zerbano 21W - Oak powder 25W - Bleached fir 33W - Sawed oak 34W - Havana oak 35W - Edinburgh oak 36W - American oak 37W - Carvi oak 38W - Queens oak 39W - Grey elm	05W - Light oak (strip) 07W - Light cherry (strip) 09W - Red walnut 13W - Indonesian teak 18W - Light zerbano 21W - Oak powder 25W - Bleached fir 29W - White oak 33W - Sawed oak 34W - Havana oak 35W - Edinburgh oak 36W - American oak 37W - Carvi oak 38W - Queens oak 39W - Grey elm 41W - Ice oak	05W - Light oak (strip) 07W - Light cherry (strip) 09W - Red walnut 13W - Indonesian teak 18W - Light zerbano 21W - Oak powder 25W - Bleached fir 29W - White oak 30W - Grey oak 33W - Sawed oak 34W - Havana oak 35W - Edinburgh oak 36W - American oak 37W - Carvi oak 38W - Queens oak 39W - Grey elm 41W - Ice oak 42W - Grace oak

***** WOODEN COLOURS ON DEMAND

																-					- C						520		
06W	08W	10W	11W	28W	40W	43W	47W	50W	51W	52W	56W	57W	58W	59W	60W	61W	62W	63W	64W	66W	67W	68W	69W	70W	71W	72W	74W	76W	77W
200								1		111	2																ishes o delay		
78W	79W	80W	80W	82W	83W	84W	85W	86W	87W	88W	89W	90W	93W	94W	95W	97W											act the s		

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS



1. Fix and/or glue the base to the floor. 2. Lay the floor leaving from 3 to 10 mm between the floor and the insert. 3. Choose the desired profile, if necessary cut TOP, PIN and BASE at the needed length and then insert the PIN in the TOP in the specific "dovetail" seat. The position the profile above the U-shaped snap-in seat of the base. 4. With the aid of a board, hammer the TOP to the desired fitting level.



250



🖈 = Article on demand minimum order 200 pcs. Production delay 4/5 weeks. Price to be agreed.

Prices are referred to whole packs, 10% increase for minimum orders of 10 pcs, 20% increase for orders of less than 10 pcs.





TERMINAL PIN

TOP IN WOODEN FINISHES AND ANODIZED FINISHES + PIN INSERT + ALUMINIUM BASE

The **TERMINAL PIN** series consists in a wide range of terminal/ outer joint squares ideal to realize the connection and junction with floors in laminate or melamine and/or wood/parquet rolled floor. The **TERMINAL PIN** allows the floor underneath to expand for more than 5 / 10 mm. It prevents from the use of the skirting –board and covers perfectly any kind of floor with a minimum thickness of 7 mm and a maximum of 22 mm. It delimitates the floor in proximity of walls, coverings, windows, doors, sliding doors, doormats buss etc.

 PINTPC...07

 scale 1:1

 H 7/10 mm

 PINTPC...09

 scale 1:1

 H 9/11 mm

 PINTPC...11

 scale 1:1

 H 10/13 mm


 PINTPC...13

 scale 1:1

 H 12/16 mm



PINTPC...17 AVAILABLE IN H 17/20 MM





ALUM. TOP + PIN INSERT + ALUM. BASE 40 PUNCHED/PERFORATED (6 anod. alum. finishes of which 3 on demand) thermo packed barlength 2,7 Im - pack. 20 Pcs - 54 Im (PIN 11, 15, 17 - 40,5 Im) (PIN 19 - 27 Im)

Article	Hmm	€/Im	€/Pc
PINTPC 07 (PIN 07)	7 / 10	13,46	36,34
PINTPC 09 (PIN 09)	9/11	13,87	37,45
PINTPC 11 (PIN 11)	10 / 13	14,30	38,61
PINTPC 13 (PIN 13)	12 / 16	14,82	40,01
PINTPC 15 (PIN 15)	15 / 18	15,53	41,93
PINTPC 17 (PIN 17)	17 / 20	16,39	44,25
PINTPC 19 (PIN 19)	19 / 22	17,24	46,55

COMPLETE

ALUM. TOP + PIN INSERT + ALUM. BASE 40 PUNCHED/PERFORATED (6 anod. alum. finishes of which 3 on demand) thermo packed

L. 0,50 IIII - 15 I C3 (I III 15, 15, 17, 15	101 (3)	FACK
Article	Hmm	€/Pc
PINTPC 07S (PIN 07)	7 / 10	14,54
PINTPC 09S (PIN 09)	9 / 11	15,05
PINTPC 11S (PIN 11)	10 / 13	15,57
PINTPC 13S (PIN 13)	12 / 16	16,07
PINTPC 15S (PIN 15)	15 / 18	16,56
PINTPC 17S (PIN 17)	17 / 20	18,53
PINTPC 19S (PIN 19)	19 / 22	18,08



ALUM. TOP COVERED + PIN INSERT + ALUM. BASE 40 PUNCHED/PERFORED (80 wooden finishes of which 49 on demand) thermo packed barlength 2,7 Im - pack. 20 Pcs - 54 Im (PIN 11, 15, 17 - 40,5 Im) (PIN 19 - 27 Im)

•			
Article	Hmm	€/lm	€/Pc
PINTPC 07 (PIN 07)	7 / 10	18,92	51,08
PINTPC 09 (PIN 09)	9 / 11	19,50	52,65
PINTPC 11 (PIN 11)	10 / 13	20,10	54,27
PINTPC 13 (PIN 13)	12 / 16	20,91	56,46
PINTPC 15 (PIN 15)	15 / 18	21,73	58,67
PINTPC 17 (PIN 17)	17 / 20	22,88	61,78
PINTPC 19 (PIN 19)	19 / 22	23,94	64,64
	COMPLETE		

ALUM. TOP COVERED + PIN INSERT + ALUM. BASE 40 PUNCHED/PERFORED (80 wooden finishes of which 49 on demand) thermo packed

L. 0,90 lm - 15 Pcs (PIN 13, 15, 17,	PACK	
Article	Hmm	€/Pc
PINTPC 07S (PIN 07)	7 / 10	20,01
PINTPC 09S (PIN 09)	9 / 11	20,63
PINTPC 11S (PIN 11)	10 / 13	20,95
PINTPC 13S (PIN 13)	12 / 16	21,63
PINTPC 15S (PIN 15)	15 / 18	22,17
PINTPC 17S (PIN 17)	17 / 20	22,73
PINTPC 19S (PIN 19)	19 / 22	23,36

© 2023: All nights reserved by Progress Profiles. Printed in litely

Available in the finishes: AO - AA - AB (AT, CH and SB available on demand with a minimum quantity order of 200 pcs) and in the wooden finishes: 04W - 05W - 07W - 09W - 13W - 13W - 27W - 25W - 29W - 30W - 31W - 32W - 33W - 34W - 35W - 36W - 37W - 38W - 39W - 41W - 42W - 45W - 46W - 46W - 49W - 53W - 54W - 55W - 65W - 75W.The code of the selected colour must be added to the article code. E.g.: PINTPC... 07S (chosen finish anod. gold) PINTPCAO 07S.

quantities, timing and costs



06W 47W 51W 08W 10W 11W 28W 40W 43W 50W 52W 56W 57W 58W 59W 60W 61W 62W 63W 64W 66W 67W 68W 69W 70W 71W 72W 74W 76W 77W On request it is possible to realize other finishes of the color range: minimum order 200 pcs. Production delay 4/5 weeks. Price to be 78W 79W 80W 80W 82W 83W 84W 85W 86W 87W 88W 89W 90W 93W 94W 95W 97W agreed. For sample finishes, contact the sales office for minimum

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS



Fix PINBFTL 40 base at the outer edge/wall.
 Align the laminate/melamine/wood floor, ensuring that approx. 3/10mm gap is left on each side to accommodate the natural expansion between the floor and the base.
 Choose the desired profile, if necessary cut TOP, PIN and BASE at the needed length and then insert the PIN in the TOP in the specific "dovetail" seat. The position the profile above the U-shaped snap-in seat of the base.
 With the aid of a board, hammer the TOP to the desired fitting level.



PROGRESS® PROFILES

* = Article on demand minimum order 200 pcs. Production delay 4/5 weeks. Price to be agreed.

Prices are referred to whole packs, 10% increase for minimum orders of 10 pcs, 20% increase for orders of less than 10 pcs.



The TERMINAL range comprises a large assortment of perimeter joint or edging profiles in aluminium covered in wooden finishes are available, plus anodized finishes. They are used in various laying situations. Ideal as an edging profile for wood parquet, laminate and melamine-coated floors. They finish the floor where it joins to abutting surfaces, windows, glazed areas, doors, terraces and may also be used for joining two floors: wood/tiles, wood/ carpeting.



ANODIZED ALUMINIUM (6 anod. alum. finishes of which 3 on demand) thermo packed - bar length 2,7 lm - pack. 40 Pcs - 108 lm (H 11 - H 13 - H 15 mm - 80 lm)

Article	H mm	€/lm	€/Pc
PINT 07	7	6,58	17,77
PINT 09	9	6,74	18,20
PINT 11	11	6,88	18,58
PINT 13	13	7,13	19,25
PINT 15	15	7,42	20,03



ALUMINIUM COVERED (80 wooden finishes of which 70 on demand) thermo packed - bar length 2,7 lm - pack. 20 Pcs - 54 lm (H 11 - H 15 mm - 80 lm)

Article	Hmm	€/Im	€/Pc
PINT 09	9	10,57	28,54
PINT 11	11	10,87	29,35
PINT 15	15	12,59	33,99

Available in the finishes: AO - AA - AB (AT, CH and SB available on demand with a minimum quantity order of 100 pcs) and in the wooden finishes: 05W-08W-10W-29W-30W-31W-34W-37W-41W-42W.

The code of the selected colour must be added to the article code. E.g.: PINT... 07 (chosen finish anod. gold) PINTAO 07.

ANODIZED ALUM. (6 anod. alum. finishes of which 3 on demand) thermo packed


bar length 0,90 lm - 20 Pcs - BLI	PACK	
Article	H mm	€/Pc
PINT 07S	7/8	7,39
PINT 09S	9 / 10	7,53
PINT 11S	11 / 12	7,68
PINT 15S	15 / 16	8,27

ALUMINIUM COVERED (80 wooden finishes of which 70 on demand)

thermo packed bar length 0,90 lm - 20 Pcs -	BLISTER PACKS	SELF PACK
Article	H mm	€/Pc
PINT 09S	9 / 10	13,53
PINT 11S	11 / 12	13,61
PINT 15S	15 / 16	14,18

Available in the finishes: AO - AA - AB (AT, CH and SB available on demand with a minimum quantity order of 100 pcs) and in the wooden finishes: 05W-08W-10W-29W-30W-31W-34W-37W-41W-42W. The code of the selected colour must be added to the article code. E.g.: PINT... 07S (chosen finish anod. gold) PINTAO 07S.





© 2028. All depts reserved by Progress Profiles. Printed in Italy


05W - Light oak (strip)	08W - Dark cherry	10W - Wengè	29W - white oak	30W - Rovere grigio	30W - Grey oak	34W - Havana oak	37W - Carvi oak	41W - Ice oak	42W - Grace oak

* WOODEN COLOURS ON DEMAND

																												12	
04W	06W	07W	09W	10W	11W	13W	28W	21W	25W	28W	32W	33W	35W	36W	38W	39W	40W	43W	44W	45W	46W	47W	48W	49W	50W	51W	52W	53W	54W
												1							20				1 an						
55W	56W	57W	58W	59W	60W	61W	62W	63W	64W	65W	66W	67W	68W	69W	70W	71W	72W	73W	74W	75W	76W	77W	78W	79W	80W	80W	82W	83W	84W
85W	86W	87W	88W			93W				On request it is possible to realize other finishes of the color range: minimum order 100 pcs. Production delay 4/5 weeks. Price to be agreed. For sample finishes, contact the sales office for minimum quantities, timing and costs.																			

ALUMINIUM COVERED WOODEN FINISHES AND ANODIZED FINISHES

TERMINAL

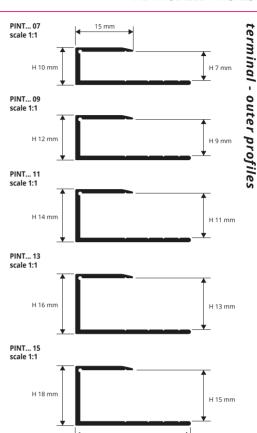

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS



30 mm


1. Choose the TERMINAL according to the required height and finish and fix with screws and screw anchors or with glue/silicone; the profile must be placed next to the abutting surface e.g. wall, glazing, etc. 2. Align the laminate/melamine/wood floor, ensuring that a large enough gap is left to accommodate the natural expansion between the floor and the profile (approx. 3/10mm on one side).



STYLE STAIR

The STYLE STAIR range comprises a large assortment of aluminium step nosing profiles for the edges of steps in wood, parquet, laminate or melamine with thickness varying from 7 to 20 mm. wooden finishes are available, plus anodized finishes. Select the most suitable profile for the thickness of the floor. There is a profile (top) and an insert (pin) for each height, while the base (punched or perforated) allows fixing by screwing or gluing.

TOP IN WOODEN FINISHES and ANODIZED FINISHES + PIN INSERT + ALUMINIUM BASE

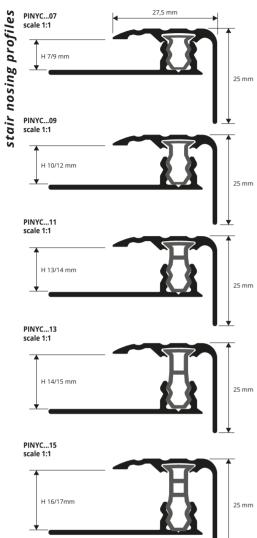



ALUM. TOP + PIN INSERT + ALUM. BASE 40 PUNCHED/PERFORATED (6 anod. alum. finishes of which 3 on demand) thermo packed 2 7 lm - nack 20 Prs - 54 lm (H 14 - H 16 - H 18 mm - 40 5 lm)

bai ieligui 2,7 mi - pack. 20 FC3 - 34	• • • • • • • • • • • • • • • • • • • •	1 10 - 11 10 11	·····
Article	H mm	€/Im	€/Pc
PINYC 07 (PIN 07)	7/9	13,85	37,40
PINYC 09 (PIN 09)	10 / 12	14,24	38,45
PINYC 11 (PIN 11)	13 / 14	14,63	39,50
PINYC 13 (PIN 13)	14 / 15	15,03	40,58
PINYC 15 (PIN 15)	16 / 17	15,40	41,58
PINYC 17 (PIN 17)	18 / 20	15,80	42,66

COMPLETE



ALUM. TOP COVERED + PIN INSERT + ALUM. BASE 40 PUNCHED/PERFORED (80 wooden finishes of which 60 on demand) thermo packed

bar length 2,7 lm - pack. 20 Pcs - 54 lm (H 14 - H 16 - H 18 mm - 40,5 lm)													
Article	H mm	€/lm	€/Pc										
PINYC 07 (PIN 07)	7/9	20,02	54,05										
PINYC 09 (PIN 09)	10 / 12	20,37	55,00										
PINYC 11 (PIN 11)	13 / 14	20,77	56,08										
PINYC 13 (PIN 13)	14 / 15	21,16	57,13										
PINYC 15 (PIN 15)	16 / 17	21,56	58,21										
PINYC 17 (PIN 17)	18 / 20	21,92	59,18										

COMPLETE

Available in the finishes: AO - AA - AB (AT, CH and SB available on demand with a minimum quantity order of 200 pcs) and in the wooden finishes: 05W - 07W - 09W - 18W - 21W - 29W - 30W - 31W - 32W - 34W - 35W - 37W - 41W - 42W - 44W - 46W - 48W - 49W - 65W - 73W - 75W. The code of the selected colour must be added to the article code. E.g.: PINYC... 07 (chosen finish anod. gold) PINYCAO 07.






1. Fix the base exactly over the stair riser. 2. Align the laminate/ melamine/wood floor, ensuring that approx. 3/10mm gap is left on one side to accommodate the natural expansion between the floor and the base. **3.** Choose the desired profile, if necessary cut TOP, PIN and BASE at the needed length and then insert the PIN in the TOP in the specific "dovetail" seat. The position the profile above the U-shaped snap-in seat of the base. **4.** With the aid of a board, hammer the TOP to the desired fitting level.

SB - Anod. sand

35W - Edinburgh oak

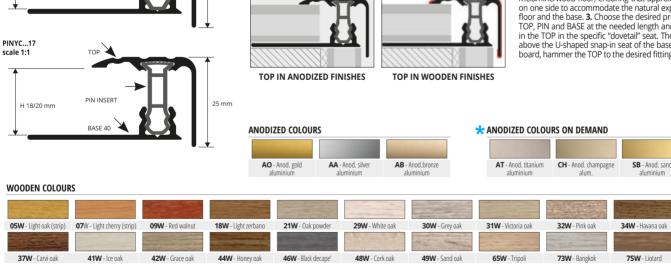

***** WOODEN COLOURS ON DEMAND

																			the			and and a					-		
04W	06W	08W	10W	11W	13W	25W	28W	33W	36W	38W	39W	40W	43W	45W	47W	50W	51W	52W	53W	54W	55W	56W	57W	58W	59W	60W	61W	62W	63W
	No.							20			200					-			10								3-5		
64W	66W	67W	68W	69W	70W	71W	72W	74W	76W	77W	78W	79W	80W	80W	82W	83W	84W	85W	86W	87W	88W	89W	90W	93W	94W	95W	97W		

On request it is possible to realize other finishes of the color range: minimum order 200 pcs. Production delay 4/5 weeks. Price to be agreed. For sample finishes, contact the sales office for minimum quantities, timing and costs



🖈 = Article on demand minimum order 200 pcs. Production delay 4/5 weeks. Price to be agreed.

Prices are referred to whole packs, 10% increase for minimum orders of 10 pcs, 20% increase for orders of less than 10 pcs.

W00DEN/LVT



STYLE STAIR L comprises a large range of aluminium stair nosing protecting profiles for step in timber, parquet, laminate or melamine material with thickness varying from 7 to 20 mm. wooden finishes are available, plus anodized finishes. The profiles is made with 3 pcs. A natural aluminium base to scew or glue to the pavement, a PIN in non-toxic rigid to insert in the TOP, then a TOP should be selected most suitable for the floor.

STYLE STAIR L

TOP IN WOODEN FINISHES AND ANODIZED FINISHES + PIN INSERT + ALUMINIUM BASE

transition profiles



ALUM. TOP + PIN INSERT + ALUM. BASE 40 PUNCHED/PERFORATED (6 anod. alum. finishes of which 3 on demand) thermo packed bar length 2,7 lm - pack. 20 Pcs - 54 lm (H 14 - H 16 - H 18 mm - 40,5 lm)

bar lengar 2,7 mil pack 20105 541			10,5 111)
Article	H mm	€/Im	€/Pc
PINYLC 07 (PIN 07)	7/9	14,24	38,45
PINYLC 09 (PIN 09)	10 / 12	14,63	39,50
PINYLC 11 (PIN 11)	13 / 14	15,03	40,58
PINYLC 13 (PIN 13)	14 / 15	15,40	41,58
PINYLC 15 (PIN 15)	16 / 17	15,80	42,66
PINYLC 17 (PIN 17)	18 / 20	16,19	43,71



ALUM. TOP COVERED + PIN INSERT + ALUM. BASE 40 PUNCHED/PERFORED (80 wooden finishes of which 57 on demand) thermo packed

bar length 2,7 Im - pack. 20 PCS - 54	Im (H 14 - I	H 16 - H 18 M	m - 40,5 im)
Article	H mm	€/Im	€/Pc
PINYLC 07 (PIN 07)	7/9	20,37	55,00
PINYLC 09 (PIN 09)	10 / 12	20,77	56,08
PINYLC 11 (PIN 11)	13 / 14	21,16	57,13
PINYLC 13 (PIN 13)	14 / 15	21,56	58,21
PINYLC 15 (PIN 15)	16 / 17	21,92	59,18
PINYLC 17 (PIN 17)	18 / 20	22,32	60,26

COMPLETE

Available in the finishes: AO - AA - AB (AT, CH and SB available on demand with a minimum quantity order of 200 pcs) and in the wooden finishes: 04W - 05W - 13W - 13W - 21W - 25W - 29W - 30W - 31W - 32W - 33W - 34W - 35W - 36W - 37W - 38W - 39W - 41W - 42W - 44W -45W - 58W - 54W - 55W

The code of the selected colour must be added to the article code. E.g.: PINYLC... 07 (chosen finish anod. gold) PINYLCAO 07.

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS







TOP IN ANODIZED FINISHES TOP IN WOODEN FINISHES

ANODIZED COLOURS






1. Fix the base exactly over the stair riser. 2. Align the laminate/ melamine/wood floor, ensuring that approx. 3/10mm gap is left on one side to accommodate the natural expansion between the floor and the base. 3. Choose the desired profile, if necessary cut TOP, PIN and BASE at the needed length and then insert the PIN in the TOP in the specific "dovetail" seat. The position the profile above the luchered come in cert of the back. A With the aid of a back? the U-shaped snap-in seat of the base. **4**. With the aid of a board, hammer the TOP to the desired fitting level.

H 7/9 mm PINYLC...09 scale 1:1 H 10/12 mr PINYLC...11 scale 1:1 H 13/14 mm PINYLC...13 scale 1:1 H 14/15 mm

PINYLC...07 scale 1:1



PINYLC...17 scale 1:1 H 18/20 mn

WOODEN COLOUR	3									
04W - Dark beech	05W - Light oak (strip)	13W - Indonesian teak	18W - Light zerbano	21W - Oak powder	25W - Bleached fir	29W - White oak	30W - Grey oak	31W - Victoria oak	32W - Pink oak	33W - Sawed oak
								The second		and the second s
34W - Havana oak	35W - Edinburgh oak	36W - American oak	37W - Carvi oak	38W - Queens oak	39W - Grey elm	41W - Ice oak	42W - Grace oak	44W - Honey oak	45W - Marocco oak	53W
54W	55W									

* WOODEN COLOURS ON DEMAND


																	and the second s										N. CO			
06	W	07W	08W	09W	10W	11W	28W	40W	43W	46W	47W	48W	49W	50W	51W	52W	56W	57W	58W	59W	60W	61W	62W	63W	64W	65W	66W	67W	68W	69W
					20				300								1													
70	N	71W	72W	73W	74W	75W	76W	77W	78W	79W	80W	80W	82W	83W	84W	85W	86W	87W	88W	89W	90W	93W	94W	95W	97W					

On request it is possible to realize other finishes of the color range: minimum order 200 pcs. Production delay 4/5 weeks. Price to be agreed. For sample finishes, contact the sales office for minimum quantities, timing and costs.

🛪 = Production on demand with minimum quantity of 200 pcs. Production delay 4/5 weeks. Price to be agreed

Prices are referred to whole packs, 10% increase for minimum orders of 10 pcs, 20% increase for orders of less than 10 pcs.



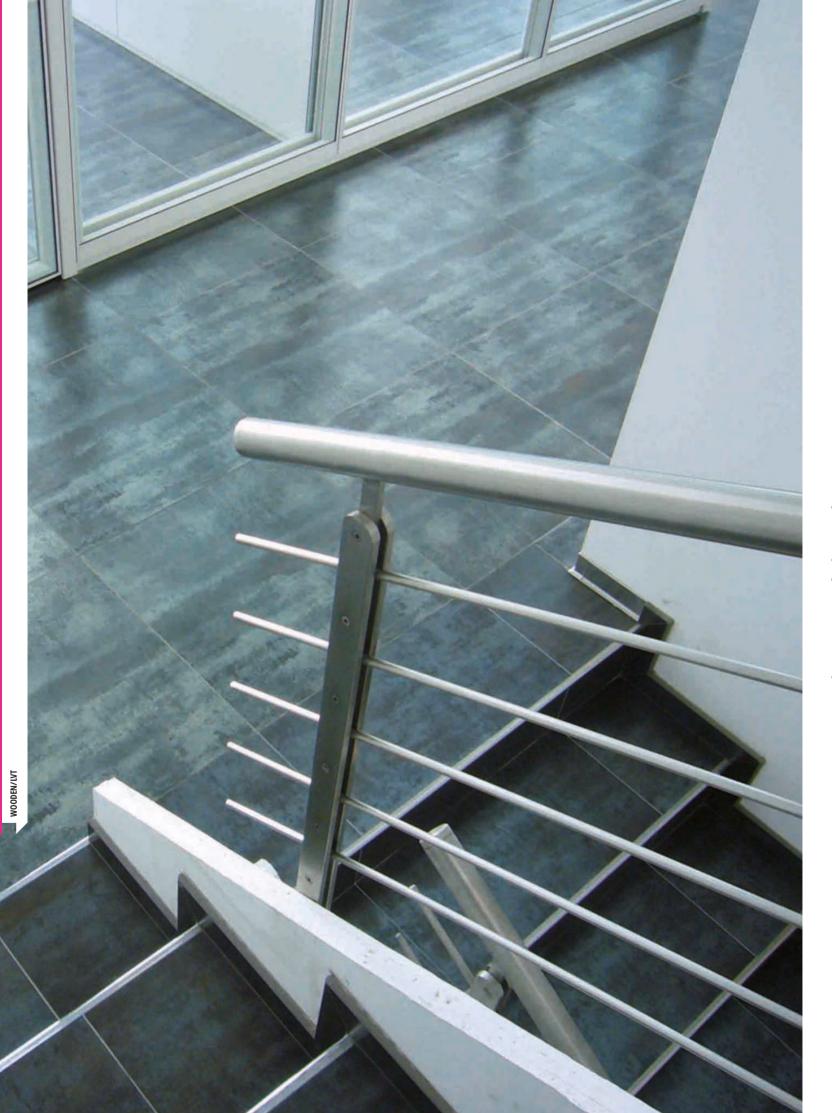

© 2028 All rights reserved by Progress Profiles. Printed in litely



UNIVERSAL, CONNECTION AND PERIMETER JOINTS



SOL 30P (Page 244)



ZERO CURVE (Page 244)



TERMINAL PIN (Page 244)

CONNECTION JOINTS



PROINTER KL ACC / ALL (Page 30-32)

© 2028. All depts reserved by Progress Profiles. Publical in liely



PROSHELL D ALL (Page 159)



PROSHELL R ALL (Page 159)



PROLEVALL 305 (Page 80)



(Page 85)



PROFLOOR 24 (Page 85)



PROSLIDER KL ALL (Page 86)



PROCOVER 1045 ALL (Page 86)

STAIR NOSINGS PROFILES



PROSTYLE KL 10 (Page 161)



PROSTAIR KL 20 (Page 161)




SOL 30P AWOODEN FINISHES and

LVT PROFILES -

ANODIZED FINISHES

SOL 30P, ZERO CURVE AND TERMINAL PIN are profile which serve as expansion joints, junction and as perimetrical expansion joint between different floors in vinyl. The profiles are composed of a BASE in PVC to fix to the support and of three TOP. The choice of the TOP depend on the desired application. Their particular section, together with the wide range of finishes available and the ease of installation, make them a much-sought profiles, that could be easily matched with every type of floor in vinyl.

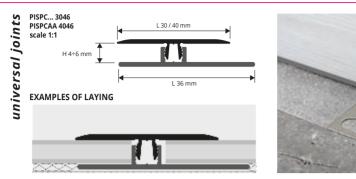

INSTRUCTIONS FOR LAYING METHODS


1. Choose SOL P / ZERO CURVE / TERMINAL PIN according to the desired finish. 2. Cut the BASE in vinyl resin/PVC to the desired length and fix it with adhesive or dowels to the support. 3. Lay the floor in vinyl, leaving a 5 mm joint between the vertical walls of the base in vinyl resin/PVC and the floor. 4. Cut the desired TOP in aluminium to the desired length. 5. Place a small wooden board on the TOP in aluminium and hammer equally in order to facilitate the insertion of the TOP into the pvc base.






ANODIZED FINISHES

COLOURS



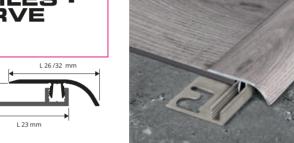

ALUMINIUM TOP (anod. silver) + BASE (vinyl resin/PVC) thermo packed - bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	Lmm	€/lm	€/Pc
PINZCAA 3246	32	8,12	21,92



ALUMINIUM TOP (anod. silver) + BASE (vinyl resin/PVC) thermo packed - bar length 2,7 Im - pack. 20 Pcs - 54 Im Article L mm €/Im €/Pc

PINTPCAA 2546	25	8,12	21,92	

ALUMINIUM TOP 6 anod. finishes (3 on demand) + BASE (vinyl resin/ PVC) -thermo packed - bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	L mm	€/lm	€/Pc
PISPC 3046	30	7,77	20,98
The code of the colored colour mus	t ho addar	to the ar	ticlo codo

E.g.: PISPC... 3046 (chosen finish anod. gold) PISPCAO 3046.

ALUMINIUM TOP 80 wooden finishes (56 on demand) + BASE (vinyl resin/PVC) - thermo packed - bar length 2 7 Jm - pack 20 Pcs - 54 Jm

Article	L mm	€/Im	€/Pc		
PISPC 3046	30	11,34	30,62		
The code of the selected colour mus E.g.: PISPC 3046 (chosen finish ano					

ALUMINIUM TOP (anod. silver) + BASE (vinyl resin/PVC)

thermo packed - bar length 2,7 lm - p			
Article	L mm	€/lm	€/Pc

PISPCAA 4046	40	8,12	21,92

ALUMINIUM TOP 6 anod. finishes (3 on demand) + BASE (vinyl resin/ PVC) -thermo packed - bar length 2,7 Im - pack. 20 Pcs - 54 Im

Article	L mm	€/lm	€/Pc
PINZC 2646	26	7,77	20,98

The code of the selected colour must be added to the article code. E.g.: PINZC... 2646 (chosen finish anod. gold) PINZCAO 2646.

ALUMINIUM TOP 80 wooden finishes (56 on demand) + BASE (vinyl resin/PVC) - thermo packed - bar length 2,7 Im - pack, 20 Pcs - 54 In

resin/PVC) - thermo packed - bar length 2,7 m - pack. 20 PCS - 54 m					
Article	L mm	€/lm	€/Pc		
PINZC 2646	26	11,34	30,62		

The code of the selected colour must be added to the article code. E.g.: PINZC... 2646 (chosen finish anod. gold) PINZCAO 2646.

ALUMINIUM	TOP 6 anod.	finishes (3 on	demand) + E	BASE (vinyl resin/
PV(C) _thermo	nackod - ha	r longth 2 7 I	m - nack 20	Drs - 5/ lm

Article	Lmm		
PINTPC 1946	19	7,77	20,98
The code of the selected colour mu	ct bo addar	to the ort	ticlo coc

The code of the selected colour must be added to the article cod E.g.: PINTPC... 1946 (chosen finish anod. gold) PINTPCAO 1946.

ALUMINIUM TOP 80 wooden finishes (56 on demand) + BASE (vinyl resin/PVC) - thermo packed - bar length 2,7 Im - pack. 20 Pcs - 54 Im

Article	L mm	€/lm	€/Pc
PINTPC 1946	19	11,34	30,62


The code of the selected colour must be added to the article code. E.g.: PINTPC... 1946 (chosen finish anod. gold) PINTPCAO 1946.

(For a precise assessment of colours request the wooden finishes sample range)

		ANO	DIZED					
		-	ON DEMAN	D - MINIMUM QUANT	ITY 200 PCS			
AO - Anod. gold aluminium	AA - Anod. silver aluminium	AB - Anod.bronze aluminium	AT - Anod. titanium aluminium	CH - Anod. champagne alum.	SB - Anod. sand aluminium			
1.0.27	Sel and							
05W - Light oak (strip)	09W - Red walnut (merbau-apple-walnut)	13W - Indonesian teak	18W - Light zerbano	21W - Oak powder	25W - Bleached fir	29W - White oak	30W - Grey oak	31W - Victoria oak
33W - Sawed oak	34W - Havana oak	36W - American oak	37W - Carvi oak	38W - Queens oak	39W - Grey elm	41W - Ice oak	42W - Grace oak	43W - Manhattan oak
44W - Honey oak	45W - Marocco oak	46W - Black decape	47W - Black oak	48W - Cork oak	49W - Sand oak	93W - New white		

On request it is possible to realize other finishes of the color range: minimum order 200 pcs. Production delay 4/5 weeks. Price to be agreed. For sample finishes, contact the sales office for minimum quantities, timing and costs.





PROWALK 2510 & 2520

ANODIZED ALUMINIUM AND WOODEN FINISHES PUNCHED OR SELF ADHESIVE



ANODIZED ALUMINIUM with adhesive thermo packed

bar length 2,7 lm - pack. 40 PCS - 108 lm						
Article	L x H mm	€/Im	€/Pc			
PWK 2510A	24 x 10	6,24	16,85			
PWK 2520A	24 x 20	18,50				
ANODIZED ALUMINIUM with adhesive thermo packed - bar length 0,90 lm - pack. 20 Pcs						
Article	LxHmm		€/Pc			
PWK 25109AS	24 x 10		6,71			

24 x 20



ANODIZED ALUMINIUM punched thermo packed

bar length 2,7 im - pack. 4	U PCS - 108 IM					
Article	L x H mm	€/lm	€/Pc			
PWK 2510F	24 x 10	4,68	12,64			
PWK 2520F	24 x 20	5,38	14,53			
ANOD. ALUM. PUNCHED with screws and screw anchors thermo packed - bar length 0,90 lm - pack. 20 Pcs Article L x H mm €/Pc						
PWK 25109FS	24 x 10	-	5,64			
PWK 25209FS	24 x 20		6,49			
ANOD. ALUM. PUNCHED with screws and screw anchors thermo packed - bar length 1,35 Im - pack. 20 Pcs						

Article L x H mm €/Pc PWK... 251013FS 24 x 10 8,18

Available in the colours: AO - AA - AB (AT, CH and SB available on demand with a minimum quantity order of 200 pcs). The code of the selected colour must be added to the article code. E.g.: PWK... 2510A (chosen finish anod. silver) PWKAA 2510A.

7.73

ALUMINIUM WOOD FINISH with adhesive lm

thermo pacl	ked - bar length	2,7 lm - pack.	40 Pcs - 108
-------------	-------------------------	----------------	--------------


PWK... 25209AS

Article	L x H mm	€/lm	€/Pc	
PWK 2510A	24 x 10	10,38	28,03	*
PWK 2520A	24 x 20	12,48	33,70	*

Available on demand in the colours: 04W - 05W - 07W - 09W - 13W - 18W - 21W - 25W - 29W - 30W - 31W - 32W - 33W - 34W - 35W - 36W - 37W - 38W - 39W - 41W - 42W - 44W - 45W - 46W - 48W -49W - 53W - 55W - 55W - 65W - 73W - 75W with a minimum quantity order of x pcs. The code of the selected colour must be added to the article code

E.g.: PWK... 2510A (chosen finish dark beech) PWK04 2510A.

PROSTEP INS is a step cover profile in silver anodized aluminium ideal for protecting and laying laminated wood / floating melaminic and parquets. Available in two heights 10.5 and 16.

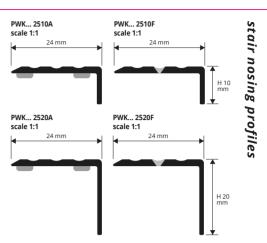

EXAMPLES OF LAYING



PROSTEP INS

ANODIZED SILVER ALUMINUM




ANODIZED SILVER ALUMINUM thermo packed bar length 2,7 lm - pack. 40 Pcs - 108 lm


Article	Hmm	€/Im	€/Pc
PTSAA 105	10,2	6,85	18,50
PTSAA 16	15,9	7,37	19,90
COLOURS			

AA - Anod, silver aluminium



EXAMPLES OF LAYING



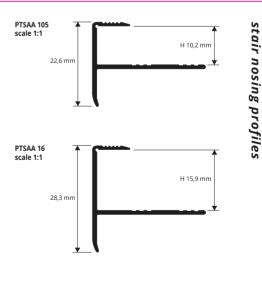



🖈 = Production on demand with minimum quantity of 200 pcs. Production delay 4/5 weeks. Price to be agreed.


Prices are referred to whole packs 10% increase for minimum orders of 10 Pcs 20% increase for orders of less than 10 Pcs.

SELF-ADHESIVE ALUMINIUM COVERED WITH PROTECTIVE FILM

SOL 30

SOL 30 self-adhesive is a joint/threshold cover profile in aluminum covered with film wooden finishes, which is highly resistant to pedestrian traffic, wear, UV rays and commonly used floor cleaning products. Easy to lay and to match with any wood finish; the surface has an open pore embossed finish. Recommended for covering joints between floors in laminate, wood, ceramic tiles, etc.

IN WOODEN FINISHES

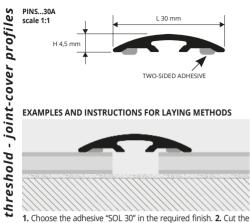

profile to the required length and clean, degrease and dry the surface, checking that the temperature for application is at least 5.3. Standard and the protective paper from the adhesive and lay the profile correctly applying a uniform vertical pressure by hand without moving the profile and without using iron/steel hammers.



ALUMINUM COVERED 80 wooden finishes (71 on demand) with ADHESIVE thermo packed - length 30 mm - bar length 2,7 lm - pack. 40 Pcs - 108 lm Article €/lm L mm €/Pc PINS...30A 30 11,81 31,89




ALUMINUM COVERED 80 wooden finishes (71 on demand) with ADHESIVE - thermo packed - bar length 0,90 lm - 20 Pcs Article L mm €/Pc PINS...309AS 30 12,09

Available in the wooden finishes: 04W - 05W - 07W - 08W - 09W - 10W - 11W - 28W - 29W - 30W The code of the selected colour must be added to the article code. E.g.: PINS... 30A (chosen finish dark beech) PINS04W 30A

ZERO CURVE SELF-ADHESIVE

ZERO CURVE self-adhesive is a transition profile in anodised aluminum and aluminum covered with film in wooden finishes, which is highly resistant to pedestrian traffic, wear, UV rays and commonly used floor cleaning products. Easy to lay and to match with any wood finish; the surface has an open pore embossed finish. Recommended for covering joints between floors in laminate, wood, ceramic tiles, etc.

ALUMINIUM COVERED WITH WOODEN FINISHES AND ANODIZED ALUMINIUM

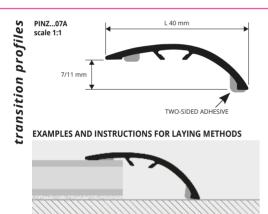

1. Choose the "ZERO CURVE" with adhesive with the required finish. 2. Cut the profile to the required length and clean, degrease and dry the surface, checking that the temperature for application is at least 15°. **3.** Remove the protective paper from the adhesive and lay the profile correctly applying a uniform vertical pressure by hand without moving the profile and without using an iron/steel hammer.



ALUMINUM COVERED 80 wooden finishes (49 on demand) with ADHESIVE thermo packed - length 40 mm - bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	Lmm	€/lm	€/Pc
PINZ07A	40	18,33	49,49
PINZAA 07A	40	10,27	27,73



ALUMINUM COVERED 80 wo with ADHESIVE thermo pack		
Article	L mm	€/Pc
PINZ079AS	40	18,26

Available in the finish: AA - 04W - 05W - 07W - 09W - 13W - 18W - 21W - 25W - 29W - 30W - 31W - 32W - 33W - 34W - 35W - 36W - 37W - 38W - 39W - 41W - 42W - 44W - 45W - 46W - 48W - 49W - 53W - 55W - 65W - 73W - 75W. The code of the selected colour must be added to the article code. E.g.: PINZ... 07A (chosen finish dark beech) PINZ04W 07A.

(For a precise assessment of colours request the wooden finishes sample range)

ANODIZED								
AA - Anod. silver aluminium								
			1000					
04W - Dark beech	05W - Light oak (strip)	07W - Light cherry (strip)	09W - Red walnut (merbau-apple-walnut)	13W - Indonesian teak	18W - Light zerbano	21W - Oak powder	25W - Bleached fir	29W - White oak
30W - Grey oak	31W - Victoria oak	32W - Pink oak	33W - Sawed oak	34W - Havana oak	35W - Edinburgh oak	36W - American oak	37W - Carvi oak	38W - Queens oak
							and the second	
39W - Grey elm	41W - Ice oak	42W - Grace oak	44W - Honey oak	45W - Marocco oak	46W - Black decape'	48W - Cork oak	49W - Sand oak	53W
				and the second se			6 · · · · · · ·	
		the transfer	10000	Charles Strength Top			er finishes of the colo	
54W	55W	65W - Tripoli	73W - Bangkok	75W - Liotard			weeks. Price to be ag ninimum quantities,	

COLOURS



between floors in laminate, wood, ceramic tiles, etc.

SILVER ANODIZED ALUMINUM with ADHESIVE thermo packed - length 40 mm - bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	Lmm	€/lm	€/Pc
PNSPAA 40 PA	40	9,07	24,49

ALUMINUM COVERED 80 wooden finishes (49 on demand) with ADHESIVE thermo packed - length 40 mm - bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	L mm	€/lm	€/Pc
PNSP 40 PA	40	16,65	44,95

SILVER ANODIZED ALUMINUM with ADHESIVE SELF PACK thermo packed - bar length 90 cm - pack. 20 Pcs Article €/Pc L mm **PNSPAA 409 PAS** 40 9,00 ALUMINUM COVERED 80 wooden finishes (49 on demand)

with ADHESIVE - thermo packed - bar length 0,90 lm - 20 Pcs Article L mm €/Pc

PNSP 409 PAS	40	16,99
ALUMINUM COVERED 80 wood with ADHESIVE - thermo pack		
Article	Lmm	€/Pc
PNSPAA 4010 PAS	40	9,95

SILVER ANODIZED ALUMINU - thermo packed - bar length	SELF PACK	
Article	L mm	€/Pc
PNSP., 4010 PAS	40	18.62


18,62 PNSP., 4010 PAS Available in the colours: 04W - 05W - 07W - 09W - 13W - 18W - 21W - 25W - 29W - 30W - 31W - 32W - 33W - 34W - 35W - 36W - 37W - 38W - 39W - 41W - 42W - 44W - 45W - 46W - 48W - 49W - 53W - 54W - 55W - 65W - 73W - 75W.

The code of the selected colour must be added to the article code. E.g.: PNSP... 40 PA (chosen finish dark beech) PNSP04W 40 PA.

PROCOVER WOOD is a joint-cover profile in aluminum covered with a very strong film available in wooden finishes. It is applied at the end of laying two adjoining floors with the same height, having left a 6 - 24 mm gap between the two floors set in a thin bed of adhesive. It protects the outside edges of the floor/covering. It is easy to lay and attractive. The design of the profile with lower vertical arrowhead part allows excellent anchorage with the silicone/adhesive.

PROCOVER WOOD

ALUMINIUM COVERED WITH PROTECTIVE FILM IN WOODEN FINISHES

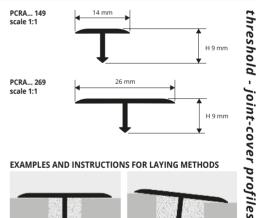

1. Choose the "PROCOVER" with the width suitable for the gap

between the two floors to be joined, taking into consideration 2/3 $\text{mm} - 2/3^2' - 1/8''$ side lap. **2.** Fill the gap with single-pack silicone or with the adhesive used for laying the floor. **3.** Bury the profile into the adhesive, making sure that both side laps of the profile rest on the coverings to be joined.

W00DEN/LVT



ALUMINUM COVERED 80 wooden finishes (76 on demand) thermo packed - bar length 2,7 Im - pack. 40 Pcs - 108 Im

L x H mm	€/Im	€/Pc
14 x 9	6,60	17,82
26 x 9	11,61	31,35
	14 x 9	

05W - Light oak 11W - Decapè bleached 28W - Aspen oak 29W - White oak 30W - Grey oak

On request it is possible to realize other finishes of the color range: minimum order 200 pcs. Production delay 4/5 weeks. Price to be agreed. For sample finishes, contact the sales office for minimum quantities, timing and costs.

PROCOVER INSERT

VINYL RESIN / BLACK RUBBER

Vinyl resin/rubber profile "U-form" for inserting PROCOVER with PINBFT 45 or PINBFT 40 Proinsert System base

VINYL RESIN / RUBBER

COLOURS




PROINSERT BASE 45 and BASE 40 - ALUM. PUNCHED/PERFORED bar length 2,7 lm - pack. 20 Pcs - 54 lm

Available in the wooden finishes: 05W - 11W - 28W - 29W - 30W The code of the selected colour must be added to the article code.

Es.: PCRA.. 149 (chosen finish light oak) PCRA04W 149.


Article	Hmm	€/lm	€/Pc
PINBFT 45	45	6,37	17,20
PINBFT 40	40	6,29	16,98





Prices are referred to whole packs 10% increase for minimum orders of 10 Pcs 20% increase for orders of less than 10 Pcs.

threshold - joint-cover






PROGRESS®

FILES

 \Box

SOL 40P SELF-ADHESIVE

ALUMINIUM COVERED WOODEN FINISHES

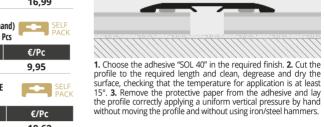


PROFIXER LINE SYSTEM

ZERO CURVE INSERTS + NYLON ANCHORS + BASE WOODEN FINISHES AND ANODIZED FINISHES


The PROFIXER LINE SYSTEM comprises an assortment of profiles in aluminium with a longitudinal dovetail groove/channel into which the anchors or the tap-down punched/perforated aluminium profile may be inserted for easy and invisible fixing.

The profiles are covered with wooden finishes that are highly resistant to pedestrian traffic, wear, UV rays and commonly used floor cleaning products. Plus anodized finishes. The **PROFIXER LINE SYSTEM** profiles are recommended for floors up to 22.5 mm thick.

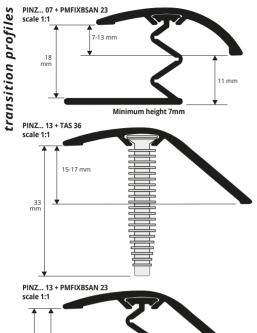



EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS



COLOURS



ANODIZED ALUMINIUM (6 anod. alum. finishes of which 3 on demand) thermo packed - bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	L mm	H mm	€/lm	€/Pc
PINZ 07	40	7 - 13	8,32	22,46
PINZ 13	47	15 - 17	11,94	32,24

PINZ... 07 7 - 13 40 PINZ... 13 47 15 - 17 18,10

Available in the finishes: AO - AA - AB (AT, CH and SB available on demand with a minimum quantity order of 100 pcs) and in the wooden finishes: 04W - 05W - 07W - 09W - 13W - 18W - 21W - 25W - 29W - 30W - 31W - 32W - 33W - 34W - 35W - 36W - 37W - 38W - 39W - 41W - 42W - 44W - 45W - 46W - 48W - 49W - 53W - 54W - 55W - 65W - 73W - 75W. The code of the selected colour must be added to the article code. E.g.: PINZ... 07 (chosen finish anod. gold) PINZAO 07.

ANODIZED ALUMINIUM (6 anod. alum. finishes of which 3 on demand)

thermo packed - bar length 0,90 lm - 20 Pcs with 5 anchors			SELF PACK	thermo packed - ba with 5 anchors	r length 0,90 lm -	20 Pcs
Article	L mm	H mm	€/Pc	Article	Lmm	Hr
PINZ 07S	40	7 - 13	10,31	PINZ 07S	40	7 -
PINZ 13S	47	15 - 17	12,60	PINZ 13S	47	15

Available in the finishes: AO - AA - AB (AT, CH and SB available on demand with a minimum quantity order of 100 pcs) and in the wooden finishes: 04W - 05W - 07W - 09W - 13W - 18W - 21W - 25W - 29W - 30W - 31W - 32W - 33W - 34W - 35W - 36W - 37W - 38W - 39W - 41W - 42W - 44W - 45W - 46W - 48W - 49W - 53W - 54W - 55W - 65W - 73W - 75W. The code of the selected colour must be added to the article code. E.g.: PINZ... 07 (chosen finish anod. gold) PINZAO 07

1. Choose the PROFIXER LINE SYSTEM profile in the required type and finish. 2. Cut the profile to the required length. 3a. For the version with screw anchors: make 5 drill holes per linear metre on the floor using a Ø 7mm drill, insert the anchors into the relative groove/channel of the profile and with the help of a rubber/plastic hammer, tap evenly over the surface until the anchor slots into the hole. 3b. For the version with tapdown aluminium base: first insert the base into the groove/channel of the 'TOP' profile and then fix or glue the base to the floor; alternatively first fix or glue the base to the floor and then insert the 'profile. 4. Close the profile, applying uniform pressure, either manually or with the help of a rubber hammer

(For a precise assessment of colours request the wooden finishes sample range)

ALUMINIUM COVERED (80 wooden finishes of which 49 on demand)

L mm H mm

ALUMINIUM COVERED (80 wooden finishes of which 49 on demand)

€/lm

15.25

Hmm

7 - 13

15 - 17

€/Pc

41,18

48,87

€/Pc

17,02

19 26

thermo packed - bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article

	ANODIZED							
			ON DEMAN	D - MINIMUM QUANT	TY 200 PCS			
AO - Anod. gold aluminium	AA - Anod. silver aluminium	AB - Anod.bronze aluminium	AT - Anod. titanium aluminium	CH - Anod. champagne alum.	SB - Anod. sand aluminium			
			100 Mar 100					
04W - Dark beech	05W - Light oak (strip)	07W - Light cherry (strip)	09W - Red walnut (merbau-apple-walnut)	13W - Indonesian teak	18W - Light zerbano	21W - Oak powder	25W - Bleached fir	29W - White oak
					-			
30W - Grey oak	31W - Victoria oak	32W - Pink oak	33W - Sawed oak	34W - Havana oak	35W - Edinburgh oak	36W - American oak	37W - Carvi oak	38W - Queens oak
			and the second second				and the second	
39W - Grey elm	41W - Ice oak	42W - Grace oak	44W - Honey oak	45W - Marocco oak	46W - Black decape'	48W - Cork oak	49W - Sand oak	53W
-	and the second	and the second second		The state of the s				
		The second	26	Part Star 7			er finishes of the colo	
54W	55W	65W - Tripoli	73W - Bangkok	75W - Liotard			weeks. Price to be ag ninimum quantities,	

NYLON 36 SCREW ANCHORS AND TAP-DOWN BASE

SCREW ANCHORS 36 - H 36 mm - pack. 20 Pcs for SOL 30-40-50 and ZERO CURVE 07-15 Article Hmm €/Pc €/Pack. **TAS 36** 36 0,27 5,40 minimum order 5 pcs.

PROFIXER TAP-DOWN BASE - ALUM. PUNCHED/PERFORED for SOL 30-40-50 and ZERO CURVE 07-15 2.7 lm pack 20 Dec E4 lm

Dai lengui 2,7 mii - pack. 20 FCS - 34 mii								
Article	Hmm	€/Im	€/Pc					
PMFIXBSAN 23	23	6,74	18,20					
1	_ ح							
23 mm	>							
	<							
*			1					



W00DEN/LVT



The PROFIXER LINE SYSTEM comprises an assortment of profiles in aluminium with a longitudinal dovetail groove/channel into which the anchors or the tap-down punched/perforated aluminium profile may be inserted for easy and invisible fixing.

The profiles are covered with wooden finishes that are highly resistant to pedestrian traffic, wear, UV rays and commonly used floor cleaning products. Plus six anodized finishes (3 available on demand). The **PROFIXER LINE SYSTEM** profiles are recommended for floors up to 22.5 mm thick.

PROFIXER LINE SYSTEM

INSERTS SOL 30 - SOL 40P - SOL 50 + NYLON ANCHORS + BASE



ANODIZED ALUMINIUM (6 anod. alum. finishes of which 3 on demand) thermo packed - bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	L mm	€/lm	€/Pc
PINS 30	30	6,08	16,42
PNSP 40P	40	7,84	21,17
		.,	,

ANODIZED ALUM. (6 anod. alum. finishes of which 3 on demand) thermo packed - bar length 0.90 lm - 20 Pcs with 5 anchors

1 0 1		
Article	L mm	€/Pc
PINS 309S	30	7,12

Available in the colours: AO - AA - AB (AT, CH and SB on demand with a minimum quantity order of 200 pcs)

ALUMINIUM COVERED (80 wooden finishes of which 71 on demand)

thermo packed - bar length 2,7 lm - pack. 40 Pcs - 108 lm							
Article	€/Pc						
PINS 30	30,78						
ALUM. COVERED (80 wooden finishes of which 71 on demand) thermo packed - barlength 0,90 Im - 20 Pcs with 5 anchors							
Article	Lm	m	€/Pc				

PINS... 309S 30 11.34 Available in the wooden finishes: 04W - 05W - 07W - 08W - 09W -10W - 11W - 28W - 29W - 30W. The code of the selected colour must be added to the article code. E.g.: PINS...30 (chosen finish dark beech) PINS04W 30.




ALUMINIUM COVERED (80 wooden finishes of which 49 on demand) thermo packed - bar length 2,7 lm - pack. 40 Pcs - 108 lm


Article	L mm	€/lm	€/Pc
PNSP 40 P	40	14,34	38,72

Available in the colours: 04W - 05W - 07W - 09W - 13W - 18W - 21W - 25W - 29W - 30W - 31W - 32W - 33W - 34W - 35W - 36W - 37W -38W - 39W - 41W - 42W - 44W - 45W - 46W - 48W - 49W - 53W - 54W -55W - 65W - 75W. The code of the selected colour must be added to the article code. E.g.: PINS... 30 (chosen finish anod. gold) PINSAO 30.

ANODIZED SILVER ALUMINIUM

thermo packed - bar length 2,7 lm - pack. 20 Pcs - 54 lm				
Article	L mm	€/lm	€/Pc	
PINSAA 50	50	8,62	23,27	

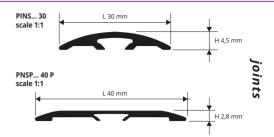

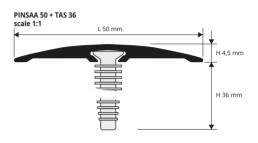

PINSAA 50 + PMFIXBSAN 23






NYLON 36 SCREW ANCHORS AND TAP-DOWN BASE


SCREW	ANCHORS	36 - I	H 36	mm -	pack.	20 Pcs
for SOL	30-40-50	and ZE	RO	CURVE	07-1	5

Article	Hmm	€/Pc	€/Pack.
TAS 36	36	0,27	5,40
minimum order 5 pcs.			



PROFIXER TAP-DOWN BASE - ALUM. PUNCHED/PERFORATED for SOL 30-40-50 and ZERO CURVE 07-15

bar length z,7 im - pack. zu i			
Article	H mm	€/lm	€/Pc
PMFIXBSAN 23	23	6,74	18,20



EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS



Choose the PROFIXER LINE SYSTEM profile in the required type and finish. 2. Cut the profile to the required length.
 For the version with screw anchors:


For the version with screw anchors: 3. Make 5 drill holes per linear metre on the floor using a Ø 7mm drill, insert the anchors into the relative groove/channel of the profile and with the help of a rubber/plastic hammer, tap evenly over the surface until the anchor slots into the hole. For the version with tap-down aluminium base: 3. First insert the base into the groove/channel of the "TOP" profile and then fix or glue the base to the floor; alternatively first fix or glue the base to the floor and then insert the 'profile. 4. Close the profile, applying uniform pressure, either manually or with the help of a rubber hammer

hammer




PROSCREW 34

ANODIZED SILVER, GOLD, BRONZE, SAND AND CHAMPAGNE ALUMINIUM

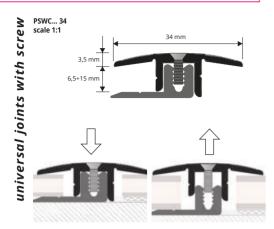

PROSCREW 44


ANODIZED SILVER, GOLD, BRONZE, SAND AND CHAMPAGNE ALUMINIUM

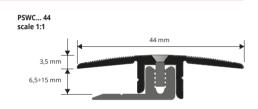




PROSCREW 33

ANODIZED SILVER, GOLD, BRONZE, SAND AND CHAMPAGNE ALUMINIUM





PROGRESS®

OFILES



BASE + TOP IN ANODIZED SILVER, GOLD, BRONZE, SAND AND CHAMPAGNE ALUMINIUM + SCREWS AND SCREW ANCHORS thermo nacked - har length 2 7 lm - nack 20 Pcs - 54 lm

pacia pacia participation pacia participation participatio				
Article	Lmm	€/lm	€/Pc	
PSWCAA 34	34	16,43	44,36	
PSWCAO 34	34	16,43	44,36	*
PSWCSB 34	34	16,43	44,36	*
PSWCAB 34	34	17,24	46,55	*
PSWCCH 34	34	17,24	46,55	*

To order the following items (top and base), see page **259** Add + 5% of the price \notin /Im for the self pack version 0,90 Im

BASE + TOP IN ANODIZED SILVER GOLD, BRONZE, SAND AND CHAMPAGNE ALUMINIUM + SCREWS AND SCREW ANCHORS o nacked - har length 2 7 lm - nack 20 Pcs - 54 lm

thermo packeu - bar length 2,7 mil - pack. 20 Fts - 34 mil				
Article	Lmm	€/lm	€/Pc	
PSWCAA 44	44	17,24	46,55	
PSWCAO 44	44	17,24	46,55	*
PSWCSB 44	44	17,24	46,55	*
PSWCAB 44	44	18,10	48,87	*
PSWCCH 44	44	18,10	48,87	*

To order the following items (top and base), see page **259** Add + 5% of the price €/Im for the self pack version 0,90 Im



BASE + TOP IN ANODIZED SILVER, GOLD, BRONZE, SAND AND CHAMPAGNE ALUMINIUM + SCREWS AND SCREW ANCHORS thermo packed - bar length 2,7 Im - pack. 20 Pcs - 54 Im

Article	L mm	€/lm	€/Pc	
PSWCAA 33	33	16,43	44,36	
PSWCAO 33	33	16,43	44,36	*
PSWCSB 33	33	16,43	44,36	*
PSWCAB 33	33	17,24	46,55	*
PSWCCH 33	33	16,46	44,44	*

To order the following items (top and base), see page ${\bf 259}$ Add + 5% of the price ${\rm \notin}/{\rm Im}$ for the self pack version 0,90 Im

COLOURS



TOP IN ANODIZED SILVER, GOLD, BRONZE, SAND AND **CHAMPAGNE ALUMINIUM thermo packed** bar length 2.7 lm - pack. 20 Pcs - 54 lm

bui iciigii 2,7 iiii pucit. 2	buillengin 2,7 millipada. 20163 04 milli				
Article	Lmm	€/lm	€/Pc		
PSWAA 34	34	9,02	24,35		
PSWAO 34	34	9,02	24,35	*	
PSWSB 34	34	9,02	24,35	*	
PSWAB 34	34	9,91	26,76	*	
PSWCH 34	34	9,91	26,76	*	

BASE IN NATURAL ALUMINIUM


thermo packed - bar leng	gth 2,7 lm - pa	ack. 20 Pcs - 54	lm
Article	Lmm	€/lm	€/Pc
PSWBAN 07F	22,6	5,89	15,90
PSWBAN 07F			

TOP IN ANODIZED SILVER, GOLD, BRONZE, SAND AND **CHAMPAGNE ALUMINIUM thermo packed** bar length 2,7 lm - pack. 20 Pcs - 54 lm

0.1				
Article	Lmm	€/lm	€/Pc	
PSWAA 44	44	10,17	27,46	
PSWAO 44	44	10,17	27,46	*
PSWSB 44	44	10,17	27,46	*
PSWAB 44	44	11,19	30,21	*
PSWCH 44	44	11,19	30,21	*

22,6 mm

BASE IN NATURAL ALUMINIUM




TOP IN ANODIZED SILVER, GOLD, BRONZE, SAND AND CHAMPAGNE ALUMINIUM thermo packed ar length **2.7 lm** - pack. **20 Pcs - 54 l**i

Article	Lmm	€/Im	€/Pc	
PSWAA 33	33	9,02	24,35	
PSWAO 33	33	9,02	24,35	3
PSWSB 33	33	9,02	24,35	7
PSWAB 33	33	9,91	26,76	7
PSWCH 33	33	9,91	26,76	7

BASE IN NATURAL ALUMINIUM

ANODIZED



© 2028 All rights reserved by Progress Profiles. Printed in Italy

AA - Anod. silver alum. AO - Anod. gold alum. AB - Anod. bronze alum. CH - Anod. champagne alum. SB - Anod. sand alum.

★ = Production on demand with minimum quantity of 200 pcs. Production delay 4/5 weeks. Price to be agreed.

Prices are referred to whole packs 10% increase for minimum orders of 10 Pcs 20% increase for orders of less than 10 Pcs.

WOODEN/LVT





BASE + TOP IN ANODIZED SILVER, GOLD, BRONZE, SAND AND CHAMPAGNE ALUMINIUM + SCREWS AND SCREW ANCHORS thermo packed - bar length 2,7 lm - pack. 20 Pcs - 54 lm

alerno puekeu bartengarz, in paek. zores of in				
Article	L mm	€/Im	€/Pc	
PSWCAA 50	50	17,98	48,55	
PSWCAO 50	50	17,98	48,55	*
PSWCSB 50	50	17,98	48,55	*
PSWCAB 50	50	18,71	50,52	*
PSWCCH 50	50	18,71	50,52	*

To order the following items (top and base), see page **259** Add + 5% of the price €/Im for the self pack version 0,90 Im

PSWAA 50 50 11,36

bar length 2,7 lm - pack. 20 Pcs - 54 lm Article

BASE IN NATURAL ALUMINIUM

7.5 mm

Article

PSWBAN 07F

PSWBAN 07F

ANODIZED

TOP IN ANODIZED SILVER, GOLD, BRONZE, SAND AND CHAMPAGNE ALUMINIUM thermo packed

thermo packed - bar length 2,7 lm - pack. 20 Pcs - 54 lm

Lmm

22,6

L mm

PSWAO 50	50	11,36	30,67	*
PSWSB 50	50	11,36	30,67	*
PSWAB 50	50	12,51	33,78	*
PSWCH 50	50	12,51	33,78	*

€/lm

€/lm

5,89

22.6 mm

SB - Anod, sand alum.

€/Pc


30,67


€/Pc

15,90

PROSCREW 50

ANODIZED SILVER, GOLD, BRONZE, SAND AND CHAMPAGNE ALUMINIUM

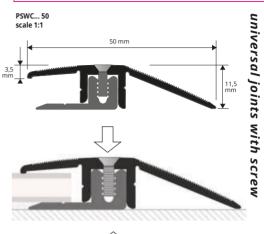



SCREWS to fix all perforated versions

AO - Anod. gold alum. AB - Anod. bronze alum. CH - Anod. champagne alum.

ON DEMAND (minimum quantity 100 pcs)

NICKEL PLATED

© 2028. All depts reserved by Progress Profiles. Publical in liely


COLOURS

ANODIZED

AA - Anod, silver alum.


WHITE NICKEL-PLATED FLATHEAD SCREW UNI 7688 3X10 back. 14 Pcs			
Article	Ømm	H mm	€/Pack.
VIZBP 310	05	10	3.92

WHITE NICKEL-PLATED FLATHEAD SCREW UNI 7688 3X16 pack. 14 Pcs			
Article	Ømm	H mm	€/Pack.
VIZBP 316	05	16	3,92



KIT PROSCREW

KIT PROSCREW		
Article		€/KIT
KIT PROSCREW	KIT consists of 14 screws VIZBP 310, 14 screws VIZBP 316, 15 screws + screw anchors VINPT 325	6,53

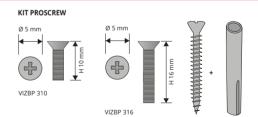

VINPT 325

EXAMPLES OF LAYING





🖈 = Production on demand with minimum quantity of 200 pcs. Production delay 4/5 weeks. Price to be agreed. Prices are referred to whole packs 10% increase for minimum orders of 10 Pcs 20% increase for orders of less than 10 Pcs.







PROMULTISKIRT SQUARE

FOAMED VINYL RESIN


PROMULTISKIRT SQUARE is an expanded vinyl resin profile covered with a vinyl resin film available in white, black, silver and wood finishes. The profile has a good resistance to chemical agents and can be secured to the wall with plastic supports fixed with screws or silicone. The skirting height is 100 mm, it can be cut to 80 and 60 mm heights thanks to the pre-incisions on the back. PROMULTISKIRT SQUARE in expanded vinyl resin coated with vinyl resin film is suitable for any indoor environment.

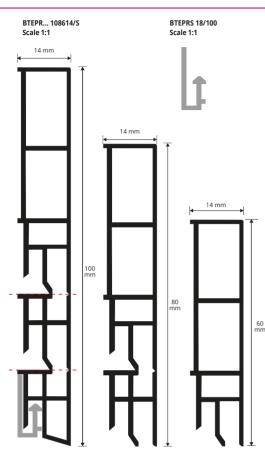

EXAMPLE OF LAYING









FOAMED VINYL RESIN (wood finishes - black - white and silver) bar length 2,4 lm - pack. 20 Pcs - 48 lm

	Article	Lmm	€/lm	€/Pc
\odot	BTEPR 108614/S	100/80/60	8,81	21,14

Available in the finishes: 29W - 30W - 34W - B - N - AA. The code of the selected colour must be added to the article code

E.g.: BTEPR... 108614/S (chosen finish Havana oak) BTEPR34W 108614/S



SUPPORT / FIXING CLIP - PLASTIC pack. 100 Pcs

Article	Hmm	€/pack.
Ø BTEPRS 18	16,5	12,68
	CHIPTING CHILL	1.0.11

Order the SUPPORT and choose the SKIRTING in the desired finish.

USE PROBAND FIX FOR FIXING THE PROFILE TO THE WALL





On request it is possible to realize other finishes of the color range: minimum order 400 pcs. Production delay 4/5 weeks. Price to be agreed. For sample finishes, contact the sales office for minimum quantities, timing and costs.

LAYING INSTRUCTIONS

1. Choose "PROMULTISKIRT SQUARE" according to the chosen colour. 2. Cut "PROMULTISKIRT SQUARE" to the required length. 3. if necessary cut "PROMULTISKIRT SQUARE" to the required height. * 4. Carefully clean the substrate on which the profile will be placed from oil, grease and dirt residues in general. Laying with adhesive only:

5a. With dry surface apply the Proband Fix. 6a. Press the profile against the wall with the correct pressure.

Laying with adhesive and support: 5b. Fix the plastic supports to the wall every 50mm with screws. 6b. Apply Proband Fix only to the back upper part of the skirting board. 7b. Fix the profile to the supports and press it against the wall with correct pressure.

***CUT INSTRUCTIONS**



Option 1A: Cut to have the height 80 mm Cut along the first pre-incision on the back of the skirting:



Option 1B: Cut to have the height 60 mm. Cut along the second pre-incision on the back of the skirting;



2. Cut the skirting on the front side at the cut previously made on the back;



3. Remove the excess part.

CORNERS, END CAPS AND JOINTS

FOAMED VINYL RESIN

INTERNAL CORNER KIT





IN/EXTERNAL CORNERS and END CAPS KIT

(wood innisnes - black - white and silver)		
Article	Hmm	€/KIT
KBTEPR108614/SI	100/80/60	16,41
KBTEPR108614/SE	100/80/60	16,41

Available in the finishes: 29W - 30W - 34W - B - N - AA. The code of the selected colour must be added to the article code. E.g.: KBTEPR...108614/S (chosen finish Havana oak) KBTEPR34W 108614/5

KIT BTEPR ... 108614/SI








PROMULTISKIRT ROUND is an expanded vinyl resin profile covered with a vinyl resin film available in white, black, silver and wood finishes. The profile has a good resistance to chemical agents and can be secured to the wall with plastic supports fixed with screws or silicone. The skirting height is 100 mm, it can be cut to 80 and 60 mm heights thanks to the pre-incisions on the back. PROMULTISKIRT ROUND in expanded vinyl resin coated with vinyl resin film is suitable for any indoor environment.

ROUND FOAMED VINYL RESIN

PROMULTISKIRT

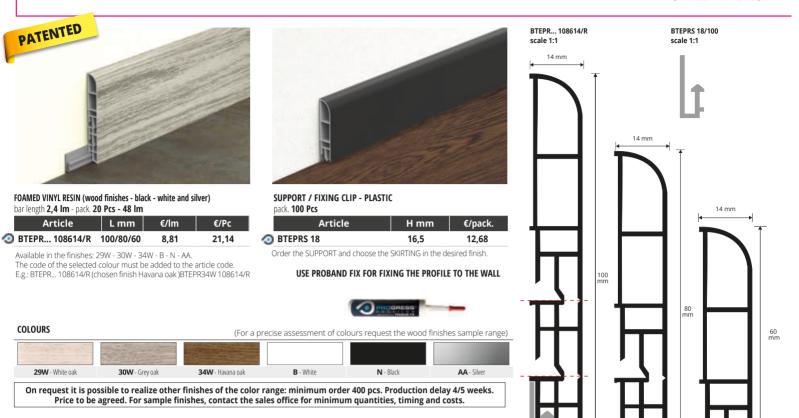

LAYING INSTRUCTIONS


1. Choose "PROMULTISKIRT ROUND" according to the chosen colour. 2. Cut "PROMULTISKIRT ROUND" to the required length. 3. if necessary cut "PROMULTISKIRT ROUND" to the required height. * 4. Carefully clean the substrate on which the profile will be placed from oil, grease and dirt residues in general.

Laving with adhesive only

5a. With dry surface apply the Proband Fix. 6a. Press the profile against the wall with the correct pressure.

 Laying with adhesive and support:
 5b. Fix the plastic supports to the wall every 50mm with screws. 6b. Apply Proband Fix only to the back upper part of the skirting board. **7b.** Fix the profile to the supports and press it against the wall with correct pressure.







Option 1B: Cut to have the height 60 mm. Cut along the second pre-incision on the back of the skirting;




2. Cut the skirting on the front side at the cut previously made on the back



3. Remove the excess part.

EXAPLE OF LAYING




W00DEN/LVT

CORNERS, END CAPS AND JOINTS

FOAMED VINYL RESIN

108614/S

Available in the finishes: 29W - 30W - 34W - B - N - AA





EXTERNAL CORNER KIT





KIT BTEPR ... 108614/RI


KIT BTEPR ... 108614/RE



SKIRTING 7016

FOAMED VINYL RESIN

SKIRTING 7016 is a vinyl resin foam profile with a height of 70 mm. available wooden finishes and finishes in solid colour that could be matched with the PROINSERT SYSTEM's profiles. The profile, suitable like skirting for floating and glued wood floor, laminate and LVT, could be laid with suitable adhesive, nails, screws or using the pre-punched support fixed to the wall with screws every 57 cm. Its special section, that allows to cover a 16 mm sperimetral joint, and wide range of finishes make it a very requested, elegant and econimic skirting profile.

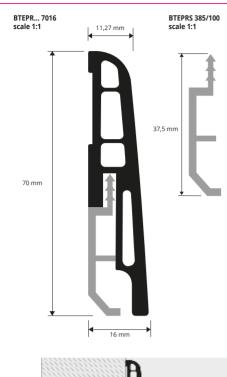

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS Choose "Skirting 7016" in the desired finish. 2. Fix the pre-punched support to the wall with screws every 50 cm.
 Attach the profile to the support applying low pressure.
 Alternatively fix the profile using a suitable fast adhesive, path or screws.

PROGRESS®

OFILES

nails or screws



FOAMED VINYL RESIN (wood finIshes - black - white and silver) Length = 2,5 m - Pack 20 pcs - 50 lm

Article	Lmm	€/Im	€/Pc
BTEPR 7016	70	4,64	11,60

USE PROBAND FIX FOR FIXING THE PROFILE TO THE WALL





SUPPORT / FIXING CLIP - PLASTIC support Length 5 cm

Article	H mm	€/pack.
BTEPRS 385	37,5	12,68

Order the SUPPORT and choose the SKIRTING in the desired finish.

IN/EXTERNAL CORNERS and END CAPS KIT ood finishes - hlack - white and silver

INTERNAL CORNER KIT

(wood ministics black white and silver)		
Article	Hmm	€/KIT
KIT BTEPR7016I	70	11,69
KIT BTEPR7016E	70	11,69

EXTERNAL CORNER KIT



54W

55W

53W

(For a precise assessment of colours request the wood finishes sample range) 05W - Light oak 13W - Teak indonesia 18W - Light Zerbano 21W - Powder Oak 25W - Bleached fir 29W - White oak 30W - Gray oak 31W - Victoria oak 33W - Sawed oak 35W - Edimburg 41W - Ice oak 42W - Grace oak 45W - Morocco oak 46W - Black decape 34W - Havana oak 36W - American oak 37W - Carvi oak 38W - Queens oak 39W - Grevelm

AA - Silver

On request it is possible to realize other finishes of the color range: minimum order 400 pcs. Production delay 4/5 weeks. Price to be agreed. For sample finishes, contact the sales office for minimum quantities, timing and costs.


N - Black



B - White

WOODEN/LVT






SKIRTING 7011

FOAMED VINYL RESIN



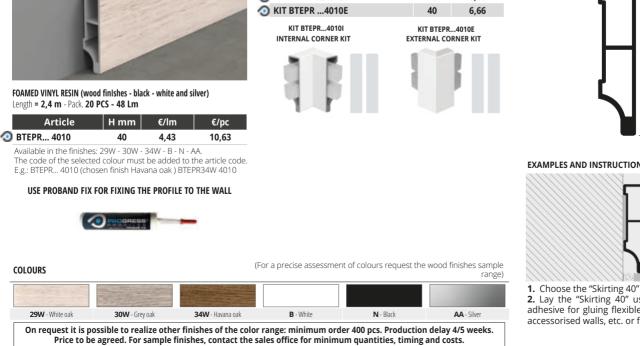

Prices are referred to whole packs, 10% increase for minimum orders of 10 Pcs, 20% increase for orders of less than 10 Pcs.


W00DEN/LVT

269

PROSEAL WOOD

EXPANDED PVC 2 WOOD FINISHING AND 4 MATCHING COLOURS

PROSEAL WOOD is a new inner connector square suitable for creating a concave skirting for wood / rolledmelamime floating wood / ceramic / marble tiles to reduce the floor /covering detachment. The particular material used allows to resist to the main chemical agents ant to small breakages. **PROSEAL WOOD's** dimensions allow the necessary expansion of the outer joint. Ideal for public (schools, rest homes, recreational area) and private places. In expanded PVC, in 2 wood finishes 4 in matching colours to combine with various wood finishes. Easy to lay with fixing silicone.



EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS



1. Choose "PROSEAL WOOD" color and/or wood finish required. 2. The laying must be carried out using fast fixing acrylic silicone, mastic, bostik suitable for gluing PVC with mortar - plaster - wall units etc., or fix using screws/nails.



bar length 2,5 lm - pack. 40 Pcs - 100 lm Lmm €/lm Article

PSAW 20	21 x 21	0,98	2,45
Available in the wood finis	hes: 05W - 1	10W , and colour	rs: B - GC -

GS - N The code of the selected colour must be added to the article code. E.g. PSAW...20 (chosen finish black) PSAWN 20.



EXPANDED PVC - 4 COLOURS bar length 2,5 lm - pack. 40 Pcs - 100 lm Article €/Pc €/lm L mm PSAW... 20 21 x 21 0,91 2,27

USE PROBAND FIX FOR FIXING THE PROFILE TO THE WALL



COLOURS

COLOURS




£/Dr

The shade of the wooden finish in rigid expanded vinyl resin/PVC results slightly different from the film usually applied on the profiles in aluminium.

PROANGLE WOOD

EXPANDED PVC 2 WOOD FINISHING AND 4 MATCHING COLOURS



EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS



1. Choose "PROANGLE WOOD" color and/or wood finish required 2. The laying must be carried out using fast fixing acrylic silicone, mastic, bostik, suitable for glueing PVC with mortar-plaster-wall units etc., or fix using screws/nails.

PROANGLE WOOD is a new inner connector square suitable for creating a convex skirting for wood / rolledmelamine floating wood / ceramic / marble floor to reduce the floor /covering detachment. The particular material used allows to resist to the main chemical agents and to small breakages. **PROANGLE WOOD**'s dimensions allow the necessary expansion of the outer joint. Ideal for public (schools, rest homes, recreational area) and private places. In expanded PVC , in 2 wood finishes 4 in matching colors to combine with various wood finishes. Easy to lay with fixing silicone.



bar length 2,5 lm - pack. 40			
Article	Lmm	€/lm	€/Pc
PGAW 15	15 x 15	0,74	1,85



bar length 2,5 lm - pack. 40 Pcs - 100 lm Article L mm €/lm €/Pc PGAW... 15 1,68 15 x 15 0,67

Available in the wood finishes: 05W - 10W, and colours: - GC - GS - N. The code of the selected colour must be added to the article code. E.g.: PGAW...15 (chosen finish black) PGAWN 15.



USE PROBAND FIX FOR FIXING THE PROFILE TO THE WALL

B - White	GC - Light gray	GS - Dark gray	N - Black	05W - Light oak (strip)	10W - Wengé (panga panga-wengè)

The shade of the wooden finish in rigid expanded vinyl resin/PVC results slightly different from the film usually applied on the profiles in aluminium.

W00DEN/LVT



SKIRTING in PVC foam height 70 mm in 12 finishes: 4 in semi-matt black-grey-white and 8 wooden finishes to be matched with the PROINSERT SYSTEM profiles for floating laminated wood floors and traditional parquet floors. Laying is done by gluing (acetic silicone - acrylic - mastic) or using screws or nails. Attractive, strong, hardwearing and economic, it is easy to lay and ideal for many public premises (hospitals, schools, gymnasiums, rest homes and creative areas) and private environments. Easy to match with many wood species.

SKIRTING

EXPANDED VINYL RESIN



Available in the colours: B - GC - GS - N - 04W - 05W - 06W - 07W - 08W - 09W - 10W - M. The code of the selected colour must be added to the article code. E.g.: BTPR... 70 (chosen colour black) BTPRN 70

COLOURS

All depts reserved by Progress Profiles. Printed in Italy

2028

AGE...

B - White	GC - Light grey	GS - Dark grey	N - Black	04W - Dark beech	05W - Light oak (strip)
OGW - Dark oak (Walnut)	07W - Light cherry (strip)	08W - Dark cherry (board)	09W - Red walnut (Merbau-Apple-Walnut)	10W - Wengè (Panga-Panga - Wengè)	M - Mahogany

The shade of the wooden finish in rigid expanded vinyl resin/pvc results slightly different from the film usually applied on the profiles in aluminum.

ANGLE BAR produced in expanded PVC in 12 finishes: 4 colours in semi-matt, black-grey-white and 8 wooden Attractive, strong, hardwearing and economic, it is easy to lay and ideal for many public premises (hospitals, schools, gymnasiums, rest homes and creative areas) and private environments. Easy to match with many wood species



EXPANDED RIGID VINYL RESIN (black - light and dark grey - white) bar length

m 2,7 m - pack. 40 PCS - 108 m			bar length 2,7 im - pack. 40 PCS - 108 im			
hm €/lm	€/Pc	Article	L x H mm	€/lm	€/Po	
5 1,13	3,05	AGE 25	25 x 25	1,17	3,16	
	זית €/lm	חm €/lm €/Pc	nm €/lm €/Pc Article	nm €/lm €/Pc Article L x H mm	nm €/lm €/Pc Article L x H mm €/lm	

Available in the colours: B - GC - GS The code of the selected colour must be added to the article code. E.g.: AGE... 25 (chosen colour black) AGEN 25.

The shade of the wooden finish in rigid expanded vinyl resin/pvc results slightly different from the film usually applied on the profiles in aluminum.

LVT PROFILES	-
SOL 30P	
ALUMINIUM ANODIZED FINISHES AND WOODEN FINISHES	

ALUMINIUM TOP 80 wooden fin. "...W" (56 on demand), 6 anodized fin. (3 on demand) thermo packed - bar length 2,7 lm - pack. 20 Pcs - 54 lm Article Lmm €/lm €/Pc

30

4,58


12,37


LVT PROFILES -
ZERO CURVE
ALUMINIUM ANODIZED FINISHES
AND WOODEN FINISHES

ALUMINIUM TOP 80 wooden fin. "...W" (56 on demand), 6 anodized fin. (3 on demand) thermo packed - bar length 2.7 lm - pack. 20 Pcs - 54 lm

	, p		• • • • • •	
Article	Lmm	€/lm	€/Pc	
PINZ 2646	26	4,58	12,37	
PINZW 2646	26	7,84	21,17	

PNSP...W 3046 30 7,84 21,17 Available in the anodized finishes: AO - AA - AB (AT, CH and SB on demand with a minimum quantity order of 200 pcs) 05W - 09W - 13W - 18W - 21W - 25W - 29W - 30W - 31W - 33W - 34W - 36W - 37W - 38W - 39W - 41W - 42W - 43W - 44W - 45W - 46W - 47W - 48W - 49W. The code of the selected colour must be added to the article code. E.g.: PNSP... 3046 (chosen finish anod. gold) PNSPAO 3046.

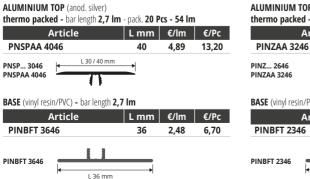






EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS 1. Choose the "SKIRTING" in the required the colour. 2. Lay the skirting using quick-setting acrylic silicone, mastic or bostik, suitable for gluing flexible PVC onto mortar-plaster-accessorised walls, etc. or fix with screws/nails.

USE PROBAND FIX FOR FIXING THE PROFILE TO THE WALL



EXPANDED VINYL RESIN




USE PROBAND FIX FOR FIXING THE PROFILE TO THE WALL

LVT PROFILES -TERMINAL PIN ALUMINIUM ANODIZED FINISHES

AND WOODEN FINISHES

ALUMINIUM TOP 80 wooden fin."W" (56 on demand), 6 anodized fin. (3 on demand) thermo packed - bar length 2,7 Im - pack. 20 Pcs - 54 Im				
Article	Lmm	€/lm	€/Pc	
PINTP 1946	19	4,58	12,37	
PINTPW 194	19	7,84	21,17	

	ALUMINIUM TOP (anod. silver)			
	thermo packed - bar length 2,7 lm - p	ack. 20 Pcs	- 54 lm	
c	Article	Lmm	€/lm	€/Po



BASE (VIIIYI resin/PVC) - bar length Z,7 IM							
	Article	L mm	€/lm	€/Pc			
PINBFT 23	46	23	2,48	6,70			
PINBFT 2346	L 23 mm						
			RES	SS®	271		

PNSP... 3046

EXPANDED RIGID VINYL RESIN (black - light and dark grey - white)

1,27

1,33

€/Pc

2,54

€/Pc

2.66

€/Pack.

152.40

€/Pack.

159 60

Hmm €/lm

Hmm €/lm

70

EXPANDED RIGID VINYL RESIN (8 wooden finishes)

70

bar length 2 lm - pack. 60 Pcs - 120 lm

bar length 2 lm - pack. 60 Pcs - 120 lm

Article

Article


BTPR... 70

BTPR... 70

EXPANDED RIGID VINYL RESIN (8 wooden finishes)

mm	€/lm	€/Pc	Article	L x H mm	€/lm	€/Pc
25	1,13	3,05	AGE 25	25 x 25	1,17	3,16
5 - N - ()4W - 05W - I	06W - 07W - (08W - 09W - 10W - M.			

SOL 30 (only top)



WOODEN-FINISHES AND ANODIZED FINISHES



30

6,08

PINS... 30

ALUMINIUM COVERED (80 wooden finishes f which 71 on demand) thermo packed - bar length 2,7 lm - pack. 40 Pcs - 108 lm


Article	Lmm	€/Im	€/Pc
PINS 30	30	11,40	30,78
 a demand with a minimum or	antitu ard	or of 200 p.c.	

Available in the anodized finishes: AO - AA - AB (AT, CH and SB available on demand with a minimum quantity order of 200 pcs), 04W - 05W - 07W - 09W - 13W - 18W - 21W - 25W - 29W - 30W The code of the selected colour must be added to the article code, E.g.; PINS., 30 (chosen finish anod, gold) PINSAO 30.

16.42

TERMINAL PIN (only top)

WOODEN-FINISHES AND ANODIZED FINISHES

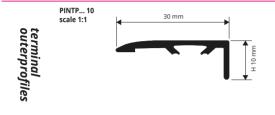


ANODIZED ALUMINIUM (6 anod. alum. finishes of which 3 on demand) thermo packed - bar length 2,7 lm - pack. 40 Pcs - 108 lm			ALIMINIUM COVERED (80 woo thermo packed - bar length 2,				
Article	Lmm	€/Im	€/Pc	Article	Lmm	€/lm	€/Pc
PINTP 10	10	8,85	23,89	PINTP	10	14,95	40,37

Available in the colours: AO - AA - AB (AT, CH and SB on demand with a minimum quantity order of 200 pcs) 04W - 05W - 07W - 09W - 13W - 18W - 21W - 25W - 29W - 30W - 31W - 32W - 33W - 34W - 35W - 36W - 37W - 38W - 39W - 41W - 42W - 44W - 45W - 46W - 48W - 49W - 53W - 54W - 55W - 65W - 73W - 75W.

The code of the selected colour must be added to the article code. E.g.: PINTP... 10 (chosen finish anod. gold) PINTPAO 10.

ZERO CURVE 07-09-13-15 (only top)

WOODEN-FINISHES AND ANODIZED FINISHES

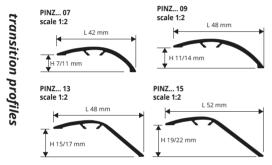

ANODIZED ALUMINIUM (6 anod. alum. finishes of which 3 on demand) thermo packed - bar length 2,7 lm

pack. 20 Pcs - 54 lm (H 7 - H 9 mm - 108 lm)				
Article	H mm	€/Im	€/Pc	
PINZ 07	7/11	8,32	22,46	
PINZ 09	11 / 14	9,04	24,41	
PINZ 13	15 / 17	11,94	32,24	
PINZ 15	19 / 22	12,52	33,80	

ALUMINIUM COVERED (80 wooden finishes f which 49 on demand) thermo packed - bar length 2,7 Im


pack. 20 Pcs - 54 lm (H 7 - H 9 mm - 108 lm)				
Article	H mm	€/Im	€/Pc	
PINZ 07	7 / 11	15,25	41,18	
PINZ 09	11 / 14	15,82	42,71	
PINZ 13	15 / 19	18,10	48,87	
PINZ 15	19 / 22	19,77	53,38	

Available in the anodized finishes: AO - AA - AB (AT, CH and SB on demand with a minimum quantity order of 200 pcs) 04W - 05W - 07W - 09W - 13W - 18W - 21W - 25W - 29W - 30W - 31W - 32W - 33W - 34W - 35W - 36W - 37W - 38W - 39W - 41W - 42W - 44W - 45W - 46W - 48W - 49W - 53W - 54W - 55W - 65W - 73W - 75W.

The code of the selected colour must be added to the article code. E.g.: PINZ... 07 (chosen finish anod. gold) PINZAO 07

STYLE STAIR (only top)

WOODEN-FINISHES AND ANODIZED FINISHES



W00DEN/LVT

thermo packed- bar length 2,7 lm - pack. 20 Pcs - 54 lm					
Article	L x H mm	€/Im	€/Pc		
PINY	27,5 x 25	9,49	25,62		

ANODIZED ALLIMINIUM (6 anod alum finishes of which 2 on domand)

ALUMINIUM COVERED (80 wooden finishes f which 60 on demand) thermo packed - bar length 2,7 Im - pack. 10 Pcs - 27 Im				
Article	L x H mm	€/lm	€/Pc	
PINY	27,5 x 25	16,01	43,23	

Available in the colours: AO - AA - AB (AT, CH and SB on demand with a minimum quantity order of 200 pcs) 05W - 07W - 09W - 18W - 21W - 29W - 30W - 31W - 32W - 34W - 35W - 37W - 41W - 42W - 44W - 46W - 48W - 49W - 65W - 73W - 75W. The code of the selected colour must be added to the article code. E.g.: PINY... (chosen finish anod. gold) PINYAO.

STYLE STAIR L (only top) WOODEN-FINISHES AND ANODIZED FINISHES 45 mm ıd) PINYL.

PINYL.

PNSP... 40P



ANODIZED ALUMINIUM (6 a thermo packed bar length 2	. ,7 lm - pack. 20	Pcs - 54 lm	on demand
Article	L x H mm	€/lm	€/Pc

45 x 23.8

10,45

7.84

ALUMINIUM COVERED (80 wooden finishes f which 57 on demand)

thermo packed - bar length 2,7 Im - pack. 10 Pcs - 27 Im


	Article		€/Im	€/PC
I	PINYL	45 x 23,8	17,62	47,57

Available in the colours: AO - AA - AB (AT, CH and SB on demand with a minimum quantity order of 200 pcs), 04W - 05W - 13W - 18W - 21W - 25W - 29W - 30W - 31W - 32W - 33W - 34W - 35W - 36W - 37W - 38W - 39W - 41W - 42W - 44W - 45W - 53W - 55W The code of the selected colour must be added to the article code. E.g.: PINY... (chosen finish anod. gold) PINYAO.

28.21

SOL 40 P (only top)

WOODEN-FINISHES AND ANODIZED FINISHES

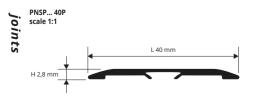



ANODIZED ALUMINIUM (6 anod. alum. finishes of which 3 on demand) thermo packed- bar length 2,7 lm - pack. 40 Pcs - 108 lm Article L x H mm €/Im

40

ALUMINIUM COVERED (80 wooden finishes f which 49 on de	emand)
thermo packed- bar length 2,7 lm - pack. 10 Pcs - 27 lm	

€/Pc	Article	L x H mm	€/Im	€/Pc
21,17	PNSP 40P	40	14,34	38,72

Available in the colours: AO - AA - AB (AT, CH and SB on demand with a minimum quantity order of 200 pcs) 04W - 05W - 07W - 09W - 13W 18W - 21W - 25W - 29W - 30W - 31W - 32W - 33W - 34W - 35W - 36W - 37W - 38W - 39W - 41W - 42W - 44W - 45W - 46W - 48W - 49W - 53W 54W - 55W - 65W - 73W - 75W.

The code of the selected colour must be added to the article code. E.g.: PNSP... 40P (chosen finish anod. gold) PNSPAO 40P.



INTERCHANGEABLE INSERT

PIN 09

PIN 15

scale 1.1

scale 1:1

PIN 07 scale 1:1

PIN 13

H = 13

PIN 19 scale 1:1

H = 10

scale 1:1

€/Pc

3,97

4,37

4,75

5,13

5,62

5,97

RIGID IMPACT-RESISTANT NO-TOXIC VINYL RESIN

PIN 11 scale 1:1


PIN 17

scale 1:1

RIGID IMPACT-RESISTANT NO-TOXIC VINYL RESIN bar length 2,7 LM - pack. 20 Pcs - 54 LM


Article	Hmm	€/lm	€/Pc
PIN 07	7	1,34	3,62
PIN 09	9	1,47	3,97
PIN 11	11	1,62	4,37
PIN 13	13	1,76	4,75
PIN 15	15	1,90	5,13
PIN 17	17	2,08	5,62
PIN 19	19	2,21	5,97

FOR SOL 40 P AND TERMINAL PIN

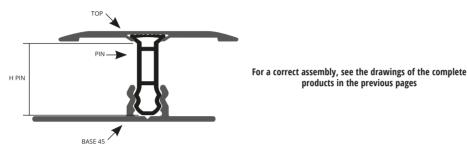

PROINSERT **BASE 45 AND BASE 40**

NATURAL ALUMINIUM





RIGID IMPACT-RESISTANT NO-TOXIC VINYL RESIN

Hmm

9

11

13

15

17

19

products in the previous pages

FOR ZERO CURVE, STYLE STAIR

€/Im

1,47

1,62

1,76

1,90

2,08

2,21

bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article

PIN 09

PIN 11

PIN 13

PIN 15

PIN 17

PIN 19



ALUM. PUNCHED/PERFORED FOR SOL 30-40-50 AND ZERO CURVE bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	width mm	€/lm	€/Pc
PINBFT 45	45	6,37	17,20
PINBFT 40	40	6,29	16,98


SCREWS and SCREW ANCHORS to fix all perforated version


NICKEL - PLATED FLATHEAD SCREWS + SCREW ANCHORS nack 1 000 Prs

pucit. 1.000 1 C3			
Article	Ømm	length mm	€/Pack.
VINIPT 325	03	25	91,53

BRASS - PLATED	FLATHEAD SCREWS + SCREW ANCHORS
pack. 1.000 Pcs	

Article	Ømm	length mm	€/Pack.
VIOTPT 325	03	25	91,53





+



© 2028 All dights reserved by Progress Profiles. Publied in liely

273





An interpretation of: The Gherkin, Norman Foster, LONDON (England), 2004




DO IT YOUR SELF PROFILES

DO IT YOUR SELF

CORNER EQUAL SIDES

POLISHED STAINLESS STEEL 1.4016

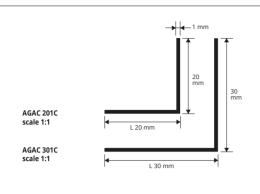

POLISHED STAINLESS STEEL 1.4016 with protective film thick 1 mm - bar length 2 lm - pack. 10 Pcs - 20 lm				
Article	L x H mm	€/lm	€/Pc	
AGAC 201C	20 x 20	7,15	14,30	
AGAC 301C	30 x 30	8,68	17,36	

The indicated prices are with bar code EAN 13. On demand are available 1 lm bars.


COLOURS





CORNER EQUAL SIDES

POLISHED BRASS



POLISHED BRASS with protective film thick **1 mm -** bar length **2 lm** - pack. **10 Pcs - 20 lm**

	poeta re			
Article	L x H mm	€/lm	€/Pc	
AGOL 201C	20 x 20	18,40	36,80	*
AGOL 301C	30 x 30	27,36	52,12	*

The indicated prices are with bar code EAN 13. On demand are available 1 lm bars.


COLOURS






CORNER EQUAL SIDES

ANODIZED GOLD AND SILVER, POLISHED CHROME AND WHITE VARNISHED ALUMINIUM



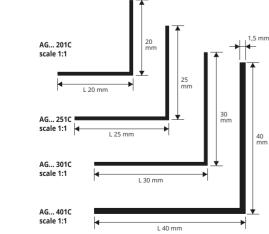

ANODIZED GOLD and SILVER ALUMINIUM thermo packed bar length 2 lm - pack. 10 Pcs - 20 lm

1 (3 - 20 111		
L x H mm	€/Im	€/Pc
10 x 10	2,38	4,76
15 x 15	2,63	5,26
20 x 20	3,21	6,42
25 x 25	3,58	7,16
30 x 30	3,92	7,84
40 x 40	7,26	14,52
	L x H mm 10 x 10 15 x 15 20 x 20 25 x 25 30 x 30	L x H mm €/Im 10 x 10 2,38 15 x 15 2,63 20 x 20 3,21 25 x 25 3,58 30 x 30 3,92

Available in the finishes: AO - AA. The code of the selected colour must be added to the article code.

E.g.: AG... 101C (chosen finish anodized gold) AGAO 101C

POLISHED CHROME ALUMINIUM thermo packed bar length 2 lm - pack. 10 Pcs - 20 lm

p			
Article	L x H mm	€/Im	€/Pc
AGBC 101C	10 x 10	3,74	7,48
AGBC 151C	15 x 15	4,04	8,08
AGBC 201C	20 x 20	4,81	9,62
AGBC 251C	25 x 25	5,31	10,62
AGBC 301C	30 x 30	5,91	11,82
AGBC 401C	40 x 40	9,32	18,64

WHITE VARNISHED ALUMINIUM thermo packed

bar length 2 lm - pack. 10	Pcs - 20 lm	-	
Article	L x H mm	€/Im	€/Pc
AGB 101C	10 x 10	2,45	4,90
AGB 151C	15 x 15	2,71	5,42
AGB 201C	20 x 20	3,27	6,54
AGB 251C	25 x 25	3,62	7,24
AGB 301C	30 x 30	3,98	7,96
AGB 401C	40 x 40	7,25	14,50

The indicated prices are with bar code EAN 13. On demand are available 1 lm bars.

COLOURS				
AO - Anodized gold alum.	AA - Anodized silver alum.	BC - Polished chrome alum.	B - White varnished alum.	



DO IT YOUR SELF

PROGRESS® PROFILES

* = Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed

Prices are referred to whole packs.

CORNER EQUAL SIDES

NON - TOXIC VINYL RESIN



Article	LxHmm	€/Im	€/Pc
AGP10C	10 x 10	0,60	1,20
AGP15C	15 x 15	0,96	1,92
AGP20C	20 x 20	1,42	2,84
AGP25C	25 x 25	1,78	3,56


E.g.: AGP10...C (colour white) AGP10BC

The indicated prices are with bar code EAN 13. On demand are available 1 lm bars.




NON TOYIC VINVI DECIN





CORNER "L-FORM"

ANODIZED GOLD AND SILVER, POLISHED CHROME AND WHITE VARNISHED ALUMINIUM

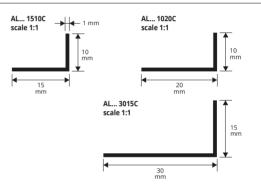

COLOURS



AL 1510C	15 X 10	2,38	4,76
AL 1020C	20 x 10	2,57	5,14
AL 3015C	30 x 15	3.30	6 60

€/lm

€/Pc

ANODIZED GOLD AND SILVER ALUMINIUM thermo packed

L x H mm

AL... 3015C Available in the finishes: AO - AA.

Article

bar length 2 lm - pack. 10 Pcs - 20 lm

The code of the selected colour must be added to the article code. E.g.: AL... 1510C (chosen finish anodized gold) ALAO1510C.

POLISHED CHROME ALUMINIUM thermo packed

bar length Z im - pack. T U PCS - ZU im				
Article	L x H mm	€/Im	€/Pc	
ALBC 1510C	15 x 10	3,86	7,72	
ALBC 1020C	20 x 10	4,04	8,08	
ALBC 3015C	30 x 15	5,00	10,00	

WHITE VARNISHED ALUMINIUM thermo packed

bar length 2 Im - pack. 10	Pcs - 20 lm		
Article	L x H mm	€/Im	€/Pc
ALB 1510C	15 x 10	2,45	4,90
ALB 3015C	30 x 15	3,35	6,70

The indicated prices are with bar code EAN 13. On demand are available 1 lm bars.



N	DN	TOXIC	VIN	IYL R	ESI	Ν	
ha	r lo	noth 2	Im	nack	10	Dec	

bar length 2 lm - pack. 10 Pcs - 20 lm			
Article	L x H mm	€/Im	€/Pc
ALP20C	20 x 10	0,92	1,84
ALP25C	25 x 20	1,39	2,78
ALP30C	30 x 20	1,45	2,90
ALP40C	40 x 10	1,71	3,42
Available in the color	irs: B-N		

The code of the selected colour must be added to the article code. E.g.: ALP20...C (colour white) ALP20BC.


The indicated prices are with bar code EAN 13. On demand are available 1 lm bars.

COLOURS






NON - TOXIC VINYL RESIN

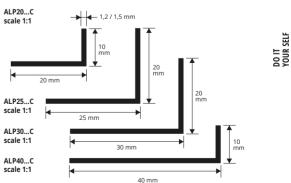




CANAL "U FORM"

ANODIZED GOLD AND SILVER, POLISHED CHROME AND WHITE VARNISHED ALUMINIUM





				10 mm	
	ł	10 mm	•		
1C 1					
			17		

20

ANODIZED GOLD AND SILVER ALUMINIUM thermo packed	
har length 2 lm - nack 10 Pcs - 20 lm	

0			
Article	L x H mm	€/Im	€/Pc
CU 081C	8 x 8	2,17	4,34
CU 101C	10 x 10	2,57	5,14
CU 151C	10 x 15	3,11	6,22
CU 201C	10 x 20	3,17	6,34

Available in the finishes: AO - AA.

The code of the selected colour must be added to the article code. E.g.: CU... 101C (chosen finish anodized gold) CUAO 101C.

POLISHED CHROME ALUMINIUM thermo packed

bar length 2 Im - pack. 10	Pcs - 20 Im		
Article	L x H mm	€/Im	€/Pc
CUBC 081C	8 x 8	3,82	7,64
CUBC 101C	10 x 10	3,91	7,82
CUBC 151C	10 x 15	4,77	9,54

WHITE VARNISHED ALUMINIUM thermo packed

bar length 2 lm - pack. 10 Pcs - 20 lm					
Article	L x H mm	€/lm	€/Pc		
CUB 081C	8 x 8	3,36	6,72		
CUB 101C	10 x 10	3,55	7,10		
CUB 151C	10 x 15	4,16	8,32		
CUB 201C	10 x 20	4.77	9.54		

The indicated prices are with bar code EAN 13. On demand are available 1 lm bars.





COLOURS

AO - Anodized gold alum.	AA - Anodized silver alum.	BC - Polished chrome alum.
B - White varnished alum.		

CANAL DOUBLE "U FORM"

ANODIZED GOLD AND SILVER, POLISHED CHROME AND WHITE VARNISHED ALUMINIUM





ANODIZED GOLD AND SILVER ALUMINIUM thermo packed bar length 2 Im - pack. 10 Pcs - 20 Im

0 1			
Article	L x H mm	€/Im	€/Pc
CW 167C	16 x 7	2,94	5,88
CW 161C	16 x 12	3,62	7,24
CW 201C	20 x 10	3,72	7,44
CW 208C	20 x 18	4,81	9,62

Available in the finishes: AO - AA. The code of the selected colour must be added to the article code. E.g.: CW... 167C (chosen finish anodized gold) CWAO 167C.

POLISHED CHROME ALUMINIUM thermo packed bar length 2 Im - pack. 10 Pcs - 20 Im

0 1			
Article	L x H mm	€/Im	€/Pc
CWBC 167C	16 x 7	4,68	9,36
CWBC 161C	16 x 12	6,03	12,06
CWBC 201C	20 x 10	6,36	12,72
CWBC 208C	20 x 18	6,99	13,98

WHITE VARNISHED ALUMINIUM thermo packed

bar length 2 lm - pack. 10 Pcs - 20 lm

Article	L x H mm	€/lm	€/Pc	
CWB 161C	16 x 12	3,72	7,44	*
CWB 208C	20 x 18	4,70	9,40	*

The indicated prices are with bar code EAN 13. On demand are available 1 lm bars.



COLOURS AO - Anodized gold alum. AA - Anodized silver alum. BC - Polished chrome alum. B - White varnished alum.

DO IT YOUR SELF




PROGRESS® PROFILES

FLAT

ANODIZED GOLD AND SILVER, POLISHED CHROME AND WHITE VARNISHED ALUMINIUM

Pl... 102C scale 1:1

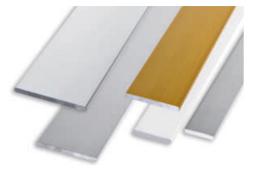

ANODIZED GOLD AND SILVER ALUMINIUM thermo packed bar length 2 lm - pack. 10 Pcs - 20 lm

Article	L mm	€/Im	€/Pc
PI 102C	10	2,22	4,44
Pl 122C	12	2,35	4,70
PI 152C	15	2,81	5,62
PI 202C	20	3,14	6,28
PI 252C	25	3,55	7,10
PI 302C	30	4,16	8,32
PI 402C	40	5,49	10,98

Available in the finishes: AO - AA. The code of the selected colour must be added to the article code. E.g.: Pl... 122C (chosen finish anodized gold) PIAO 122C.

POLISHED CHROME ALUMINIUM thermo packed bar length 2 lm - pack 10 Pcs - 20 lm

Article	Lmm	€/Im	€/Pc	
PIBC 102C	10	3,72	7,44	
PIBC 122C	12	3,83	7,66	
PIBC 152C	15	4,28	8,56	
PIBC 202C	20	4,68	9,36	
PIBC 252C	25	5,30	10,60	
PIBC 302C	30	6,95	13,90	
PIBC 402C	40	9,21	18,42	

Pl... 122C scale 1:1 PI... 152C scale 1:1 PI... 202C scale 1:1 PI... 252C scale 1:1 L 25 mm PI... 302C scale 1:1 L 30 mm PI... 402C scale 1:1 L 40 mr

WHITE VARNISHED ALUMINIUM thermo packed bar length 2 lm - pack. 10 Pcs - 20 lm


÷ .			
Article	Lmm	€/lm	€/Pc
PIB 102C	10	2,80	5,60
PIB 152C	15	2,90	5,80
PIB 202C	20	3,17	6,34
PIB 252C	25	3,62	7,24
PIB 302C	30	4,17	8,34
PIB 402C	40	5,55	11,10

The indicated prices are with bar code EAN 13. On demand are available 1 lm bars.

COLOURS			
AO - Anodized gold alum.	AA - Anodized silver alum.	BC - Polished chrome alum.	B - White varnished alum.

FLAT

NATURAL, POLISHED AND BRUSHED BRASS



BRUSHED BRASS thermo packed bar length 2.7 lm - pack. 20 Pcs - 20 lm

bar length 2,7 lm - pack. 10 Pcs 20 lm			bar length 2,7 lm - pack. 20 Pcs - 20 lm					
Article	L mm	€/Im	€/Pc	Article	Lmm	€/lm	€/Pc	
O PIOL 102C	10	12,01	32,43	🛨 🧿 PIOS 102C	10	12,01	32,43	*
O PIOL 202C	20	23,17	62,56	🛨 🧿 PIOS 202C	20	23,17	62,56	*

*

COLOURS

NATURAL BRASS thermo packed bar length 2,7 lm - pack. 10 Pcs - 20 lm

POLISHED BRASS thermo packed

Article

O PION 102C

PION 202C



L mm

10

20

€/lm


7,46

15,04

€/Pc

20,14

40,61 📩




Prices are referred to whole packs.



EMPTY ROUND TUBE

ANODIZED GOLD AND SILVER ALUMINIUM POLISHED CHROME ALUMINIUM

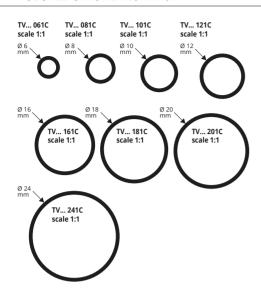

ANODIZED GOLD AND SILVER ALUMINIUM thermo packed thick 1 mm - bar length 2 lm - pack. 10 Pcs - 20 lm

Article	Ø mm ext.	€/Im	€/Pc
TV 061C	6	2,32	4,64
TV 081C	8	2,48	4,96
TV 101C	10	2,70	5,40
TV 121C	12	3,02	6,04
TV 161C	16	3,36	6,72
TV 181C	18	3,77	7,54
TV 201C	20	4,16	8,32
TV 241C	24	6,78	13,56

Available in the finishes: AO - AA.

E.g.: TV... 122C (chosen finish anodized gold) TVAO 122C.

POLISHED CHROME ALUMINIUM thermo packed thick 1 mm - bar length 2 im - pack. 10 Pcs - 20 im

unen burrengur -		20 111		
Article	Ø mm ext.	€/Im	€/Pc	
TVBC 081C	8	3,97	7,94	*
TVBC 101C	10	4,43	8,86	*
TVBC 121C	12	4,92	9,84	*
TVBC 161C	16	5,51	11,02	*
TVBC 181C	18	6,15	12,30	*
TVBC 201C	20	6,85	13,70	*
TVBC 241C	24	11,55	23,10	*




COLOURS

AO - Anodized gold alum.	AA - Anodized silver alum.	BC - Polished chrome alum.			
The indicated prices are with bar code EAN 13. On demand are available 1 Im bars.					

FULL ROUND TUBE

ANODIZED GOLD AND SILVER ALUMINIUM POLISHED CHROME ALUMINIUM



ANODIZED GOLD AND SILVER ALUMINIUM thermo packed bar length 2 Im - pack. 10 Pcs - 20 Im


Article	Ø mm ext.	€/lm	€/Pc	
TP 06C	6	2,89	5,78	*
TP 08C	8	3,82	7,64	
TP 10C	10	5,43	10,86	
Available in the finish	ies: AO - AA.			

The code of the selected colour must be added to the article code. E.g.: TP... 122C (chosen finish anodized gold) TPAO 122C.

POLISHED CHROME ALUMINIUM thermo packed har length 2 Im - pack 10 Prs - 20 Im

Dar length 2 mi - pack. 10 FCS - 20 mi				
Ø mm ext.	€/lm	€/Pc		
6	4,68	9,36	*	
8	6,46	12,92	*	
10	9,05	18,10	*	
	Ø mm ext. 6 8	Ø mm ext. €/lm 6 4,68 8 6,46	Ø mm ext. €/Im €/Pc 6 4,68 9,36 8 6,46 12,92	

The indicated prices are with bar code EAN 13. On demand are available 1 lm bars.





FULL SQUARE TUBE

ANODIZED GOLD AND SILVER ALUMINIUM

ANODIZED	GOLD /	AND SIL	VER ALUI	MINIUM	thermo	packed	
bar length 2	lm - pa	ck. 10 Pc	s - 20 lm				

Article	L x H mm	€/lm	€/Pc
TQP 08C	8 x 8	4,63	9,26
TQP 10C	10 x 10	6,70	13,40
Available in the finishe	s: AO - AA. Th	e code of the	selected colour

must be added to the article code. E.g.: TQP... 08C (chosen finish anodized gold) TQPAO 08C.

The indicated prices are with bar code EAN 13. On demand are available 1 lm bars.



COLOURS


AO - Anodized gold alum. AA - Anodized silver alum.





EMPTY SQUARE TUBE

ANODIZED GOLD AND SILVER ALUMINIUM POLISHED CHROME ALUMINIUM



	11	
/	11	

/ т
Ava The E.g.
POI bar

COLOURS		
		-
AO - Anodized gold alum.	AA - Anodized silver alum.	BC - Polished chrome alum.

ANODIZED GOLD AND SILVER ALUMINIUM thermo packed
har length 2 lm - nack 10 Prs - 20 lm


Article	L x H mm	€/Im	€/Pc		
TQV 10C	10 x 10	3,21	6,42		
TQV 15C	15 x 15	4,23	8,46		
TQV 20C	20 x 20	5,30	10,60		
Available in the finish	ies: AO - AA.				

e code of the selected colour must be added to the article code. z.: TOV... 10C (chosen finish anodized gold) TOVAO 10C.

LISHED CHROME ALUMINIUM thermo packed length 2 lm - pack. 10 Pcs - 20 lm

Article	L x H mm	€/Im	€/Pc		
TQVBC 10C	10 x 10	5,29	10,58		
TQVBC 15C	15 x 15	7,04	14,08		
TQVBC 20C	20 x 20	8,84	17,68		

The indicated prices are with bar code EAN 13. On demand are available 1 lm bars.

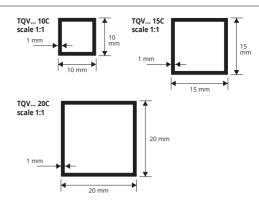

EMPTY RECTANGULAR TUBE

ANODIZED GOLD AND SILVER, POLISHED CHROME AND WHITE VARNISHED ALUMINIUM





	103-20111		
Article	L x H mm	€/lm	€/Pc
TR 2010C	20 x 10	4,23	8,46
TR 3015C	30 x 15	5,43	10,86
Available in the finishes: The code of the selecte		t be added to t	he article code.

E.g.: TR... 2010C (chosen finish anodized gold) TRAO 2010C

POLISHED CHROME ALUMINIUM thermo packed

bar length Z Im - pack. 10 PCS - 20 Im				
Article	L x H mm	€/Im	€/Pc	
TRBC 2010C	20 x 10	7,01	14,02	
TRBC 3015C	30 x 15	9,05	18,10	

ANODIZED GOLD AND SILVER ALUMINIUM thermo packed

L mm

18

22

25

L mm

18

22

25

L mm

18

The code of the selected colour must be added to the article code. E.g.: UG... 181C (chosen finish anodized gold) UGAO 181C.

thick 1 mm - bar length 2 lm - pack. 10 Pcs - 20 lm

POLISHED CHROME ALUMINIUM thermo packed thick 1 mm - bar length 2 lm - pack. 10 Pcs - 20 lm

WHITE VARNISHED ALUMINIUM thermo packed thick 1 mm - bar length 2 lm - pack. 10 Pcs - 20 lm

Article

Article

Article

UGBC 181C

UGBC 221C

UGBC 251C

UGB 181C

Available in the finishes: AO - AA.

UG... 181C

UG... 221C

UG... 251C

WHITE VARNISHED ALUMINIUM thermo packed	
bar length 2 lm - pack. 10 Pcs - 20 lm	

Article	L x H mm	€/Im	€/Pc	
TRB 2010C	20 x 10	4,35	8,70	*

€/lm

2 61

2,81

2,89

€/Im

4,12

4,63

4,68

€/Im

2,71

€/Pc

5 22

5,62

5,78

€/Pc

8,24


9,26

9,36

€/Pc


5,42

The indicated prices are with bar code EAN 13. On demand are available 1 lm bars.




CURVE PROFILE


ANODIZED GOLD AND SILVER, POLISHED CHROME AND WHITE VARNISHED ALUMINIUM










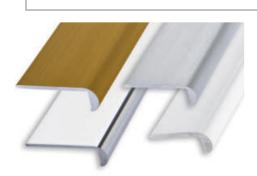

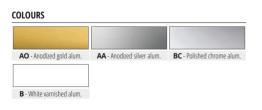


The indicated prices are with bar code EAN 13.


On demand are available 1 lm bars.

DO IT YOUR SELF

PROFILE "T FORM"

ANODIZED GOLD AND SILVER ALUMINIUM POLISHED CHROME ALUMINIUM





ANODIZED GOLD AND SILVER ALUMINIUM thermo packet	d
thick 1 mm - bar length 2 lm - pack. 10 Pcs - 20 lm	

Article	L x H mm	€/lm	€/Pc
T 1515C	15 x 15	3,36	6,72
T 2525C	25 x 25	4,77	9,54
A 11 1 1 1 1 1 1 1 1 1	10 11		


Available in the finishes: AO - AA. The code of the selected colour must be added to the article code. E.g.: T... 1515C (chosen finish anodized gold) TAO 1515C.

POLISHED CHROME ALUMINIUM thermo packed

thick 1 mm - bar length 2 lm - pack. 10 Pcs - 20 lm				
Article	L x H mm	€/lm	€/Pc	
TBC 1515C	15 x 15	5,07	10,14	

TBC 1515C	15 x 15	5,07	10,14
TBC 2525C	25 x 25	6,51	13,02

The indicated prices are with bar code EAN 13. On demand are available 1 Im bars.




COLOURS

AO - Anodized gold alum.	AA - Anodized silver alum.	BC - Polished chrome alum.

CURTAINBALANCE

ANODIZED SILVER AND WHITE VARNISHED ALUMINIUM



ANODIZED SILVER ALUMINIUM thermo packed thick 4 mm - bar length 2 lm - pack. 10 Pcs - 20 lm					
Article	L mm	€/lm	€/Pc		
CTAA 304C	30	7,00	14,00	_	
CTAA 404C	40	9,47	18,94	*	
WHITE VARNISHED ALUMINIUM thermo packed thick 4 mm - bar length 2 lm - pack. 10 Pcs - 20 lm					
				_	
			€/Pc		
thick 4 mm - bar length 2	lm - pack. 10 I	Pcs - 20 lm	€/Pc 14,38	*	
thick 4 mm - bar length 2 Article	lm - pack. 10 I L mm	Pcs - 20 lm €/Im		* *	



COLOURS


AA - Anodized silver alum. B - White varnished alum.

© 2023 All rights reserved by Progress Profiles. Printed in litely

















TQPF 08 TQPF 10 TQPF 12 TQPF 14


TVF 12 TVF 16 TVF 20 TVF 25











FLAT IRON

thick 3 mm - bar length 2 lm - pack. 10 Pcs - 20 lm

Article	L mm	€/lm	€/Pc
PIF 153	15	2,17	4,34
PIF 203	20	2,50	5,00
PIF 253	25	3,13	6,26
PIF 403	40	5,07	10,14
items not for sell indiv	idually.		

CORNER EQUAL SIDES IRON

thick 3 mm - bar length 2 lm - pack. 10 Pcs - 20 lm				
Article	LxHmm	€/Im	€/Pc	
AGF 203	20 x 20	5,24	10,48	
AGF 303	30 x 30	6,52	13,04	
AGF 403	40 x 40	8,21	16,42	
items not for sell in	dividually.			

CORNER "L-FORM" IRON

thick 2 mm -	bar length 2 Im	- pack. 10 Pcs	- 20 lm

uner z min buriengui	- min puck. Io i c.	20 1111		
Article	LxHmm	€/Im	€/Pc	
ALF 3020	30 x 20	6,31	12,62	*
ALF 4020	40 x 20	7,04	14,08	*

items not for sell individually. EMPTY ROUND TUBE IRON

bar length 2 im - pack. 10 Pcs - 20 im

bui icligati z ini puck.	10105 20111			
Article	Ø mm ext.	€/Im	€/Pc	
TVF 12	12	3,77	7,54	*
TVF 16	16	4,83	9,66	*
TVF 20	20	5,91	11,82	*
TVF 25	25	7,08	14,16	*
items not for sell individually.				

FULL ROUND TUBE IRON

bar length **2 lm** - pack. **10 Pcs - 20 lm**

Article	Ø mm ext.	€/lm	€/Pc	
TPF 10	10	3,70	7,40	*
TPF 12	12	4,27	8,54	*
items not for sell indiv	/idually.			

FULL SQUARE TUBE IRON

bar length 2 Im - pack. 10 Pcs - 20 Im

Article	LxHmm	€/Im	€/Pc	
TQPF 08	8 x 8	2,90	5,80	*
TQPF 10	10 x 10	4,35	8,70	*
TQPF 12	12 x 12	5,64	11,28	*
TQPF 14	14 x 14	7,64	15,28	*
items not for sell ind	ividually			

EMPTY SQUARE TUBE IRON

bar length 2 lm - pack. 10 Pcs - 20 lm

Article	L x H mm	€/Im	€/Pc				
TQVF 20	20 x 20	7,15	14,30	*			
TQVF 25	25 x 25	9,02	18,04	*			
TQVF 30	30 x 30	10,06	20,12	_			
TQVF 40	40 x 40	12,93	25,86	*			
itoms not for coll indiv	<i>idually</i>						

items not for sell individually.

EMPTY RECTANGULAR TUBE IRON

bar length 2 Im - pack. 10 Pcs - 20 Im								
Article	L x H mm	€/Im	€/Pc					
TRF 3020	30 x 20	7,80	15,60					
TRF 4020	40 x 20	9,09	18,18					
items not for sell individually.								

PROFILE "T-FORM" IRON

bar length 2 lm - pack. 10 Pcs - 20 lm

Article	LxHmm	€/Im	€/Pc
TF 20	20 x 20	5,24	10,48

items not for sell individually.

CANAL "U FORM" IRON

bar length 2 lm - pack. 10 Pcs - 20 lm							
Article	LxHmm	€/lm	€/Pc				
CUF 1515	15 x 15	4,56	9,12	*			
CUF 3020	30 x 20	5,50	11,00	*			

items not for sell individually. The indicated prices are without bar code


🛪 = Production on demand with minimum quantity of 250 pcs. Production delay 4/5 weeks. Price to be agreed

Prices are referred to whole packs.





An interpretation of: One World Trade Center, David Childs , NE<mark>W YORK CITY (USA), 2014</mark>

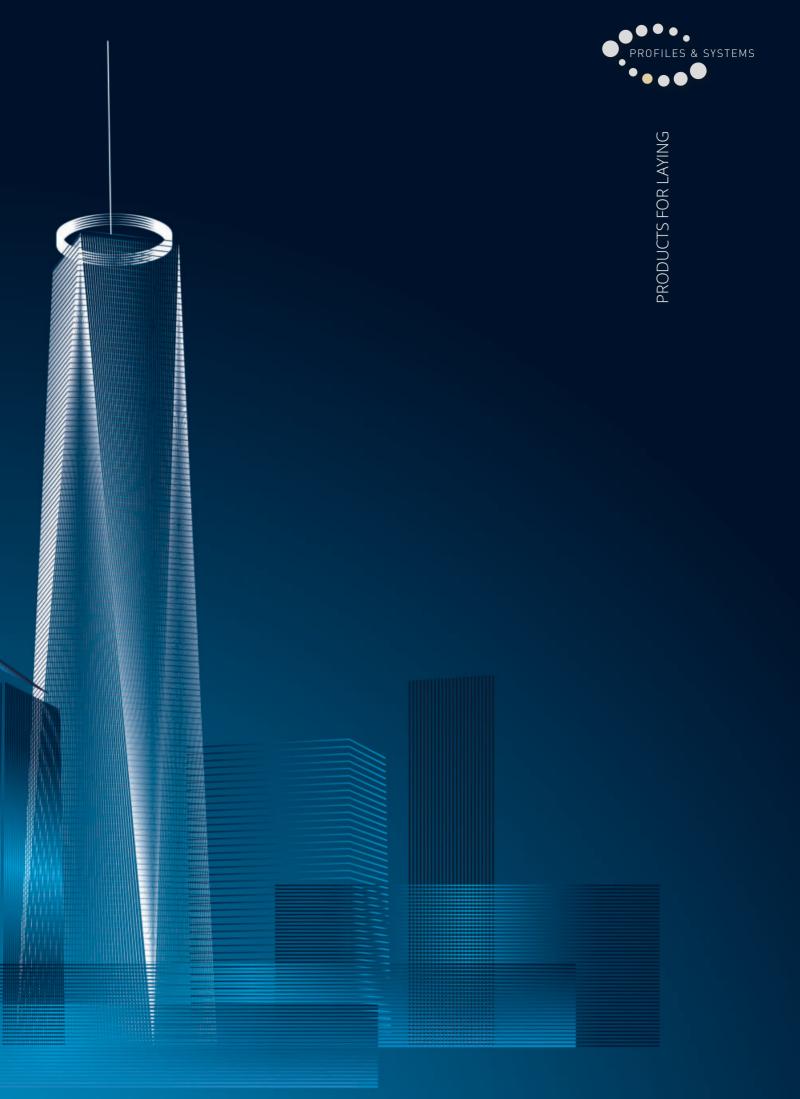

PRODUCTS FOR LAYING

TRANSPARENCY FOR A PERFECT LAYING.



Completely visible joint

H ≥ 50 mm

H ≥ 50 mm

PROBANO

The only one with 2 elements

Save 3 pieces on intersections

1407796 1424326 2,790,556 EP 2573296 B1 EP 2952652 B1 EP 3511484 B1 US 8,635,815 B2 US 9,328,522 B2 US 10,760,284 2019000015848 20201800000069410 Patents Pending



Proleveling System







Kicking the clip in the direction of the joint.

ADVANTAGES

Simple and quick to lay with only 2 elements: leveler & **cap**. No need for expensive hand tools.

The only worldwide leveling system with multiple size levelers (2,3 and 5 mm). Built in spacers are available to accommodate "+" intersections as well as "T" joints with a single leveler saving up to 3 pieces per joint.

The only System with only two elements (**leveler & cap**) capable of leveling 3 to 20 mm floors and wall coverings with 1/2/3/5 mm available joints, and from 20 to 40 mm with 8 mm joint. Simply flip the cap over to work with various thicknesses.



It guarantees a minimum joint of 1 mm, maximum 5 mm.



Vertical compression reduces movement and widening of joints.

The thin base of the leveler allows for easy placement without mortar accumulation.



The shaped hole in the middle of the cross and T-shaped levelers allow a perfect control of the tiles lining up. Moreover the holes on their base enable a perfect anchoring between adhesive and tile.





PRODUCTS FOR LAYING





DESCRIPTION

Proleveling System is a revolutionary and innovative leveling system when laying medium and large materials with a thickness between 3 and 40 mm. The patented system is made of 2 elements:

- A leveling base (1-2-3-5 mm size) with spaced notches that allow spacing/separating/ joining floors of any type and material in a way that is: linear, cross and half cross with joints to be chosen between 1mm, 2 mm, 3 mm and 5 mm.
- The threaded stem is attached perpendicularly to the base in a way that allows for easy adjustment with turns of the cap during installation. Removal of the cap and Stem after the materials are set is made easy with strategically placed breakage points that release with either increased pressure by turning the cap or by kicking the cap in the direction of the joint.

One cap fits all threaded stems and can be reused an infinite amount of times for big cost savings.

The new PPLS (patented) system assists in the reduction or elimination of ledging and lippage in the installation of various types of materials that are applied to floors or walls with mortar including: Large Format Tile, Natural Stone, Thin Profile Tile and many others.

LAYING SYSTEM

- **a)** Choose the desired type of Leveler (spacers) based on the requested joints and joining:
 - 1 mm Linear, Cross and Half Cross Version
 - 2 mm Linear, Cross and Half Cross Version
 - 3 mm Linear, Cross and Half Cross Version
 - 5 mm Linear, Cross and Half Cross Version
- **b)** Apply the thinset or mortar on a level base with the proper notched trowel as called out in the setting materials manufacturer's installation instructions.
- c) During the application of the tile or other materials, position the base of the chosen Leveler under the edge of the tile at the appropriate joint location and continue laying in sequence.
- **d)** Attach the cap to the threaded stem by rotating it clockwise. Level the joint by rotating the cap using the minimum amount of pressure needed.
- e) Once the setting materials have become solid and the floor or wall is ready for grout: kick the cap in the direction of the joint to detach connection points between base and stem.


Remover: Fixed on a drill allows to remove levelers from caps.





By turning the cap it is possible to level a thickness of up to 40 mm with an 8 mm joint.







T-shaped leveler installation.





Linear leveler installation.




© 2023 All rights reserved by Progress Profiles. Printed in liety

288



Proleveling System

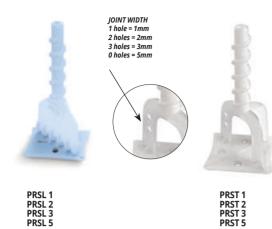



PRSC 1 PRSC 2 PRSC 3 PRSC 5



PRSTT



PRST

LINEAR LEVELER PROLEVELING SYSTEM

Article	thick mm	Pcs/ Pack.	€/Pc	€/Pack.	Pcs/box			
PRSL 1	1	100	0,174	17,40	4000			
PRSL 2	2	100	0,174	17,40	4000			
PRSL 3	3	100	0,174	17,40	4000			
PRSL 5	5	100	0,183	18,30	4000			

PROLEVELING SYSTEM REMOVER FOR LEVELER

Article Pcs/ €/Pc €/Pack. Pcs/box PRSSV 0,99 49,50 1300 50

PRSSV

"T" LEVELER PROLEVELING SYSTEM								
Article	thick mm	Pcs/ Pack.	€/Pc	€/Pack.	Pcs/box			
PRST 1	1	100	0,206	20,60	3000			
PRST 2	2	100	0,206	20,60	3000			
PRST 3	3	100	0,206	20,60	3000			
PRST 5	5	100	0,216	21,60	3000			

ROTATING POMMEL CAP FOR LEVELER PROLEVELING SYSTEM

Article	Pcs/ Pack.	€/Pc	€/Pack.	Pcs/box
PRSTT	50	1,14	57,00	1000
PRST	50	0,97	48,50	1000

CROSS LEVELER PROLEVELING SYSTEM

(30x30) (40x40) (45x45)

(50x50)

(60x60)

(30x60)

Article	thick mm	Pcs/ Pack.	€/Pc	€/Pack.	Pcs/box
PRSC 1	1	100	0,206	20,60	3000
PRSC 2	2	100	0,206	20,60	3000
PRSC 3	3	100	0,206	20,60	3000
PRSC 5	5	100	0,216	21,60	3000

PROTECTION CAP FOR PROLEVELING SYSTEM Article Pcs/ €/Pc €/Pack. Pcs/box PRSPC

It protects the marble and natural stones surface from scratches

Tiles cm x cm	30 X 30	40 X 40	45 X 45	50 X 50	60 X 60	80 X 80	90 X 90	120 X 120
U. / MQ	11	6	5	4	3	5	5	3
(Type of leveler)*	(only +)	(2+, 3L)	(2+, 3L)	(1+, 2L)				


* + = cross leveler, L = linear leveler , T = "T" shape leveler

Tiles cm x cm	30 X 60	40 X 80	45 X 90	120 X 30	100 X 50	120 X 60
U. / MQ	6	6	6	6	4	4
(Type of leveler)*	(only +)	(3 + , 3L)	(3+, 3L)	(3+, 3L)	(2+, 2L)	(2+, 2L)

* + = cross leveler, L = linear leveler , T = "T" shape leveler

Tilest cm x cm	10 X 100	12 X 100	15 X 100	20 X 100	10 X 120	12 X 120	15 X 120	20 X 120	10 X 80	12 X 80	15 X 80	20 X 80	40 x 80	45 x 90	100 x 50	120 x 60
U. / MQ	20	17	14	10	17	14	11	9	25	21	17	13	6	5	4	4
(Type of leveler)*	(only T)	(only T)	(only T)	(only T)												

* + = cross leveler, L = linear leveler , T = "T" shape leveler



@ 2028 All dights reserved by Progress Profiles. Printed in Italy

0,99 49,50 3000 50

that could be provoked by the cap during the floor levelling.

(80x80) (90x90)

(120x120)

(40x80) (45x90) (120x30)

(120x50) (120x60)







Proleveling Wedge System









ADVANTAGES



Complies with the legislation: Thanks to the join of the stems directly on the base, after the removal there are no components between the joints;



LEVELING WEDGE Article

PRLW

PRLW 120

PRLW 220

Pcs/pack

100

12-20

12-20

Ergonomic wedge:

The concave part of the wedge allows greater ease in insertion;

Wedge - PRLW

Pcs/box

2400

1.5

2



Easier to insert:

Improved base with the new eye shape that ensures better and more effective insertion under the tile;

PROLEVELING WEDGE SYSTEM

Leveling system for tiles composed of 3 elements: wedge, leveler and plier. The levelers are available for grout lines of 1/1.5/2 and 3 mm and are suitable for tiles with thickness from 3 to 12 mm and from 12 to 20 mm. The wedge, with a length of 90 mm and a width of 22 mm, is inserted during the laying inside the leveler and thanks to the plier we get a complete flatness between adjacent tiles. When the adhesive is hardened, kick the wedges and the protruding part of the levelers along the grout line.



Levellers	H	3-12	mm





Levellers H 12-20 mm





PRLWP

€/Pack.

29.00

30,20

31,60

32,60

19.30

20,60

0.193

0,206

PROLEVELING WEDGE SYSTEM - LINEAR LEVELERS									
Article	h. mm	Thick. mm	Pcs/pack	Pcs/Box	€/Pc				
PRLW 1	3-12	1	200	3000	0,145				
PRLW 15	3-12	1,5	200	3000	0,151				
PRLW 2	3-12	2	200	3000	0,158				
PRLW 3	3-12	3	200	3000	0,163				

100

100

€/Pc €/Pack.

0,169 16,90

2500

2500

TRACTION PLIER for PROLEVELING WEDGE Article Pcs/pa


EM
€/Pc
27,65




X cm



Ex: 120 X 50 cm = 93 Pz X 10 m²

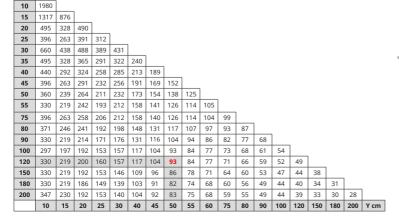

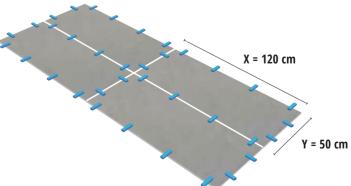

RО



PRODUCTS FOR LAYING



MULTISPACER Removable and reusable spacer for joints of tiled floors and walls. Its little tabs and open shape allows various uses with a perfect joint and view of the junctions among tiles during the laying.

MULTISPACER










MULTISPACER

© 2023. All depts reserved by Progress Profiles. Printed in Italy

Article	Thick. mm	Pcs/pack	Pcs/Box	€/Pc	€/Pack.
MSP 1	1	100	2500	0,343	34,30
MSP 2	2	100	2500	0,349	34,90
MSP 3	3	100	2500	0,355	35,50
MSP 5	5	100	2500	0,37	37,40

The **CROSS-SHAPED** and **T-SHAPED SPACERS** are perforated, weatherproof and made in top quality material with choice of colour. They are used to provide regular gaps in floors and coverings and thanks to the anti-floating perforations remain in the correct laying position. Available in every required thickness 1 - 2 - 3 - 4 - 5 - 7 - 10 mm. Levelling wedges are also available for compensating differences in level that emerge during laying. The **Y-SHAPED SPACERS** have to be used to separate hexagonal tiles in floors and walls. Available in thickness 2 and 3 mm.

SPACERS LEVELLING WEDGES

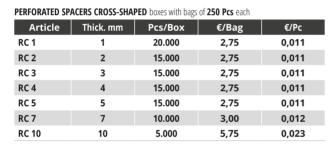



PERFORATED SPACERS T-SHAPED boxes with bags of 250 Pcs each


Article	Thick. mm	Pcs/Box	€/Bag	€/Pc
RT 1	1	20.000	2,75	0,011
RT 2	2	15.000	2,75	0,011
RT 3	3	15.000	2,75	0,011
RT 4	4	15.000	2,75	0,011
RT 5	5	15.000	2,75	0,011
RT 7	7	10.000	3,00	0,012
RT 10	10	5.000	5,75	0,023



Y-SHAPED SPACERS FOR HEXAGONAL TILES boxes with bags of 250 Pcs each





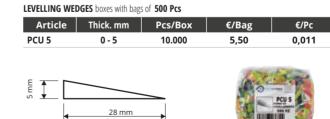

SPACERS / SQ.M

SI ACERS / SQ.M															
TILE FORMAT cm x cm	60 x 60	60 x 30	40 x 40	40 x 30	40 x 20	33 x 33	30 x 30	30 x 20	25 x 25	20 x 20	15 x 15	13 x 26	13 x 13	10 x 20	10 x 10
CROSS-SHAPED SPACERS No. / Sq.m	3	6	7	9	12	9	11	17	16	25	44	30	60	50	100
T-SHAPED SPACERS No. / Sq.m	6	12	14	18	24	18	22	34	32	50	88	60	120	100	200
Y-SHAPED SPACERS 2 spacers for each tile multiplied by the amount of tiles per square meter															




PROSUPPORT TUBE SYSTEM

PROSUPPORT TUBE SYSTEM is an adjustable and modular supports system for outdoor floating floors from the height of 29 mm to 1000 mm. The system is composed of 1 base, 2 screws, 1 flange, 2 heads and several pvc pipes to obtain the requested height. Both heads, according to the screw, can be fix or self-levelling.

ADJUSTABLE AND MODULAR SUPPORTS SYSTEM FOR OUTDOOR FLOATING FLOORS

PATENTED

© 2023 All rights reserved by Progress Profiles. Printed in Italy

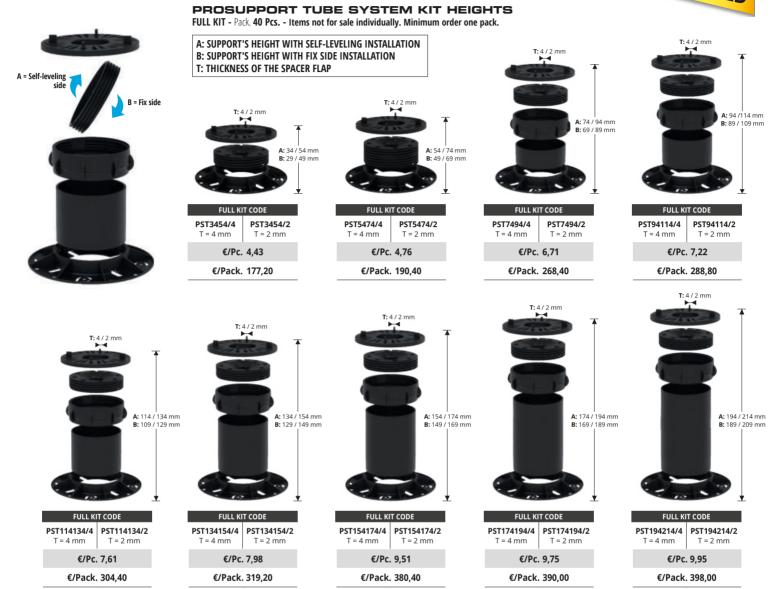

HEIGHTS GREATER THAN 209 mm

H (mm) SELF-LEVELING HEAD (A)	H (mm) FIX HEAD (B)	Choose the kit acc desired tile			PIPE		FLANGE	€/PC.
		PST3454/4 T = 4 mm	PST3454/2 T = 2 mm				PSTGH 02	
214/234	209/229		4	+	PSTT 175	+		11,18
234/254	229/249		+	+	PSTT 195	+		11,85
254/274	249/269			+	PSTT 215	+		12,26
274/294	269/289	T: 4/2		+	PSTT 235	+		12,76
294/314	289/309		-	+	PSTT 255	+		13,36
314/334	309/329		-	+	PSTT 275	+		14,07
334/354	329/349	-	-	+	PSTT 295	+		14,07
354/374	349/369		-	+	PSTT 315	+		14,97
374/394	369/389		-	+	PSTT 335	+		14,97
394/414	389/409		··· · ·	+	PSTT 355	+	PSTGH 02	16,14
414/434	409/429	. 1.5		+	PSTT 375	+	15161102	16,14
434/454	429/449	PST3454/.	4	+	PSTT 395	+		17,68
454/474	449/469	F3134347.		+	PSTT 415	+		17,68
474/494	469/489		4	+	PSTT 435	+		17,68
494/514	489/509		+	+	PSTT 455	+		19,86

292



Items not for sale individually. Minimum order one pack.

PRE-CUT EXTENSION PIPE - outer diameter Ø110 mm Thickness 4 mm - polyethylene polypropylene - pack. 40 Pc.

· ····· poijee											
Article	H (mm)	Pc/pack.	€/Pc	€/pack.							
PSTT 35	35	40	0,50	20,00							
PSTT 55	55	40	1,02	40,80							
PSTT 75	75	40	1,39	55,60							
PSTT 95	95	40	1,77	70,80							
PSTT 115	115	40	3,30	132,00							
PSTT 135	135	40	3,55	142,00							
PSTT 155	155	40	3,74	149,60							
Itoms not for s	uhivihni als:	ally Minimu	Minimum order one nack								

Items not for sale individually. Minimum order one pack.

FULL LENGHT EXTENSION PIPE - outer diameter Ø110 mm Thickness 4 mm - polyethylene or polypropylene - pallet 43 Pc.

Production delay 4/5 weeks.

1 , , , , , , , , , , , , , , , , , , ,	51 15									
Article	H (ml)	ml/pallet.	€/ml	€/Pc	€/pallet					
PSTT 2700	2,7	116	24,09	65,04	2796,72					
Items not for sale individually. Minimum order one pallet.										
UPON REQUEST IT IS POSSIBLE TO HAVE HEIGHTS TILL 1000 MM USING										
PIPES FROM 155 TILL 955. For information and installation instructions ask for the technical data sheet. Price to be agreed.										

PSTT...




PSTT 2700





PERIMETER SPACER

Perimeter spacer of stainless steel AISI 316L / 1.4404 - V4A for laying outdoor floating floors. The profile makes a 5 mm wide perimeter gap, for the outflow of rainwater; moreover, thanks to the rounded flin with which is provided, it does not damage the waterproofing sheath. The slit width of 0.5 cm and the length of 18 cm ensure a perfect anchorage of the spacer with the heads of the Prosupport System.

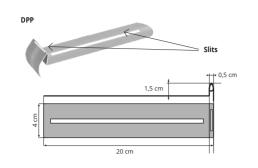



PERIMETER SPACER PROSUPPORT SYSTEM Stainless steel AISI 316L / 1.4404 - V4A - pack. 40 Pcs								
Article	€/Pc	€/Pack.						
DPP	3,55	142,00						

PROSUPPORT TUBE SYSTEM OPTIONAL

ADJUSTING KEY (only for head PSTH 04)



ADJUSTABLE SPACER TABS 4 mm polypropylene - Pack 80 pcs

 Article
 L x H mm
 Pcs/pack
 €/Pc
 €/Pack.

 PSTJ
 80 x 20
 80
 0,83
 66,40

 Spacer tabs 80 mm long to be fixed on the self-levelling head, which allow the fixing of wooden, WPC and aluminium joists of max width 80 mm.
 60,40



Items not for sale individually. Minimum order one pack.

Transparent plastic 4 mm cross spacer for laying on gravel or

€/Pc

0,91

€/Pack.

91,00

SPACER FOR APPLICATION ON GRAVEL

Pack. 100 Pcs (box 100 pcs) Article

FIXING CLIP FOR TILES - WIND-PROOF Pack 40 pairs

ArticleL x H mmpairs/pack€/Pair€/Pack.PSTWP20 x 60406,09243,60Fastening clip to fix the tiles and block the floor in case of strong wind. The clips must be inserted inside the cross joint or along the perimeter of the floor.0



Items not for sale individually. Minimum order one pack.

RUBBER DISK for laying on bituminous roof membrane

H 2 mm - Pack. 100	Pcs (box 100 pcs)			
Article	H (mm)	€/Pc	€/Pack.	
LVGG 02	2	1,96	196,00	*

Rubber disc, 2 mm thick, to be applied under the support (SQG 15) to protect the bituminous membrane.



PRODUCTS FOR LAYING

294



irregular surfaces.

DILV



***** = Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed
Prices are referred to whole packs.

PROSUPPORT PROFILE T & N is a profile for the protection and finishing of the external edge of raised floors in ceramic, wood and composite materials. The vertical section of the profiles features a specially designed fins that create a dovetail cladding system. This dovetail cladding system allows for the adhesive used to fix the covering to also mechanically bond to the profiles. The profile is also available with a decorative edge of 2 cm height (PROSUPPORT PROFILE T).

PROFILE T & N VARNISHED ALUMINIUM

PROSUPPORT

NATURAL ALUMINIUM

H 81,5



PROSUPPORT PROFILE T - VARNISHED ALUMINIUM bar length 2,7 Im - pack. 20 Pcs - 54 Im




COLOURS (EMBOSSED)



* ON DEMAND (EMBOSSED)

© 2023. All dights reserved by Progress Profiles. Printed in Italy



PROSUPPORT PROFILE N - NATURAL ALUMINIUM bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	H mm	L	€/lm	€/Pc
PSPRP 15560AL	60	156,5	20,89	56,40

COLOURS



LAYING INSTRUCTIONS

1. Choose "PROSUPPORT PROFILE" desired model. 2. Cut "PROSUPPORT PROFILE" to the desired lenght and put on the supports and aligning. 3. Lay the floor by adjusting the height of the supports until completely leveling. 4. Cut the tiles of the correct size to close the perimeters of the floating floor. 5. Fix on the vertical surface of the profile the tiles using a suitable adhesive.

PSPRPT 20AL...

L 177,7 mm





PROSUPPORT PROFILE A & B

PROSUPPORT SYSTEM A&B Perimeter profile to protect and finish the outer edge of raised floors of different types, ceramic, wood, stone etc. The PROSUPPORT PROFILE A consists in an "L"-shaped horizontal flat base to insert and anchor above the PROSUPPORT Self-levelling head and a vertical visible part to insert in the vertical "L"-shaped element (as indicated in the drawing). Use: Perimeter profile to protect and finish the outer edge of raised floors of different types, ceramic, wood, marble etc. The PROSUPPORT PROSUPPORT PROFILE accurate the two of the protect and finish the outer edge of raised floors of different types, ceramic, wood, marble etc. The PROSUPPORT PROSUPPORT PROFILE accurate the provide the protect of the protect o

PROFILE consists in an "L"-shaped horizontal flat base to insert and anchor above the **PROSUPPORT** Self-levelling head and a vertical visible part to insert in the vertical "L"-shaped element (as indicated in the drawing)



PUNCHED AND PERFORATED PROSUPPORT A NATURAL ALUMINIUM - length 2,7 Im - pack. 20 Pcs


	0.	1	
Article	LxH	€/lm	€/Pc
BPPSAN 15015	150 X 15	27,36	73,87
BPPSAN 15020	150 X 20	28,67	77,41
BPPSAN 15025	150 X 25	29,98	80,95

COLOURS



TOP PROFILE PROSUPPORT B - VARNISHED ALUMINIUM length 2,7 Im Pack 10 Pcs (PFPSAL...1060 Pack 20 Pcs)

Article	H1	€/lm	€/Pc
PFPSAL 1060	60	20,25	54,68
PFPSAL 1080	80	23,51	63,48
PFPSAL 10100	100	26,45	71,42



GF - Grey (7038) A - Anthracite grey - (no RAL)

* ON DEMAND (EMBOSSED)



VARNISHED ALUMINIUM, NATURAL ALUMINIUM



PEPSAI 1080

PROSUPPORT B

PEPSAI 1060

PFPSAL... 10100



295

Prices are referred to whole packs.



PRORAIL SYSTEM


PRORAIL PSTRAN 53 23 mm 23 mr 30 mm 1 mm 50 mm

PRORAIL RET PSTRAN 5030



PRORAIL SYSTEM LAYING PATTERN

Material required for 1 qm of the below pattern: -3 pcs PROSUPPORT TUBE/PROSUPPORT TUBE SLIM -3 pcs fastening rings PRORAIL RING -2.7 lm PRORAIL joist -4 lm PRORAIL RUBBER



FIXING WITH PRORAIL JOIST: Prosupport tube/slim + Prorail + Prorail spacer + Prorail rubber





PRORAIL - SHAPED JOIST

aluminium - Pack 10 Pcs - Bar lenght 2,7 Lm					
Article	L x H (mm)	Pc/Pack	€/lm	€/Pc	
PSTRAN 53	50 X 30	10	16,48	44,50	



PRORAIL RET - SMOOTH JOIST

aluminium - Pack 10 Pcs - Bar lenght 2,7 ML					
Article	L x H (mm)	Pc/Pack	€/lm	€/Pc	
PSTRAN 5030	50 X 30	10	11,41	30,81	


TECHINCAL LAYING INSTRUCTIONS

1. Choose the support **PROSUPPORT TUBE** or **PROSUPPORT SLIM** of the required height;

2. Set the fastening ring PRORAIL RING on the supports;

3. Set the joist PRORAIL (*) or the joist PRORAIL RET on the ring; 4. Insert the rubber PRORAIL RUBBER inside the grooves of the joist PRORAIL:

5. Set the cross spacers PRORAIL SPACER following the laying pattern; (*) It is possible to fix the joist PRORAIL on the supports fixing it into the spacer flaps, see picture hereunder.

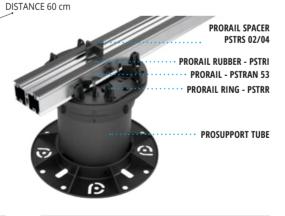

FIXING WITH RING AND PRORAIL JOIST: Prosupport tube/slim + Prorail ring + Prorail + Prorail spacer + Prorail rubber



PRORAIL RUBBER Roll lenght 110 lm

PRORAIL SYSTEM SYSTEM is a modular system composed of aluminium joists to lay floating floors of any size, to create steady and modular substructures together with PROSUPPORT TUBE and PROSUPPORT SLIM. The system consists of two aluminium joists, PRORAIL and PRORAIL RET, one fastening ring PRORAIL RING, two cross spacers with removable flaps PRORAIL SPACER and one anti-noise and anti-slip rubber PRORAIL RUBBER

Article	L roll ml	€/lm	€/roll
PSTRI	110	1,90	209,00



PRORAIL RING - JOIST FASTENING RING polypropylene - Pack 40 Pcs

Article	Ømm	Pc/Pack	€/Pc	€/Pack
PSTRR	135	40	0,88	35,20



PRORAIL SPACER PSTRS 02

PRORAIL SPACER PSTRS 04

PRORAIL SPACER - CROSS SPACER with removable flaps
polypropylene - Pack 100 Pcs

Article	thickness (mm)	Pc/Pack	€/Pc	€/Pack
PSTRS 02	2	100	0,76	76,00
PSTRS 04	4	100	0,88	88,00



ANTI-ROTATION CLIP - Pack 40 Pcs

Article	Pc/Pack	€/Pc	€/Pack
PSTCAR	40	1,05	42,00

FIXING WITH RING AND PRORAIL RET SMOOTH JOIST : Prosupport tube/slim + Prorail ring + Prorail ret



© 2023 All rights reserved by Progress Profiles. Printed in Italy

296

PRODUCTS FOR LAYING







© 2023 All rights reserved by Progress Profiles. Printed in Italy

PROSUPPORT SLIM SYSTEM

PROSUPPORT SLIMis a modular system to make outdoor floating floors from 10 to 40 mm height, it is composed of two bases of 10 mm height, levellers of 10 mm thickness and anti-noise and anti-slip disks. Thanks its modularity the system allows to make, from a height of 10 mm, all heights with 2 mm interval using the levellers.

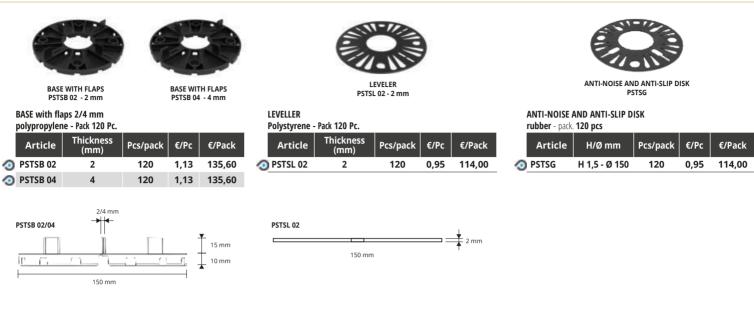

ACHIEVABLE HEIGHTS WITH PROSUPPORT SLIM SYSTEM

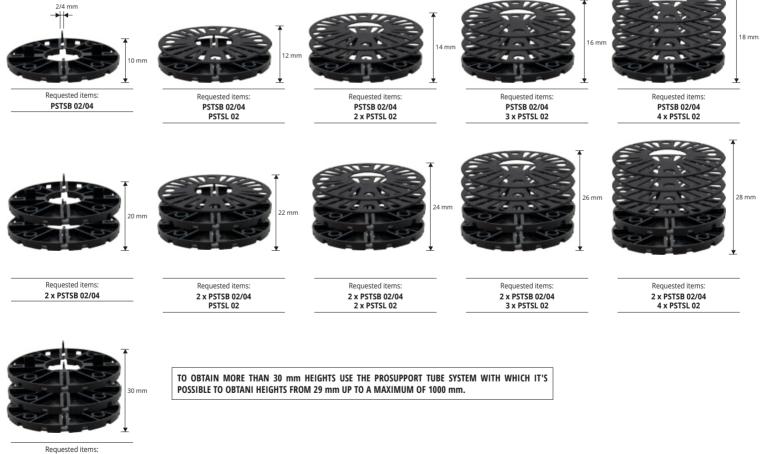

3 x PSTSB 02/04





SUPPORT and **LEVELLER** are suitable for the realization of outdoor floating floors. The support, in polyethylene, has a height of 15 mm. The rubber leveller, with a thickness of 3 mm, can be applied on the supports up to a maximum of 2. **SUPPORT** and **LEVELLER** are suitable for outdoor areas, terraces, pool edges and pedestrian crossings.

SUPPORT AND LEVELLER POLYETHYLENE

SQUARES SUPPORT boxes of **350 Pcs** Article Thick. mm €/Pc €/Pack. SQG 15 126,00 15 0,36 ITEMS NOT FOR SALE INDIVIDUALLY.



SQUARES LEVELLER boxes of 100 Pcs			
Article	Thick. mm	€/Pc	€/Pack.
LQG 03	3	0,27	27,00

ITEMS NOT FOR SALE INDIVIDUALLY.



LEVELER

LAYING INSTRUCTIONS

150 mm

150 mm

SQG 15

H

H

LQG 03

1. Lay the supports on the waterproofing membrane. **2.** To reach the desired height or compensate different heights, if necessary, place 1 or 2 rubber levelers on the support. **3.** Lay the floating flooring.



15 mm

15 mm

3 mm

0

MAGNET KIT



MAGNET KIT - 4 magnets and 4 plates for ceramic inspection panel - packs of 10 kits - price for 1 Kit Article €/KIT KMD 13,28

SCISSORS



SCISSORS



PROECOFON

PROECOFON is a roll of closed-cell polyethylene used as edging between the wall and screed or where there are expansion joints. It should be used in all floor-laying work to ensure long life of the floor.

EXPANDED POLYETHYLENE CLOSED - CELL WITH ADHESIVE



CLOSED-CELL EXPANDED POLYETHYLENE				
Article	Thick. x H mm	lm/roll	€/lm	€/Roll

PEF 550A	5 X 50	25	2,06	51,50
PEFPU 510A	5 X 10	2,7	2,81	7,59
PEF 5100A	5 X 100	100	0,83	83,00
For perimeter areas and joints				

PEFPU 510A for Proterrace Drain Drip PEF550A - sold exclusively in packs of **2 pcs**

EXEMPLE OF LAYING



PROBAND FIX

MONOCOMPONENT WATERPROFF SEALANT



SEALANT MONOCOMPONENT WATERPROOF

Article	Cartridge Im	€/Pc	€/Pack.	
PRBFXB	290	17,64	211,68	
PRBFXG	290	17,64	211,68	
DISPENSING GUN FOR SEALANT CARTRIDGES				
Autiala	Autiala Da/Daala C/Da		C/D-	

PRBFXGUN	1	352,60

SEALANT MONOCOMPONENT WATERPROOF CARTRIDGE Pack of **12** cartridges

Article	Cartridge Im	€/Pc	€/Pack.
PRBFXUB	600	34,61	415,32
PRBFXUG	600	34,61	415,32
COLOURS			



Technical data:			
Appearance:	white or gray thixotropic paste		
Temperature range for application:	+ 5 °C / + 40 °C		
Temperature range:	- 40 °C / + 90 °C		
Curing:	≈ 2 mm / 24 h		
Commissioning:	~ 7 days		

Suggestions for the installation:

In general cementitious support must be free from dust, oil and grease, dry and free from any visible moisture, free of loose or imperfectly anchored parts such as residual traces of cement, lime and paint, which must be totally removed. In case of contact with eyes, rinse immediately with water and seek medical advice. Avoid contact with skin and keep out of reach of children.

• Use

Balconies, terraces, bathrooms, kitchens, saunas, swimming pools and exterior surfaces of any size.

• Don't use

On bitumen membranes. To seal proband with PRODESO[®].

PROPOLISH

WHITE CREAM - BASED SURFACTANTS SUITABLE FOR CLEANING

White cream - based surfactants , amines and inert powder, suitable for cleaning, degreasing and polishing of stainless steel surfaces and opaque/matt brass. The product, ready to use , does not contain acids and alkalis and do not leave marks after use. It does not emit harmful substances

ñ	ING
ğ	R LAV
ž	쥰

-	Article	Pack. g.	Pcs/Pack	€/Pc	€/Pack.
0	PRLISH	250	6	20,25	121,50
and the second se					

PROCARE CLEAN

CLEANING SPRAY

Cleaning spray ready to use suitable for cleaning of stainless steel, brass and aluminum profiles, from residual surface oxide and limestone. The product deposit a protective film that prevents the deposit of limestone and soap residues. Its periodic use allows to obtain bright and cleaner surfaces for long period. Suitable also for glasses, mirrors and bathroom fittings.

4	Article	Pack. lm	Pcs/Pack.	€/Pc	€/Pack.
-	PRCLEAN	750	6	19,59	117,54

TROWEL in steel foil 3x3, support in polished aluminium with electro welded fixing. Rubber grip fixed with a anti-rotation system. Particularly suitable for the laying of the waterproofing system PROFOIL.	an TROWEL
	STEEL
ROWEL STEINLESS STEEL ax 6 Pcs Article Tooth Dimensions mm Pcs/Box €/Pack. €/Pc PFTT33 3X3 280X120 6 101,88 16,98	120 mm
TROWEL in steel foil 5x7, support in polished aluminium with electro welded fixing. Rubber grip fixed with a anti-rotation system. Particularly suitable for the laying of the waterproofing and uncoupling systems PRODESC and PRODESO® HEAT & PRODESO® HEAT GRIP.	
ROWEL STEINLESS STEEL lox 6 Pcs Article Tooth Dimensions mm Pcs/Box €/Pack. €/Pc PFTT57 5X7 280X121 6 101,88 16,98	121 mm
TROWEL in steel foil 10x10, support in polished aluminium with electro welded fixing. Rubber grip fixed with a anti-rotation system. Particularly suitable for the laying of tiles above the waterproofing and uncoupling system PRODESO [®] and PRODESO [®] HEAT & PRODESO [®] HEAT GRIP.	an ms TROWEL STEEL
TROWEL STEINLESS STEEL Box 6 Pcs Article Tooth Dimensions mm Pcs/Box €/Pack. €/Pc PFTT1010 10X10 280X122 6 101,88 16,98	122 mm
TROWEL in PVC size 10x10 cm, resistants to solvents, with a triangular teeth of interaxle spacing of 5 mm, 4 mi and 3 mm. To be used for the application of adhesives PROBAND FIX.	TROWEL
ROWEL Article Dimensions mm €/Pc PRSPD 10 100x100 3,79	100 mm
ROLLER in nylon, 40 cm long, fixed to a varnished metal or stainless steel 304 frame, suitable for pressing th PRODESO®, PRODESO® HEAT & PRODESO® HEAT GRIP and PROFOIL. The roller is equipped with an extendable gri length-adjustable and with an L base that allows to load 1 bag of adhesive to obtain the correct and homogenou pressing of the membranes. A tripod allows to keep the roll in the right position while loading the bag.	ip, ROLLER
ROLLER IN STAINLESS STEELL 40 cm Article Lmm Finish €/Pc PSM 400 varnished 515,83 PSMAC 400 steel 652,95	Ţ

Prices are referred to whole packs.



400 mm

٢

PROGRESS® PROFILES PRODUCTS FOR LAYING



An interpretation of: Premier Tower, Elenberg Fraser, MELBOURNE (Australia) Ш




BUILDING SYSTEMS





SNAP-ON STRAND SHEATH

GREY RIGID PVC

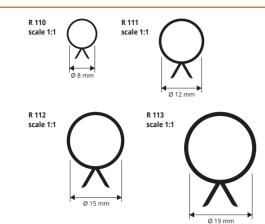


GREY RIGID PVC	
har length 3 lm - nack	50 Prs - 150 lm

bar length 5 im - pack	. 50 PCS - 1	50 1111		
Article	Ø inches	Ømm	€/lm	€/Pc
R 110	3 x 3″	8	0,50	1,50
R 111	3 / 8"	12	0,55	1,65
R 112	1 / 2"	15	0,59	1,77
R 113	0' 6"	19	0,63	1,89
R 110/ 111: 15.000	lm / pallets			

R 112/113: 10.800 lm / pallets

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS




Laying is extremely simple by just positioning the sheath so that the "V" shaped flanges are facing the prestressed reinforcement strands that are already in situ and gently pressing until the sheath snaps on.



The **SNAP-ON PVC STRAND SHEATH** serves to cover/neutralise the reinforcement strands inside the prestressed beams; the sheath cancels out the stress that the strands transmit to the beam, thereby permitting the positive to be changed to left-handed moments. Available in various diameters and lengths.

SNAP-ON STRAND TUBE

GREY RIGID PVC




ar length 3 lm - pa	dck. 50 PCS - 1	50 IM		
Article	Ø inches	Ømm	€/lm	€/Pc
R 114	3/8″	12	0,50	1,50
R 115	1/2″	15	0,55	1,65
R 116	0/6"	19	0,60	1,80

COLOURS



G - Grey



LAYING INSTRUCTIONS


Laying is very simple; just insert the casing over the strands before they are tensioned.

FINNED DISTANCE TUBE

GREY RIGID PVC

TDA 09

scale 1:1



Article	Ømm	€/Im	€/Pc
TDA 09	9	0,40	0,80
TDA 12	12	0,45	0,90
TDA 09: 15.000 lm / pallet TDA 12: 10.000 lm / pallet			
COLOURS			





LAYING INSTRUCTIONS

Laying is very simple:
1. Just insert the iron rod into the finned tube before closing the reinforcement panel.
2. Upon removing the reinforcement panels, if necessary insert the end plugs.

END CAPS FOR DISTANCE TUBE GREY HD POLYPROPYLENE

304

BUILDING SYSTEMS

PPT 09 / 12

SMOOTH END CAPS - GREY HD POLYPROPYLENE

pack. 1000 Pcs			
Article	Ømm	€/Pc	€/Pack.
PPT 09	9	0,026	26,00
PPT 12	12	0,029	29,00

Prices are referred to whole packs.


RIBBED DISTANCE TUBE

GREY RIGID PVC





G - Grey



GREY RIGID PVC

bar length 2 Im - pack	25 Pcs - 50 lm		
Article	Ø mm inside	€/lm	€/Pc
PPD 20	20	0,60	1,20
PPD 22	22	0,65	1,30
PPD 26	26	0,85	1,70
DDD 20/ DDD 22: E 00)0 lm / pallots		

PPD 20/ PPD 22: 5.000 lm / pallets PPD 26: 3.000 lm / pallets

WASHERS AND END CAPS FOR DISTANCE TUBE GREY HD POLYPROPYLENE - PVC / RUBBER

PPD 20

WASHERS - GREY HD POLYPROPYLENE

pack. 1000 Pcs					
Article	Ø mm outside	€/Pc	€/Pack.		
PPR 20	20	0,044	44,00		
PPR 22	22	0,045	45,00		
PPR 26	26	0,135	135,00		
OUTSIDE WASHERS - GREY HD POLYPROPYLENE pack. 1000 Pcs Article Ømm €/Pc €/Pack.					
pack. 1000 Pcs Article	Ømm	€/Pc	€/Pack.		
	Ø mm 26	€/Pc 0,252	€/Pack. 252,00		
Article	26 PVC / RUBBER	0,252			
Article RETDB 22 INSIDE END CAPS -	26 PVC / RUBBER	0,252			

				°cs bags)		
Article	Ømm	Pcs/Pack.	€/Pc	€/Pack.		
PPT 09	9	1000	0,026	26,00		
PPT 12	12	1000	0,030	30,00		
PPT 16	16	1000	0,031	31,00	*	
PPT 20	20	2000	0,032	64,00		
PPT 22	22	2000	0,033	66,00		R
PPT 26	26	2000	0,102	204,00		
	S - GREV H	ID POLYPROPY	I FNF			
		ID POLYPROPY two 1000 Pcs b				
	divided into			€/Pack.		
ack. 2000 Pcs	divided into	two 1000 Pcs b	ags	€/Pack. 70,00	*	



DRIP

GREY RIGID PVC




	T

GCT 30 scale 1:1

GCT 20

scale 1:1



20 mm

LAYING INSTRUCTIONS Must be fixed below the sheathing/armature to create the drip course. BUILDING Systems

G - Grey

€/Pc

0,72

1,08

€/lm





20 x 12 0,36 30 x 15 0,54

LxHmm

GCT 20: 15.000 lm / pallets GCT 30: 10.000 lm / pallets

Article

GCT 20

GCT 30

bar length 2 Im - pack. 50 Pcs - 100 Im




Prices are referred to whole packs.



PROFILE

WITH TRIANGULAR CHAMFER

GREY RIGID PVC

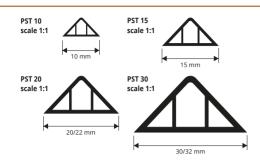

The TRIANGULAR CHAMFER is made in grey rigid PVC in various widths 10-15-20-30 mm and standard length of 2 lm. It is mainly used to chamfer the corners of the concrete pours when making, for example, walls-columns etc. It is strong and easy to lay.

PST 30 PST 20: 15.000 lm / pallets PST 30: 10.000 lm / pallets

PST 22: 15.000 lm / pallets PST 32: 10.000 lm / pallets

G - Grey

COLOURS

Article

GREY RIGID PVC

20.000 lm pallets GREY RIGID PVC

PST 10

PST 15

PST 20

bar length 2 lm - pack. 50 Pcs - 100 lm Article

bar length 2 Im - pack. 50 Pcs - 100 Im

Width mm

10

15

Width mm

20/22

30/32

€/lm

0,20

0,22

€/lm

0,25

0.37

€/Pc

0,40

0,44

€/Pc

0,50

0,74

€/Pc 0,80

1.00



LAYING INSTRUCTIONS

Put the nails into the central part along the profile before pouring the concrete

ROUNDED TRIANGULAR

CHAMFER FILLET

GREY RIGID PVC





GREY RIGID PVC bar length 2 lm - pack. 50 Pcs - 100 lm					
Article	L mm	€/lm			
PSD 22	20/22	0,40			
PSD 32	30/32	0,50			



LAYING INSTRUCTIONS Put the nails into the central part along the profile before pouring the concrete.

FISHBONE RIBBED JOINT

GREY RIGID PVC

COLOURS GREY RIGID PVC bar length 2 lm - pack. 50 Pcs - 100 lm Article HxLmm €/lm €/Pc G - Grey GRP 25 25 X 5 0,50 1,00 GRP 45 45 X 5 1.80 0.90 GRP 25: 10.000 lm / pallets GRP 45: 5.000 lm / pallets

LAYING INSTRUCTIONS

Laying is very simple: just insert the ribbed joint into the gap deliberately left in the concrete or the screed.

PROFILE WITH DOUBLE CHAMFER - FOR BALCONIES


GREY RIGID PVC

COLOURS	GREY RIGID PVC on demand bar length			_	
	Article	H mm	€/Im		
G - Grey	R 117	80	12,95	*	
LAYING INSTRUCTIONS Laying is very simple: just fix it with nails or clamps in the relative formwork prior to pouring the concrete.	 PROFILE SPECIFICATION Chamfer angle 45° Chamfer length 20 mm Bar length on demand Weight x metre ≈ 2,3 Kg 				
306 PROGRESS®	\star = Production on demand w	ith minimum qua	ntity of 100 pcs.	Production	delay 4/5 weeks. Price to be agreed.
PROFILES	Prices are referred to whole packs.				

© 2023 All dights reserved by Progress Profiles. Pdnted in Utaly

The **WATERSTOPS** profiles are made in high-quality polyvinyl chloride (plasticized PVC) and have excellent physical-mechanical properties, strength, flexibility, resistance to ageing and fluid-tightness even under pressure. The "Flat Waterstop" model art. WP is used for adjacent pours of concrete, while the "Waterstop with Bulb" model art. WB is used in concrete casting but as an expansion joint, thanks to the central bulb. They find many applications: floors, underground rooms, trench ducts/ underground passages, face walls, cisterns, silos, swimming pools, tanks, canals, dams, aqueducts, etc. The quality of the materials allows the waterstops to be used on concrete structures exposed to temperatures between $-30^{\circ}C$


The quality of the materials allows the waterstops to be used on concrete structures exposed to temperatures between –30°C and +70°C, also ensuring good resistance to chemicals in alkaline environments, to brackish waters and to acid solutions.



FLAT WATERSTOPS - PLASTICIZED PVC BLUE pack. rolls 25 Im (WP 150 - pack. rolls 50 Im)

pack rolls 25 mil (millister pack rolls 50 mil)				
Article	L mm	€/lm	€/Pack.	
WP 100	100	4,40	220,00	
WP 150 (50 ml)	150	4,10	205,00	
WP 200	200	4,95	247,50	
WP 220	220	6,20	310,00	*
WP 250	250	7,45	372,50	
WP 300	300	9,10	455,00	*

ANCHORING CLIPS for WATERSTOPS on demand.

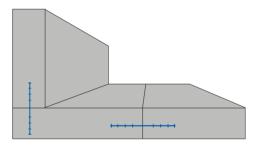

SEALING OF WATERSTOPS


The Waterstops may be welded together to obtain a single piece of the required length. The two parts must be properly cleaned for perfect fluid-tightness of the joints. The waterstops are usually field welded using a normal hot-air heater on the ends of the sections.

The bond is accomplished by melting the material and pressing one end over the other.



WATERSTOPS WITH BULB - PLASTICIZED PVC BLUE pack, rolls 25 lm

pada tono 10				
Article	L mm	€/lm	€/Pack.	
WB 200	200	7,10	177,50	
WB 220	220	8,60	215,00	
WB 250	250	10,35	258,75	
WB 300	300	11,50	287,50	
ANCHORING CLIPS for W	ATERSTOPS	on demand.		

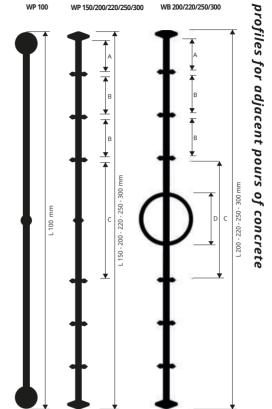

/		
	} · · · · ·	


COLOURS



SIZE					
ART.	А	В	С	D	
WP 100	40 mm				
WP 150	13,3 mm	15,5 mm	45,5 mm		
WP 200	22 mm	22 mm	50 mm		
WP 220	23 mm	25 mm	50 mm		
WP 250	19 mm	21 mm	71,5 mm		
WP 300	20,5 mm	22,5 mm	78 mm		
WB 200	16 mm	18 mm	85 mm	32 mm	
WB 220	16 mm	18,5 mm	86 mm	33 mm	
WB 250	26 mm	20 mm	84 mm	30 mm	
WB 300	26 mm	22 mm	88 mm	34 mm	

ANCHORING CLIPS FOR WATERSTOPS

GREY UH POLYPROPYLENE

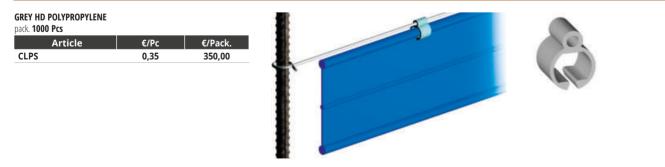

WATERSTOP

PLASTICIZED PVC BLUE




BUILDING SYSTEMS

Prices are referred to whole packs.

PRODISTANZ

GREY HD PLYPROPYLENE


PRODISTANZ is a patented new product that simplifies, improves and speeds up the work of securing and preparing shuttering panels used in the casting of concrete; it avoids the cutting and assembling in situ of the tubular waler-washer (traditional system). **PRODISTANZ** is recommended for its special, very strong structure, which is resistant to compressive stress and prevents water infiltration thanks to the lateral ribs along the cylindrical part and the horizontal supports and circles. It consists of a single plastic element and is available in a wide range of lengths 15-20-25-30-35-40 cm (in packs of 100 Pcs.). They come with watertight plugs in a choice of two types. Watertight caps at 18 Atm. / Bar.

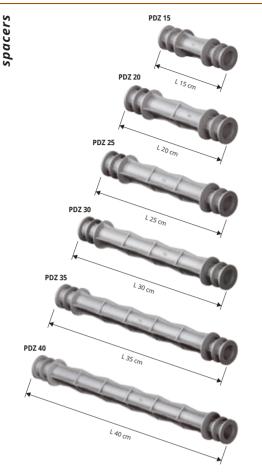



GREY HD POLYPROPYLENE ack 100 Prs + 200

patk. IUU PLS + ZUU enu taps				
	Article	L cm	€/Pc	€/Pack.
	PDZ 15	15	0,43	43,00
	PDZ 20	20	0,46	46,00
	PDZ 25	25	0,50	50,00
	PDZ 30	30	0,53	53,00
	PDZ 35	35	0,60	60,00
	PDZ 40	40	0.65	65.00



SIMPLE FAST ECONOMIC

- Exclusive patented product
- High resistance to compressive stress and to water infiltration Fast, assured work, without waste, cutting costs or pipe scraps
 Extremely easy to use
- Vast range available: 15-20-25-30-35-40 cm
 Innovative design guaranteed
 Quality Constant colour and quality



HOLLOW END CAPS - GREY HD POLYPROPYLENE

Ø mm Pcs/Pack.

2000

2000

€/Pc

0,035

€/Pc

0,033

pack. 2000 Pcs divided into two 1000 Pcs bags

22

SMOOTH PLUGS - GREY HD POLYPROPYLENE pack. 2000 Pcs divided into two 1000 Pcs bags

Article Ø mm Pcs/Pack.

22

Article

PPTC 22

PPT 22



END CAPS AND JOINTS FOR PRODISTANZ

€/Pack.

70,00


€/Pack.

66,00

GREY HD POLYPROPYLENE - PVC/RUBBER


Article	into two 1000 Po Ø mm	€/Pc	€/Pack
TIGPC 22	22	0,212	424,0
JOINT - GREY HD POI pack. 1000 Pcs divided		bags	
Article	Ømm	€/Pc	€/Pack
GPDZ 22	22	0,199	199,0
	EE		





RAPY 100 FOR HEAVY MESH


GREY HD POLYPROPYLENE



GREY HD POLYPROPYLENE nack Rn Im th **1 lm**

Article	Hmm	€/Im	€/Pack.
PLF 20	20	0,62	49,60
PLF 25	25	0,68	54,40
PLF 30	30	0,70	56,00

3000 kg a piece (bar lenght: 1lm) equally distributed.



GREY HD POLYPROPYLENE

Article

length 1 lm - pack. 60 lm					
Hmm	€/lm	€/Pack.			
35	0,77	46,20			
40	0,97	58,20			
45	1,27	76,20			
50	1,46	87,60			
55	1,67	100,20			
60	2,01	120,60			
	35 40 45 50 55	35 0,77 40 0,97 45 1,27 50 1,46 55 1,67			







Strong and very resistant linear spacer, to be joined lengthwise and have several lengths. The new shape allows to combine high technical performances to a costs optimization.



GREY HD POLYPROPYLENE

RAPY 200

GREY HD POLYPROPYLENE

spacers



ARTICLES NOT FOR SALE SINGLY

ARTICLES NOT FOR SALE SINGLY

Hmm

45

50

55

60

€/lm

1,00

1,18

1,32

1,57

€/Pack

64.00

75,52

84,48

100,48 📩

*

*

The RAPY 200 spacer is sturdy, resistant and easy to place. Ideal for reinforced horizontal, vertical and sloped Structures. The side and horizontal holes allow it to perfectly penetrate into the concrete. When flipped over, it can be used for insulation panels, floors and precast structures. On demand available at 1 metre.

GREY HD POLYPROPYLENE

length 2 Im - pack. 96 Im

2028. All dights reserved by Progress Profiles. Printed in litely

6

icingai z ini pacia so ini			
Article	H mm	€/lm	€/Pack.
PLF 20R	20	0,67	64,32
PLF 25R	25	0,74	71,04
PLF 30R	30	0,80	76,80
PLF 40R	40	1,00	96,00
Maximum weight: 3000 kg	a piece (bar	lenght: 2 lm) eau	ually distributed

The spacer is made up of two 1 Im pieces joined together






Spacer for horizontal use for heavy reinforcement and meshes; it withstands heavy incidental weights and loads with great stability.

GREY HD POLYPROPYLENE

bar length 50 cm - Pack. 100 Pcs (DMP 30 - Pack 75 Pcs)					
Article	Hmm	€/Pc	€/Pack.		
DMP 20	20	0,44	44,00	*	
DMP 25	25	0,46	46,00	*	
DMP 30	30	0,50	50,00	*	


Maximum weight:

2.500 kg a piece (bar lenght: 50 cm) equally distributed.





MULTIPIEDE **GREY HD POLYETHYLENE**

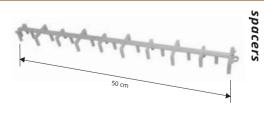

309

Prices are referred to whole packs.


TYPE **"PAV"** WHEEL

GREY HD POLYPROPYLENE

The circular spacer **PAV** is a patented and innovative product to resolve problems connected with the laying of spacers for electrically welded mesh, using rods of different diameter Ø 4-6-8-10-12 mm and thereby avoiding the purchase of other types of spacers for iron with larger diameter.


spacers for electrically welded mesh





GREY HD POLYPROPYLENE

раск. 2000 PCS							
Article	Formwork spacer mm	Ø rod mm	€/Pc	€/Pack.			
PPV 10	10	4/8	0,030	60,00			
PPV 15	15	4/8	0,035	70,00			





GREY HD POLYPROPYLENE pack 1000 Pcs

Formwork spacer mm	Ø rod mm	€/Pc	€/Pack.			
20	4/8	0,040	40,00			
25	4/12	0,045	45,00			
30	4/12	0,050	50,00			
	spacer mm 20 25	spacer mm or od mm 20 4/8 25 4/12	spacer mm or od mm eyrc 20 4/8 0,040 25 4/12 0,045			

GREY HD POLYPROPYLENE pack. 500 Pcs

Article	Formwork spacer mm	Ø rod mm	€/Pc	€/Pack.
PPV 40	40	8/16	0,115	57,50
PPV 50	50	8/16	0,193	96,50


NEW PATENTED UNIVERSAL MODEL FOR RODS Ø 4/12 MM. THE ADVANTAGES OF THE NEW PAV RANGE ARE AS FOLLOWS: 1st The only universal spacer for 4 to 12 mm rods. 2nd Easy to insert. 3rd Innovative and technical design.

The universal spacer **PAU** can be used either horizontally or vertically. Strong and resistant, it can bear heavy loads and is easy to fit. Recommended for cross application of wires in electro-welded or welded meshes.

TYPE **"PAU"** TOWER

GREY HD POLYPROPYLENE





pack. 4000 Pcs (PPU 10) - pack. 3000 Pcs (PPU 15)

Article	Formwork spacer mm	Ø rod mm	€/Pc	€/Pack.
PPU 10	10	4/12	0,030	120,00
PPU 15	15	4/12	0,035	105,00

GREY HD POLYPROPYLENE pack. 1000 Pcs

Article	Formwork spacer mm	Ø rod mm	€/Pc	€/Pack.
PPU 30	30	4/12	0,050	50,00
PPU 40	40	4/12	0,055	55,00

NEW PATENTED UNIVERSAL MODEL FOR RODS Ø 4/12 MM. THE ADVANTAGES OF THE NEW PAV RANGE ARE AS FOLLOWS: 1st The only universal spacer for 4 to 12 mm rods.

2nd Easy to insert. **3rd** innovative and technical design.



GREY HD POLYPROPYLENE pack. 2000 Pcs

Article	Formwork spacer mm	Ø rod mm	€/Pc	€/Pack.
PPU 20	20	4/12	0,040	80,00
PPU 25	25	4/12	0,045	90,00

310

BUILDING SYSTEMS

SPACER

FOR VERTICAL/HORIZONTAL MESH

GREY HD POLYETHYLENE

spacers

GREY HD POLYETHYLENE

length 192 mm - width 90 mm								
Article	Pc/pack.	H mm	€/Pc	€/Pack.				
DVO 10	400	10	0,28	112,00	*			
DVO 15	400	15	0,32	128,00	*			
DVO 20	300	20	0,36	108,00	*			
DVO 25	120	25	0,42	50,40	*			
DVO 30	250	30	0,50	125,00				
DVO 35	200	35	0,54	108,00	*			

SPACER for vertical and horizontal meshes. complete with hooks fixing to mesh. dimensions 192 x 90 mm.

WHITE HD STYROFOAM


pack. 600 Pcs				
Article	Thick mm	€/Pc	€/Pack.	
DSVT	10	0,32	192,00	*



56 mm



GREY HD POLYPROPYLENE

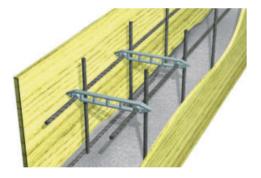

GREY HD POLYPROPYLENE - for mesh up to Ø 8 mm

With the **DOPPY** type spacer with double slot, two Ø 4 to 8 mm mesh reinforcements may be kept simultaneously at the same distance from the formwork.

PPY 30


pack. 500 Pcs				
Article	mesh dist. L mm	€/Pc	€/Pack.	
PPY 15	100	0,30	150,00	*
	PYLENE - for mesh up	to Ø 8 mm		
oack. 250 Pcs Article	mesh dist.	to Ø 8 mm €/Pc	€/Pack.	
pack. 250 Pcs			€/Pack. 92,50	 *

250

0,50

125,00

*

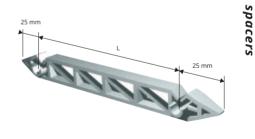

BUILDING SYSTEMS


311

Prices are referred to whole packs.

PROTECTIVE CAPS FOR RODS FOR ADJACENT POURS

The **PROTECTIVE CAPS** have been created to comply with the safety regulations as per Italian law 81/2008. They protect the end of the protruding rods, thereby preventing injury to operators. Two types for different diameters are available.


HD POLYPROPYLENE

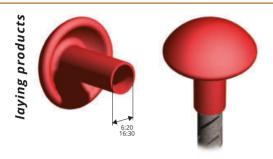

HD POLYPROPYLENE - colour red pack. 200 Pcs (divided into two 100 Pcs bags)					
Article	Ømm	€/Pc	€/Pack.		
PCPF 620	6/20	0,19	38,00		
PCPF 1630	16/30	0,44	88,00		

FLAT SPACER FOR MOUNTING PREFABRICATED PANELS


HD POLYPROPYLENE

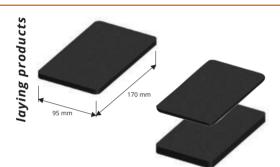

HD POLYPROPYLENE size 170 X 95 mm - pack. 400 Pcs							
Article	Thick mm.	€/Pc	€/Pack.				
PPN 02	2	0,50	200,00				
HD POLYPROPYLENE size 170 X 95 mm - pac	k. 100 Pcs						
Article	Thick mm.	€/Pc	€/Pack.				
PPN 10	10	1,32	132,00				

HD POLYPROPYLENE size 170 X 95 mm - pack. 200 Pcs						
Article	Thick mm.	€/Pc	€/Pack.			
PPN 05	5	0,83	166,00			



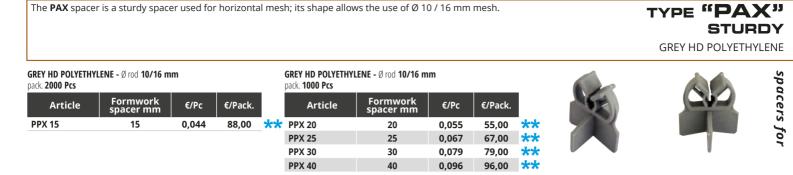

distance from the	e PAL spacer is a lightweight spacer used to join the iron mesh framework of floor slabs, maintaining the stance from the formwork.					TYPE "PAL' FOR FLOOR SLABS					
REY HD POLYPROPYI ack. 2000 Pcs	LENE - Ø rod 6+5 m	m		GREY HD POLYPRO pack. 1000 Pcs	DPYLENE - Ø rod 6+5 m	m				GREY HD POLYPROP	W
Article	Formwork spacer mm	€/Pc	€/Pack.	Article	Formwork spacer mm	€/Pc	€/Pack.		12	20	elded
PPO 15	15	0,058	116,00 📩	PPO 25	25	0,076	76,00	*			В
PPO 20	20	0,067	134,00 📩	t -							iesh

The PAS spacer is	a sturdy spacer used for h	eavy reinforcement and	large diameter rods
The The space is	a staray spacer ascaror r	cavy rennorcenteric and	nunge ulunneter rous.

TYPE **"PAS"** CHAIR

GREY HD POLYETHYLENE

GREY HD POLYETHYL pack. 2000 Pcs - divide						LENE - Ø rod 0/28 mm ed into two 500 Pcs bags					6	
Article	Formwork spacer mm	€/Pc	€/Pack.		Article	Formwork spacer mm	€/Pc	€/Pack.		-	(
PPS 15	15	0,037	74,00	**	PPS 30	30	0,083	83,00	**	101	Δ.	
PPS 20	20	0,050	100,00	**	PPS 40	40	0,099	99,00	**			
PPS 25	25	0,065	130,00	**	PPS 50	50	0,165	165,00	**			~ V

★ = Production on demand with minimum quantity of 10000 pcs. Production delay 4/5 weeks. Price to be agreed.


*** *** = Production on demand with minimum quantity of 50000 pcs. Production delay 4/5 weeks. Price to be agreed.

Prices are referred to whole packs.



BUILDING SYSTEMS

PVC / RUBBER

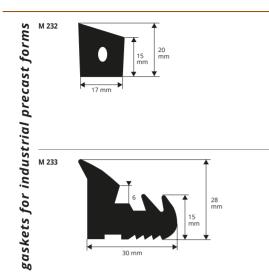


PVC / RUBBER length rolls 50 lm		
Article	€/Im	
M 232	to be agreed	*




UN

ength rolls 50 lm		
Article	€/lm	
M 233	to be agreed	*








PVC / RUBBER - weight 650 g / Im

length rolls 50 lm		
Article	€/lm	
M 234	to be agreed	*
M 234 A	to be agreed	*
M 234 B	to be agreed	*






PVC / RUBBER - weight 980 g length rolls 50 lm	/ Im		
Article	€/lm		
M 235	to be agreed	*	

*

*


*





PVC / RUBBER - weight 270 g / Im length rolls 50 Im €/Im Article €/Im M 236 to be agreed M 236 A to be agreed M 236 B to be agreed





PVC / RUBBER - weight 510 g / Im length rolls 50 Im

13.5

Article	€/lm	
M 237	to be agreed	*




314

PROGRESS® PROFILES

***** = Production on demand with minimum quantity of 50 lm. Production delay 4/5 weeks. Price to be agreed. Prices are referred to whole packs.


PVC / RUBBER

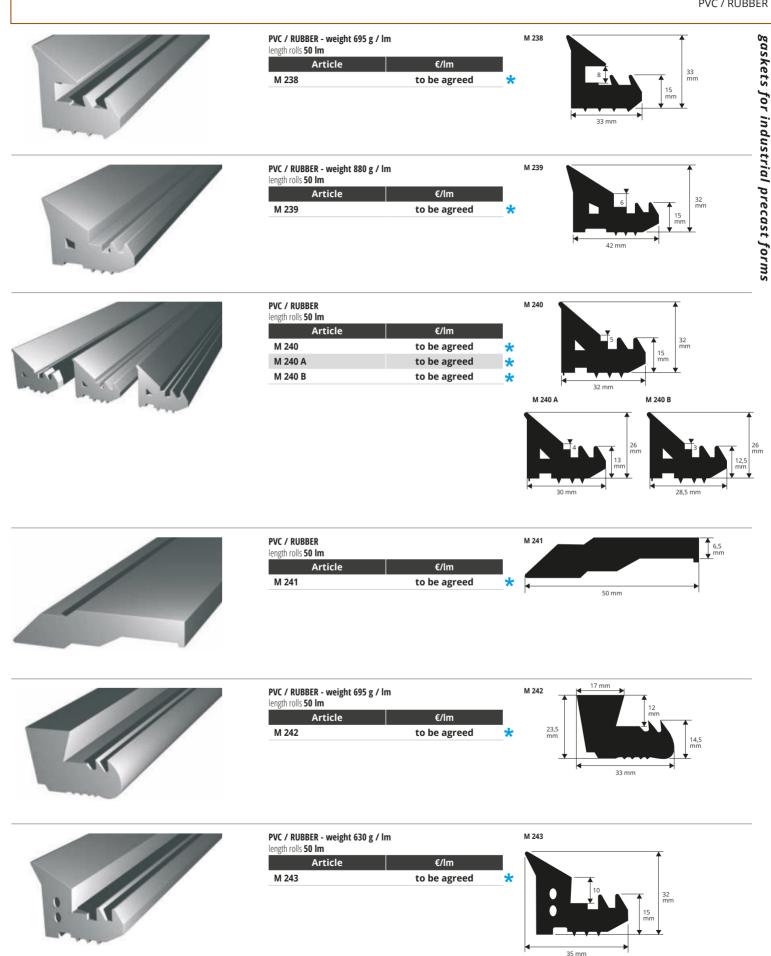

* = Production on demand with minimum quantity of 50 lm. Production delay 4/5 weeks. Price to be agreed. Prices are referred to whole packs.

BUILDING SYSTEMS

PVC / RUBBER

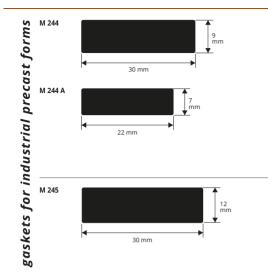

PVC / RUBBER - weight 180-330 g / lm length rolls 50 lm Article €/lm M 244 to be agreed M 244 A to be agreed




*

*

000

















PVC / RUBBER - weight 335 g / Im length rolls 50 Im					
Article	€/lm				
M 247	to be agreed				






PVC / RUBBER - weight 270 g / lm length rolls 50 lm

Article	€/lm	
M 248	to be agreed	*
M 248 A	to be agreed	*




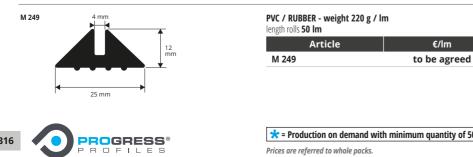



🖈 = Production on demand with minimum quantity of 50 lm. Production delay 4/5 weeks. Price to be agreed. Prices are referred to whole packs.

BUILDING Systems

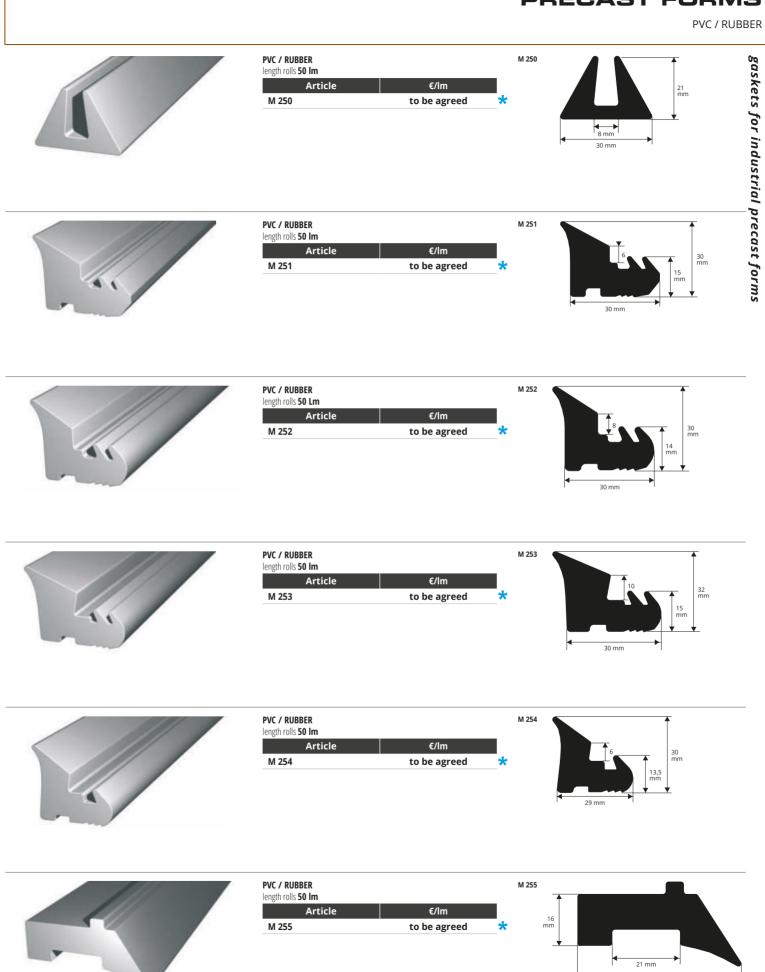

🖈 = Production on demand with minimum quantity of 50 lm. Production delay 4/5 weeks. Price to be agreed.


Prices are referred to whole packs.

317


50 mm

PROGRESS® PROFILES BUILDING SYSTEMS


PVC / RUBBER

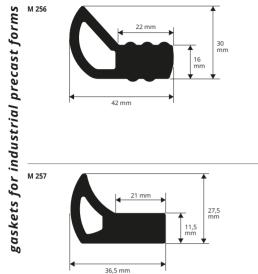

PVC / RUBBER ength rolls 50 lm		
Article	€/lm	
M 256	to be agreed	*




UN




PVC / RUBBER length rolls 50 lm		
Article	€/lm	
M 257	to be agreed	*






PVC / RUBBER length rolls 50 lm		
Article	€/lm	
M 258	to be agreed	*






PVC / RUBBER - weight 750 g / Im length rolls 50 Im						
Article	€/lm					
M 259	to be agreed					





PVC / RUBBER - weight 350 g / lm

length rolls 50 lm		
Article	€/Im	
M 260	to be agreed	*





*



C 550 B

C 550 G

C 550 8

C 550 11

7,5

C 550 A

C 550 F

C 550 7


C 550 10

COEXTRUDED FLEXIBILE VINYL RESIN

C 550 C

C 550 9

C 550 12

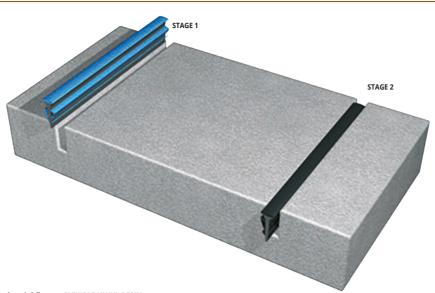

For industrial floors - FLEXIBLE VINYL RESIN

pack.	101	230	

sheath L mm	disk thick mm	€/roll	€/lm	
3,5	2,4	60,00	0,24	*
3,8	2,8	65,00	0,26	*
5,2	3,2	70,00	0,28	*
5,8	3,6/3,8	75,00	0,30	*
6	4,2	87,50	0,35	*
	mm 3,5 3,8 5,2 5,8	disk trick mm 3,5 2,4 3,8 2,8 5,2 3,2 5,8 3,6/3,8	mm disk trick mm €/roi 3,5 2,4 60,00 3,8 2,8 65,00 5,2 3,2 70,00 5,8 3,6/3,8 75,00	mm disk trick mm €/ron €/rm 3,5 2,4 60,00 0,24 3,8 2,8 65,00 0,26 5,2 3,2 70,00 0,28 5,8 3,6/3,8 75,00 0,30

MINIMUM QUANTITY 20 ROLLS = 5000 lm per colour and dimension. Available for every type of diamond and abrasive disk.

For larger gaps - FLEXIBLE VINYL RESIN

Article	sheath L mm	disk thick mm	€/roll	€/lm	
C 550 7	7	5/6	172,00	0,86	*
C 550 8	8	6/7	212,00	1,06	*

For larger gaps - FLEXIBLE VINYL RESIN

pack. roll 100 lm					
Article	sheath L mm	disk thick mm	€/roll	€/lm	
C 550 11	11	9/10	162,00	1,62	*
C 550 12	12	10/11	176,00	1,76	*

For larger gaps - FLEXIBLE VINYL RESIN

pack. roll 150 lm						
	Article	sheath L mm	disk thick mm	€/roll	€/lm	
	C 550 9	9	7/8	181,50	1,21	*
	C 550 10	10	8/9	210,00	1,40	*

The inserted joints have a wider upper flat part to cover the splintering of the floor created by the disk during cutting.


Available in the colours: G - Y - R - N - B. The code of the selected colour must be added to the article code. E.g.: C 550 A... (chosen colour Grey) C 550 AG.



RESOLVES THE FOLLOWING PROBLEMS:

- Perfectly covers the gap made with any type of disk and remains for a long time at floor level without sinking.
- Thanks to the central semi-rigid shank, the sheath cannot contract in the joint areas.
- When the disk is worn, the sheath need not be changed because it adapts to even the narrowest gaps.
- Also available for larger gaps from 6 mm to 12 mm.

• Very easy to lay.

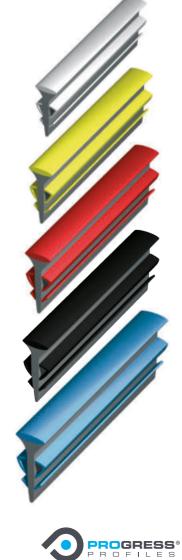

BUILDING SYSTEMS

PAVIJOINT

GREY RIGID PVC

construction joints for industrial floors

PAVIJOINT is a rigid PVC profile with the upper part in elastic PVC/rubber, which absorbs the stress of the floor movements. Two T-irons are inserted inside the profile to strengthen it and to unite two short rods; through holes are also made for the rods 80 cm apart. The **PAVIJOINT** totally replaces the conventional aluminium beams used for shuttering the concrete cast, thereby

The **PAVIJOINT** totally replaces the conventional aluminium beams used for shuttering the concrete cast, thereby avoiding demoulding of the cast and cutting of the joint with diamond-slitting disks in a delicate point such as construction joints.



LAYING ACCESSORIES

GREY RIGID PVC



RIBBED DISTANCE TUBE (to neutralise the short rods) RIGID PVC - bar length 2 Im - pack. 20 Pcs - 50 Im					
Article	Ø mm outside	€/lm	€/Pc		
PPD 20	20	0,53	1,06		
PPD 22	22	0,56	1,12		
CORNER JOINTS FOR SECURING PAVIJOINT - pack. 20 Pcs					
Article	€	/Pc	€/Pack.		
SQBD	5	,50	110,00	*	

PLUGS FOR FINNED TUBE - GREY HD POLYETHYLENE

pack. ZUUU PCS divided in two TUUU PCS bags					
Article	Ømm	€/Pc	€/Pack.		
PPT 20	20	0,032	64,00		
PPT 22	22	0,035	70,00		

© 2023: All nights reserved by Progress Profiles. Printed in litely

320

***** = Production on demand with minimum quantity of 10000 pcs. Production delay 4/5 weeks. Price to be agreed. Prices are referred to whole packs.

The **SHEATH LAYING TROLLEY** was designed to lay different sizes of bubble sheathing easily and correctly. It is supplied with the accessories indicated in the photo (except for the pliers).

SHEATH LAYING TROLLEY


FOR INDUSTRIAL FLOORS



laying products

START OF LAYING

EASY TO USE



GROUT DRAGGER FOR MORE CONTROLLED LAYING

ROLL-LIFTING FEET



EXTRA WEIGHT




LIGHTWEIGHT FOR MOBILITY

pallet


CPGC





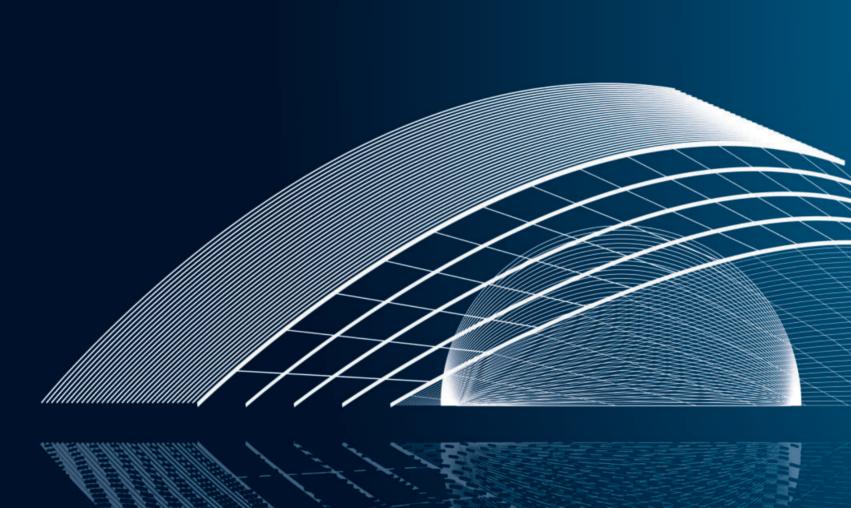

An interpretation of: City of Art and Science, Santiago Calatrava, Valencia (Spain), 2009

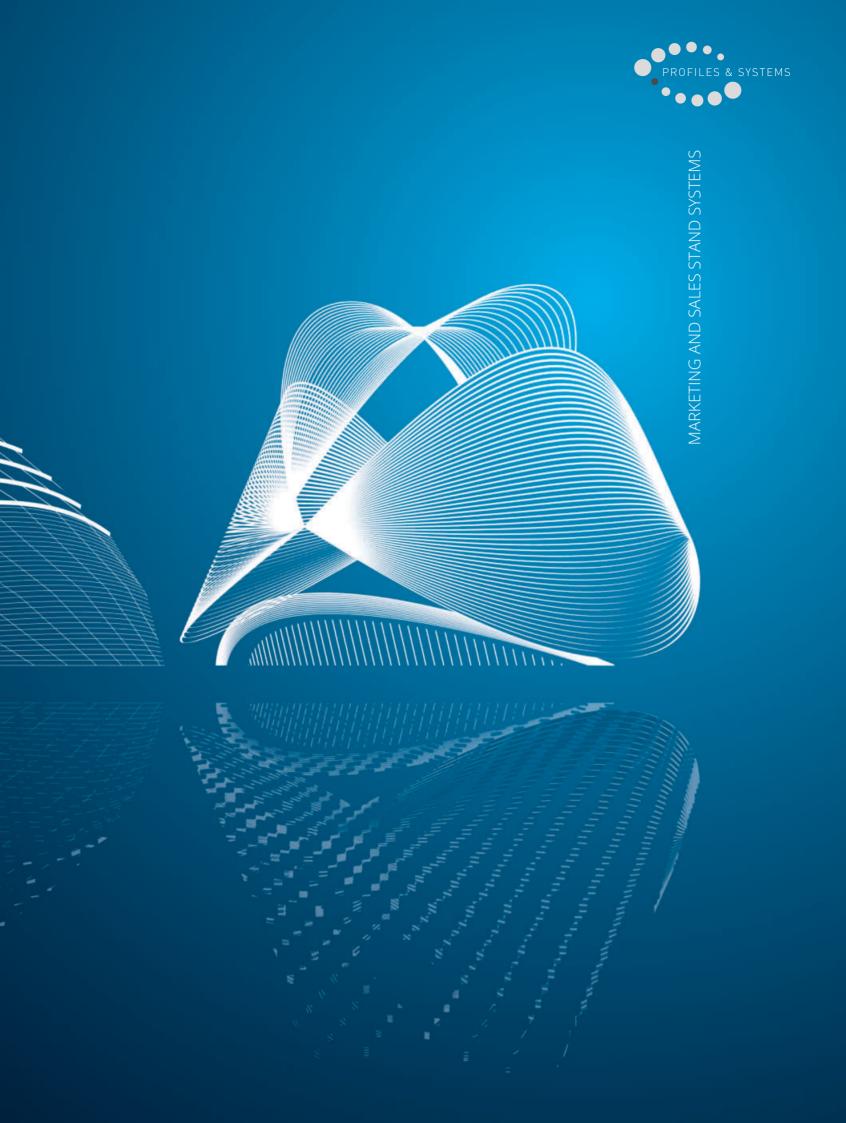

SQUARE SHOW CASE WITH DRAWERS FOR PROFILES FOR SHOW ROOM

SQUARE SHOW CASE WITH 10 DRAWERS length 39,5 cm - width 39,5 cm - height 109 cm (*Brochure and flyers not included)








SET OF SAMPLES AVAILABLE FOR 10 DRAWERS

- Set **Samples Description** PROFILES FOR WALLS - Projolly Triangle - Prointer - Proterminal Int - Prolistel Channel - Prolistel ACC, P ALL, 1 Led - Profinlist 20 - Proedge AC, OT - Proround - Probord PROFILES FOR WALLS - Proseal 50, 25 - Proshell - Proshell All - Prointer KL - Prokerlam SQ - Prokerlam Line -2 Prokerlam Jolly - Protop - Protop T - Proshell R, D PROFILES FOR FLOORS - Proterminal Curve - Projolly Curve - Proslider Curve - Prolevigal - Proelegant - Profinal 3 - Prosquare - Proangle - Projoint - Procanal - Proflat PROFILES FOR FLOORS - Proslider - Procarpet - Proslider LR - Proskid - Proskid ALL - Prolevall 29, 33, 305 -4 Pronivo - Protrans PROFILES FOR FLOORS - Profloor - Propress - Proslider - Prolinoleoum - Procover - Promoquette Gin -5 Promoguette Clip - Promoguette - Promoguette Fix PROFILES FOR FLOORS + JOINTS - Proplate - Prolevall 38 - Proflex - Proflex ALN - Prodilat - Mortar-laid 6 loints STAIR NOSING PROFILES - Prostair - Prostyle - Prostyle Grip - Prostair - Prostair 50 - Probrastep - Probrastep -7 Protermstep ACC, ALL - Prostyle STAIR NOSING PROFILES - Prostair Led - Prostep Ins - Prostyle KL - Prostair KL 20 - Prowalk - Proend Ins, Grip 8 - Proend 50 - Proend - Tube 12 - Tube plugs 12 - Eyelet - Hinge support 9 TERRACES - Proterrace Drain - Proterrace PCG, ALT, pc, PCJ, ECO
- SKIRTING Proskirting INS, ISP Punched support Proskirting Proskirting Shell, Led Cable glands support -10 Polycarbonate flat - Proskirting Giled - Top Giled
- 11 SKIRTING - Skirting 40, 60, 100, 7016, 7011 - Support clip - Skirting 60 Flex - Covecap - Skirting
- PROFILES FOR PARQUET Proscrew Base Proscrew 44, 33, 50 Proinsert Base 45, 40 Pin Insert Top Sol 40 P, 12 30 P - Terminal Pin - Zero Curve - Style Stair - Style Stair L - Terminal - Base LVT 30, 23 - LVT Top, Terminal, Zero Curve

NOTES:

Labels will delivering with the profiles samples, but in a separeted pack. (*) Write the brochures and flyers codes of the systems to be displayed

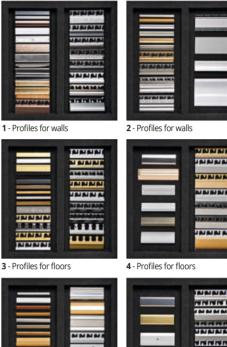

6 - Profiles for floors + joints

-

5 - Profiles for floors

	ALL ALL ALL ALL
	INNEL
ALC: N DO	
MANANA	STREET, STREET
	MANANA
Consumer Calific	

7 - Stair nosing profiles



9 -Terraces

11 - Skirting

8 - Stair nosing profiles



10 - Skirting



12 - Profiles for parquet



EXPOSURE DISPLAY / WALL UNIT FOR SHOWROOM



EXPOSURE DISPLAY / WALL UNIT FOR SHOWROOM W 208 cm x H 240 cm

Description	Article	€/Pc
Exposure display / wall unit	ESHPAN 250	8488,42
The exposure display / wall unit is complete with		
19 Sample board PESP	PESP 1 ÷ 19	
1 Display PROLEVELING SYSTEM	PNPLSI	
1 Bruchure display PROLEVELING SYSTEM	PBPLS	
50 Flyer PROLEVELING SYSTEM	FLYPLSI 18	
3 Finishes case:		
- PROJOLLY finishes case	COFPJ	
- PROJOLLY SQUARE finishes case	COFPJQ	
- PROTERMINAL finishes case	COFPT	
2 Photo book	BOAM	
1 Exposure display PROSHOWER with Design grid	PSHWDL 70 + PSHWD 70	
1 Bruchures exposure	ESPB	
3 Sample board PROLISTEL	PESPPLT - PESPPLT15 - PESPPLTI	þ
3 Sample board SKIRTING	PESPBT - PESPPK - PESPPKCH	
Description	Article	€/Pc



325 MARKETI NG

ROTATING DISPLAY EXPOSURE STAND FOR SHOW ROOM

ROTATING DISPLAY EXPOSURE STAND FOR SHOW ROOM (with 18 sample boards) - diameter 81 cm - height 224 cm
Article

€/Pc FSPGSM18 1044,73

The rotating display allows to exposed 18 removable boards with images of different settings. (On the order write the number of the 18 chosen boards PESP) The sample boards are 19. When the display is ordered, specify the desired 18 sample boards according to sales requirements.



SMALL **EXPOSURE STAND**



SMALL EXPOSURE STAND (with 4 sample boards)

width 33 cm - depth 50 cm - height 60 cm Article €/Pc

CURAS 295,13 It allows to expose 4 easily removable boards at your choice. (On the order write the number of the 4 chosen boards PESP) The sample boards are 19. When the stand is ordered, specify the desired 4 sample boards according to sales requirements.

TROLLEY



PROGRESS®

ROFILES

TROLLEY (with 18 sample boards) width 50 cm - depth 35 cm - height 63 cm Article

TRAG18 1110,02 (On the order write the number of the 18 chosen boards PESP ...)

SAMPLE BOARD

width 30 cm - height 56 cm

PESP 1/ 2/ 3/ 4/ 5/ 6/ 7/ 8/ 9/ 10/ 11/ 12/ 13/ 14/ 15/ 16/ 17/ 18/ 19

SAMPLE BOARD

For the composition of the display ESPGSM and CURAS, choose the boards you wish with the reference number.

Article





Pr

Sample board n° 6

	- 0	٩/	
Ŧ	Innen I		-
	Innine		-
	ACCOUNTS OF	M	111
Ē	Constantial and a second		
r	Junion	22	
T		4	E
		Ľ.	
	-	1	
	-	6	

Sample board nº 5 Prolevigal, Protinal , Proelega Prolevigal, Procanal, Projoint Proangle, Proflat

100

140		- 0	
	-	24	
14	_		
		and some of	
-			
¥	-		
2	_	_	
26	and in case		
E.	-	And in case of the local division of the loc	
15	_	and the owner where the	
2.5			
Ε.		_	
6	and the owner of the		
E			
	-		
2.24	-	-	

Sample board nº 9 Sample board nº 10 Proflex, Prodilat. Adhesiv-laid Ioin



Sample board nº 13



Sample board nº 17 l, Do it yourself her, Canal, Flat,



CHI PH P



€/Pc

40,23

Sample board nº 4 ord, Proedge, Proshell, Prosg oedge, Proshell, Pros , Probath, Proseal, Pro



Sample board n° 8



Sample board nº 7

A

ų

-

Sample board nº 14 Skirting 40/ 60/ 80/ 100



Sample board n° Skirting 7011 T Style

Sample board nº 16 SOL 40P, Terminal Pin Zero Cuer Style Stair, Terminal, SOL 30, Profixer Line, SOL 50, Proscrev

Sam Profoil, Pro Proband Fix	i ple bc ideso, Pro BU, Prob , Prodrip,	and Koll,	Proband
		•	
		-	-
2			-
100-			-





© 2028 All rights reserved by Progress Profiles. Printed in Italy

MARKETING

326

E

Cur

€/Pc

Sample board nº 18 Chamfer, Prodistanz, Waterstop, Snape-on Strand, PAU/PAV spacer

Sample board n° 15 Proskirting, Giled, Shell, Led, Flat

ROTATING DISPLAY FOR SKIRTING

2120202-014

Π.

1

and the second sec



Art	ticle	€/Pce		- Carlos and the second	
ESPGSMBT		1100,00			Name and American American
Note: The revolving to PROGRESS PROFILES, to request customizations	hat you see on this page	range of samples from , and it is not possible to			
					len Len Remarken Este
ESPGSMBT 3 PROMULTISKIRT SQUARE	ESPGSMBT 4	ESPGSMBT 5	ESPGSMBT 6	ESPGSMBT 7	ESPGSMBT 8 PROSKIRTING CHAN
					PROSKIPTING FLAT
Diame Desc Desc protect thread protect thread protect thread states protect thread protect thread states protect thread protect thread		Annual An		SKIRTING 100'150 mm.mm	
					PROSKIRTING INS
				SKIRTING 100 Automatic	
	PROSKIRTING 40			Million State	

PROLISTEL AND SKIRTING DISPLAY

PROLISTEL AND SKIRTING COUNTER DISPLAY				
Article	€/Pc			
ESPBLSH	391,78			




PROLISTEL width 30 cm - height 38 cm		
Article	€/Pc	
PESPPLT	65,29	
PESPPLT15	65,29	
PESPPLTP	65,29	
PESPPLTP	65,29	


ROTATING DISPLAY FOR SKIRTING

diameter 81,5 cm - height 170 cm

SKIRTING width 30 cm - height 38 cm

Article €/Pc		
65,29		
65,29		
65,29		

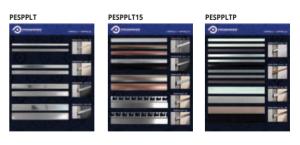

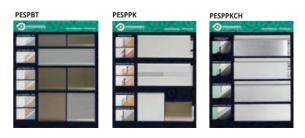

PROGRESS® PROFILES



100 400

SAMPLE CASES

FINISHES CASES

Article	Description	€/Pc
COFPJ	Projolly / Projolly Quart	67,05
COFPJQ	Projolly Square	67,05
COFPT	Proterminal	67,05
COFSTL	Stone Line	67,05
COFBT	Skirtings	67,05





COLOUR RANGE KEYRINGS

PROFILES COLOUR RANGE

Article	Description	€/Pc	a selling
COLBS	Skirtings	26,82	
COLPJ	Projolly	21,45	Nº1
COLPJM	Projolly marble	21,45	
COLPJQ	Projolly square	21,45	
COLPJQT	Projolly quart	21,45	
			COLBS



COLPI

COLPJM

SAMPLES	AND
WOODEN	

PROFILES FOR LAMINATE, PARQUET AND CARPETED FLOORS		
Article	€/Pc	
TUBLAM (PROINSERT SYSTEM profiles samples)	26,11	
CCOLL (standard wood samples)	63,40	
CCOLLR (on demand wood samples)	82,48	*



TUBLAM

PROSKIRTING GILED DISPLAY

PROSKIRTING GILED PANEL width 70 cm - height 92 cm

	neight 32 cm	
	Article	€/Pc
ESPGLED		601,41




PROSKIRTING LED DISPLAY

PROSKIRTING LED PANEL width 70 cm - height 92 cm


	Article	€/Pc
ESPI	LED	536.47





BACK OF PROSKIRTING LED BOARD











(with PROSHOWER BASE L + SET OF AVAILABLE GRIDS) width 100 cm x 36 cm - height 73 cm Article €/Pc

EXPOSURE DISPLAY PROSHOWER SYSTEM FOR SHOWROOM

PROSHOWER SYSTEM DISPLAY





EXPOSURE PRODESO® HEAT SYSTEM

ESPPDHI595

width 60 cm - depth 60 cm - height 206 cm Article

€/Pc

1110,02



Article

SPCPDESH...



€/Pc

65,29



Article



€/Pc

65,29

EXPOSURE PRODESO® HEAT SYSTEM EXPOSURE PRODESO® HEAT SYSTEM

SPCPDES...

PRODUCT BOARD PROLEVELING SYSTEM DISPLAY SPACERS



SPACERS DISPLAY

SPACERS DISPLAY (ACCESSORIES EXCLUDED)



€/Pc
8,03

EXIBITION BOARD

EXHIBITION BOARD - 80 x 57 cm



EXPOSURE DISPLAY PROSUPPORT TUBE

EXPOSURE DISPLAY PROSUPPORT TUBE WITH 50 FLYER

Article	€/Pc
ESPPST	112,84
FLYPSUP	15,67



EXPOSURE DISPLAY PROTERRACE

EXPOSURE DISPLAY PROTERRACE WITH 50 FLYER

Article	€/Pc
ESPFDPP	130,59
FLYPTER	15,67



PROGRESS® P R O F I L E S

CATALOGUE



0

0

🧿 = News 2023



331

0

PROGRESS® PROFILES

MODULAR DISPLAY SYSTEM FOR SHOWROOM

The **MODULAR DISPLAY SYSTEM WITH INTECHANGEABLE BOARDS** is composed by an metal base, 225 cm height, 93 width and 44 cm deep. It is possible to fix to this framework boards with pictures, samples and fixing patterns of profiles. A shelf with a fixing example of the most common profiles showed on the boards above is in the middle of the framework. Thanks to the pictures of fixing patterns, profiles samples and fixinf examples, the modular display allows the customer to have an overall view of the use of the Progress Profiles products and systems. The modularity and the small size of the display allows its positioning in all showroom and sales point. Thanks to the modularity of the boards, the customer can choose the boards according to the products he wants to show. The system is easy to update with new finishes and products.



Article	Description	€/Pc	
RIV 1	Modular display Profiles for walls 1	2950,00	*
RIV 2	Modular display Profiles for walls 2	2950,00	*
RIV 3	Modular display Profiles for walls 3	2950,00	4
PAV1	Modular display Profiles for floors 1	2950,00	7
PAV2	Modular display Profiles for floors 2	2950,00	-
CRV	Modular display Curved profiles	2950,00	7
GR1	Modular display Stair nosing profiles 1	2950,00	-1
GR2	Modular display Stair nosing profiles 2	2950,00	3
GIU1	Modular display Joints 1	2950,00	7
PTR	Modular display Proterrace	2950,00	3
PSH1	Modular display Proshower 1	2950,00	4
PSH2	Modular display Proshower 2	2950,00	3
PFPG	Modular display Profoil panel	2950,00	-1
B1	Modular display Baseboards 1	2950,00	3
B2	Modular display Baseboards 2	2950,00	-
LED	Modular display Proledlight	2950,00	3
LGN	Modular display Profiles for parquet	2950,00	-1
PLV	Modular display Proleveling	2950,00	3
PSPT	Modular display Prosupport tube	2950,00	-
PSTS	Modular display Prosupport slim/prorail	2950,00	3

MODULAR DISPLAY WITH STEPS





★ = Article on demand, Production delay and prices to be agreed.



Proskirting led, Proskirting ied, Proskirting giled, Proskirting list, Proskirting isp, Proskirting,

Proskirting shell, Proskirting channel, Proskirting flat,

Proskirting ins, Proskirting line;



B 12 0



PROFOIL PANEL SYSTEM,

PRO GOBORD SYSTEM, PROFOIL PANEL NICHE,



.....





 \odot

Skirtings

......

PSTS: Prosupport Slim, Prorail System;

Proledlight system, Proskirting led, Proskirting giled, Prostair led,

Prolistel led;









SHOWROOM SET-UP EXAMPLES



PROPOSALS OF SHOWROOM EQUIPMENT - PROPOSAL 1 - Back - panels and desks are not included DISPLAYS FOR PROFILES ARE AVAILABLE UNDER CUSTOMER REQUEST

Description	Article
Rotating display stand + Sample boards (x18)	ESPGSM18 + PESP
Counter display for flyer + Proleveling system flyer	PBPLS + FLYPLS 20
Proleveling System Board	PNPLS
Proterrace Display	ESPFDPP
Counter display for mini catalogues	ESPB
Membrane case	COFM
Photo book	BOAM



PROPOSALS OF SHOWROOM EQUIPMENT - PROPOSAL 3 - Back - panels and desks are not included DISPLAYS FOR PROFILES ARE AVAILABLE UNDER CUSTOMER REQUEST

Description	Article
Exposure Display / Wall unit	ESHPAN 250
Square show case with drawers for profiles	ESPQC
custom displays and expositors	-



PROPOSALS OF SHOWROOM EQUIPMENT - PROPOSAL 2 - Back - panels and desks are not included DISPLAYS FOR PROFILES ARE AVAILABLE UNDER CUSTOMER REQUEST

Description	Article
Exposure Display / Wall unit	ESHPAN 250
Proshower system display + available grids set	ESPSHW 70 + COLGPSHW70
Exibition Board	PNPSR
Photo Book	BOAM
Proleveling system Sample Board	PNPLS



PROPOSALS OF SHOWROOM EQUIPMENT - PROPOSAL 4 - Back - panels and desks are not included DISPLAYS FOR PROFILES ARE AVAILABLE UNDER CUSTOMER REQUEST


Description	Article	
Exposure Display / Wall unit	ESHPAN 250	
Square show case with drawers for profiles	ESPQC	

EXAMPLE OF CUSTOMIZED SHOWROOM SET-UP - 3



EXAMPLE OF CUSTOMIZED SHOWROOM SET-UP - 1





DISPLAYS FOR PROFILES




MARKETING

335

PROGRESS® PROFILES

DISPLAYS FOR PROFILES

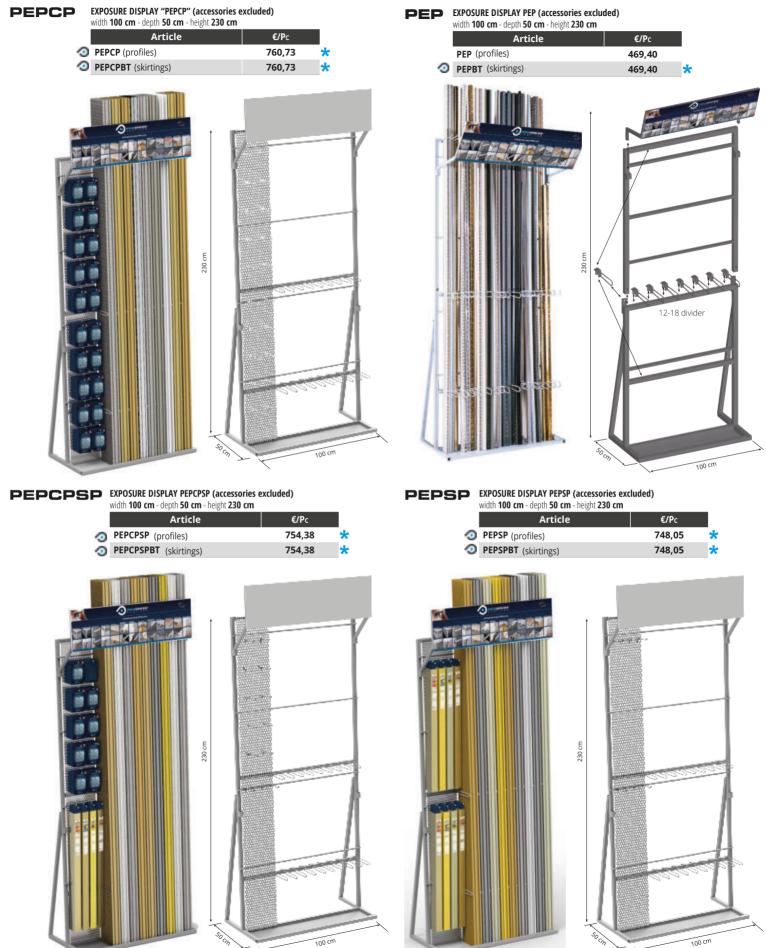

* = Article on demand, Production delay and prices to be agreed.

336

PROGRESS® PROFILES



News 2023
 + article on demand, Production delay and prices to be agreed.

MARKETING

337

PROGRESS® PROFILES

GADGETS

GADGETS		
Article	Description	€/Pc
PEN	Pen	3,17
CUTTER	Cutter	15,08
FOGLAPP	Post It	4,43
PENCIL	Work pencil	3,30
TAPMOUSE	Mousepad	12,68
CARTPBPP	Portfolio	26,63
USB	USB Pendrive	31,06
FLESSOMETRO	Таре	15,72
CAP	Baseball cap	10,14
MARSUPIO BASIC	Pouch	14,57
PRGS10	Profile measurement ruler	3,80
OMBRELLOP	Umbrella	21,42
PLAN	Planning	12,04
PENNA DA BANCO	Counter pen	13,94
PENNA TECNICA	Technical Pen	17,76



T-SHIRT		
Article	Description	€/Pc
TSHIRT S	T-shirt white S	15,21
TSHIRT M	T-shirt white M	15,21
TSHIRT L	T-shirt white L	15,21
TSHIRT XL	T-shirt white XL	15,21
TSHIRT XXL	T-shirt white XXL	15,21



Article	Description	€/Pc
GILET	Vest	60,86



	0	
A	0	

Description

polo stretch wwhite M

polo stretch white L

polo stretch white XL

polo stretch white XXL

€/Pc

48,80

48,80

48,80

48,80

PILE PROGRESS PROFILES

WHITE POLO

POLOB M

POLOB L

POLOB XL

POLOB XXL

Article

Article	Description	€/Pc
PILE	Fleece sweatshirt	57,71



BLUE NAVY POLO Article Description €/Pc F

POLOBIMM	polo stretch wwhite M	48,80
POLOBN L	polo stretch blu navy L	48,80
POLOBN XL	polo stretch blu navy XL	48,80
POLOBN XXL	polo stretch blu navy XXL	48,80





MARKETING

Progress Profiles SpA Via Le Marze 7 31011 ASOLO (TV) Italy

Tel. +39 0423 950398 Fax +39 0423 950979 Certified company UNI EN ISO 9001:2015 P.I. IT 03481880262 - R.E.A. TV 275319 C.F. e lscr. Reg.Impr. TV 03481880262 Cap. soc. € 120.000,00 i.v. N. Meccanografico TV 44685

ORDER	No.	

on,	20

Sale with retention of ownership made according to the conditions established in the terms of sale herebelow

Fax _

CUSTOMER CODE	AREA MANAGER COMM.
Company	Agent
Street	Payment
District Zip Code	Bank ABI
Province	Agency CAB
e-mail	Delivery
VAT No	Notes

CODE DESCRIPTION U.M. QUANTITY UNIT PRICE DISC. %

Terms of sale: 1) Dispatch at cost price - 2) Orders are always "SUBJECT TO APPROVAL BY THE MANUFACTURER". - 3) in the event of refusal of the goods after 7 days have elapsed from the date of order, the customer is obliged to pay 30% of the total amount. Retention of ownership: 1) Sale is made with retention of ownership by Progress Profiles until full payment of the price, in accordance with sections 1523 ut seq. of the Italian Civil Code - 2) Failure to pay even one instalment shall entitle Progress Profiles, among other things, to take back the goods and to withhold the paid instalments by way of compensation for damage, all and any objection being forthwith excluded. Should collection of the goods and withholding of the Italian Code of Civil Procedure, will be that of Progress Profiles. The latter shall have the right to take action in respect of the difference. - 3) The sole place of jurisdiction for any dispute, in accordance with section 28 of the Italian Code of Civil Procedure, will be that of Progress Profiles.

A charge is made for late payment, whatever the reason, at the bank interest rate of 2.50% a month, which the customer undertakes to accept with the signing hereof.

With our signature we declare that we have perused the foregoing terms of sale and in particular specifically approve the clauses: 1) Terms of sale. - 2) Retention of ownership. - 3) Termination of the agreement and the consequences thereof. - 4) Chosen place of jurisdiction Law Court of Treviso.

Stamp and signature in acceptance _

Tel.



GENERAL TERMS AND CONDITIONS OF SALES PROGRESS PROFILES S.P.A.

These general terms and conditions (hereafter "General Terms and Conditions of Sales") govern the contractual relationships of the products manufactured or marketed (hereafter "Product/s" or "Good/s") by the company PROGRESS PROFILES S.P.A. (hereafter "Vendor") to its customers (hereafter individually "Buyer" or "Customer") (Buyer and Vendor also referred to jointly as "Parties" and individually as "Party"). These General Terms and Conditions of Sales do not apply to sales to consumers.

1) EFFECTIVENESS OF THE GENERAL TERMS AND CONDITIONS

() percentioness or the detected terms and conditions of all explored terms and conditions of the customer will not apply, even in order terms and conditions of all explored terms and conditions of the explored terms and conditions of the customer will not apply, even partially, unless they have been expressly accepted in writing by the Vendor. These General Terms Conditions of Sales are effective until they have been expressly revoked by the Vendor or are replaced by new terms and conditions that will become effective from their signing.

2) ORDER The Goods object of each sale between the Buver and the Vendor are described in the purchase order ("Order") that the Buver sends directly or indirectly through its representatives to the Vendor. The Order is considered irrevocable for the Buver if confirmed by the Vendor through the Order Confirmation, preform invoice.

3) CONTRACT

he sales contract of the Goods ("Contract") is governed by the Order, by the Order Confirmation and these General Terms and Conditions. The sending of an Order by the Customer implies his/her full acceptance of these General Terms and Conditions of sales and of any of the specific ones related to the Order itself. The Contract is completed with the acceptance of the Order by Order Confirmation, communicated in writing by the Vendor to the Buyer or, failing that, with the execution of the Order by delivering the Goods to the carrier or forwarder. Any changes to the Contract, proposed by the Buyer, will result in changes to the same only if accepted in writing by the Vendor.

4) DELIVERY TERMS, TRANSPORT OF GOODS

The delivery terms of the Goods will be agreed from time to time in the individual Order and relative Order Confirmation. The delivery terms must always be considered indicative, not essential, and are not binding for the Vendor. Any variations requested in the production phase, nonetheless relieve the Vendor from complying with the agreed from time to time in the individual Order and relative Order Confirmation. The delivery terms sust always be considered indicative, not essential, and are not binding for the Vendor. Any variations requested in the production phase, nonetheless relieve the Vendor from complying with the agreed terms. In this case the terms and conditions of delivery will be renegotiated. If the Buyer expressly requests an express delivery service in the Order, the Vendor will indicate, in the Order Confirmation the cost for this service which shall be considered accepted, if not contested in writing by the Buyer to the Vendor. Any reference to delivery terms (e.g. EX WORKS, CIF, FOB and others) contained in the Order confirmation refers to the Incoterms® of the International Chamber of Commerce, in the text in force on the date of the Order Confirmation. If a sale has been agreed with transport via carrier, regardless of the Party that appoints the carrier, the risks are transferred to the Customer with the delivery of the Goods to the first carrier: any claims for breakages, deterioration, tampering or deficiencies must be reported by Buyer to the carrier in accordance with the law, providing the Vendor with appropriate information. The Vendor is therefore entitled to reasonably anticipate or postpone the delivery of all or part of the Goods, without this entitling the Buyer to request full or partial termination of the Sales Contract or to claim compensation or indemnity and without the Buyer refusing delivery of the Goods. We shall not be liable for any delays in shipments which will not entitle the Customer to claim damages and/or penalties, to delay payments or reject the Goods. It is understood, however, that maximum effort shall be ensured in the execution of the Order on the agreed dates.

5) FORCE MAIEURE

The occurrence of causes not dependent on the will of the Parties, such as strikes of any kind, earthquakes, fires, floods, lack of motive power or energy, lack or scarcity of raw materials, breakdowns and breakages at the Vendor's production facilities, delays in granting authorizations by the Authorities, embargo or other measures of national or supranational Authorities and other impediment, tindependent of the will of the Parties, which make delivery temporarily impossible or excessively expensive, the delivery time will be extended by a period equal to the duration of the impediment, the Party, upon becoming aware of the impediment, will communicate within a reasonable time to the other Party the existence of the impediment and, where this is not already implicit in the type of impediment, the probable effects it shall have on the delivery obligation. Similarly, the Party will inform the other Party of the removal of the impediment. It is understood that neither the Customer nor the Vendor can demand compensation or indemnity of any kind due to the occurrence of the circumstances provided for in article 5.

6) REFUSAL TO RECEIVE DELIVERY

Where the Buyer refuses to receive the delivery of all or part of the Goods only, the Vendor may, at its own unquestionable choice, demand performance of the Contract, or declare its total or partial termination. In either case, the Vendor retains the right to claim compensation for damages. Any responsibility of the Vendor for risks and costs deriving from or inherent to the stock of the Goods is expressly excluded, which shall be entirely charged to the Buyer.

7) DESCRIPTIVE DRAWINGS AND DOCUMENTS

The dimensions, sections, drawings, colours, finishes, prices and the other data included in the catalogues, prospectuses, circulars, advertisements, illustrations and price lists of the Vendor are approximate indications. These data is not binding except to the extent that they are expressly provided for in the Order Confirmation or in the Contract. Any photographs included in the offer and/or the Vendor's Order Confirmation are not binding and are for illustrative purposes only.

8) PRICES, PAYMENTS AND DEFINITION OF DEFAULT INTERESTS

b) FRUCES, PATIMICIES AND DEFINITION OF DEFAULT INTERCESS The prices of the products are those indicated in the price list or on each offer made by the Seller and shall be dearly indicated on the order confirmation. The prices of the products are those indicated in the price list or on each offer made by the Seller and shall be determined on the basis of the price list in force when the order shall be taken in charge and processed by the Seller and shall be dearly indicated on the order confirmation. The prices of the products are those indicated in the price list in force when the order shall be taken in charge and processed by the Seller and shall be dearly indicated on the order confirmation. The prices of the products do not include any taxes or duties whatsoever, and are always Ex Works and do not include any installation or transport. Payments must be made by the Customer as specified and within the times indicated on the order confirmation. Orders for an amount less than $\in 100.00$ shall not be fulfilled, or alternatively their value shall be increased by processing and handling costs. Orders for an amount less than Eur 300.00 shall also be increased by ancillary costs as shown on the "transport cost charges" chart in the Progress Profiles catalogue in the related section. For late payments, default interests shall be charged at the rate established by Italian Legislative Decree no. 231/2002 and subsequent amendments and / or additions, and shall apply from the first day after the expiry of the payment deadline. It is understood however that for any complaints or disputes the Customer is not entitled to suspend or, in all cases, delay payments for the Products subject of the claim, or any other supplies. More generally, no action or exception may be taken or opposed by the Customer unless after the full payment of the Products for which this dispute or exception is referred to. Furthermore, the Customer is not authorized to make any deductions from the agreed price (eg in the case of alleged defects in the Products), unless previously agreed in writing with the Seller.

9) SUSPENSION OF PERFORMANCE AND TERMINATION

9) SUSPENSION OF PREVOKMANCE AND TEXMINATION The non-payment, even partial, of supplies or any amount due by the Buyer, or the total or partial non-fulfilment of contractual obligations or agreed conditions for the supply, automatically authorizes the Vendor to suspend further shipments or cancel any Orders in progress, or to subordinate the delivery of the Products to the provision of adequate guarantees of payment, and exonerate the Vendor from any ongoing commitment with the same Customer at any time and without prior notice. The Vendor has a similar right whenever changes occur to the Buyer, in its structure or corporate structure, in the composition of its governing or management bodies, in its financial situation, equity or commercial image, as well as in the case of lodging or submission of proof of debt in bankrupty, pending enforcement or precautionary procedures, suspensions, difficulties or delays in the performance of obligations assumed, including to third parties, of facts referring to the Buyer that may be detrimental to the successful completion of the Contract and/or detrimental to commercial interests of the Vendor.

10) CHANGES - CONFORMITY

The Vendor reserves the right to make non-decisive changes to models, measures, materials always within the tolerances of use and without obligation of communication to the Buyer by sending the Order, the Customer declares to have verified that the Goods described in the Order comply with any legal, regulatory or diverse in line cubic in their country or in another country of destination of the Goods, applicable to the import, sale and use of the Goods. In or case will the Vendor be held exponsible for any non-compliance with these legal provisions, regulations or administrative provisions. It is the Buyer's obligation to indicate to the Vendor in the Order any provision of fave or regulations and applicable to the import, sale and use of the Goods. In or case will the Vendor be held exponsible for any non-compliance with these legal provisions, regulations or administrative provisions. It is the Buyer's obligation to indicate to the Vendor in the Order any provision of law or regulation and/or any standard applicable to the Goods ordered if different from those applicable in taby and/or indicated in the Vendor's Offer. In this case, the prices of the Goods will not be those indicated in article 8, but the will be agreed between the Parties for each supply. It is understood that, in the absence of such indications, the Vendor will not be in any way responsible for the non-compliance or non-conformity of the Goods supplied to laws, regulations, standards or administrative provisions and the Buyer's hall be obliged to keep the Vendor indemnified from any damage or claim that the Vendor, or its staff or administrators, may suffer, even against claims made by third parties, due to such shortcomings.

11) WARRANTY AND LIMITS

1) WARKING FARCE LINESS In the terms provided for in article 11, the Vendor undertakes to deliver the Products as agreed and exempt from manufacturing defects. The warranty does not cover aesthetic defects, meaning finishes difference or shades in the outward appearance of the products. The Vendor is also not responsible for defects in conformity and defects in conformity and defects in the Products due to normal wear. The Vendor likewise is not liable for defects in conformity of the Products and defects caused by non-compliance, even partial, of the rules provided in the instruction manual/product data sheet, maintenance and/or cleaning with unsuitable products and/or materials and from incorrect choice by the Customer of the Product ordered for the purpose and intended use. This warranty does not extend to defects due to tampering or improper use of the Products, negligent preservation thereof, causes of force majeure The Vendor assumes no responsibility for damages resulting from the installation of the Products supplied. The Vendor declines all responsibility for any damage that may, directly or indirectly, derive from persons or things as a result of failure to comply with all the requirements indicated in the documentation accompanying the Products, and in particular that concern the warnings regarding installation, use and maintenance.

12) REPORTING OF FAULTS AND DEFECTS

12) REPORTING OF FAULTS AND DEFELTS The Products prevention of the products, etc.) must, under penalty of forfeiture, be contested at the time of delivery directly to the carrier on the transport document and notified not later than 7 (seven) days to the Vendor by registered letter with return receipt or other means of communication that assures the proof and date of receipt (e.g. Certified Electronic Email). After this deadline, the Products will be considered for all purposes accepted, furthermore, the use and/or installation and/or laying of the Products presenting apparent defects, excludes the possibility of disputes or complaints concerning the defects themselves. Any hidden defects (defects not indicated by a go discovery and in any case no later than 12 (welve) months from delivery to the Buyer. It is understood that the successful use and/or laying acceptance of the Products that we manifested defects, excludes the possibility of disputes or complaints concerning the defects themselves. In plants concerning the defects themselves, any hidden defects themselves, implying acceptance of the Products of the Products that have manifested defects, excludes the possibility of disputes or complaints concerning the defects themselves, implying acceptance of the Products for all purposes. Each complaint must accurately specify the defect found; the Products object of the dispute must always be made available to the Vendor's agents for their verification. Any complaints or disputes will not entitle the Buyer to suspend or delay payments due to the Vendor in any way. Following a regular complaint by the Customer, within the terms indicated above, the Vendor will only perform the free replacement of the Product recognized as defective by the Vendor, Product that will be accepted in return from the same Vendor only in original packaging, undamaged and complete. Any disputes concerning a single delivery do not exonerate the Customer from the obligation to withdraw the remaining quantity of Products provided for by the specific Order, or by other Orders distinct from the one in question, nor do they enfail the termination of the Contract.

13) LIMITATION OF LIABILITY

Any compensation for defetive goods to be paid to the Buyer cannot in any case exceed the consideration paid and relative to the quantity of defective Goods. This warranty lasts 12 (twelve) months from the delivery of the Goods, it shall replace and supersedes all legal guarantees and/or responsibilities provided by law and excludes any other responsibility of the Vendor, however, originating from the Goods supplied or their resale; in particular, the Buyer cannot make further claims for indemnity or compensation for damages, direct or indirect, of any nature, price reduction or termination of the Contract. Following the term of the warranty, no claim can be made against the Vendor.

14) RETENTION OF TITLE

This sale is carried out with retention of title (art. 1523 Italian Givil Code et seq.); therefore the Products remain the property of the Vendor until full payment of the price by the Buyer. Failure to pay, even partially, entitles the Vendor to reserve the right to undertake any other action, to directly recover the Goods under consideration in the supply, even if held by third parties. The Buyer acquires the property right of the Goods only following full payment of the related price to the Vendor in addition to ancillary charges, but assumes the risks from the time of delivery and will be liable for any damage or loss of the Goods (for example due to poor maintenance or negligence).

15) INDUSTRIAL AND INTELLECTUAL PROPERTY

Any distinguishing mark and/or production and commercial technology of the Vendor, whether registered and/or patented or not, must be treated as confidential by the Customer and must not be used or disclosed without the prior written authorization of the Vendor, and the redicted as confidential by the Customer and must not be used or disclosed without the prior written authorization of the Vendor, and printed matter and other documents (price lists, catalogues or other similar documents, even on IT and digital support) relating to the Products are the exclusive property of the Vendor, covered by copyright. Their reproduction, even if only partial, is prohibited unless previously authorized by the Vendor. The Vendor warns against the unauthorized use of its own brand, and/or other trademarks shown on the Products or connected to the Products supplied, and/or distinguishing names or marks, as well as patents, models and drawings relating to their Products.

16) APPLICABLE LAW AND EXCLUSIVE IURISDICTION

Except when agreed in these General Terms and Conditions of Sales, the Italian law shall apply to these General Terms and Conditions of Sales and to each Sales Contract completed between Vendor and Buyer. The application of the United Nations Convention on contracts for the international sales of movable property, adopted in Vienna on 11.4.1980, is expressly excluded. For any dispute connected or arising from these General Terms and Conditions of Sales and/or Orders and/or Orders and/or Contracts, the Court of Treviso (Italy) shall have exclusive jurisdiction.

17) PRIVACY

In the execution of these General Terms and Conditions and/or of each Contract, personal and contact data (personal data, company e-mails, company telephones, smartphones) may be communicated to each other between Vendor and Buyer, or in any case made available to the respective contacts. for business use, etc.) of administrators, employees and collaborators who, depending on the duties and tasks assigned, manage the Contract and/or execute it. Therefore, both parties will process such personal data to the extent that they are strictly necessary for the execution of all aspects of the Contract (if any): and with their transfer, in consideration of the execution of the Contract, also in extra EU countries. Data shall be retained until the completion of the reciprocal services covered by the Contract and subsequently on the basis of the prescribed terms for the deeds and documents of the entrepreneur. The individual employee or collaborator can exercise all the rights listed in articles 15 to 21 of Regulation EU 2016/679, without prejudice, however, to the limits deriving from the legitimate interest of the employer.

Place and date Asolo, 01/04/2019

Signature of Progress Profiles SPA Borl Jean

Signature of the Buyer

Pursuant to and for the purposes of articles 1341 and 1342 of the Italian Civil Code, the Buyer declares to have read all the terms and conditions of this Contract and to expressly approve the following clauses: 4 (DELIVERY TERMS, TRANSPORT OF GOODS), 5 (FORCE MAJEURE), 6. (REFUSAL TO RECEIVE DELIVERY), 8 (PRICES, PAYMENTS AND DEFINITION OF DEFAULT INTERESTS) 9 (SUSPENSION OF PERFORMANCE AND TERMINATION), 10 (CHANGES AND CONFORMITY) 11 (WARRANTY AND LIMITS), 12 (REPORTING OF FAULTS AND DEFECTS) 13 (LIMITATION OF LIABILITY), 16(APPLICABLE LAW AND EXCLUSIVE JURISDICTION).

Place and date Asolo. 01/04/2019

Signature of Progress Profiles SPA Bor

Signature of the Buver



IN THE CASE OF COMPLAINT, SEND A FAX TO No. +39 0423 950 979 or E-MAIL: cservice2@progressprofiles.com

FORM FOR NON-CONFORMING MATERIAL - PART A

Please fully complete this form

Business name: Reason for complaint: Customer Name_____ damaged material Street ____ missing material _____ Zip Code ______ District _____ correct documents (confirm/transport documents) but Province ____ non-conforming material Material non-conforming in: quality e@mail ____ quantity VAT No. ____ _____ Fax _____ Tel. ____ **Dispatch references:** _____ ORD. N° ____ Preform Invoice _____

Name of carrier _____

Date _

Description of material

Cod. / Article					Description	U.M.	Quantity

Required action:

____ Return of goods


Sending of material

Date and place _____

Signature of agent in confirmation

Signature of customer in acceptance



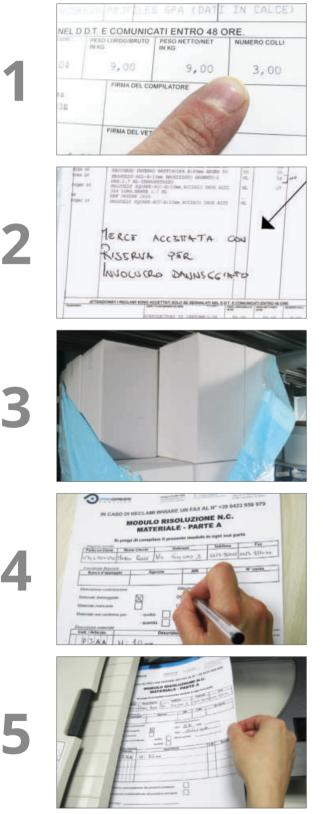

OPERATIONS TO BE CARRIED OUT IN PRESENCE OF THE CARRIER

- 1. Verify whether the number of packages corresponds to the number indicated in the transport documents
- 2. Verify the state of the outer packaging and on the carrier bulletin write: *"accepted with reserve"* specifying the type of anomaly
- 3. Open the packaging and verify the goods

4. Fill in the "*n.c. resolution form*" (see next page)

5. Send the "*n.c. resolution form*" and a copy of the reserve made to the carrier to fax number +39 0423 950979 or by e-mail to: cservice2@progressprofiles.com

In the event of damage or any other anomaly, if no reserve has been specified on the transport document, you will not be entitled to any compensation.

The reserve is a right enshrined in the Civil Code (art. 1688).



SELF PACK and ECO BLISTER


The **SELF PACK** range consists of blister profiles with adhesive labels with all the explanations for the interpretation of technical information regarding our profiles (code, length, finish, etc.). In the perforated version, screws and plugs are included. The **ECO BLISTER** range consists of blister profiles without explanation label but provided only with an EAN barcode. In the perforated version, screws and plugs are not included.

Both have 4 colours to identify the 4 types of profiles (blue for window sill covers, red for fitting terminals, yellow for step covers, and beige for the proinsert system).





LAYING INSTRUCTION

LAYING INSTRUCTIONS: SELF-ADHESIVE




LAYING INSTRUCTIONS: WITH SCREWS/PLUGS






- 1) Clean the adhesion area. The surface must be dry, dust free, grease free, and non-friable.
- 2) Remove the protective paper.
- 3) Lay the profile and press evenly on the entire length.
- 1) Drill holes in the floor taking care that they match the holes on the profile.
- 2) Insert the plugs in the holes.
- 3) Tighten the profile.

GUIDE TO CONSULTATION

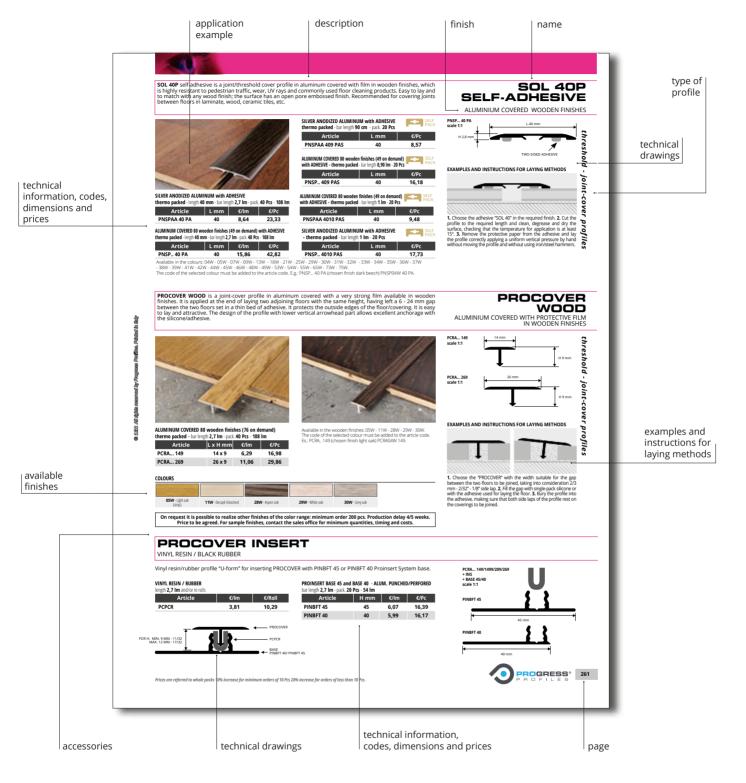

CODE COMPOSITION

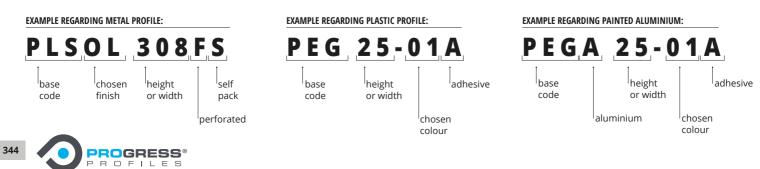

Progress Profiles SpA Via Le Marze 7 31011 ASOLO (TV) Italy Tel. +39 0423 950398 Fax +39 0423 950979 Certified company UNI EN ISO 9001:2015 P.I. IT 03481880262 - R.E.A. TV 275319 C.F. e Iscr. Reg.Impr. TV 03481880262 Cap. soc. € 120.000,00 i.v. N. Meccanografico TV 44685

IMPORTANT:

Every time a price list will be given to your Client, we ask you to fill in this form and deliver it to the company Progress® Profiles s.p.a. fax: +39 0423 950 979 or mail: cservice2@progressprofiles.com

Kind regards

CEO & A.D. **Dennis Bordin**

Place	
Date	
Name Agent	
To the attention of Mr	
Name Client	
Reference person	(Stamp)
With the present we give the following material	· · · · · · · · · · · · · · · · · · ·
Catalogue / List Pcs	
Discounts	
Note	
	- 14/A
PROGRESS® PROFILES OFFICIAL CATALAGUE Rev.00_23 - distribution of this catalogue is un controlled - Approval and issue: Dev. / Borl (D. Bordin) - Check:	(M. Torresan)



FINISHED PRODUCT AND RAW MATERIALS FEATURES

ALUMINIUM: Primary alloy suitable for complex extrusions, it is highly resistant and has excellent superficial finish at natural state making it ideal for successive finishing processes: Anodizing, Polishing, Painting. Hot hardened and tempered it reaches a Brinnel Hp hardness degree around 70 kg/mm².

Aluminium ALLOY Mg 0,7 Si 0,4	Conventional Designation: P-Al Mg Si	UNI 3569-66	UNI 6060
-------------------------------	--------------------------------------	-------------	----------

*Cu%	*Mn%	*Zn%	*Ti%	*Cr%	Si%	Mg%	*Fe%	AI%
0,10	0,10	0,15	0,10	0,10	0,3-0,6	0,35-0,6	0,1-0,3	Remainder

* Maximum admitted values

TILTEX & ANODIZED ALUMINIUM:

Anodic oxidation process against corrosion from atmospheric agents not combined with galvanic processes. The profiles are treated with preventive processes making them evenly matt. They are subsequently coloured by means of electro-chemical oxidation in the standard Silver, Gold, Bronze, Sand, Champagne colours with a thickness of about 15-20 micron.

The Anodized Copper and Titanium finishes are firstly superficially polished and, All TILTEX finishes are firstly subjected to a special superficial brushing and,

subsequently, to the above process.

BRUSHED & POLISHED ALUMINIUM:

It is made of a special preventive mechanical-chemical polishing treatment and subsequent anodic bath in Chrome and Gold colours. The obtained profiles maintain the same resistance to corrosion features of the anodized profiles, but with a brilliant aesthetical aspect, making them similar to the polished surfaces.

The Polished Copper and Titanium finishes are firstly subjected to superficial polish and, subsequently, to the above process.

All BRUSHED finishes are subjected to a special superficial brushing and, subsequently, to the above process.

THERMOPLASTIC VINYL RESIN



RVA: RIGID THERMOPLASTIC SHOCKPROOF NON TOXIC VINYL RESIN:

Purposely studied material for optimising the performing features of rigid profiles for permanent indoor application with aesthetical and long-lasting requirements. Realised starting from primary pigments and resin, their PVC composition makes it suitable for a high range of applications up to a temperature of +50/60°C. The raw material used guarantees excellent resistance to U.V. rays, to limited chemical impacts and stagnation of fungus and bacteria.

FEATURES	TEST	UNIT OF MEASURE	INDICATIVE VALUE
Specific weight	ASTM D 792	gr/cm ³	1,43 +-0,02
Rockwell Hardness	ASTM D 785		108
VICAT Point	ISO 306	°C	83,7
Tensile strength at break	ASTM D 638	Мра	50
Elongation at Break	ASTM D 638	%	100
IZOD Resistance with Cut	ASTM D 256	J/m	60
Yielding strength point	ASTM D 638	Мра	48
Flammability	UL 94	CLASS	VO
Reaction to UV Rays	-	-	EXCELLENT RESISTANCE

RVF: FLEXIBLE NON-TOXIC VINYL RESIN (PLASTICISED THERMOPLASTIC): Same chemical features of RVC with which it is perfectly compatible in the CO-EXTRUSION process used by ourselves in most of the dilatation, fitting joints. Thanks to the nature of the used plasticisers, the material maintains its own essential flexible features in time

FEATURES	TEST	UNIT OF MEASURE	INDICATIVE VALUE
Specific weight	CEI 20-34	gr/cm³	1,24 +-02
Hardness	ISO 868	Sh-A	70 +-2
Breaking load	ISO 527	N/mm ²	>_ 13
Elongation at Break	ISO 527	%	300
Thermal stability at 200°C	ISO 182	min.	25
Apparent Rigidity Module	ISO R 458	Мра	310
Cold Flex temperature	ISO R 458	C°	-30



PAINTED ALUMINIUM:

The painting process is made of a chromium phosphate-based pre-treatment, of an electrostatic polyester-powder based paint with highly resistant features to U.V. rays and to atmospheric agents. The coating thickness covers the entire profile surface having an average thickness of approx. 50-70 micron. A hot mesh polymerisation process is also carried out for maximum guarantee of the chemical-mechanical resistance.

VARNISHED ALUMINIUM WITH SEASIDE TREATMENT:

special pre-treatment to the epoxy-polyester coating, which increases the resistance to corrosion of the profile when installed at sea front. This treatment is certified after completing 2500 hours (104 days) exposure to saline acetic mist

RVC: CO-EXTRUDED THERMOPLASTIC VINYL RESIN FOR CO-EXTRUSION:

Primary resin with chemical composition similar to RVA is characterised by a high resistance and optimised compatibility with regard to long-lasting adherence with plasticised resins used in the co-extrusion process, meaning the permanent joining of two materials with different degrees of Shore hardness

FEATURES	TEST	UNIT OF MEASURE	INDICATIVE VALUE
Specific weight	ISO 1183	gr/cm ³	1,40 +-0.5
Hardness	ISO 868	Sh-A	75+/-2
Breaking load	ISO 527	Мра	> 18
Elongation at Break	ISO 527	%	> 350
Stiffening temperature	ISO 1183	°C	-40 +/- 2

EPDM AND NEOPRENE VULCANISED RUBBER:

The vulcanised rubber is a modified mix of EPDM and NEOPRENE of Grey or Black colour: below are the particular features:

Excellent mechanical properties in a working temperature interval from -35°C t + 100°C; Resistance to aqueous, oily and hydrocarbon fluids. Low permanent deformation with compression and pulling. Excellent resistance to ageing. Excellent resistance to dynamic fatigue and laceration. The intrinsic features of the material make it particularly suitable in the realisation of profiles where high stresses in time are requested, both indoor and outdoor.

FEATURES	TEST	UNIT OF MEASURE	INDICATIVE VALUE
Specific weight	DIN 53420	gr/cm³	1,21
Hardness	DIN 53505	Shore A	60 +-3

RESISTANCE TO CORROSIVE AGENTS:

Below is the indicative resistance towards the main diluted chemical agents and elements. Normally, the PVC products must never come into contact with Aromatic hydrocarbons, Ketones and Esters.

For further information on the materials write to our technical department.

CORROSIVE AGENT	RIGID VINYL RESIN CONCENTRATION (RVA)
Weak acids reaction	Null
Weak acids reaction	Null
Reaction to alcohol, aliphatic hydrocarbons, oils	Null
Reaction to Ketones, esters, aromatic hydrocarbons	DISSOLUTION
Flammability	CLASS VO UL94
Reaction to UV Rays	excellent resistance

FINISHED PRODUCT AND RAW MATERIALS FEATURES

STAINI ESS STEEL

The steel profiles are realised through cold shaping of constant thickness sheets, therefore, differentiating from the corresponding version in aluminium and brass realised by hot extrusion, despite maintaining the applicative and dimensional features. The stainless steel is efficiently resistant to mechanical stresses, particularly suitable in the chemical, food, hospital sector for responding to hygienic, duration and resistance to chemical agents requisites

Normally produced with Polished finish, it is possible to realise a brushed finish that is implemented with the partial removal of material using nylon fibre and quartz rotary brushes that confer a brushed/satin matt look to the surface, without altering its features. The ultra-glossy finish happens by means of special brushes to create mirror polished finishes. Produced in different chemical compositions, below are the main features:

AISI	DIN	*C	Cr	Ni	*Si	*Mn	Мо
430	1,4016	0,10	16,0÷18,0	-	1,0	1,0	-
304	1,4301	0,06	18,0÷20,0	8,0÷10,5	1,0	2,0	-
316L	1,4404	0,03	16,0÷18,0	11,0÷13,0	1,0	2,0	2,0÷2,5

* Maximum admitted values

STAINLESS STEEL AISI 430 - EN X 8 CR 17 - DIN 1.4016:

Chromium stainless steel forming part of the FERRITE category, despite being considered stainless it can easily be stained in presence of particularly aggressive products, and be contaminated by oxidising generated by other materials.

STAINLESS STEEL AISI 304 - EN X 5 CRNI 18 10 - DIN 1.4301:

Nickel/chromium stainless steel forming part of the AUSTENITIC category is the most diffused and used alloy in the manufacturing of products with highly technical and performing features. Highly resistant to most chemical smac) products it can superficially stain or darken; a normal polishing (e.g. sidol/ smac) product is sufficient to give it back its original state. In presence of oxidising stains in the Brushed/satin version due to the brushes,

simply use a wirewool.



STAINLESS STEEL AISI 316 - EN X 2 CRNIMO 17 12 - DIN 1.4404: Stainless steel AISI 316 is part of the AUSTENITIC category that is characterised by the internal presence of Molybdenum besides Nickel-Chromium. this features confers an excellent resistance of the material in limit conditions, which the presence of Chlorine and Salt.

APPLICATION FIELDS:

Material	Indoor	Outdoor	Floor	Wall	Heavy traffic	High chemical attack (*)	Food Contact	Pools	Thermal environments	Marine environments	average % of recycling
STAINLESS STEEL - AISI 316	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	70-90%
STAINLESS STEEL - AISI 304	yes	yes	yes	yes	yes	no	yes	no	no	no	70-90%
STAINLESS STEEL - INOX 1.4016	yes	no	yes	yes	no	no	no	no	no	no	70-90%
NATURAL BRASS	yes	yes	yes	yes	yes	no	no	no	no	no	92-98%
CHROME BRASS	yes	no	yes	yes	no	no	no	no	no	no	92-98%
POLISHED VARNISHED BRASS	yes	no	no	yes	no	no	no	no	no	no	92-98%
NATURAL ALLUMINIUM	yes	yes	yes	yes	yes	no	no	no	no	no	20-70%
VARNISHED ALLUMINIUM	yes	yes	no	yes	no	no	no	no	no	no	20-70%
WOOD EFFECT FINISHES ALLUMINIUM	yes	no	yes	yes	no	no	no	no	no	no	20-70%
ANODIZED / POLISHED / BRUSHED ALLUMINIUM	yes	no	yes	yes	no	no	no	no	no	no	20-70%
VINIL RESIN (PVC)	yes	no	no	yes	no	yes	no	yes	yes	yes	10-80%



Progress Profiles® always at the forefront of the research and development process, uses an important percentage of secondlife raw materials for its products. This continuous search for new production technologies together with the use of renewable energy, thanks to the production of its photovoltaic systems, pushes Progress Profiles towards its industrial project with zero environmental impact, "A look into the future", one of the most important values and founders of the company itself.

(*) In the case of applications in environments where they are used special chemicals aggresyesve, consult the technical department.

BRASS:

The brass profiles are characterised by a high resistance to mechanical stresses making it particularly suitable in heavy traffic applications like, for example, industrial applications with frequent pedestrian crossings. The brass is resistant to the main chemical agents intervening in ceramic coating applications. The surface of the profile, in presence of humidity or particularly aggressive agents, can show superficial oxidising phenomenon that can be removed by using a normal polishing product (e.g. Sidol and Smac). The profiles can be realised by means of hot extrusion and cold shaping of constant thickness sheets.

EXTRUSION ALLOY Cu Zn 43 Pb2 Al EN 12167 CW 624N

**Cu%	*Pb%	*Sn%	*Fe%	*Ni%	**AI%	Other%	Zn%
55-57	1,6-3	0,30	0,30	0,30	0,05-0,5	0,2	Remainder
** Indicative	values * N	Aaximum ad	mitted values				

POLISHED BRASS:

The polished finish is realised with special machines with springs/brushes that mechanically polish the surface without altering the intrinsic features of the material. A partial darkening of the surface in presence of oxidising materials is a phenomenon that can be contrasted using normal polishing products (e.g. Sidol and Smac).

CHROMIUM BRASS:

The finish is obtained by beams of galvanic process that confers a brilliant look similar to the ultra-glossy stainless steel. The treatment confers an excellent aesthetical look, excellent resistance to chemical aggressions but limited resistance to mechanical superficial impacts and persistent abrasion.


LAMINATING ALL OV Cu Zn 37 EN 1652 CW 508

LAMINATING ALLOT CU LILIS/ LIN 1052 CW 500L						
**Cu%	*Pb%	*Fe%	Zn%	Impurity%		
67	0,1	0,1	Remainder	0,30		
** Indicative	values * N	laximum adn	nitted values			







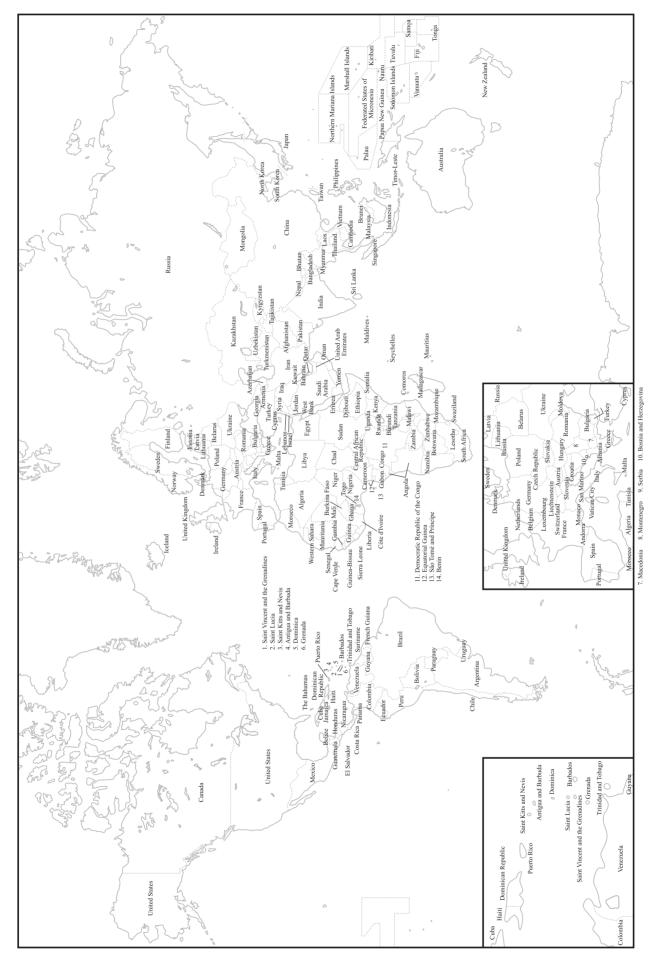






SL07

Colour chart

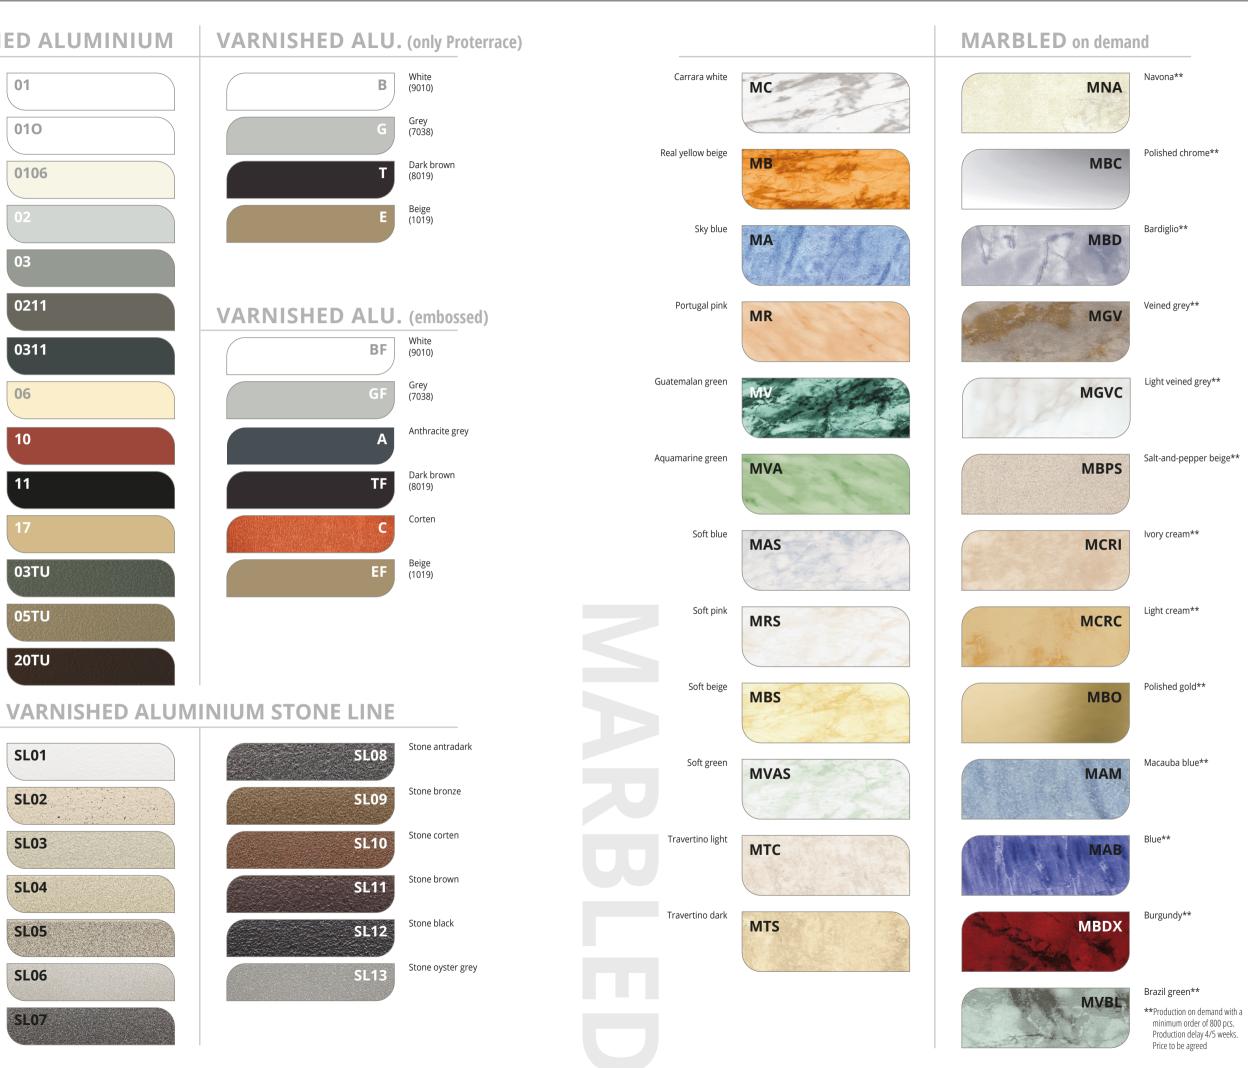

Colour chart







8 0 3 1 8 9 3 3 4 4 0 5

Production delay 4/5 weeks.

Price to be agreed



INDEX

	PAGE
AG AGAC	276
AGAC AGE25	276 237
AGOL	276
AGP	277
AL ALP	277 277
BR	331
BTA 40	225
BTA 60	227
BTA 80 BTA100	229 231
BTAC	230
BTAC 40	224
BTAC 60	226
BTAC 80 BTEPR4010	228 235,269
BTEPR7011	235
BTEPR7011	269
BTEPR7016 BTEPR7016	234 268
BTEPRR	233,267
BTEPRS	232,266
BTPF	236
BTPR BTPV	237 236
C 550	319
C51	146,147
CAT	331
CLPS	307
COF COFMIE	328 329
COL	328
CPGC	321
СТ	282
CU CURAS	278 326
CURAS CW	278
DMP	309
DSVT	311
DVO ESHPAN 250	311 325
ESPB	331
ESPCLSH	326
ESPD	330
ESPFDPP ESPGLED	330 328
ESPGSM 18	326
ESPGSMBT	327
ESPPDHT	329
ESPPLS	330
ESPPST ESPQC	330 324
ESPSHW 70	329
FLY	331
FTPP	300
G GCAC	146 143
GCAN	143
GCT	305
GDA	150
GDA 55 GDSP	151 147
GNS	147
GP	148
GPL	73
GRP KBPSHWPAC	306 195
KBPSHWPAC	300
М	314
MCAT	331
MSP	291
PBP PBPLS	121 331
PBPLS PC	169
PCG	168
PCLA	73
PCLO	73
PCM 08	111

PCPF 312 PCR 89,110 PCR14PT 91 PCRA 89 PCRA 261 PCRA 261 PCRA 261 PCRA 88 PCCO 88 PCT 60 PCT 60 PCT 60 PDCA 71 PDAACV 111 PDAC 74 PDD 164 PDDR 174,177 PDES 185 PDES 183 PDES 183 PDES 183 PDES 183 PDES 187 PDES 187 PDS 187 PDN 76 PDN 76 PDZ 308 PED 187 PEGA 48 PEGA 45 PET <th></th> <th></th>		
PCR1045 86 PCRA 91 PCRA 261 PCRA 261 PCRA 10 PCRA 88 PCRO 88 PCT 60 PDT 60 PDT 75 PDAACV 111 PDAC 74 PDD 164 PDDR 174,177 PDES 185 PDESH 181 PDESH 181 PDESH 183 PDKLA 86 PDLR 75 PDO 74 PDONCV 111 PDRP 171 PDN 187 PDN 187 PDN 187 PDNR 76 PDZ 308 PED 132 PED 43 PEGA 44 PEGA	PCPF	312
PCR1045 86 PCRA 91 PCRA 261 PCRA 261 PCRA 10 PCRA 88 PCRO 88 PCT 60 PDT 60 PDT 75 PDAACV 111 PDAC 74 PDD 164 PDDR 174,177 PDES 185 PDESH 181 PDESH 181 PDESH 183 PDKLA 86 PDLR 75 PDO 74 PDONCV 111 PDRP 171 PDN 187 PDN 187 PDN 187 PDNR 76 PDZ 308 PED 132 PED 43 PEGA 44 PEGA	PCR	89,110
PCR14PT 91 PCRA 261 PCRA 261 PCRA 10 PCRA 88 PCRO 88 PCT 60 PDT 75 PDAACV 111 PDAC 74 PDD 164 PDDR 174,177 PDES 183 PDESH 181 PDESH 183 PDESH 183 PDESH 183 PDESH 183 PDLR 75 PDO 74 PDONCV 111 PDR 77 PDDN 187 PDR 76 PDZ 308 PED 132 PED 135 PEDB 45 PEF 187 PDEG 46 PEGA 47		
PCRA 89 PCRA 261 PCRA 110 PCRAC 88 PCT 60 PCT 60 PCT 60 PDA 75 PDAACV 111 PDAC 74 PDD 164 PDD 164 PDDR 174,177 PDES 183 PDESHC 183 PDESHC 183 PDESHK 182 PDESHK 182 PDESHT 183 PDKA 75 PDO 74 PDONCV 111 PDR 10 188 PDR 76 PDZ 308 PED 4528 135 PEB 132 PED 132 PED 132 PED 135 PEGR 45 <		
PCRA 261 PCRA 110 PCRAC 88 PCRO 88 PCRO 88 PCT 60 PCTT 60 PDA 75 PDAACV 111 PDAC 74 PDD 164 PDDR 174,177 PDES 183 PDESH 181 PDESHG 183 PDESHK 182 PDESHK 182 PDESHK 183 PDESHT 183 PDN 74 PDONCV 111 PDRP 171 PDSNDTP 187 PDWR 76 PDZ 308 PED 132 PED 132 PED 135 PEGM 45 PEG 46 PEGR 47 <t< td=""><td></td><td>-</td></t<>		-
PCRA 110 PCRAC 88 PCRO 88 PCT 60 PCT 60 PDA 75 PDAACV 111 PDAC 74 PDD 164 PDDR 174,177 PDES 183 PDESH 181 PDESHG 179 PDESHK 182 PDESHK 182 PDESHK 182 PDONCV 111 PDR 74 PDONCV 111 PDR 75 PDO 74 PDONCV 111 PDR 187 PDWR 76 PDZ 308 PED 132 PED 132 PED 132 PED 136 PEGR 45 PEGR 46	DCDA	
PCRAC 88 PCRO 88 PCRO 88 PCT 60 PCTT 60 PDA 75 PDAACV 111 PDAC 74 PDD 164 PDD 164 PDD 185 PDES 183 PDESH 181 PDESHK 182 PDESHK 182 PDESHK 183 PDESHK 183 PDESHT 183 PDESHT 183 PDESHT 183 PDESHT 183 PDESHT 187 PDONCV 111 PDRN D 187 PDSND 187 PDWR 76 PDZ 308 PEE 132 PEE 133 PEG 44 PEGA 45 <t< td=""><td>PCRA</td><td></td></t<>	PCRA	
PCRO 88 PCT 60 PCTT 60 PDA 75 PDAACV 111 PDAC 74 PDD 164 PDDR 174,177 PDES 185 PDESEC 183 PDESHK 182 PDESHK 182 PDESHK 182 PDESHK 183 PDKA 86 PDKA 74 PDON 74 PDONCV 111 PDR 10 188 PDRP 171 PDSNDTP 187 PDWR 76 PDZ 308 PED 132 PED 132 PED 135 PEG 48 PEGA 48 PEGA 47 PEG 47 PEG 17 PEGRA.50	PCKA	
PCT 60 PCTT 60 PDA 75 PDAACV 111 PDAC 74 PDD 164 PDDR 174,177 PDESE 183 PDESEM 181 PDESH 181 PDESH 182 PDESHK 182 PDESHK 182 PDESHK 183 PDKLA 86 PDIR 74 PDONCV 111 PDR 71 PDSNDTP 187 PDVR 76 PDZ 308 PED 132 PED 132 PED 132 PED 133 PEG 48 PEGA 48 PEGA 47 PEGRA 48 PEGRA 47 PEGRA 90 PETX		
PCTT 60 PDA 75 PDAACV 111 PDAC 74 PDD 164 PDDR 174,177 PDES 183 PDESH 183 PDESH 181 PDESHG 179 PDESHK 182 PDESHK 183 PDLRA 75 PDO 74 PDONCV 111 PDR170 188 PDNLA 86 PDLRA 75 PDO 74 PDONCV 111 PDR10 188 PDRP 171 PDSNDTP 187 PDWR 76 PDZ 308 PED 132 PED 132 PED 135 PEG 48 PEGAC 46 PEGR 47 PEGR	PCRO	88
PDA 75 PDAACV 111 PDAC 74 PDD 164 PDDR 174,177 PDES 185 PDESEC 183 PDESH 181 PDESHG 179 PDESHK 182 PDESHK 183 PDKA 86 PDLRA 75 PDO 74 PDONCV 111 PDRP 171 PDRP 171 PDSND 187 PDWR 76 PDZ 308 PED 132 PED 132 PED 132 PED 132 PED 45 PEF 187 PEGA 48 PEGAC 46 PEGRAC 47 PEGRAC 47 PEGRAC 47 PEGRA	PCT	60
PDA 75 PDAACV 111 PDAC 74 PDD 164 PDDR 174,177 PDES 185 PDESEC 183 PDESH 181 PDESHG 179 PDESHK 182 PDESHK 183 PDKA 86 PDLRA 75 PDO 74 PDONCV 111 PDRP 171 PDRP 171 PDSND 187 PDWR 76 PDZ 308 PED 132 PED 132 PED 132 PED 132 PED 45 PEF 187 PEGA 48 PEGAC 46 PEGRAC 47 PEGRAC 47 PEGRAC 47 PEGRA	PCTT	60
PDAACV 111 PDAC 74 PDD 164 PDDR 174,177 PDES 185 PDESEC 183 PDESH 181 PDESH 182 PDESHK 182 PDESHK 183 PDKALA 86 PDLA 75 PDO 74 PDONCV 111 PDRI 10 PBSND 187 PDWR 76 PDZ 308 PED 132 PED 132 PED 132 PED 132 PED 133 PED 136 PEG 48 PEGA 46 PEGR 47 PEGRA 47 PEGRAC 47 PEGRAC 47 PEGRAC 47		75
PDAC 74 PDD 164 PDDR 174,177 PDES 185 PDESEC 183 PDESH 181 PDESHG 179 PDESHK 182 PDESHK 183 PDKA 86 PDLA 75 PDO 74 PDONCV 111 PDR 71 PDSND 187 PDWR 76 PDZ 308 PED 132 PED 132 PED 132 PED 132 PED 133 PED 45 PEF 187 PEG 48 PEGAC 46 PEGR 47 PEGRO 47 PEGRO 47 PEGRO 47 PEGRO 47		
PDD 164 PDR 174,177 PDES 185 PDESEC 183 PDESH 181 PDESHG 179 PDESHK 182 PDESHT 183 PDESHT 183 PDESHT 183 PDESHT 183 PDESHT 183 PDESHT 183 PDLRA 75 PDO 74 PDONCV 111 PDRP 171 PDSNDTP 187 PDWR 76 PDZ 308 PED 132 PED 132 PED 132 PED 132 PEG 48 PEGA 48 PEGA 48 PEGA 47 PEGRO 47 PEGRO 47 PEGRO 47		
PDDR 174,177 PDES 185 PDESEC 183 PDESH 181 PDESHG 179 PDESHK 182 PDESHK 182 PDESHK 182 PDESHT 183 PDEKAL 86 PDLRA 75 PDO 74 PDONCV 111 PDRI 171 PDSND 187 PDWR 76 PDZ 308 PED 4528 135 PED 132 PED 132 PED 132 PEG 187 PEG 187 PEG 187 PEG 132 PED 132 PEG 136 PEGR 45 PEG 46 PEGR 47 PEGR 47		
PDES 185 PDESEC 183 PDESH 181 PDESHG 181 PDESHG 182 PDESHT 183 PDESHT 183 PDESHT 183 PDESHT 183 PDLRA 75 PDO 74 PDONCV 111 PDRP 171 PDSND 187 PDVR 76 PDZ 308 PED 132 PED 132 PED 132 PED 133 PEG 45 PEF 187 PEG 48 PEGAC 46 PEGAC 47 PEGR 136 PEGRAC 47 PEGRAC 47 PEGRAC 47 PEGRAC 47 PERM 337 PEN	PDD	
PDESEC 183 PDESH 181 PDESHG 179 PDESHK 182 PDESHST 183 PDKA 86 PDLRA 75 PDO 74 PDONCV 111 PDRI 10 188 PDRP 171 PDSNDTP 187 PDWR 76 PDZ 308 PED 4528 135 PED 132 PED 132 PED 133 PED 187 PEG 48 PEGA 48 PEGA 48 PEGA 46 PEGR 137 PEGR 136 PEGRA 47 PEGR 17 PEGRA 47 PELONCV 107 PEM 337 PEN 153		
PDESH 181 PDESHG 179 PDESHK 182 PDESHST 183 PDKLA 86 PDLRA 75 PDO 74 PDONCV 111 PDR 171 PDSND 187 PDSNDTP 187 PDWR 76 PDZ 308 PED 132 PED 132 PED 133 PED 132 PED 133 PEG 48 PEGA 48 PEGA 48 PEGA 46 PEGR 137 PEGRA 47 PEGR 47 PEGR 47 PEGR 187 PEGR 107 PELN 107 PELN 107 PEN 150 PEN	PDES	
PDESHG 179 PDESHK 182 PDESHST 183 PDKA 86 PDLRA 75 PDO 74 PDONCV 111 PDRP 171 PDSNDTP 187 PDWR 76 PDZ 308 PED 4528 135 PED 132 PED 132 PED 187 PED 187 PED 132 PED 132 PED 132 PEG 48 PEGA 48 PEGA 48 PEGA 46 PEGR 137 PEGR 137 PEGR 137 PEGR 47 PEGR 17 PEGR 137 PEGR 137 PEGR	PDESEC	183
PDESHG 179 PDESHK 182 PDESHST 183 PDKA 86 PDLRA 75 PDO 74 PDONCV 111 PDRP 171 PDSNDTP 187 PDWR 76 PDZ 308 PED 4528 135 PED 132 PED 132 PED 187 PED 187 PED 132 PED 132 PED 132 PEG 48 PEGA 48 PEGA 48 PEGA 46 PEGR 137 PEGR 137 PEGR 137 PEGR 47 PEGR 17 PEGR 137 PEGR 137 PEGR	PDESH	181
PDESHK 182 PDESHST 183 PDKLA 86 PDLRA 75 PDO 74 PDONCV 111 PDRP 171 PDSND 187 PDSNDTP 187 PDWR 76 PDZ 308 PED 4528 135 PED 132 PED 132 PED 187 PED 132 PED 187 PED 187 PEG 48 PEGA 48 PEGA 48 PEGA 46 PEGR 136 PEGRA 47 PEGRA 47 PEGRO 47 PEGRA 107 PEL 68 PELACV 107 PEM 337 PEN 153 PETA <td>PDESHG</td> <td>179</td>	PDESHG	179
PDESHST 183 PDKLA 86 PDLRA 75 PDO 74 PDONCV 111 PDRI 10 188 PDRP 171 PDSND 187 PDSND 187 PDSND 187 PDWR 76 PDZ 308 PED 4528 135 PED 132 PED 132 PED 187 PEG 48 PEGA 48 PEGA 48 PEGA 46 PEGR 136 PEGRA 47 PEGRO 47 PEGRO 47 PEGRO 47 PEGRO 47 PELMONCV 107 PEL 68 PEL 68 PELM 150 PEN 153 <td< td=""><td>PDESHK</td><td>182</td></td<>	PDESHK	182
PDKLA 86 PDLRA 75 PDO 74 PDONCV 111 PDR 171 PDRP 171 PDSND 187 PDSNDTP 187 PDWR 76 PDZ 308 PED 4528 135 PED 132 PED7537 135 PED 187 PEG 45 PEF 187 PEG 48 PEGAC 46 PEGR 43 PEGR 46 PEGR 47 PEGRO 47 PEGRO 47 PEL 68 PEL 68 PEL 107 PEL 107 PEM 337 PEN 150 PEN 153 PETAC 90 PFC40 <td>DECHST</td> <td></td>	DECHST	
PDLRA 75 PDO 74 PDONCV 111 PDRI 10 188 PDRP 171 PDSND 187 PDSND 187 PDWR 76 PDZ 308 PED 4528 135 PED 132 PED 132 PED 135 PED 45 PEF 187 PEGA 48 PEGA 48 PEGAC 46 PEGR 136 PEGRA 47 PEGRO 47 PEGRO 47 PEGRO 47 PEGRO 47 PEL 68 PEGRAC 47 PELMONCV 107 PEL 68 PEL 68 PEN 150 PEN 153 PETAC		
PDO 74 PDONCV 111 PDRP 171 PDSND 187 PDSNDTP 187 PDSNDTP 187 PDWR 76 PDZ 308 PED 4528 135 PED 132 PED 132 PED 135 PED 135 PED 137 PEG 48 PEGAC 46 PEGR 136 PEGRA 47 PEGR 136 PEGRAC 47 PEGRO 47 PEL 68 PEL 68 PEL 137 PEN 149 P	PURLA	
PDONCV 111 PDRI 10 188 PDRP 171 PDSND 187 PDSNDTP 187 PDSNDTP 187 PDWR 76 PDZ 308 PED.4528 135 PED 132 PED 132 PED 135 PEDB 45 PEF 187 PEG 48 PEGA 48 PEGA 46 PEGR 136 PEGR 47 PEGRA.50 136 PEGRAC 47 PEGRAC 47 PEGRO 47 PEGRO 47 PEGRA.50 136 PERAC 107 PELM 150 PEN 150 PEN 153 PETAC 90 PETX 153 <td< td=""><td></td><td></td></td<>		
PDRI 10 188 PDRP 171 PDSND 187 PDSNDTP 187 PDWR 76 PDZ 308 PED 4528 135 PED 132 PED 132 PED 132 PED 135 PEBBD 45 PEF 187 PEG 48 PEGAC 46 PEGR 48 PEGR 46 PEGR 47 PEGRO 47 PEGRO 47 PEL 68 PELAACV 107 PEN 150 PENF 149 PEN 153 PETAC 90 PETX 153 PETAC 90 PETX 153 PETO 188 PFLPANI.CH 203 PFLPANI. <td></td> <td></td>		
PDRI 10 188 PDRP 171 PDSND 187 PDSNDTP 187 PDWR 76 PDZ 308 PED 4528 135 PED 132 PED 132 PED 132 PED 135 PEBBD 45 PEF 187 PEG 48 PEGAC 46 PEGR 48 PEGR 46 PEGR 47 PEGRO 47 PEGRO 47 PEL 68 PELAACV 107 PEN 150 PENF 149 PEN 153 PETAC 90 PETX 153 PETAC 90 PETX 153 PETO 188 PFLPANI.CH 203 PFLPANI. <td>PDONCV</td> <td>111</td>	PDONCV	111
PDRP 171 PDSND 187 PDSNDTP 187 PDWR 76 PDZ 308 PED 4528 135 PED 132 PED7537 135 PEDB 45 PEF 187 PEG 48 PEGA 48 PEGA 46 PEGR 46 PEGR 47 PEGRA 47 PEL 68 PELAACV 107 PEM 337 PEN 150 PENF 149 PEP 337 PEN 153 PETAA 91 PETX 153 PETX 153 PETX 153 PETO 90 PFC40 45 PFDP 166 PFDP 188 <t< td=""><td></td><td>188</td></t<>		188
PDSND 187 PDSNDTP 187 PDWR 76 PDZ 308 PED 4528 135 PED 132 PED7537 135 PEBD 187 PED7537 135 PEDBD 45 PEG 48 PEGA 48 PEGAC 46 PEGRA 46 PEGRA 47 PEGRAA.50 136 PEGRAC 47 PEGRO 47 PEGRAC 47 PEGRO 47 PEGRA.50 136 PELACV 107 PELM 68 PELN 150 PEN 150 PEN 153 PETAC 90 PFC40 45 PFDP 153 PETO 90 PFC40 45		171
PDSNDTP 187 PDWR 76 PDZ 308 PED 4528 135 PED 132 PED7537 135 PEDBD 45 PEG 48 PEGA 48 PEGA 46 PEGRA 46 PEGR 137 PEGR 136 PEGRA 47 PEGRAA.50 136 PEGRAC 47 PEGRO 47 PEGRA.50 136 PELMACV 107 PEL 68 PELAACV 107 PEM 337 PEN 150 PEN 150 PEN 153 PETA 90 PETX 153 PETO 90 PFC40 45 PFDP 166 PFDPP 188		
PDWR 76 PDZ 308 PED 4528 135 PED 132 PED7537 135 PEDBD 45 PEF 187 PEG 48 PEGA 48 PEGA 46 PEGR 46 PEGR 47 PEGRAA 50 136 PEGRAC 47 PEGRAC 47 PEGRO 47 PEGRO 47 PEGRAC 107 PEL 68 PEL 68 PELN 107 PEM 337 PEN 150 PENF 149 PEP 337 PESP 326 PETAC 90 PFC40 45 PFDP 153 PETO 188 PFLOPST 188 <t< td=""><td>PDSNDTP</td><td></td></t<>	PDSNDTP	
PDZ 308 PED 135 PED 132 PED 132 PED 135 PED 135 PED 135 PED 135 PEDBD 45 PEF 187 PEG 48 PEGA 46 PEGA 46 PEGR 46 PEGR 46 PEGR 46 PEGR		
PED 4528 135 PED 132 PED7537 135 PEDBD 45 PEF 187 PEG 48 PEGAC 46 PEGAC 46 PEGAC 46 PEGAC 46 PEGR 47 PEGRAC 47 PEGRAC 47 PEGRAC 47 PEGRAC 47 PEGRAC 47 PEGRAC 107 PEL 68 PELAACV 107 PEL 68 PELM 150 PENF 149 PEP 337 PESP 326 PETAC 90 PFTAC 90 PFTAC 90 PFC40 45 PFDP 166 PFDP 188 PFLONICH 203		
PED 132 PED 135 PEDBD 45 PEF 187 PEG 48 PEGA 48 PEGAC 46 PEGR 136 PEGR 136 PEGR 136 PEGRAC 47 PEGRAC 47 PEGRAC 47 PEGRAC 47 PEGRO 47 PEGRO 47 PEGRO 47 PEGRO 47 PEGR 107 PEL 68 PEL.AACV 107 PEM 337 PEN 149 PEP 337 PEN 149 PETAC 90 PETX 153 PETO 90 PFC40 45 PFDP 166 PFDP 165 PFLO <td>PDZ</td> <td></td>	PDZ	
PED7537 135 PEDBD 45 PEF 187 PEG 48 PEGA 48 PEGA 46 PEGA 46 PEGA 46 PEGR 46 PEGR 46 PEGR 46 PEGR 47 PEGRAA.50 136 PEGRAC 47 PEGRAC 47 PEGRO 47 PEGRO 47 PEGRAC 47 PEGRO 47 PEL 68 PELAACV 107 PELMONCV 107 PEN 150 PEN 150 PEN 150 PEN 153 PETAC 90 PETX 153 PETO 90 PFC40 45 PFDP 166 <t< td=""><td></td><td></td></t<>		
PEDBD 45 PEF 187 PEG 48 PEGA 48 PEGAC 46 PEGR	PED	132
PEDBD 45 PEF 187 PEG 48 PEGA 48 PEGAC 46 PEGR	PED7537	135
PEF 187 PEG 48 PEGA 48 PEGA 46 PEGAC 46 PEGR 46 PEGR 46 PEGR 46 PEGR 46 PEGR 47 PEGRAC 47 PEGRO 47 PEL 68 PELAACV 107 PEN 150 PEN 150 PEN 153 PETAC 90 PETX 153 PETO 90 PFC40 45 PFDP 166 PFDPP 188 PFLON 188 PFLP	PEDBD	45
PEG 48 PEGA 48 PEGAC 46 PEGO 46 PEGO 46 PEGR5230 137 PEGR5230 137 PEGR5230 137 PEGR 46 PEGR	PFF	
PEGA 48 PEGAC 46 PEGAC 46 PEGR 5230 137 PEGR 5230 137 PEGR 5230 137 PEGR 5230 136 PEGRA 91 PEGRAC PEL 68 PELAACV 107 PELM 68 PELMACV 107 PEN 150 PENF 149 PEP 337 PENF 153 PETAA 91 PETAC 90 PETAC 90 PETC40 45 PFDP 153 PETO 90 PFC40 45 PFDP 166 PFDPP 165 PFLO 188 PFLONST 188 PFLPANICH 203 PFLT 44 PFPSAL 295 PFR24 85 PFRAC712 83 PFROL712 83		
PEGAC 46 PEGO 46 PEGR5230 137 PEGR5230 137 PEGR5230 137 PEGR5230 137 PEGR5230 136 PEGRA50 136 PEGRAC 47 PEGRO 47 PETM 68 PELN 107 PEN 150 PEN 153 PETA 90 PFC40 45 PFDP 166 PFDPP 165 PFLO 188 PFLOPST 188 PFLONCH 203 PFLT 44 PFSAL 295		
PEGO 46 PEGR 137 PEGR5230 137 PEGR7032 136 PEGRAC 47 PEGRAC 47 PEGRO 47 PEGRO 47 PEGRO 47 PEGRO 47 PELAACV 107 PEL 68 PELAACV 107 PEM 337 PEN 150 PENF 149 PEP 326 PETAA 91 PETAC 90 PETC 153 PETO 90 PFC40 45 PFDP 166 PFDP 165 PFLO 188 PFLOPST 188 PFLPAN 189 PFLAM 189 PFLAM 295 PFR24 85 PFRA712 83 <t< td=""><td>PEGA</td><td></td></t<>	PEGA	
PEGR 5230 137 PEGR 7032 136 PEGRAA. 50 136 PEGRAC 47 PEGRO 47 PEGRO 47 PEGRO 47 PELACV 107 PEL 68 PELAACV 107 PEM 337 PEN 150 PENF 149 PEP 326 PETAM 91 PETAC 90 PETAC 90 PETC 153 PETO 90 PFC40 45 PFDP 166 PFDP 165 PFLO 188 PFLOPST 188 PFLOPST 188 PFLPANICH 203 PFTA 295 PFR24 85 PFRA712 83 PFROL712 83 PFROL712 83 <td>PEGAC</td> <td></td>	PEGAC	
PEGR7032 136 PEGRAA 50 136 PEGRAC 47 PEGRO 47 PEL 68 PELAACV 107 PEL 68 PELAACV 107 PEM 337 PEN 150 PENF 149 PEP 326 PETAC 90 PETAC 90 PETFX 153 PETO 90 PFC40 45 PFDP 165 PFDP 165 PFDP 165 PFLONC 188 PFLOPST 188 PFLPANICH 203 PFLT 44 PFPSAL 295 PFRAC712 83 PFRAC712 83 PFRAC712 83 PFX 144 PFX 144 PFXSPR 144	PEGO	46
PEGR7032 136 PEGRAA 50 136 PEGRAC 47 PEGRO 47 PEL 68 PELAACV 107 PEL 68 PELAACV 107 PEM. 337 PEN 150 PENF 149 PEP 326 PETAC 90 PETFX 153 PETFX 153 PETO 90 PFC40 45 PFDP 165 PFDP 165 PFDP 165 PFLO 188 PFLOST 188 PFLPANICH 203 PFLT 44 PFPSAL 295 PFRAC712 83 PFRAC712 83 PFRAC712 83 PFX 144 PFX 144 PFX 144	PEGR 5230	137
PEGRAA 50 136 PEGRAC 47 PEGRO 47 PELACV 107 PELAACV 107 PEM 337 PEN 150 PEN 150 PEN 149 PEP 337 PESP 326 PETA 91 PETAC 90 PETFX 153 PETFX 153 PETO 90 PFC40 45 PFDP 166 PFDPP 165 PFLO 188 PFLPAN 188 PFLPAN 188 PFLPAN 188 PFLPANICH 203 PFLT 44 PFPSAL 295 PFRAC712 83 PFRAC712 83 PFRAC712 83 PFX 144 PFXS 144	PEGR7032	136
PEGRAC 47 PEGRO 47 PELACV 107 PEL.MACV 107 PELONCV 107 PEM 337 PEN 150 PENF 149 PEP 326 PETAC 91 PETAC 90 PETFX 153 PETO 90 PFC40 45 PFDP 166 PFDP 165 PFLO 188 PFLOPST 188 PFLPANICH 203 PFLT 44 PFPSAL 295 PFR24 85 PFRAC712 83 PFROL712 83 PFROL712 83 PFX 144 PFX 144 PFX 144 PFX 144 PFX 144 PFXAC 140 <td>PEGRAA 50</td> <td>136</td>	PEGRAA 50	136
PEGRO 47 PEL 68 PELAACV 107 PELONCV 107 PEM 337 PEN 150 PENF 149 PEP 337 PENF 149 PEP 326 PETAC 91 PETAC 90 PETFX 153 PETO 90 PFC40 45 PFDP 166 PFDPP 165 PFLO 188 PFLOPST 188 PFLPANICH 203 PFLT 44 PFPSAL 295 PFRA712 83 PFRAC712 83 PFROL712 83 PFX 144 PFX 144 PFX 144 PFX 144 PFX 144		
PEL 68 PELAACV 107 PELONCV 107 PEM 337 PEN 150 PENF 149 PEP 327 PESP 326 PETAC 91 PETAC 90 PETFX 153 PETFX 153 PETO 90 PFC40 45 PFDP 166 PFDPP 165 PFLONCY 188 PFLPAN 189 PFLPAN 189 PFLPAN 189 PFLPAN 203 PFLT 44 PFPSAL 295 PFRAC712 83 PFROL712 83 PFROL712 83 PFX 144 PFXS 144 PFXS 144 PFXS 144 PFXAC 140		
PELAACV 107 PELONCV 107 PEM 337 PEN 150 PENF 149 PEP 337 PESP 326 PETAA 91 PETAC 90 PETFX 153 PETFX 153 PETO 90 PFC40 45 PFDP 166 PFDPP 165 PFLO 188 PFLOPST 188 PFLPAN 189 PFLT 44 PFSAL 295 PFR		
PELONCV 107 PEM 337 PEN 150 PENF 149 PEP 337 PESP 326 PETAA 91 PETAA 91 PETAC 90 PETFX 153 PETFX 153 PETO 90 PFC40 45 PFDP 166 PFDPP 165 PFLO 188 PFLPAN 189 PFLPANICH 203 PFLT 44 PFPSAL 295 PFRA712 83 PFRAC712 83 PFRAC712 83 PFT 301 PFX 144 PFX 144 PFXS 144 PFXSPR 145 PFXAC 140		
PEM 337 PEN 150 PENF 149 PEP 337 PESP 326 PETAA 91 PETAA 91 PETAC 90 PETFX 153 PETFX 153 PETFX 153 PETO 90 PFC40 45 PFDP 166 PFDPP 165 PFLO 188 PFLOPST 188 PFLPAN 189 PFLPAN 189 PFLT 44 PFPSAL 295 PFR24 85 PFRA712 83 PFROL712 83 PFROL712 83 PFX 144 PFXS 144 PFXS 144 PFXS 144 PFXAC 140		
PEN 150 PENF 149 PEP 337 PESP 326 PETAA 91 PETAC 90 PETFX 153 PETFX 90 PETFX 153 PETFX 153 PETFX 90 PFC40 45 PFDP 166 PFDP 166 PFDP 165 PFLO 188 PFLO 188 PFLO 188 PFLO 188 PFLT 203 PFTT 204 PFRA712 83 PFRA712 83 PFT 148	PELONCV	107
PENF 149 PEP 337 PESP 326 PETAA 91 PETAC 90 PETFX 153 PETFX 153 PETFX 90 PETFX 153 PETFX 153 PETFX 153 PETFX 153 PETFX 90 PFC 90 PFC 90 PFC 90 PFC	PEM	337
PENF 149 PEP 337 PESP 326 PETAA 91 PETAC 90 PETFX 153 PETFX 153 PETFX 90 PETFX 153 PETFX 153 PETFX 153 PETFX 153 PETFX 90 PFC 90 PFC 90 PFC 90 PFC	PEN	150
PEP 337 PESP 326 PETAA 91 PETAC 90 PETFX 153 PETFX 153 PETFX 153 PETFX 90 PFTC 90 PFC40 45 PFDP 166 PFDP 165 PFLO 188 PFLOPST 188 PFLPANICH 203 PFLT 44 PFPSAL 295 PFR1216 84 PFRA712 83 PFRAC712 83 PFRAC712 83 PFX 148 PFX 144 PFXS 144 PFXS 144 PFXAC 140	PENF	149
PESP 326 PETAA 91 PETAC 90 PETFX 153 PETFXPAA 153 PETFX 90 PFTC 90 PFC40 45 PFDP 165 PFDP 165 PFLO 188 PFLOPST 188 PFLPANICH 203 PFLT 44 PFPSAL 295 PFR1216 84 PFRA712 83 PFRAC712 83 PFRAC712 83 PFX 148 PFX 144 PFXS 144 PFXSPR 145 PFXAC 140	PEP	
PETAA 91 PETAC 90 PETFX 153 PETFXPAA 153 PETFXPAA 153 PETFX 90 PFC40 45 PFDP 165 PFDP 165 PFLOPST 188 PFLPAN 189 PFLPANICH 203 PFLT 44 PFPSAL 295 PFR1216 84 PFRAC712 83 PFRAC712 83 PFRT 301 PFX 148 PFX 144 PFXS 144 PFXSPR 145 PFXAC 140	PESP	
PETAC 90 PETFX 153 PETFX 153 PETO 90 PFC40 45 PFDP 166 PFDPP 165 PFLO 188 PFLPAN 188 PFLPAN 188 PFLPAN 189 PFLT 44 PFPSAL 295 PFR1216 84 PFRA712 83 PFRAC712 83 PFRAC712 83 PFX 144 PFX 144 PFX5 144 PFX5 144 PFXAC 140	DETAA	
PETFX 153 PETFXPAA 153 PETO 90 PFC40 45 PFDP 166 PFDPP 165 PFLO 188 PFLPAN 189 PFLPANICH 203 PFLT 44 PFPSAL 295 PFR1216 84 PFRA712 83 PFRAC712 83 PFT 148 PFX 144 PFX 144 PFXSPR 145 PFXAC 140	DETAC	-
PETFXPAA 153 PETO 90 PFC40 45 PFDP 166 PFDPP 165 PFLO 188 PFLPAN 189 PFLPAN 189 PFLPANICH 203 PFLT 44 PFPSAL 295 PFR1216 84 PFRA712 83 PFRAC712 83 PFRAC712 83 PFT 148 PFX 144 PFX5 144 PFX5 144 PFX5 144 PFX5 144	PETAL	
PETO 90 PFC40 45 PFDP 166 PFDPP 165 PFLO 188 PFLOPST 188 PFLPAN 189 PFLPANICH 203 PFLT 44 PFPSAL 295 PFR1216 84 PFRA712 83 PFRAC712 83 PFRAC712 83 PFT 301 PFX 144 PFXS 144 PFXS 144 PFXS 144 PFXS 144 PFXS 144 PFXS 144 PFXAC 140		
PFC40 45 PFDP 166 PFDPP 165 PFLO 188 PFLOPST 188 PFLPAN 189 PFLPAN 189 PFLT 44 PFPSAL 295 PFR1216 84 PFR24 85 PFRAC712 83 PFROL712 83 PFTT 301 PFX 148 PFX 144 PFX5 144 PFX5 144 PFXAC 140	PETFXPAA	
PFDP 166 PFDPP 165 PFLO 188 PFLOPST 188 PFLPAN 189 PFLPAN 189 PFLPAN 189 PFLT 44 PFPSAL 295 PFR1216 84 PFRA712 83 PFRAC712 83 PFROL712 83 PFTT 301 PFX 148 PFX 144 PFX5 144 PFX5PR 145 PFXAC 140		
PFDP 166 PFDPP 165 PFLO 188 PFLOPST 188 PFLPAN 189 PFLPAN 189 PFLPAN 189 PFLT 44 PFPSAL 295 PFR1216 84 PFRA712 83 PFRAC712 83 PFROL712 83 PFTT 301 PFX 148 PFX 144 PFX5 144 PFX5PR 145 PFXAC 140	PETO	90
PFDPP 165 PFLO 188 PFLOPST 188 PFLPAN 189 PFLPAN 189 PFLPANICH 203 PFLT 44 PFPSAL 295 PFR1216 84 PFR24 85 PFRAC712 83 PFROL712 83 PFTT 301 PFX 148 PFX 144 PFX5 144 PFX5PR 145 PFXAC 140	PETO PFC40	
PFLO 188 PFLOPST 188 PFLPAN 189 PFLPANICH 203 PFLT 44 PFPSAL 295 PFR1216 84 PFR24 85 PFRA712 83 PFROL712 83 PFTT 301 PFX 148 PFX 144 PFX5 144 PFX5 144 PFXAC 140	PETO PFC40	45
PFLOPST 188 PFLPAN 189 PFLPANICH 203 PFLT 44 PFPSAL 295 PFR1216 84 PFR24 85 PFRA712 83 PFROL712 83 PFTT 301 PFX 148 PFX 144 PFX5 144 PFX5PR 145 PFXAC 140	PETO PFC40 PFDP	45 166
PFLPAN 189 PFLPANICH 203 PFLT 44 PFPSAL 295 PFR1216 84 PFRA712 83 PFRAC712 83 PFROL712 83 PFTT 301 PFX 148 PFX 144 PFX5 144 PFX5PR 145 PFXAC 140	PETO PFC40 PFDP PFDPP	45 166 165
PFLPANICH 203 PFLT 44 PFPSAL 295 PFR1216 84 PFRA712 83 PFRAC712 83 PFROL712 83 PFTT 301 PFX 148 PFX 144 PFXSPR 145 PFXAC 140	PETO PFC40 PFDP PFDPP PFLO	45 166 165 188
PFLT 44 PFPSAL 295 PFR1216 84 PFR24 85 PFRA712 83 PFRAC712 83 PFROL712 83 PFTT 301 PFX 148 PFX 144 PFX5 144 PFX5PR 145 PFXAC 140	PETO PFC40 PFDP PFDPP PFLO PFLOPST	45 166 165 188 188
PFPSAL 295 PFR1216 84 PFR24 85 PFRAC712 83 PFRAC712 83 PFROL712 83 PFTT 301 PFX 148 PFX 144 PFX5 144 PFX5 144 PFX5 144 PFXAC 140	PETO PFC40 PFDP PFDPP PFLO PFLOPST PFLPAN	45 166 165 188 188 188 189
PFR1216 84 PFR24 85 PFRA712 83 PFRAC712 83 PFROL712 83 PFTT 301 PFX 148 PFX 144 PFX5 144 PFX5 144 PFX5 144 PFX5 144	PETO PFC40 PFDP PFDPP PFLO PFLOPST PFLPAN PFLPANICH	45 166 165 188 188 189 203
PFR1216 84 PFR24 85 PFRA712 83 PFRAC712 83 PFROL712 83 PFTT 301 PFX 148 PFX 144 PFX5 144 PFX5 144 PFX5 144 PFX5 144	PETO PFC40 PFDP PFDPF PFLO PFLOPST PFLPAN PFLPANICH PFLT	45 166 165 188 188 189 203
PFR24 85 PFRA712 83 PFRAC712 83 PFROL712 83 PFTT 301 PFX 148 PFX 144 PFX5 144 PFX5 144 PFX5 144 PFX5 144 PFX5 144	PETO PFC40 PFDP PFDPF PFLO PFLOPST PFLPAN PFLPANICH PFLT	45 166 165 188 188 189 203 44
PFRA 712 83 PFRAC712 83 PFROL712 83 PFTT 301 PFX 148 PFX 144 PFX5 144 PFX5 144 PFX5 144 PFX5 144 PFX5 144	PETO PFC40 PFDP PFLOPST PFLOPST PFLPAN PFLPAN PFLPAN PFLPAN PFLPAN	45 166 165 188 188 189 203 44 295
PFRAC712 83 PFROL712 83 PFTT 301 PFX 148 PFX 144 PFX5 144 PFX5 144 PFX5 144 PFX5 144 PFX5 144 PFX5 144	PETO PFC40 PFDP PFLO PFLOM PFLAM PFLPAN PFLPANICH PFLT PFPSAL PFR1216	45 166 165 188 188 189 203 44 295 84
PFROL712 83 PFT 301 PFX 148 PFX 144 PFX5 144 PFX5PR 145 PFXAC 140	PETO PFC40 PFDP PFDPF PFLOST PFLOPST PFLPAN PFLPANICH PFLT PFPSAL PFR1216 PFR24	45 166 165 188 188 189 203 44 295 84 85
PFTT 301 PFX 148 PFX 144 PFX5 144 PFX5PR 145 PFXAC 140	PETO PFC40 PFDP PFDPF PFLOST PFLOPST PFLPAN PFLPANICH PFLT PFPSAL PFR1216 PFR24 PFRA 712	45 166 165 188 188 203 44 295 84 85 83
PFX 148 PFX 144 PFX5 144 PFX5PR 145 PFXAC 140	PETO PFC40 PFDP PFDPF PFLOPST PFLPAN PFLPANICH PFLT PFPSAL PFR1216 PFR712	45 166 165 188 188 189 203 44 295 84 84 85 83 83
PFX 144 PFX5 144 PFX5PR 145 PFXAC 140	PETO PFC40 PFDP PFDPF PFLOST PFLPAN PFRA1216 PFRA712 PFRAC712 PFROL712	45 166 165 188 188 203 44 295 84 85 83 83 83 83
PFX 144 PFX5 144 PFX5PR 145 PFXAC 140	PETO PFC40 PFDP PFDPP PFLOPST PFLPAN PFLPANICH PFLT PFPSAL PFR1216 PFR24 PFRA712 PFRAC712 PFROL712 PFROL712	45 166 165 188 188 203 44 295 84 85 83 83 83 83 301
PFX5 144 PFX5PR 145 PFXAC 140	PETO PFC40 PFDP PFDPP PFLOPST PFLPAN PFLPANICH PFLT PFPSAL PFR1216 PFR24 PFRA712 PFRAC712 PFRAC712 PFRT PFTT PFX	45 166 165 188 188 203 44 295 84 85 83 83 83 83 301
PFX5PR 145 PFXAC 140	PETO PFC40 PFDP PFDPP PFLOPST PFLPAN PFLPAN PFLPAN PFLPAN PFLPAN PFLPAN PFRAL PFRA	45 166 165 188 188 203 44 295 84 85 83 83 83 83 301 148
PFXAC 140	PETO PFC40 PFDP PFDPP PFLOPST PFLPAN PFLPAN PFLPAN PFLPAN PFLPAN PFLPAN PFRAL PFRA	45 166 165 188 189 203 44 295 84 85 83 83 83 301 148 144
	PETO PFC40 PFDP PFDPP PFLOPST PFLPAN PFLPAN PFPSAL PFRA712 PFRAC712 PFROL712 PFROL712 PFRAC712 PFRAC712 PFRAC712 PFRAC712 PFRAC712 PFROL712 PFRAC712 PFROL712 PFROL712 PFX PFX PFX PFX5	45 166 165 188 189 203 44 295 84 85 83 83 83 301 148 144 144
	PETO PFC40 PFDP PFDPP PFLO PFLOMICH PFLFANICH PFLANICH PFLANICH PFLANICH PFLANICH PFRA24 PFRA712 PFRAC712 PFRAC712 PFRT PFX PFX PFX PFXS PFXSPR	45 166 165 188 189 203 44 295 84 85 83 83 83 83 301 148 144 144 145
	PETO PFC40 PFDP PFDPP PFLOPST PFLAN PFLPAN PFLPAN PFF24 PFRA712 PFRAC712 PFX PFX PFX PFX5 PFX5 PFXAC	45 166 165 188 189 203 44 295 84 85 83 83 301 148 144 145 140

PFXACPR	140
PFXAL	141
PFXALN	142
PFXOT	141
PGAO	71
PGAW15	238,270
PGBORD	205
PGR	117,137
PHTST	206
Pl	279
Pl	32,33
PIAC	30
PIF	283
DIKI	32,160
PIKLAC	30
PIKLAC	160
PIN	271,272
PINS	260
DINIT	110
PINT PINTPC	252,258
PINYC	254
PINYLC	255
PINZ	260,262
PINZC	250,258
PISPC	249,258
PITA	72
PITO	72
РЈ	18
PJ	23
PJ	22
PJAACV	109
PJAC	15
PJE	25
PJE	24
PJO	17
PJONCV	109
PJP	23
PJQ	9
DIOC	6
PJQS PJQSAC	2
PJQSOS	5
PJQT	11,14
PJQTAC	10
PJTR	28
PJTR135	29
PJTRAC	26
PJTRO	27
PKAA	220
PKCHAA	211
PKFLAA	211
PKGLEDAA	219
PKINSAA 60	212
PKISPAA	213
PKL	156
PKLEDAA	217
PKLIAA	212
PKLL	58
PKLL	157
PKLT	214
PKSHAA 70	221
PKSHAA	221
PLF	309
PLFR	309
PLFE	309
PLG	67,68
PLS	97
PLSAC	93
PLSO	95
PLT	43
PLTAC	40
PLTCH	34,198
PLTLED	43
PLTP	43
PLTP	42
PLU16	85
PLV	99
	79
PLV29	00
PLV30	80
	80 80 79

PLVOL 358	81
PLVOL 4413	81
PMF	100
PMG	101
PMPFX	245
	-
PMQ	100
PNPLS	330
PNPLWS	330
PNPSR	330
PNSP	261
PNVA 713	82
PP	313
PPD	305
	312
PPN	-
PPT	304
PPU	310
PPV	310
РРҮ	311
PQE	71
PRB	188
PRBBU	186
PRBFX	186
PRBKL	186
PRBKLAB	186
PRBPE	185
PRBT	186
PRBT	196
PRCLEAN	300
PRCP	239
PRCPS	239
	239 54
PRDAC	• •
PRFA	71
PRFAACV	108
PRFAC	70
PRFO	70
PRFONCV	108
PRLISH	300
PRLW	
PRLVV	290
PRMKL	186
PRS	289
PRS712	84
PRSHLF	205
PRSPD 10	301
PRTA	78
PRTAC	77
	77
PRTO	
PS	53
PSA	56
PSA	55
PSAW20	238
PSAW20	270
PSB	57
PSBF	57
PSD	306
PSDWK	167
PSDWK	123
PSF	56
PSHA	52
PSHAC	50
PSHD	159
PSHLDK	201
PSHPAN	190
PSHPANCEK	200
PSHPANEK	190
PSHR	159
PSHW	193
PSHWBB	191
PSHWCP	201
PSHWDL	191
	-
DCHWINI	192
PSHWDL	192
PSHWP	194
PSHWP PSHWPACS	194 196
PSHWP PSHWPACS PSHWPFACS	194 196 197
PSHWP PSHWPACS	194 196
PSHWP PSHWPACS PSHWPFACS	194 196 197
PSHWP PSHWPACS PSHWPFACS PSHWPGACS PSHWPLACS	194 196 197 196 197
PSHWP PSHWPACS PSHWPFACS PSHWPGACS PSHWPLACS PSHWPLT	194 196 197 196 197 197 194
PSHWP PSHWPACS PSHWPFACS PSHWPGACS PSHWPLACS PSHWPLT PSHWRD	194 196 197 196 197 194 193
PSHWP PSHWPACS PSHWPFACS PSHWPGACS PSHWPLACS PSHWPLT PSHWRD PSLD	194 196 197 196 197 194 193 78
PSHWP PSHWPACS PSHWPFACS PSHWPGACS PSHWPLACS PSHWPLT PSHWRD	194 196 197 196 197 194 193

Dec	= 4
PSS	54
PST PST	306 292
PSTRAN	292
PSTSL	298
PSWC	264
PSYA	127
PSYAC	126
PSYACS 2610	114
PSYGRACS 6020	118
PSYKLAA 1045	161
PSYO	126
PSYW	129
РТ	37
PT	66
PT	39
PTAC	16
PTAC	36
PTACV PTANCV	104 105
PTEDP	105
PTEDP PTI	35
PTO	37
PTO	65
PTONCV	105
PTP	120
PTPW	129
PTR	120
PTR50	119
PTRACS	114
PTRB	121
PTRGRACS	117
PTRKLAA 2045	161
PTRLEDAA	124
PTRW	128
PTRWZ	128
PTS 613	82
PTSAA PTSAA	127 253
PTSPA	122
PTSPA	59
PTSPAC	122
PTSPAC	122
PTUE	170
PVJ	320
PWK	133
PWK25	134
PWKAC	132
R	306
R	291
R11	304
SC	131
SO	131
SPCPDES	329
SQG	299
T TCT	282 131
TDA	304
TET	131
TGS	131
TP	280
TQP	280
TQV	281
TR	281
TRAG18	326
TV	280
UG	281
VIN	273
WP	307

