

PROTERMINAL is a L-shaped profile in chromed and antique brass that can be applied on external corners of coverings. It can be used to close the perimeter of coverings, like a connection profile between step tread and riser of stairs coated with ceramic or natural stone tiles and also as separation profile for floor and wall coverings. Its particular section and elegance make PROJOLLY a much sought-after profile that allows a workmanlike application.

PROTERMINAL

CHROMED BRASS AND ANTIQUE BRASS



CHROMED BRASS thermo packed
bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	H mm
PTOC 06	6
PTOC 08	8
PTOC 10	10
PTOC 125	12,5

COLOURS




ANTIQUÉ BRASS thermo packed
bar length 2,7 lm - pack. 20 Pcs - 54 lm


Article	H mm
PTOB 08	8
PTOB 10	10
PTOB 125	12,5

INSTRUCTIONS FOR LAYING METHODS

1. Choose "PROTERMINAL" according to the tile thickness. 2. Cut "PROTERMINAL" to the desired length and apply the adhesive on the support where the profile will be laid. 3. Press the anchoring flange of "PROTERMINAL" into the adhesive. 4. Lay the tiles, aligning them with the profile leaving a 2 mm joint. Remove immediately all remains of adhesive from the surface of the profile. 5. Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile.

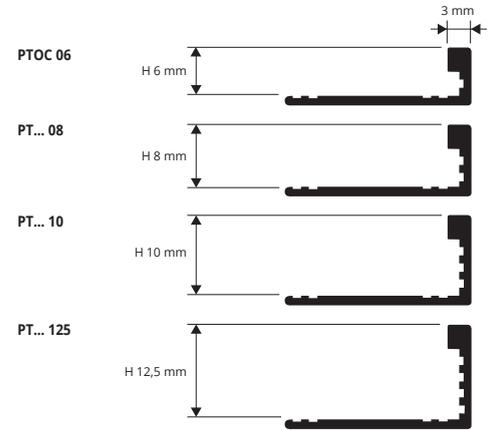

EXEMPLES OF LAYING

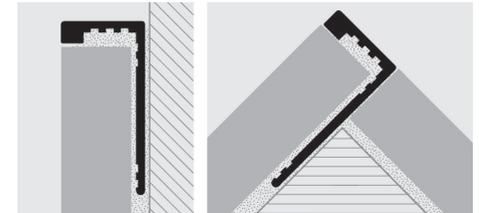

PROTERMINAL is a L-shaped profile in natural and anodized aluminium that can be applied on external corners of coverings. It can be used to close the perimeter of coverings, like a connection profile between step tread and riser of stairs coated with ceramic or natural stone tiles and also as separation profile for floor and wall coverings. Its particular section and the availability in six different finishes make **PROTERMINAL** a much sought-after profile that allows a workmanlike application.

PROTERMINAL

NATURAL AND ANODIZED ALUMINIUM



ANODIZED ALUMINIUM (gold - silver) thermo packed
bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	H mm
PTAO 03 (anod. gold)	3
PTAA 03 (anod. silver)	3
PTAO 045 (anod. gold)	4,5
PTAA 045 (anod. silver)	4,5
PTAO 06 (anod. gold)	6
PTAA 06 (anod. silver)	6
PTAO 08 (anod. gold)	8
PTAA 08 (anod. silver)	8
PTAO 10 (anod. gold)	10
PTAA 10 (anod. silver)	10
PTAO 11 (anod. gold)	11
PTAA 11 (anod. silver)	11
PTAO 125 (anod. gold)	12,5
PTAA 125 (anod. silver)	12,5
PTAA 15 (anod. silver)	15
PTAA 20 (anod. silver)	20

ANODIZED ALUMINIUM (black-titanium-copper-bronze- antique bronze) thermo packed - bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	H mm
PTAT 08 (anod. titanium)	8
PTAR 08 (anod. copper)	8
PTNE 08 (anod. black)	8
PTAB 08 (anod. bronze)	8
PTAT 10 (anod. titanium)	10
PTAR 10 (anod. copper)	10
PTNE 10 (anod. black)	10
PTAB 10 (anod. bronze)	10
PTBRA 10 (anod. antique bronze)	10
PTAT 11 (anod. titanium)	11
PTAT 125 (anod. titanium)	12,5
PTAR 125 (anod. copper)	12,5
PTNE 125 (anod. black)	12,5
PTAB 125 (anod. bronze)	12,5
PTBRA 125 (anod. antique bronze)	12,5

COLOURS




NATURAL ALUMINIUM


bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	H mm
PTAN 03 (natural)	3
PTAN 045 (natural)	4,5

COLOURS

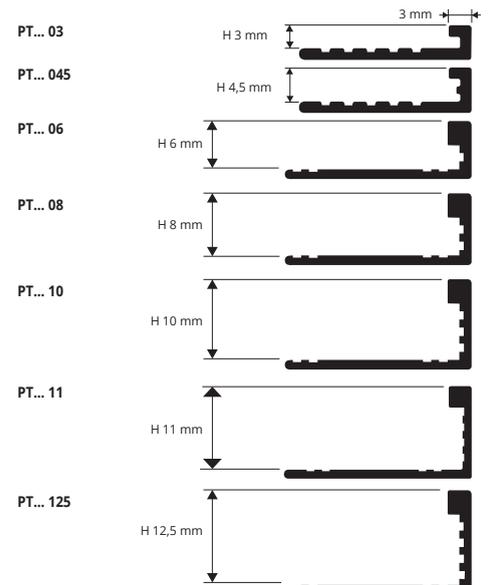

EXEMPLES AND INSTRUCTIONS FOR LAYING METHODS

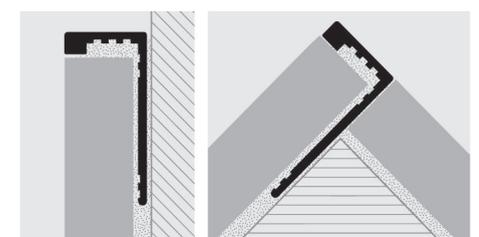

1. Choose "PROTERMINAL" according to the tile thickness and desired finish. 2. Cut "PROTERMINAL" to the desired length and apply the adhesive on the support where the profile will be laid. 3. Press the anchoring flange of "PROTERMINAL" into the adhesive. 4. Lay the tiles, aligning them with the profile leaving a 2 mm joint. Remove immediately all remains of adhesive from the surface of the profile. 5. Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile.

* = Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed