


# **PROFESSIONAL TILING TOOLS**



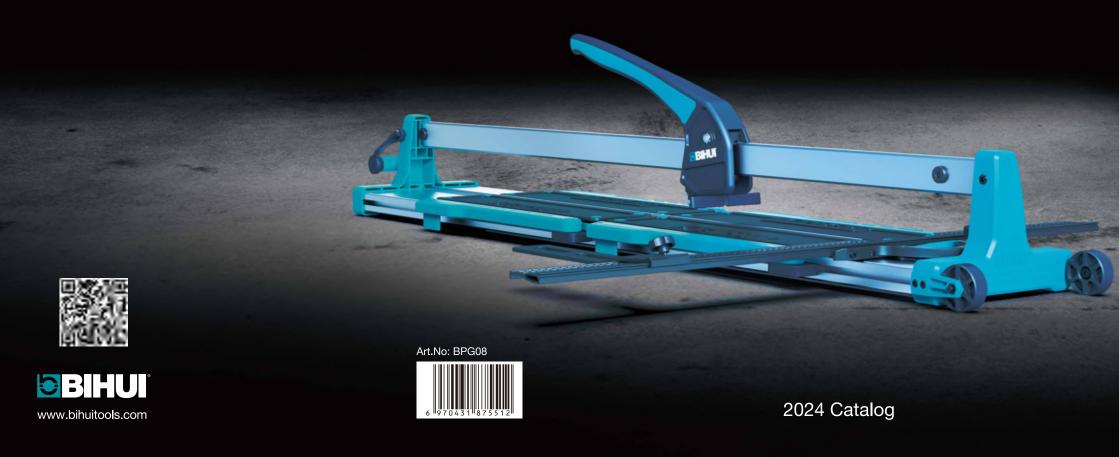

With the key words being innovation and quality, BIHUI develops tools for professional installers and strives to focus on the design, manufacture and distribution of tiling and construction tools for safe handling, transportation and cutting of large format tiles as well as installing all kinds of ceramic & porcelain tiles.

With over 18 years R&D experience and OEM&ODM production, the concept of BIHUI has evolved into a brand that represents the ethos and values. it is based upon offering a comprehensive range of products with a unique recognisable global identity that is visually appealing and informative with a competitive and flexible pricing policy to help build global markets and that is utilising recyclable materials for both product and packing minimising the environmental impact.

## **MISSION:**

Making laying jobs much easier & Making life-living much better


# **VISION:**

To be a Globally Leading Brand in Tiling Tools

## **VALUE:**

Customer First, Innovative, Collaboration, Practical, Proactive



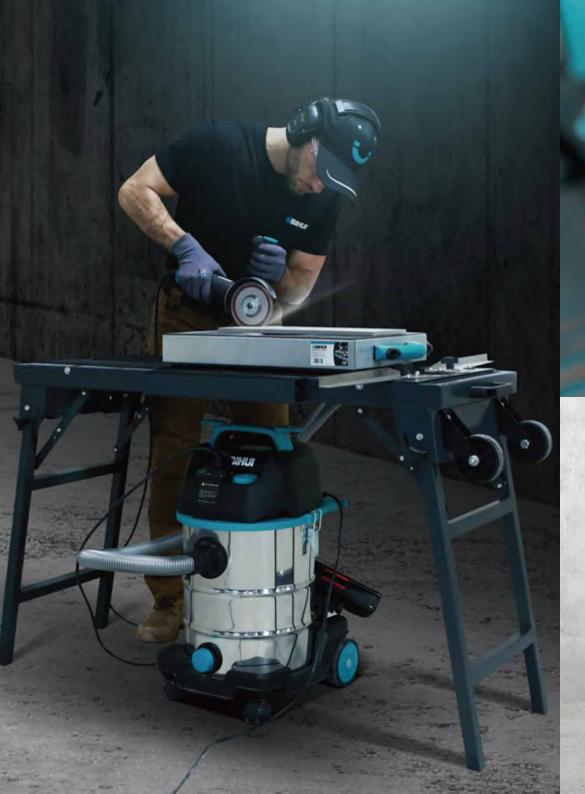



Contact us online www.bihuitools.com or Send an email to sales@bihuitools.com



# Innovation Quality High-Performance






































































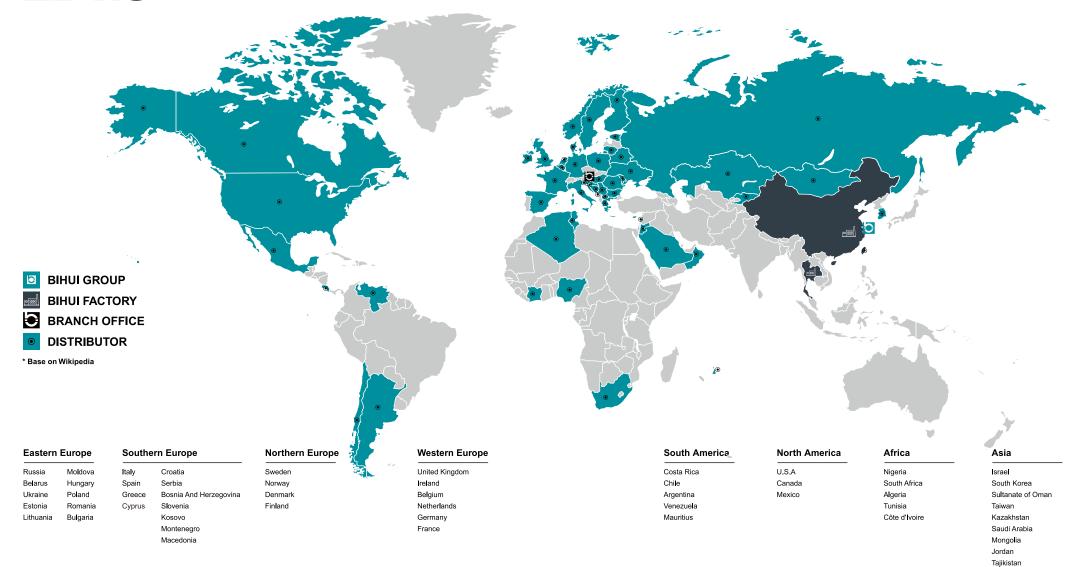

**JOIN US...** 

BECOME THE TILING TOOLS LEADER IN YOUR MARKET

DISTRIBUTORS 60+

**BIHUI TEAM 150+** 

PRODUCTION BASE 2

OFFICE 2

# PRODUCT CATALOG

|                            |       | TILE SPIRIT LEVEL                  | 98-99   |
|----------------------------|-------|------------------------------------|---------|
| 16 LARGE FORMAT TOOLS      | 16-31 | 1 00 TILE BEATER & SUCTION CUP     | 100-109 |
| 32 TILE CUTTER & TILE SAW  | 32-44 | 110 LEVELING SYSTEM & TILE SPACERS | 110-118 |
| 45 DIAMOND TOOLS           | 45-75 | 110 NOTCHED & BRICKLAYING TROWEL   | 119-125 |
| 76 CONCRETE GRINDER        | 76-78 | 126 CLEANING TOOLS                 | 126-130 |
| 79 VACUUM CLEANER          | 79-83 | 131 TILING TOOLS                   | 131-137 |
| 84 ELECTRIC MACHINE        | 84-87 | 138 PROMOTIONAL ITEMS              | 138-141 |
| MIXING MACHINE & PADDLE    | 88-91 | 142 TRADE FAIRS & MERCHANDISING    | 142-149 |
| 92 ALUMINUM BOX SCREED SET | 92-93 | 150 BLADE GUIDELINE                | 150-153 |
| 94 LASER LEVEL             | 94-97 | 154 ICONS AND CERTIFICATIONS       | 154-155 |

PREPARATION 1







CUTTING & DRILLING









INSTALLATION

3





GROUTING







CLEANING









#### **Trade Electric Cutting System**

- ▲ Compatible rails with the trade manual cutting system. **Two systems, One rail**
- ▲ Reinforced rails with steel rod, make cutting more stable, precise and longer lifetime
- Suitable for cutting tiles and slabs sizes up to 3.2m long
- CE approved electric cutting machine, 1,500W, 230V/50Hz, 13,000RPM
- Max. Straight Cutting depth 17mm
- Max. Angle Cutting depth 15mm

#### Components:

- 1 x Premium cutting blade 125mm
- 1 x Edge cutting blade 125mm
- 4 x Plastic suction cup
- 2 x F clamp for fixing the rail
- 1 x Rubber adaptor
- 1 x small tools bag with fixing accessories

| Art.No |             |                      |   |
|--------|-------------|----------------------|---|
| LFEC5  | 320cm(126") | 3-15mm(1/8"- 19/32") | 1 |
| LFRS5  | 320cm(126") | 3-15mm(1/8"- 19/32") | 1 |









#### **Trade Manual Cutting System**

- ▲ Compatible rails with trade electric cutting system. Two systems, One rail
- ▲ Reinforced rails with steel rod, make cutting more stable, precise and longer lifetime
- ▲ Suitable for cutting tiles and slabs sizes up to 3.2m long
- ▲ Revolutionary cutter head can cut tiles up to 15mm thick
- ▲ Heavy duty breaker with higher breaking force for 3-15mm thick tiles

#### Components:

- 3 x aluminium rails
- 4 x plastic suction cup
- 1 x cutting head
- 1 x breaker nipper
- 1 x spare wheel in plastic box
- 1 x small tools bag with fixing accessories

| Art.No | <b>\limits</b> |                      |   |
|--------|----------------|----------------------|---|
| LFMC5  | 320cm(126")    | 3-15mm(1/8"- 19/32") | 1 |
| LFRS5  | 320cm(126")    | 3-15mm(1/8"- 19/32") | 1 |
|        |                |                      | 1 |







#### **Breaker Nippers**

| Art.No | Breaking               |
|--------|------------------------|
| LFTBE  | Max.8mm(5/16") thick   |
| LFTBD  | Max.15mm(19/32") thick |
| LFTBH  | Max.15mm(19/32") thick |







#### **Manual Cutting System**

- ▲ Compatible rails with the electric cutting system. Two systems, One rail
- Suitable for cutting tiles size upto 3.2M
- Rails in size 1.4M and 0.8M for different tile length

- Components:
  1 x Carbide wheel assembled
  1 x Spare wheel in box
- 4 x Plastic suction cup
- 2 x F clamp 1 x Breaking clamp
- 1 x Breaking nipper

| Art.No | <b>\limits</b> |                    |   |
|--------|----------------|--------------------|---|
| LFMC   | 320cm(126")    | 6-8mm(1/4"- 5/16") | 1 |
| LFRS   | 320cm(126")    | 6-8mm(1/4"- 5/16") | 1 |
| LFRS   | 320cm(126")    | 6-8mm(1/4"- 5/16") | 1 |












#### **Classic Carrier System**

- Max. Capacity: 3.2x1.6M
- ▲ Max. Lifting Capacity: 130kg (286 lbs)
- 2pcs longitudinal rails with soft grip handles
- ▲ Adjustable length: 1700-3200mm
- ▲ Includes 4 vacuum suction cup and 6 aluminum suction cup
- ▲ Robust and stable plate for large-format plates





#### **Trade Carrier System**

- ▲ Max. Capacity: 3.2x1.6M
- Max. Lifting Capacity: 200Kg (441 lbs)
- ▲ Includes 6 or 8 vacuum suction cup with brass handle
- Featured with four soft grip handle on the top and four extension handle on the side for extra force
- ▲ Lightweight and easy to transport large format tiles thanks to the adjustable extension bar so to adapt to tiles sizes to handle them

| Art.No | Size    |
|--------|---------|
| LFCSV6 | 6xSCVG8 |





#### **Battery Powered Master Carrier System**

- Max. Capacity: 3.2M x 1.6M
- Max. Lifting Capacity: 200Kg (441 lbs)
- ▲ Includes 6pcs battery powered vacuum suction cup with digtal panel
- IInterchangeable design for switching the suction cup
- ▲ Featured with four soft grip handle on the top and four extension handle on the side for extra force
- ▲ Lightweight and easy to transport large format tiles thanks to the adjustable extension bar so to adapt to tiles sizes
- Suitable for both smooth and texture tiles

| Size       |
|------------|
| 1.9M(75")  |
| 1.65M(65") |
| 200mm(8")  |
| /          |
|            |





**><>**\Lz.o



- Seconds to set up and fold up
- Easy storage and transport
- ▲ Aluminium alloy legs, soft grip ends zero scratch the ground surface
- ▲ Multiple support points, very stable without shaking on uneven ground
- Set up as a large portable workbench at any job site

| Art.No | Opening Din  | nension     | Folded Di        | mension          | Loading Capacity |
|--------|--------------|-------------|------------------|------------------|------------------|
| LFFT   | 221x113x73cm | 87"x44"x73" | 32.5x19.5x88.5cm | 12.8"x7.7"x34.8" | 300Kg(660lbs)    |



#### **Tilers Multi-function Workbench**

- Reinforced portable workbench with ergonomic working height
- ▲ Extendable tile supports for increased work surface upto 720mm
- ▲ Longitudinal groove for 45°& 90° cutting and 110mm holes with drill guide for drilling
- ▲ Easy to put the manual tile cutter on it and can be used as a small scaffold
- Designed with four folding legs, carrying handles and wheels for easy transport
- ▲ Comes complete with two F clamps, adjustable rulers and restraints
- ▲ Table size 1160mm and straight cutting size 950mm

| Art.No | Size       | Loading Capacity       |
|--------|------------|------------------------|
| TWT900 | 116cm(46") | 200Kg(441 <b>I</b> bs) |









#### Tiler's Working Bench Master

- ▲ All in one design with foldable legs and transport wheels

- ▲ Suitable for cutting, drilling, polishing jobs as well as transportation
- ▲ Adjustable height in 560mm, 613mm, 665mm, 717mm and 770mm

| Art.No | Open Size      | Table size | Accessory Table Size |
|--------|----------------|------------|----------------------|
| TWTMST | 1070x440x760mm | 800 x 400  | 180x400mm            |








- ▲ Made of stainless steel with cushion stripe
- Cutting angle range 45-48°
- Max.cutting length unlimited
- Max.cutting thickness 19mm
- Diamond blade 125mm
- Dust collector for 32mm hood
- ▲ Suitable for M14 and 5/8"-11 angle grinder

| Art.No | Size          |                   |
|--------|---------------|-------------------|
| LFMBF  | 270x146x190mm | 10-1/4"x6"x7-1/2" |
| LFMBA  | 270x146x190mm | 10-1/4"x6"x7-1/2" |

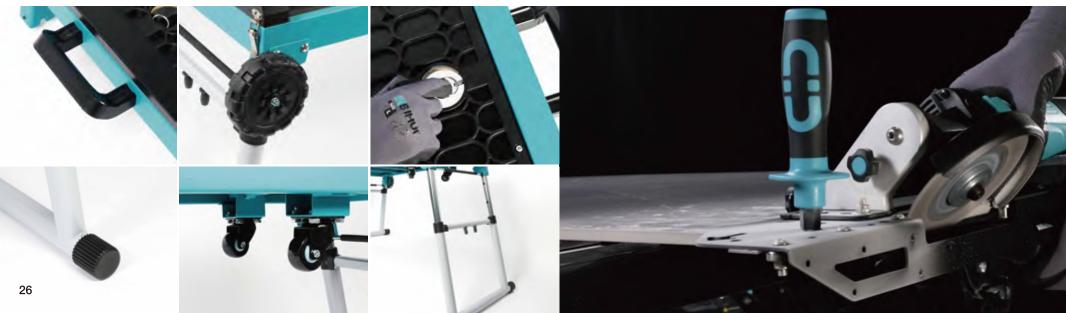



#### **Working Bench**

- ▲ A lightweight, robust and stable workbench for large-format tiles, enabling cutting / drilling without risk of damaging the work surface
- Easily assembled for transport and storage and can be mounted together with additional tables for increased work surfaces
- ▲ Foldable legs and storage hooks for cutting system
- ▲ Height: 800mm
- Width: 1400mm
- ▲ Length: 1800mm
- ▲ Suitable for tile size upto 3.6 x 1.4M after 2 tables joint together

| Art.No | Size              |
|--------|-------------------|
| LFWB   | 1.8x1.4M(71"x55") |






#### LARGE FORMAT TOOLS



#### **Transport Cart**

- ▲ The ideal solution to move large format slabs of porcelain stoneware in the warehouse, places of installation offering a work area to apply the adhesive
- Thanks to the four rubber castors (lockable) positioned on each corner, superb control of movement and direction is created plus they make it extremely stable
- Max. Load: 280kg(617 lbs)
- Suitable to display tile size upto 3.2 x 1.6M

| Art.No | Size               |
|--------|--------------------|
| LFCART | 3.2x1.6M(126"x63") |

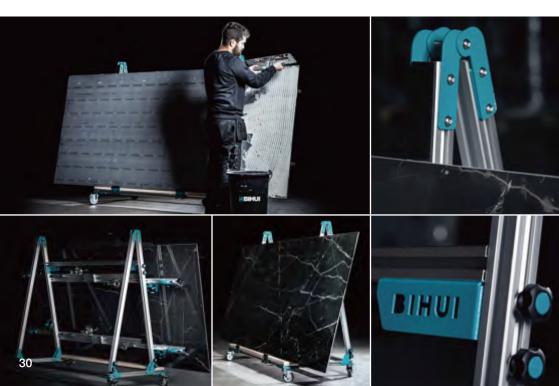



#### Tile Beater

- ▲ Eliminate air from underneath the tile
- Heavy duty rubber pad

| Art.No | Size                          |
|--------|-------------------------------|
| BLFTBT | 355x146x10mm<br>(14"x6"x3/8") |



#### Tile Space & Level Regulator

- ▲ Ideal for adjust tile gap in horizon from 0.5mm to 40mm
- Two buttons for adjusting tile level
- With 2pcs 6 inch vacuum suction cup
- ▲ Light duty and durable structure
- ▲ Ideal for large porcelain or stone tiles and glass

| Art.No | Size                     |
|--------|--------------------------|
| LFTSB6 | 0.5-40mm(1/64")-(1-5/8") |



#### PREMIUM Tile Space & Level Regulator

- Designed to shortening gaps between tiles
- ▲ Adjustable from 0.5-40mm
- Two buttons for adjusting tile level
- Ideal for handling with porcelain or stone tiles and glass
- With 2pcs 6 inch vacuum suction pad

| Art.No | Size                     |
|--------|--------------------------|
| LFTSR2 | 0.5-40mm(1/64")-(1-5/8") |



#### Multi Angle Tile Fixer & Adjuster

■ With vacuum suction cup

Art.No

- ▲ Work for 90°& 180°& 270°alignment and tile gap adjustment
- Two buttons for adjusting tile level
- ▲ Light duty and durable structure
- $\ensuremath{\blacktriangle}$  Ideal for handling with porcelain or stone tiles and glass

| LFTFV6 | Universal |
|--------|-----------|
|        |           |
|        |           |







C-LION

- ▲ Double-layer aluminum alloy chassis, strong and durable
- ▲ Tungsten carbide scoring wheel with etched scale for using with different tile thickness
- ▲ Anti-rotation handle for change scoring wheels from Ø1/4" (6mm) to Ø7/8"(22mm)
- Ø7/8"(22mm) scoring wheel included
- Magnetic absorption and fast release breaking device with 800kg breaking power for single-handed operation
- ▲ Adjustable measurement guide and side ruler for cutting tiles from different angle
- ▲ Anti-slip handle with storage function and snap-in for locking the handle
- ▲ LED light for extra vision and laser level for precise cutting(600mm version not included)
- 1M and 1.2M tile cutter with caster design
- ▲ Suitable for cutting all kinds of ceramic tiles, such as wall tiles, polished tiles and glazed tiles

| Art.No  | Cutting | Length  | Diagonal Cutting<br>Length(mm) | Cutting Thickness (mm) | Breaking force (kg) |
|---------|---------|---------|--------------------------------|------------------------|---------------------|
| TCB600  | 600     | 24"     | 424 x 424                      | 3 - 18                 | 800                 |
| TCB800  | 800     | 31-1/2" | 560 x 560                      | 3 - 18                 | 800                 |
| TCB1000 | 1000    | 40"     | 700 x 700                      | 3 - 18                 | 800                 |
| TCB1200 | 1200    | 47-1/4" | 850 x 850                      | 3 - 18                 | 800                 |








COMING SOON

#### INCISE Tile Cutter

- One-piece aluminum alloy die casting forming base
- Single rail system, simple and durable
- ▲ Integral molding design for breaking part, cutting head and handle
- ▲ Smart and easy adjusting knob for fitting with different thickness tiles
- Suitable for cutting with 90° or any angles.
- Visible cutting angle and scale plate in white and black
- ▲ Readable ruler with double row scale and pointing arrow
- ▲ Angle positioning with limitation design for easy and precise location
- ▲ Storable inclined bracing for extra support

| Art.No  | Cutting Length |                  | Diagonal Cutting<br>Length(mm) | Cutting Thickness (mm) | Breaking force (kg) |
|---------|----------------|------------------|--------------------------------|------------------------|---------------------|
| TCA400  | 400            | 15 <b>-</b> 3/4" | 280×280                        | 5 - 18                 | 600                 |
| TCA750  | 750            | 29-1/2"          | 530 x 530                      | 5 - 18                 | 1000                |
| TCA930  | 930            | 36-1/2"          | 660 x 660                      | 5 - 18                 | 1000                |
| TCA1250 | 1250           | 49"              | 880 x 880                      | 5 - 18                 | 1000                |



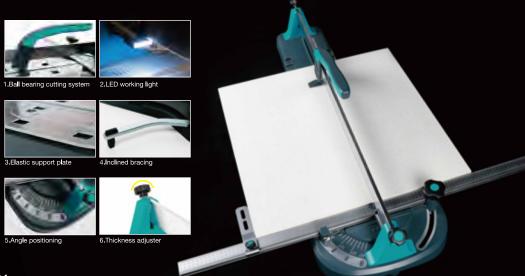



#### **Deluxe Tile Cutter**

- ▲ Aluminum die casting one-piece base, strong and durable
- ▲ Special designed single guide rail with built-in bearing system
- ▲ Magnetic absorption and fast release breaking device
- ▲ Extension bars to support large tile cutting
- Suitable for cutting with 90° or any angles
- Tungsten carbide scoring wheel 22mm
- ▲ Laser line for precise cutting
- With two casters and carry handle
- ▲ Suitable for cutting all kinds of ceramic tiles, such as wall tiles, polished tiles and glazed tiles

| Art.No | Cutting | Length  | Diagonal Cutting<br>Length(mm) | Cutting Thickness (mm) | Breaking force (kg) |
|--------|---------|---------|--------------------------------|------------------------|---------------------|
| TCD080 | 800     | 31-1/2" | 560 x 560                      | 5 - 18                 | 1000                |
| TCD120 | 1200    | 47-1/4" | 840 x 840                      | 5 - 18                 | 1000                |
| TCD160 | 1600    | 63"     | 1130 x 1130                    | 5 - 18                 | 1000                |







#### **Wise Power Tile Cutter**

- ▲ Aluminum die casting one-piece base, strong and durable
- ▲ Special designed single guide rail with built-in bearing system
- ▲ Magnetic absorption and fast release breaking device
- ▲ Extension bars to support large tile cutting
- Suitable for cutting with 90° or any angles
- Visible swing position ruler in metric and inch
- Tungsten carbide scoring wheel 22mm
- ▲ Laser line for precise cutting
- ▲ Suitable for cutting all kinds of ceramic tiles, such as wall tiles, polished tiles and glazed tiles



#### **Strong Tile Cutter**

- Thick double layer aluminum alloy base
- Solid single rail system
- ▲ Long lifetime scoring wheel Ø22x5x5mm
- ▲ Magnetic absorption breaking device
- Extension legs with 45°guide for large tiles
- ▲ Laser line for precision cutting

| Art.No  | Cutting | Length  | Diagonal Cutting<br>Length(mm) | Cutting Thickness (mm) | Breaking force (kg) |
|---------|---------|---------|--------------------------------|------------------------|---------------------|
| TCP1200 | 1200    | 47-1/4" | 840 x 840                      | 5 - 20                 | 1000                |
| TCP1600 | 1600    | 63"     | 1130 x 1130                    | 5 - 20                 | 1000                |







#### **Laser Tile Cutter**

- ▲ Thick 1.6mm double layer aluminum alloy base
- Solid rail system 20x40mm
- ▲ Long lifetime scoring wheel Ø22x5x5mm
- ▲ Magnetic absorption breaking device
- ▲ Adjustable cutting frame
- Extension bars for 1M/1.5M mitre cutting
- Guide for mitre cutting 45°
- ▲ Laser line for extra precision

| Art.No  | Cutting | Length  | Diagonal Cutting<br>Length(mm) | Cutting Thickness (mm) | Breaking force (kg) |
|---------|---------|---------|--------------------------------|------------------------|---------------------|
| TCS1200 | 1200    | 47-1/4" | 850 x 850                      | 6-15                   | 800                 |
| TCS1600 | 1600    | 63"     | 1130 x 1130                    | 6-15                   | 800                 |




#### **Professional Tile Cutter**

- ▲ Aluminum die casting one-piece base, strong and durable
- ▲ Single guide rail with built-in ball bearing system, easy for cutting big tiles
- ▲ Ergonomic soft grip handle, labour-saving
- ▲ Extension bars to support large tiles
- ▲ Magnetic absorption breaking device, single-handed operation
- ▲ Gauge for straight and angled cutting, both in metric and inches
- ▲ Ø7/8"(22mm) scoring wheel included, quick replacement design



| Art.No  | Cutting Length |         | Diagonal Cutting<br>Length(mm) | Cutting Thickness (mm) | Breaking force (kg) |
|---------|----------------|---------|--------------------------------|------------------------|---------------------|
| TCC900  | 900            | 36"     | 635 x 635                      | 4-16                   | 800                 |
| TCC1200 | 1200           | 47-1/4" | 850 x 850                      | 4-16                   | 800                 |
| TCC1650 | 1650           | 65"     | 1165 x 1165                    | 4-16                   | 800                 |



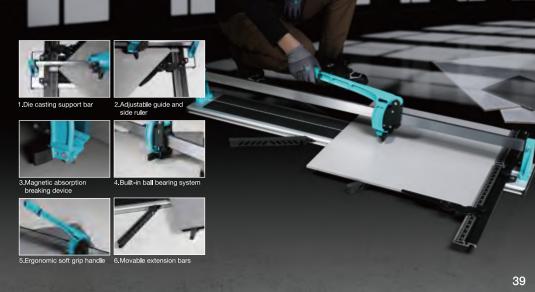

#### **Fast Tile Cutter**

- One piece aluminum alloy base
- Solid single rail system
- ▲ Long lifetime scoring wheel Ø22mm
- Suitable for 90° and 45° cutting
- ▲ Laser and LED line for precision cutting
- ▲ For tiles, porcelain ,ceramic and all kinds of tiles

| Art.No  | Cutting Length |         | Diagonal Cutting<br>Length(mm) | Cutting Thickness (mm) | Breaking force (kg) |
|---------|----------------|---------|--------------------------------|------------------------|---------------------|
| TCF700  | 700            | 27-1/2" | 490 x 490                      | 5-14                   | 800                 |
| TCF1000 | 1200           | 40"     | 700 x 700                      | 5-14                   | 800                 |
| TCF1200 | 1600           | 47-1/4" | 840 x 840                      | 5-14                   | 800                 |





#### **Martial Tile Cutter**

- ▲ Metal structure base with spring and hollow base plate
- ▲ Single guide rail with 10 ball bearings and labor-saving handle
- Strong steel support bar
- Magnet breaking design
- Gauge for straight and angled cutting

| Art.No  | Cutting Length |         | Diagonal Cutting<br>Length(mm) | Cutting Thickness (mm) | Breaking force (kg) |
|---------|----------------|---------|--------------------------------|------------------------|---------------------|
| TCM700  | 700            | 27-1/2" | 495 x 495                      | 5 - 16                 | 800                 |
| TCM900  | 900            | 36"     | 635 x 635                      | 5 - 16                 | 800                 |
| TCM1200 | 1200           | 47-1/4" | 850 x 850                      | 5 - 16                 | 800                 |
| TCM1650 | 1650           | 65"     | 1165 x 1165                    | 5 - 16                 | 800                 |







#### **Automatic Electric Tile Cutting Machine**

- ▲ For straight and 45° cut, diagonal cut, bullnose edges etc.
- Built with a water pump and laser line
- ▲ Folding legs with built-in wheels for transportion
- Max. cutting depth: 30mm
- ▲ Suitable for cutting ceramics, stoneware, porcelain and other materials
- 1.6M, 1.8M, 2.4M, 3.0M available

| Te                         | chnical Data |                   |
|----------------------------|--------------|-------------------|
| Art.No                     | TCSA1200     | TCSA1200A         |
| Output                     | 3000W        | 3000W             |
| Voltage                    | 230V/50Hz    | 110V/60Hz         |
| Speed                      | 12,000RPM    | 12,000RPM         |
| Cutting blade              | 120x20x1.3mm | 4-3/4"x3/4"x1/16" |
| Max.cutting blade          | 135x20x10mm  | 5-1/4"x3/4"x3/8"  |
| Max cutting depth          | 30mm         | 1-3/16"           |
| Max cutting angle          | 45°          | 45°               |
| Diagonal Cutting Length(cn | n) 850x 850  | 33-1/2"x 33-1/2"  |
| Cutting Length             | 1200mm       | 48"               |











#### Tile Saw 10"

- ▲ Equipped with movable stand, easy to store and move
- ▲ With LED light & laser light, making cutting more accurate
- Cutting precision: 1/36"
- ▲ Max cutting depth: 3.75"
- Straight cutting: 36"
- ▲ Diagonal cutiing: 24"
- Cutting capacity: 3.75"(90°), 1.5" (45°)
- Blade diameter:10"
- Bevel Range: 0-45°
- Cutting material: Tile, Marble

| Т                   |             |                    |
|---------------------|-------------|--------------------|
| Art.No              | TCSTW10     | TCSTW10A           |
| Voltage             | 230V/50Hz   | 110V/60Hz          |
| Power               | 1800W-15A   | 1800W <b>-</b> 15A |
| Speed               | 4500RPM     | 4500RPM            |
| Blade diameter      | 250mm(10")  | 250mm(10")         |
| Max cutting thickne | 85mm(3.75") | 85mm(3.75")        |
| Cutting angle range | 0-45°       | 0-45°              |
| Table size          | 36"x24"     | 36"x24"            |





#### COMING SOON

#### **Electric Cutting System for 2cm tiles**

- One-piece aluminum alloy guide rail
- Die-cast aluminum alloy parts
- ▲ Can cut a variety of ceramic tiles from 4 to 22mm
- ▲ Adjustable length for different purpose
- ▲ Ergonomic soft handle





#### ANGLE GRINDER

#### **5" Variable Speed Angle Grinder**

- With constant speed soft start
- Spindle Thread M14
- 6 variable gears from 3,000-11,000RPM
- With 3M cord and power-off protection
- 2-position TPR side handle
- ▲ Includes wrench, guard, side handle, carbon brushes







Suitable for Drilling, Cutting and Polishing





€



#### COMING SOON

#### 5" Variable Speed Angle Grinder

- ✓ With constant speed soft start
- Spindle Thread M14
- 6 variable gears from 3,000-11,000RPM
- With 3M cord and power-off protection
- 2-position TPR side handle
- ▲ Includes wrench, guard, side handle, carbon brushes

| Tech    | nnical Data   |
|---------|---------------|
| Art.No  | AGBP12        |
| Output  | 1200W         |
| Voltage | 230V/50Hz     |
| Speed   | 3000-11000RPI |









#### **Diamond Blade**



▲ Suitable for cutting Hard Tiles , Marble , Slim Slab etc





#### **Diamond Blade**

- Full 7mm height continuous diamond rim
- ▲ Central bore reinforced with 55mm double flange
- ▲ Suitable for cutting Hard Tiles , Marble , Slim Slab etc

| Art.No  | •     |        |         |   |    |
|---------|-------|--------|---------|---|----|
| DCDT115 | 115mm | 4-1/2" | 22.23mm | 7 |    |
| DCDT125 | 125mm | 5"     | 22.23mm | 7 | AL |



#### **Diamond Blade**

- Full 7mm height continuous diamond rim
- ▲ Central bore reinforced with 70mm double flange
- ▲ Suitable for cutting Hard Tiles , Marble , Slim Slab etc

| Art.No  |       |    |          | _ |    |
|---------|-------|----|----------|---|----|
| DCDT200 | 200mm | 8" | 25.4mm - | 7 | Sp |
| DCDT230 | 230mm | 9" | 22.23mm  | , |    |







#### **Diamond Blade**

- ▲ Full 10mm height continuous diamond rim
- ▲ Central bore reinforced with 55mm double flange
- Suitable for cutting Hard Tiles, Porcelain Tiles, Ceramic Tiles etc








#### **Diamond Blade**

- ▲ Full 10mm height continuous diamond rim
- ▲ Central bore reinforced with 55mm double flange
- Suitable for cutting Hard Tiles, Porcelain tiles, Ceramic tiles etc.


| Coramio |       |        |         |    |      |
|---------|-------|--------|---------|----|------|
| Art.No  |       |        |         |    |      |
| DCDA115 | 115mm | 4-1/2" | 22.23mm | 10 | a la |
| DCDA125 | 125mm | 5"     | 22.23mm | 10 | AL   |



#### **Diamond Blade**

- Full 10mm height continuous diamond rim
- Central bore reinforced with 55mm double flange
- Suitable for cutting Hard Tiles, Porcelain Tiles, Ceramic Tiles etc

| Art.No  | <del></del> |        |         |    |      |
|---------|-------------|--------|---------|----|------|
| DCDM115 | 115mm       | 4-1/2" | 22.23mm | 10 | ale. |
| DCDM125 | 125mm       | 5"     | 22.23mm | 10 | SP   |




#### **Diamond Blade**

- Full 7mm height continuous diamond rim
- Central bore reinforced with 70mm double flange
- Suitable for cutting Slim Slab, Porcelain Tiles , Ceramic Tiles etc

| Ooranio | 11100 010 |        |         | _ |   |
|---------|-----------|--------|---------|---|---|
| Art.No  | -         |        | (1)     |   |   |
| DCDS115 | 115mm     | 4-1/2" | 22.23mm | 7 | 1 |


22.23mm



#### **Diamond Blade**

- Full 10mm height continuous diamond rim
- Suitable for cutting Mosaic Tiles, Glass mosaic, Stone mosaic etc

| Art.No  | •     |        |         |    |     |
|---------|-------|--------|---------|----|-----|
| DCDC115 | 115mm | 4-1/2" | 22.23mm | 10 |     |
| DCDC125 | 125mm | 5"     | 22.23mm | 10 | 28- |
| DCDC180 | 125mm | 7"     | 22.23mm | 10 |     |



#### **Diamond Blade**

DCDS125

■ Full 10mm height continuous diamond rim

125mm

- Central bore reinforced with 55mm double flange
- Suitable for cutting Porcelain, Marble, Slim Slab

| Art.No  | <del>-</del> |        |         |    |    |
|---------|--------------|--------|---------|----|----|
| DCDW115 | 115mm        | 4-1/2" | 22.23mm | 10 |    |
| DCDW125 | 125mm        | 5"     | 22.23mm | 10 | 88 |



#### Diamond Blade

- Full 10mm height continuous diamond rim
- Thin 1.4mm thickness for less dust and faster cuts
- Central bore reinforced with 55mm double flange
- Steel body is made with special steel for additional rigidity
- ☐ High speed cutting with minimal chipping and self cooling
- Suitable for cutting Hard Tiles, Porcelain Tiles,
- Ceramic Tiles etc

| Art.No  |       |    |         |    |    |  |
|---------|-------|----|---------|----|----|--|
| DCDV125 | 125mm | 5" | 22.23mm | 10 | Sp |  |





#### **Diamond Blade**

- ▲ Full 12mm height rim with four special "W"
- Thick 2.4mm body for universal cutting purpose
- ▲ Suitable for cutting Granite, Stone and Hard Bricks etc.

| Art.No  | -(0   | <b></b> | 8       |    |    |
|---------|-------|---------|---------|----|----|
| DCDF115 | 115mm | 4-1/2"  | 22.23mm | 12 | SP |



#### **Diamond Blade**

- ▲ 4mm height segment diamond rim
- 2.4mm thickness for steady cutting
- Suitable for cutting Stainless, Ceramic, Concrete, Masonry, Plastic, Light Wood

|         | × 11. |        |         |   |     |
|---------|-------|--------|---------|---|-----|
| Art.No  | -     | -      |         |   |     |
| DSBS115 | 115mm | 4-1/2" | 22.23mm | 4 |     |
| DSBS125 | 125mm | 5"     | 22.23mm | 4 | 200 |

22.23mm



#### **Diamond Blade**

- Full 12mm height rim with four special "W"
- ▲ Thick 2.4mm body for universal cutting purpose
- Suitable for cutting Granite, Stone and Hard Bricks etc.

| Art.No  | -(    | ·  | 8       |    |    |
|---------|-------|----|---------|----|----|
| DCDF125 | 125mm | 5" | 22.23mm | 12 | SP |



#### **Diamond Blade**

DSBS180

- Full 3mm height continuous diamond rim
- 1.4mm thickness for slim cutting

180mm

■ Suitable for cutting Aluminium, Steel Pipe, Steel Sheet, Angle Iron, PVC Pipe, Rebar

| Art.No  |       |        |         | _ |     |
|---------|-------|--------|---------|---|-----|
| DSBC115 | 115mm | 4-1/2" | 22.23mm | 3 |     |
| DSBC125 | 125mm | 5"     | 22.23mm | 3 | 28- |
| DSBC180 | 180mm | 7"     | 22.23mm | 4 |     |



#### **Diamond Blade**

- Full 12mm height rim with four special "W"
- ▲ Thick 2.4mm body for universal cutting purpose
- Suitable for cutting Granite, Stone and Hard Bricks etc.

| Art.No  | -(0   |    | 8       |    |  |
|---------|-------|----|---------|----|--|
| DCDF230 | 230mm | 9" | 22.23mm | 12 |  |



#### **Diamond Blade**

- 3mm height segment music slot diamond rim
- 1.4mm thickness for slim cutting
- Suitable for cutting Aluminium, Steel Pipe, Drywall, Plastic, Light Wood, Fiber Cement

| Art.No  |       |        |         | _ |         |
|---------|-------|--------|---------|---|---------|
| DSBM115 | 115mm | 4-1/2" | 22.23mm | 3 | and the |
| DSBM125 | 125mm | 5"     | 22.23mm | 3 | 28-     |
| DSBM180 | 180mm | 7"     | 22.23mm | 4 |         |





#### **Wet Continuous Rim Diamond Blade**

- Full 7.5mm height continuous diamond rim
- Thin 1.6mm thickness for less dust and faster cuts
- ▲ High speed cutting with minimal chipping and self cooling.

| Art.No  | -(    |        |         |     |    |
|---------|-------|--------|---------|-----|----|
| DCBG115 | 115mm | 4-1/2" | 22.23mm | 7.5 | Sp |





#### **Super Narrow Teeth Diamond Blade**

- Dry cutting depth upto 20mm
- ▲ Reinforced flange & Long lifetime
- Suitable for Tiles, marble, natural and artificial stone

| Art.No  | -     |        |         | -  |    |
|---------|-------|--------|---------|----|----|
| DCBN115 | 115mm | 4-1/2" | 22.23mm | 10 |    |
| DCBN5   | 125mm | 5"     | 22.23mm | 10 | AL |





#### **Super Thin Turbo Diamond Blade**

- Dry cutting depth upto 20mm
- ▲ Reinforced flange & Long lifetime
- ▲ Suitable for Tiles, marble, natural and artificial stone

| Art.No  | -     |        | 8       |     |    |
|---------|-------|--------|---------|-----|----|
| DCBT115 | 115mm | 4-1/2" | 22.23mm | 7.5 |    |
| DCBT5   | 125mm | 5"     | 22.23mm | 7.5 | 88 |




52

#### **Segment Diamond Blade**

- Full 10mm height continuous diamond rim
- ▲ Thick 1.8mm body for universal cutting purpose
- ▲ High speed cutting with minimal chipping and self cooling
- ▲ Perfect for use with angle grinder
- Suitable for cutting Hard Tiles , Porcelain tiles, Ceramic tiles etc.

| Art.No  | -     |        | 8       |    |    |  |
|---------|-------|--------|---------|----|----|--|
| DCBS120 | 120mm | 4-3/4" | 20.00mm | 10 | Sp |  |







#### **Vacuum Brazed Diamond Cutting & Grinding Wheel**

- Designed for bevelling, small cuts, grinding, rounding and shaping edges and corners
- ▲ Suitable for materials like porcelain, marble and granite etc.

| Art.No    | <del></del> |        | 8       | MAX RPM |     |
|-----------|-------------|--------|---------|---------|-----|
| DCWMM115A | 115mm       | 4-1/2" | 5/8"-11 | 13300   |     |
| DCWMM115  | 115mm       | 4-1/2" | M14     | 13300   | Spo |
| DCWMM5    | 125mm       | 5"     | M14     | 12250   |     |



#### **Electroplated Diamond Cutting and Grinding Wheel**

- Designed for bevelling, small cuts, grinding, rounding and shaping edges and corners
- Suitable for materials like porcelain, marble and granite etc.

| Art.No    | <del>-</del> |        |         | MAX RPM |    |
|-----------|--------------|--------|---------|---------|----|
| DCWME115A | 115mm        | 4-1/2" | 5/8"-11 | 13300   |    |
| DCWME5    | 125mm        | 5"     | M14     | 12250   | 88 |



#### **Edge Cutting & Grinding Blade**

- ▲ Full 25mm height continuous diamond rim
- 2.0mm thickness with provided strength and rigidity
- ▲ High speed cutting with minimal chipping and self cooling.
- ▲ Suitable for cutting Hard Tiles , Porcelain tiles, Ceramic tiles etc.

| Art.No | -     |    | 8       | MAX RPM |    |
|--------|-------|----|---------|---------|----|
| DPE125 | 125mm | 5" | 22.23mm | 12250   | Sp |





#### **Diamond Cutting and Grinding Blade**

- Full 30mm height diamond rim
- ▲ Thin 1.0mm thickness for faster cuts
- ▲ High speed cutting with minimal chipping
- ▲ Suitable for cutting Glass, Porcelain Tiles , Slab etc.

| Art.No | -(    | ·      | 8       | MAX RPM |    |
|--------|-------|--------|---------|---------|----|
| DPG115 | 115mm | 4-1/2" | 22.23mm | 13300   |    |
| DPG125 | 125mm | 5"     | 22.23mm | 12250   | 35 |









#### Mini Diamond Blade

- ▲ For fast and prec
- ▲ Ideal for cutting of a latent property of the latent property

| ceramic tiles, i | oorcelain. | marble | and | stor |
|------------------|------------|--------|-----|------|
|                  |            |        |     |      |

| Art.No | •    |        |         |   |    |
|--------|------|--------|---------|---|----|
| DCW50  | 50mm | 2"     | M14     | 6 |    |
| DCW50A | 50mm | 2"     | 5/8"-11 | 6 |    |
| DCW60  | 60mm | 2-3/8" | M14     | 6 | BI |
| DCW60A | 60mm | 2-3/8" | 5/8"-11 | 6 |    |



#### **Premium Bullnose Grinding Wheel**

- Bullnose design for quick bevelling
- Medium grit for general grinding
- Perfect for use with angle grinder
- Suitable for grinding Hard Tiles, Porcelain tiles, Ceramic tiles etc.

| Art.No | -    |    | Thickness | MAX RPM |    |
|--------|------|----|-----------|---------|----|
| DGW310 | 75mm | 3" | 10mm      | 11000   |    |
| DGW315 | 75mm | 3" | 15mm      | 11000   | BL |
| DGW320 | 75mm | 3" | 20mm      | 11000   |    |





- ▲ For fast grinding in tight areas
- Ideal for grinding concrete, screed and adhesive
- Turn by hand to check concentric rotation



| Art.No |      |    | 8       |   |    |
|--------|------|----|---------|---|----|
| DGW50  | 50mm | 2" | M14     | 6 |    |
| DGW50A | 50mm | 2" | 5/8"-11 | 6 | BL |







- ▲ For wet & dry grinding edges and surfaces
- Suitable for tile, porcelain, marble and glass
- Use the entire diamond surface for the best results
- ▲ Size: 55 x 95mm

| Art.No | Grit |
|--------|------|
| DHP060 | 60#  |
| DHP120 | 120# |
| DHP200 | 200# |
| DHP400 | 400# |





#### **Demi-Bullnose Grinding Wheel**

- Demi-Bullnose design for quick bevelling
- Medium grit for general grinding
- Perfect for use with angle grinder
- Suitable for grinding Hard Tiles, Porcelain tiles, Ceramic tiles etc.

| Art.No | -    |    | Thickness | MAX RPM |    |
|--------|------|----|-----------|---------|----|
| DGV310 | 75mm | 3" | 10mm      | 11000   |    |
| DGV315 | 75mm | 3" | 15mm      | 11000   | 85 |
| DGV320 | 75mm | 3" | 20mm      | 11000   |    |



#### **Round Grinding Wheel**

- Round design for quick bevelling
- Medium grit for general grinding
- Perfect for use with angle grinder
- Suitable for grinding Hard Tiles, Porcelain tiles, Ceramic tiles etc.

| Art.No | -(   |    | Thickness | MAX RPM |    |
|--------|------|----|-----------|---------|----|
| DGR310 | 75mm | 3" | 10mm      | 11000   |    |
| DGR315 | 75mm | 3" | 15mm      | 11000   | 35 |
| DGR320 | 75mm | 3" | 20mm      | 11000   |    |



























**Polishing Pad Holder** ■ Velcro connection to polishing pads ■ Rubber Backing with M14 or 5/8"-11 thread

#### **Universal Diamond Grinding Flap Wheel 2.0**

- Spiral turbo design for aggressive and fast grinding
- Durable diamond and silicon carbide flaps
- Bore size 22.23, suitable for most angle grinder
- Upgraded stronger metal backing plate for longer lifetime
- ▲ Suitable for grinding and smoothing materials like porcelain, marble and granite etc

| Art.No | +(0   | )      | Grit | MAX RPM |    |
|--------|-------|--------|------|---------|----|
| DPS060 | 115mm | 4-1/2" | #60  | 10500   |    |
| DPS120 | 115mm | 4-1/2" | #120 | 10500   | Sp |
| DPS200 | 115mm | 4-1/2" | #200 | 10500   |    |







#### **Diamond Polishing Pads**

- Step 3 for a perfect job
- Sharp, durable, well finish
- ■ Great for polishing flat surfaces and bevelled edges

| Art.No | Size      | Grit  |
|--------|-----------|-------|
| DPW4S3 | 100mm(4") | 1/2/3 |









#### **Vacuum Brazed Diamond Polishing Pad**

- ▲ Aggressive and well finish
- ■ Great for polishing flat surface and bevelling edges
- Designed for tile, porcelain, marble and glass

| Art.No | Size  | Grit |
|--------|-------|------|
| DPV405 | 100mm | #50  |
| DPV410 | (4")  | #100 |



#### **Universal Diamond Grinding Flap Wheel**

- ▲ Spiral turbo design for aggressive and fast grinding
- Durable diamond and silicon carbide flaps
- ▲ Bore size 22.23, suitable for most angle grinder
- ▲ Suitable for grinding and smoothing materials like porcelain, marble and granite etc

| Art.No | -(0   |        | Grit | MAX RPM |    |
|--------|-------|--------|------|---------|----|
| DPF060 | 115mm | 4-1/2" | #60  | 10500   |    |
| DPF120 | 115mm | 4-1/2" | #120 | 10500   | Sp |
| DPF200 | 115mm | 4-1/2" | #200 | 10500   |    |




### **Diamond Polishing Pads**

- Sharp, durable, well finish
- ■ Great for polishing flat surfaces and bevelled edges
- ▲ Light color pad design
- Specially ideal for white and light color ceramic tiles and other materials

| Art.No | Size          | Grit  |
|--------|---------------|-------|
| DPP405 | 100mm<br>(4") | #50   |
| DPP410 |               | #100  |
| DPP420 |               | #200  |
| DPP480 |               | #800  |
| DPP415 |               | #1500 |





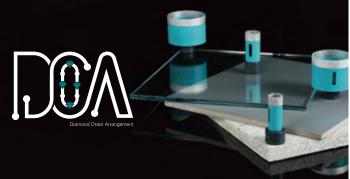


















#### Turbo Dry Drill Bit 2.0

- Order arrangement diamond technology
- ▲ M14 or 5/8"-11 thread available to angle grinder
- ▲ Faster speed and longer lifetime
- ▲ Suggested RPM 11000

| Art.No | Size | Art.No  | Size  |
|--------|------|---------|-------|
| DBDB06 | 6mm  | DBDB55  | 55mm  |
| DBDB08 | 8mm  | DBDB57  | 57mm  |
| DBDB10 | 10mm | DBDB60  | 60mm  |
| DBDB12 | 12mm | DBDB65  | 65mm  |
| DBDB20 | 20mm | DBDB68  | 68mm  |
| DBDB25 | 25mm | DBDB70  | 70mm  |
| DBDB28 | 28mm | DBDB75  | 75mm  |
| DBDB30 | 30mm | DBDB82  | 82mm  |
| DBDB35 | 35mm | DBDB100 | 100mm |
| DBDB40 | 40mm | DBDB115 | 115mm |
| DBDB50 | 50mm | DBDB120 | 120mm |



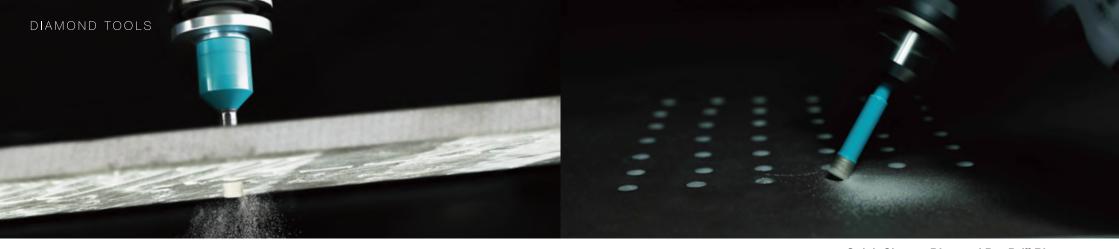




#### **Turbo Dry Drill Bit**


- Vacuum brazed diamond drill bit
- ▲ M14 or 5/8"-11 thread to angle grinder
- ▲ Fast speed and long lifetime
- ▲ Suggested RPM 11000
- Suitable for drilling porcelain, marble and granite

| Art.No | Size | Art.No  | Size  |
|--------|------|---------|-------|
| DBDF06 | 6mm  | DBDF55  | 55mm  |
| DBDF08 | 8mm  | DBDF57  | 57mm  |
| DBDF10 | 10mm | DBDF60  | 60mm  |
| DBDF12 | 12mm | DBDF65  | 65mm  |
| DBDF20 | 20mm | DBDF68  | 68mm  |
| DBDF25 | 25mm | DBDF70  | 70mm  |
| DBDF28 | 28mm | DBDF75  | 75mm  |
| DBDF30 | 30mm | DBDF82  | 82mm  |
| DBDF35 | 35mm | DBDF100 | 100mm |
| DBDF40 | 40mm | DBDF115 | 115mm |
| DBDF50 | 50mm | DBDF120 | 120mm |



More sizes available











#### **Quick Change Diamond Dry Drill Bit**

- Quick clip handle to shaft drill
- ▲ Suggested RPM 2500
- Suitable for drilling porcelain, marble and granite

| Art.No | Si   | ze    |
|--------|------|-------|
| DBDQ05 | 5mm  | 3/16" |
| DBDQ06 | 6mm  | 1/4"  |
| DBDQ07 | 7mm  | 9/32" |
| DBDQ08 | 8mm  | 5/16" |
| DBDQ10 | 10mm | 3/8"  |
| DBDQ12 | 12mm | 1/2"  |
| DBDQ14 | 14mm | 9/16" |
| DBDQ20 | 20mm | 3/4"  |
|        |      |       |

More sizes available



#### **Cooling Wax**

- ▲ For cooling tile drill bit
- ▲ Prolonger lifetime and drilling speed

| Art.No  | Size             |
|---------|------------------|
| DBCW20  | 20 <b>-</b> 25ml |
| DBCW30  | 30m <b>i</b>     |
| DBCW50  | 50m <b>i</b>     |
| DBCW100 | 100pcs           |
|         |                  |



61

#### **Drill Chuck Adaptor**

- For converting M14 thread into hexagon connection for drill machine
- ▲ Suggested MIN RPM 2500

| Art.No | Size            |
|--------|-----------------|
| DBAMH  | M14-Hexagon     |
| DBAAH  | 5/8"-11-Hexagon |







#### **Diamond Turbo Drill Set**

- Vacuum brazed diamond drill bit
- ▲ M14 connection to angle grinder
- ▲ Hexagon adaptor for electric drill
- ▲ Fast speed and long lifetime
- ▲ Drills in size Ø6x64, Ø8x64, Ø20x74, Ø35x74, Ø50x74, Ø70x74mm

| Art.No | Kit      |
|--------|----------|
| DBDMK6 | 6pcs Set |



#### **Diamond Turbo Drill Set**

- Vacuum brazed diamond drill bit
- ▲ Hexagon adaptor for electric drill
- ▲ Fast speed and long lifetime
- Drills in size Ø6x64, Ø8x64, Ø10x64, Ø12x64mm & Adaptor

| Art.No | Kit      |
|--------|----------|
| DBDMK5 | 5pcs Set |



#### Diamond Turbo Drill Set

- Vacuum brazed diamond drill bit
- ▲ M14 connection to angle grinder
- ▲ Hexagon adaptor for electric drill
- Fast speed and long lifetime
- **■** Drills in size Ø25x74, Ø35x74, Ø40x74, Ø45x74, Ø50x74, Ø68x74mm

| Art.No | Kit      |
|--------|----------|
| DBDMS6 | 6pcs Set |



#### **Diamond Turbo Drill Set**

- Vacuum brazed diamond drill bit
- M14 connection to angle grinder
- Drills in size Ø25x74, Ø40x74, Ø60x74, Ø70x74mm

| Art.No | Kit      |
|--------|----------|
| DBDMK4 | 4pcs Set |



#### **Diamond Turbo Drill Set**

- Vacuum brazed diamond drill bit
- Vacuum brazed diamond grinding bit
- ▲ M14 connection to angle grinder
- ▲ Fast speed and long lifetime
- Drill in size 25x74, 35x74, 40x74, 45x74, 68x74mm
- ▲ Finger bit in 20mm & cone bit in 20-48mm

| Art.No | Kit      |
|--------|----------|
| DBDMS7 | 7pcs Set |



#### Diamond Turbo Drill Set

- Vacuum brazed diamond drill bit
- ▲ M14 connection to angle grinder
- ▲ Fast speed and long lifetime
- Drills in size Ø20x74, Ø35x74, Ø55x74, Ø60x74mm, Ø75x74mm

| Art.No | Kit      |
|--------|----------|
| DBDMS5 | 5pcs Set |



#### **Diamond Turbo Drill Set**

- Vacuum brazed diamond drill bit
- M14 connection to angle grinder
- Drill in size 25x74, 35x74, 40x74, 45x74, 50x74, 68x74mm
- ▲ Finger bit in 20mm & cone bit in 20-48mm
- Cutting disc in 125mm & cooling gel

| Art.No  | Kit       |
|---------|-----------|
| DBDMS10 | 10pcs Set |





#### **Diamond Mill**

- ▲ Medium grit
- ▲ Suggested MIN RPM 1500
- ▲ For enlarge or polishing holes after drilling

| Art.No | Si   | ze   | Thread           |
|--------|------|------|------------------|
| DMB10  | 10mm | 3/8" | M14              |
| DMB10A | 10mm | 3/8" | 5/8" <b>-</b> 11 |



#### **Diamond Mill**

- ▲ Medium grit
- ▲ Suggested MIN RPM 1500
- ▲ For enlarge or polishing holes after drilling

| Art.No | Si   | ze   | Thread  |
|--------|------|------|---------|
| DMB20  | 20mm | 3/4" | M14     |
| DMB20A | 20mm | 3/4" | 5/8"-11 |



#### **Multi-Function Diamond Mill**

- Medium grit
- ▲ Suggested min. RPM 1500
- Available in M14 or 5/8"-11
- ▲ For enlarge or polishing holes after drilling
- ▲ Chamfering 0-10mm, Ø10mm, 10-25mm, Ø25mm, Ø25-48mm

| Art.No | Size   | Thread  |
|--------|--------|---------|
| DM4N1  | 4 in 1 | M14     |
| DM4N1A | 4 in 1 | 5/8"-11 |



#### Diamond Mill

- ▲ Suggested MIN RPM 1500
- ▲ For enlarge or polishing holes after drilling

| Art.No  | Size            | Thread  |
|---------|-----------------|---------|
| DMC238  | 2 <b>-</b> 38mm | M14     |
| DMC238A | 2-38mm          | 5/8"-11 |



#### **Diamond Mill**

- Medium grit, Flat top
- Suggested MIN RPM 1500
- ▲ For enlarge or polishing holes after drilling

| Art.No   | Size             | Thread  |
|----------|------------------|---------|
| DMF2048  | 20 <b>-</b> 48mm | M14     |
| DMF2048A | 20-48mm          | 5/8"-11 |



#### Diamond Mill

- Medium grit, Flat top
- Suggested MIN RPM 1500
- ▲ For enlarge or polishing holes after drilling

| Art.No   | Size             | Thread  |
|----------|------------------|---------|
| DMF3575  | 35 <b>-</b> 75mm | M14     |
| DMF3575A | 35-75mm          | 5/8"-11 |



#### DIAMOND TOOLS

















**Technical Data** 

AG1400A

1400W 110V/60hz

3000-10000RPM

115mm(4-1/2")/125mm(5")

Art.No

Output

Voltage

Speed

Thread

Diameter





- With constant speed soft start
- Spindle Thread 5/8"-11
- 6 variable gears from 3,000-10000RPM
- 2-position TPR side handle quick change blade cover
- Quick change blade cover
- ▲ Includes wrench, guard, side handle, carbon brushes

#### **Suitable for Drilling, Cutting and Polishing**








#### **Turbo Dry Drill Bit**


- Vacuum brazed diamond drill bit
- ▲ M14 or 5/8"-11 thread to angle grinder
- ▲ Fast speed and long lifetime
- ▲ Suggested RPM 11000
- ▲ Suitable for drilling porcelain, marble and granite

| Art.No | Size    | Art.No  | Size    |
|--------|---------|---------|---------|
| DBDA05 | 3/16"   | DBDA45  | 1-3/4"  |
| DBDA06 | 1/4"    | DBDA50  | 2"      |
| DBDA08 | 5/16"   | DBDA55  | 2-3/16" |
| DBDA10 | 3/8"    | DBDA60  | 2-3/8"  |
| DBDA12 | 1/2"    | DBDA65  | 2-1/2"  |
| DBDA20 | 3/4"    | DBDA68  | 2-5/8"  |
| DBDA28 | 1-1/8"  | DBDA70  | 2-3/4"  |
| DBDA30 | 1-3/16" | DBDA75  | 3"      |
| DBDA35 | 1-3/8"  | DBDA82  | 3-1/4"  |
| DBDA38 | 1-1/2"  | DBDA100 | 4"      |
| DBDA40 | 1-5/8"  | DBDA115 | 4-1/2"  |



More sizes available



















#### **Vacuum Brazed Diamond Mills Set**

- ▲ 5/8"-11 to Hexagon adaptor for electric drill machine
- ▲ Perfect for enlarge/polishing holes with long lifetime
- Diamond mills in 3/8"(10mm), 3/4"(20mm), 3/32"-1-1/2"(2-38mm), 3/4"-1-7/8" (20-48mm)
- Wax for diamond dry drills or mills

| Art.No | Kit      |
|--------|----------|
| DBDAS6 | 6pcs Set |



#### **Diamond Turbo Drill Set**

- Vacuum brazed diamond drill bit
- 5/8"-11 connection to angle grinder
- ▲ Hexagon adaptor for electric drill
- ▲ Fast speed and long lifetime
- **⊿** Drills in size Ø6x64, Ø8x64, Ø20x74, Ø35x74, Ø50x74, Ø70x74mm

| Art.No | Kit      |
|--------|----------|
| DBDAK6 | 6pcs Set |



#### **Vacuum Brazed Diamond Mills Set**

- ▲ 5/8"-11 to Hexagon adaptor for electric drill machine
- Drill guide master for holes from 4mm to 115mm
- Perfect for enlarge/polishing holes with long lifetime
- $\blacksquare$  Diamond mills in 3/8"(10mm), 3/4"(20mm), 3/32"-1-1/2"(2-38mm), 3/4"-1-7/8"(20-48mm)
- Wax for diamond dry drills or mills

| Art.No | Kit      |
|--------|----------|
| DBDAS7 | 7pcs Set |



#### Vacuum Brazed Diamond Mills and Drill Bits Set

- 5/8"-11 connection to angle grinder
- ▲ 5/8"-11 to Hexagon adaptor for electric drill machine
- Drill guide master for holes from 4mm to 115mm
- ▲ Perfect for enlarge/polishing holes with long lifetime
- **△** Dry drills in size Ø1/2"(12mm), Ø3/4"(20mm), Ø4-1/2"(115mm)
- Diamond mills in 3/8"(10mm), 3/4"(20mm), 3/32"-1-1/2"(2-38mm), 3/4"-1-7/8"(20-48mm)
- Wax for diamond dry drills or mills

| Art.No  | Kit       |
|---------|-----------|
| DBDAS10 | 10pcs Set |







#### **Professional Diamond Tools Set**

- ▲ Vacuum brazed diamond drill bit in size 20x74mm & 38x74mm
- Vacuum brazed diamond finger bit in 20mm & cone bit in 2-38mm
- Cutting disc in 115 & 125mm
- ▲ Pad holder & polishing pads in 100mm
- Hand pad in grit #60

| Art.No  | Size      |
|---------|-----------|
| DBDAS16 | 16pcs Set |



#### **Drill Guide Master**

- ▲ Integrated water hole attach to cooling system for wet drilling
- ▲ For guiding hole saw drill from 4mm to 115mm
- ▲ Fixed hole size in 4,5,6,7,8,10,12,20,35mm
- ▲ Adjustable steel plate with maximum opening length 80mm
- ▲ For 81mm to 115mm drills, place the drills at the end of the guide
- Loose the screw, suction cup can be used individually with max. capacity of 35Kg (77lbs)
- Suction cup suitable for Tiles, Glass, Marble, Granite, etc.

| Art.No | Size      |
|--------|-----------|
| DBGM   | Universal |



#### **Diamond Turbo Drill Set**

- Vacuum brazed diamond drill bit
- 5/8"-11 connection to angle grinder
- ▲ Fast speed and long lifetime
- Drill in size 1/4", 5/16", 3/4", 1-3/8", 2", 2-3/4" & Adaptor

| Art.No | Kit      |
|--------|----------|
| DBDAK7 | 7pcs Set |



#### **Universal Guide**

- ▲ High quality suction pad for hole locating
- ▲ Integrated with steel plate for precise drilling
- ▲ ABS material with comfort nylon handle
- ▲ Suitable for drill sizes in 4,5,6,8,10,12,14mm

| Art.No | Size      |
|--------|-----------|
| DBGU   | Universal |



#### **Diamond Turbo Drill Set**

- Vacuum brazed diamond drill bit
- ▲ 5/8"-11 connection to angle grinder
- ▲ Fast speed and long lifetime
- Drill in size 25x74, 35x74, 40x74, 45x74, 50x74, 68x74mm
- ▲ Finger bit in 20mm & cone bit in 20-48mm
- Cutting disc in 125mm & cooling gel

| Art.No  | Kit       |
|---------|-----------|
| DBDAK10 | 10pcs Set |



#### Multi-Functional Adjustable Tile Hole Locator

- Made of 2.5mm aluminum alloy material, durable and perfect thickness
- ▲ Laser calibration in both centimeters and inches, easy and simple
- Six-sided foldable arms with 360° freely fixing knobs
- Guide in 25, 40, 45, 55 and 75mm drilling holes on tiles, glass, marble, granite etc.
- ▲ BIHUI unique comfort flower screw

| Art.No | Size      |
|--------|-----------|
| DBG6   | Universal |





#### **Electroplated Diamond Drill Bit**

- ▲ Suitable for drilling porcelain, marble, granite, glass and travertine
- ▲ To maximize performance ensure drill is cooled with water

| Art.No | Size |        |       | Art.No | Si    | ze      |
|--------|------|--------|-------|--------|-------|---------|
| DBW06  | 6mm  | 1/4"   | DBW45 |        | 45mm  | 1-3/4"  |
| DBW08  | 8mm  | 5/16"  |       | DBW50  | 50mm  | 2"      |
| DBW10  | 10mm | 3/8"   |       | DBW55  | 55mm  | 2-3/16" |
| DBW12  | 12mm | 1/2"   |       | DBW68  | 68mm  | 2-5/8"  |
| DBW20  | 20mm | 3/4"   |       | DBW75  | 75mm  | 3"      |
| DBW25  | 25mm | 1"     |       | DBW100 | 100mm | 4"      |
| DBW35  | 35mm | 1-3/8" |       | DBW120 | 120mm | 4-3/4"  |





More sizes available



#### **Diamond Drill and Mill Bit**

- Drill bit tip for drilling holes
- ▲ Mill bit body for enlarge or even holes
- ▲ Suitable for drilling and milling porcelain, marble and granite

| Art.No | Siz  | ze     |
|--------|------|--------|
| DMM20  | 20mm | 3/4"   |
| DMM35  | 35mm | 1-3/8" |
| DMM50  | 50mm | 2"     |
| DMM68  | 68mm | 2-5/8" |



# **Drain Hole Open Dry Drill Bit**

- ▲ Featured with hole size in 40mm and grinding diameter in 60mm
- ▲ Fast drilling and perfect grinding to floor drain installation

| Art.No | Siz  | ze     |
|--------|------|--------|
| DBDP40 | 35mm | 1-3/8" |

# **Multi-Purpose Dust Box**

- Suitable for drilling and cutting
- Dust hole connecting with vacuum machin
- Dust trash door underneath
- Soft handle for easy carry
- ▲ Light weight and solid structure

| Art.No | Size                             |
|--------|----------------------------------|
| TDB    | 500x350x62mm<br>(20"x14"x2-1/2") |







#### **Bucket Dust Collector**

- Ideal for dust extraction in the filling and mixing process
- Quick clamping on the bucket with spring
- 3-steps rubber connector to the vacuum cleaner
- ▲ Fast extraction design for reduced dust
- Suitable for mixing bucket upto 35mm thickness
- Benefits to health and environment

| Art.No | Size      |
|--------|-----------|
| TDBM   | Universal |











#### **Drilling Dust Extractor**

- Collects dust while drilling on wall or floor
- Designed also for guiding the hole drilling
- Universal rubber adaptor diam. 25-35mm
- Rubber sealing base largely prevents the leakage of fine dust
- Steel V frame for enhanced strength
- Suitable for tiles, concrete and bricks etc.

| Art.No | Size       |
|--------|------------|
| TDBS   | Up to 72mm |



# **Dual-Row Cup Wheel**

- Double row design for aggressive and fast material removal as well as surface preparation
- Features with air holes designed to aid in and maintain a cool stable cutting pattern and reduced wear
- ▲ Suitable for grinding, smoothing and for removing of adhesives and materials from concrete, granite, sandstone and building material

| Art.No | •     |    | (8)     | MAX RPM |    |
|--------|-------|----|---------|---------|----|
| DCWD5  | 125mm | 5" | 22.23mm | 12250   |    |
| DCWD7  | 180mm | 7" | 22.23mm | 8500    | 35 |





#### **Cutting Dust Extractor**

- Collects dust while cutting tiles
- Can be used with BIHUI angle grinder
- Designed with level support for easily straight cutting
- Suitable for cutting disc in 115mm and 125mm

| Art.No | Size        |
|--------|-------------|
| TDBC   | Ø 115-125mm |



#### **Turbo Cup Wheel**

- ▲ Spiral turbo design for aggressive and fast material removal as well as surface preparation
- ☐ Features with large air holes designed to aid in and maintain a cool stable cutting pattern and reduced wear
- Suitable for grinding, smoothing and for removing of adhesives and materials from concrete, granite, sandstone and building material

| Art.No |       |    |         | MAX RPM |    |   |
|--------|-------|----|---------|---------|----|---|
| DCWT5  | 125mm | 5" | 22.23mm | 12250   |    | L |
| DCWT7  | 180mm | 7" | 22.23mm | 8500    | 35 | ŀ |





# **Grinding Dust Extractor**

- Better health and less cleaning due to dust-free grinding
- Universal vacuum cleaner connection:diam 25-35 mm
- Brush rim largely prevents the leakage of fine dust
- ▲ Adjustable front part allows edge work
- ▲ Adjustable snap closure for secure mounting on the angle grinder

| Art.No | Size        |
|--------|-------------|
| DCWDE5 | 100-125mm   |
| DCWDEB | Spare brush |



# Fan Cup Wheel

- ▲ Turbo fan design for aggressive and fast material removal as well as surface preparation
- ▲ Features with large air holes designed to aid in and maintain a cool stable cutting pattern and reduced wear
- Suitable for grinding and smoothing materials like concrete, granite, sandstone and building material

| Art.No | -     |    | (1)     | MAX RPM |      |
|--------|-------|----|---------|---------|------|
| DCWF5  | 125mm | 5" | 22.23mm | 12250   | (A)P |
| DCWF7  | 175mm | 7" | 22.23mm | 8500    | 35   |



# Vacuum Brazed Coating & Glue Grinding Cup Wheel

- Spiked diamonds for aggressive and fast material removal as well as surface preparation
- ▲ Features with air holes designed to aid in and maintain a cool stable cutting pattern and reduced wear
- ▲ Reinforced compound technology with high durability against impact and abrasion
- Suitable for removing epoxy, adhesive residues, paint coatings etc. from concrete, granite, sandstone and building material

| Art.No |       |    | 8       | MAX RPM |     |  |
|--------|-------|----|---------|---------|-----|--|
| DCWG5  | 125mm | 5" | 22.23mm | 12250   | AD. |  |
| DCWG7  | 180mm | 7" | 22.23mm | 8500    | ST. |  |



#### **Arrow Cup Wheel**

- ▲ Arrow segment design for aggressive and fast material removal as well as surface preparation
- ▲ Features with large air holes designed to aid in and maintain a cool stable cutting pattern and reduced wear
- Suitable for grinding and smoothing materials like concrete, granite, sandstone and building material as well as adhesive, epoxy and paint removal

| Art.No | <b>€</b> |    | (1)     | MAX RPM |    |
|--------|----------|----|---------|---------|----|
| DCWA5  | 125mm    | 5" | 22.23mm | 12250   |    |
| DCWA7  | 175mm    | 7" | 22.23mm | 8500    | AL |







 $(\in$ 

- ▲ Made of durable aluminum alloy, metal and engineering nylon
- ▲ Ergonomic design characterized with the increased balance and flatness
- Suitable for almost all 180mm diamond or resin discs
- ▲ Featured with power-off & overloading protections, and speed regulation
- Full wave electronics, soft start, and with a start-current limit function
- Removable front protective cover with magnetic, convenient for corner grinding (inner corner)
- Self-cleaning design, equipped with professional vacuum cleaner interface, can be used in vacuum bag or vacuum cleaner, dust-free operation
- Removing old surfaces as well as preparing a new base for secondary renovation
- Suitable for materials like tile, concrete, etching, tile adhesive, natural stone, plaster, paint, coating, adhesive carpet etc.

| Technical Data |           |  |  |
|----------------|-----------|--|--|
| Art.No         | CG1900    |  |  |
| Output         | 1900W     |  |  |
| Voltage        | 230V/50Hz |  |  |
| Speed          | 0-3000RPM |  |  |
| Cup Wheel      | 180mm(7") |  |  |

| t.No            |           | 8       | RIM     |  |
|-----------------|-----------|---------|---------|--|
| 1900W           | 180mm(7") | 22.23mm | Dual ro |  |
| 900 <b>-</b> GW | 180mm(7") | 22.23mm | Spike   |  |



180mm Diamond or resin discs



Connection pipe to vacuum cleaner



Protective cover with magnetic



Constant speed and soft start



Dust-free brush



Variable speed switch



#### CONCRETE FLOOR GRINDER



# **Working Stand for Concrete Grinder**

- ▲ Working stand with 1 .0-1.2M adjustable height and ergonomic handles
- ▲ With 2.5M cable, switch box and universal wheels and positioner device
- Suitable for BIHUI 1900W Concrete Grinder
- ▲ Save labor and energy when polishing or grinding large areas surfaces

| Art.No | Size                    |
|--------|-------------------------|
| CGWS19 | 1.0-1.2M(40")-(47-1/4") |









# **Concrete Floor Grinder**

- ▲ Made of durable aluminum alloy, metal and engineering nylon
- ▲ Ergonomic design characterized with the increased balance and flatness
- ▲ Featured with power-off & overloading protections, and speed regulation
- ▲ Full wave electronics, soft start, and with a start-current limit function
- Removing old surfaces as well as preparing a new base for secondary renovation
- Suitable for materials like tile, concrete, etching, tile adhesive, natural stone, plaster, paint, coating, adhesive carpet etc.

| Technical Data          |           |  |  |  |
|-------------------------|-----------|--|--|--|
| Art.No                  | CG2000    |  |  |  |
| Power:                  | 2000W     |  |  |  |
| Rated voltage: 230/110V |           |  |  |  |
| Frequency:              | 50/60HZ   |  |  |  |
| Speed:                  | 0-3000RPM |  |  |  |
| Cup wheel:              | 180mm(7") |  |  |  |
| VDE plug and 3m cable   |           |  |  |  |





|     | Dust class*                              | Maximum transmittance                    | Suitable for   | Disposal     |
|-----|--|--|--|--------------|
|     | LMAIL                                    | ≤ 1,0%                                   | <b>Dusts with OEL** values &gt; 1³mg/m</b> Domestic dust, soil, lime   | _            |
|     | MMALM                                    | < 0,1%                                   | Dusts with OEL** values ≥ 0,1mg/m³ Wood, screed, primer coat and paint, plaster, cement, concrete, tile adhesive, paints such as latex and oil paints, quartz containing materials such as sand and pebbles  | Low dust     |
|     | H Martin Management H                    | < 0,005%                                 | Dusts with OEL** values < 0,13 mg/m Carcinogenic dust, dust with pathogens, dust with bacteria   | Dust free    |
| - 1 | 10 10 10 10 10 10 10 10 10 10 10 10 10 1 | 2017 10000000000000000000000000000000000 | THE RESERVE OF THE PERSON OF T | ALC: UNKNOWN |





Floor Brush



Handle




Wand



Plastic Crevice Tool



Reducer Adapter



**Dust Bag** 



Dust Collection Bag



#### **Industrial Vacuum Cleaner 38L**

- ▲ Innovative auto clean system ensure the vacuum works at high suction
- ▲ Equipped with 2 HEPA filters stops 99.95% of fine dusts at 0.3um.
- Wet and dry for liquids and dry solids extraction
- ▲ Power socket for power tool use activates automatically
- Suction power control for adapted suction performance
- ▲ Automatic trailing mechanism for emptying the suction hose completely
- ▲ Robust wheels and castors built to withstand the tough construction site
- Cable wrap for convenient cord storage
- ▲ Practical accessory case and storage area.

| Technical Data       |                    |                  |  |  |
|----------------------|--------------------|------------------|--|--|
| Art.No               | VCA38              | VCB38            |  |  |
| Voltage / Frequency  | 230V/50Hz          | 110V/60Hz        |  |  |
| Motor power (w)      | 1200W              | 1.85HP           |  |  |
| Airflow (max)        | 262M3/H            | 153CFM           |  |  |
| Water lift (Max)     | 250                | 104 <b>I</b> nch |  |  |
| Filter efficiency    | HEPA, >99.5%@0.3μm |                  |  |  |
| Filter cleaning      | Innovated          | uto cleaning     |  |  |
| Airflow adjustable   | adjustable         | adjustable       |  |  |
| Power socket         | 2000W              | 1200W            |  |  |
| Remote control start | Optional Optional  | Optional         |  |  |
| Tank capacity        | 38L                | 10Gal            |  |  |
| Weight               | 13.5kg             | 30lbs            |  |  |
| Dust Class           | H                  | class            |  |  |



#### Vacuum Cleaner 35L

- ▲ High-quality stainless steel suction tubes
- ▲ Flow rate monitoring with warning LED and acoustic warning signal
- ▲ Hose diameter selector switch Robust chassis with extra-large, construction site suitable wheels and swivel castors
- ▲ Adjustable, foldable push bar for easy transport
- Electronic soft start with deferred rundown switching
- ▲ Power socket with automatic switch-on for attached machine
- Water recognition with sensor disconnection
- ▲ Special plastic bag for clean disposal Transport closure by sealing plug

| Technical Data      |              |              |  |  |
|---------------------|--------------|--------------|--|--|
| Art.No              | VCM35        | VCL35        |  |  |
| Voltage / Frequency | 230V/50Hz    | 110V/60Hz    |  |  |
| Motor power (w)     | 1200W        | 1080W        |  |  |
| Airflow (max)       | 250 mbar     | 153CFM       |  |  |
| Water lift (Max)    | 250          | 104 inch     |  |  |
| Airflow adjustable  | adjustable   | adjustable   |  |  |
| Power socket        | 2000W        | 1200W        |  |  |
| Tank capacity       | 35L          | 9.25Gal      |  |  |
| Weight              | 16Kg         | 35 lbs       |  |  |
| Dust Class          | M d          | lass         |  |  |
| Suction hose 35mm   | 5M           | 5M           |  |  |
| Suction hose 38mm   | 2.5M         | 2.5M         |  |  |
| Noise(LpA)          | LpA 74dB(A)  | LpA 74dB(A)  |  |  |
| Dimension(LxWxH)    | 54x39x63.5cm | 54x39x63.5cm |  |  |





Power tool adapter Ø21, 25, 32mm Power tool adapter Ø35mm



Crevice nozzle



Round nozzle Ø 75mm



HEPA 13 cartridge filter



Vacuum tubes, stainless steel, 2 x 0.5M



Fleece filter bag



Disposal bag







# **Vacuum Cleaner 30L**

- Suitable for extracting solid particles (dust and cutting waste) and water
- Semi-automatic HEPA filter cleaning system
- Blower function
- Dust full indicator
- Power tool socket function
- On-board accessory storage
- Drain device for convenient liquid disposal
- ▲ Convenient hose hook for easy transport and storage

| Technical Data                                     |           |  |  |  |
|--|-----------|--|--|--|
| Art.No   | VCH30     |  |  |  |
| Voltage / Frequency                                | 230V/50Hz |  |  |  |
| Motor power (w)                                    | 1200W     |  |  |  |
| Airflow (m³ / min)                                 | ≥1.8      |  |  |  |
| Vacuum pressure (KPa)                              | 16.5±1.5  |  |  |  |
| Noise (LpA)  | ≤70       |  |  |  |
| Tank capacity (L)                                  | 30        |  |  |  |
| Electrical cord Length (m)                         | 2.3       |  |  |  |
| Lifetime (H)                                       | 350       |  |  |  |
| Protection class                                   | IPX4      |  |  |  |
| New weight   | 9.5Kg     |  |  |  |
| Power socket for electro portable tool max. 2,000W |           |  |  |  |

Manufacturer reserves the right to change specifications without notice. Specifications may differ from country to country





Wet Use Floor Brush For also sucking water



Carpet Floor Brush For carpet use



Sofa Brush For curtains and funitures



Round Brush For sawdust etc.



Crevice Nozzle For corners, cracks etc.



Plastic Connection Parts

#### **Mixer Station with Timer**

- ▲ Easy Transport with 2 big wheels
- ▲ Thermal protection prevents motor overload.
- ▲ Three pieces design for easy storage or transportation
- Power 750W
- Voltage 230V-50HZ
- Tub volume 65 litres
- ▲ Maximum mixing capacity 50Kg











#### **Portable Mortar Mixer**

- ▲ Powerful mixer with a compact and robust design
- ▲ Removable paddles for easy cleaning
- Drum capacity 120L, 100L mixing capacity
- Socket opener on the lid for easier filling
- Suitable for mixing a variety of substances including cement, mortar, plaster and concrete

|                     | Technical Data              |
|---------------------|-----------------------------|
| Art.No              | MM1500                      |
| Power               | 1500W                       |
| Voltage             | 230V                        |
| Frequency           | 50HZ                        |
| Motor Power         | 1600RPM                     |
| Drum Capacity       | 120L(32Gal)                 |
| Drum Mouth Diameter | 690mm(27.17")               |
| Drum Rotate Speed   | 30RPM                       |
| Loading             | 120kgs(264.56lbs)           |
| Overall Dimensions  | 760x820x1170mm(27"x32"x46") |
| Net Weight          | 127kgs(280lbs)              |
|                     |                             |

Manufacturer reserves the right to change specifications without notice. Specifications may differ from country to country

#### 20L Bucket Liner

- Soft and durable material
- Easy to clean and can be used multiple times

| Art.No | Siz               | :e                    | The second second |   |  |
|--------|-------------------|-----------------------|-------------------|---|--|
| MPBL20 | 250(-270mm)x370mm | 10"(-10-1/4")x14-3/4" |                   | V |  |
|        | BIHUÍ             |                       |                   |   |  |









# **Leveling Compound Mixing Station**

- Mixes up to 100kg with hands free
- ▲ Ergonomic handle and damping structure angles for pouring
- Removable 1900W mixing machine and large paddle
- Brake transporting castors and light weight frame
- ▲ Arc-shaped pouring spout and dust cover plate
- Suitable for mixing self-levelling cement, compounds & epoxies with good fluidity

| Technical Data                                |                    |  |  |  |  |
|---|--------------------|--|--|--|--|
| Art.No  | MS1900             |  |  |  |  |
| Measurement                                   | 745x560x997mm      |  |  |  |  |
| Net Weight                                    | 33.5Kg             |  |  |  |  |
| Power   | 1900W              |  |  |  |  |
| Voltage/Frequency                             | 230V/50-60HZ       |  |  |  |  |
| No load speed                                 | 1st 150-300RPM     |  |  |  |  |
| No load speed                                 | 2nd 300-650RPM     |  |  |  |  |
| Mixing Paddle                                 | 300x600mm          |  |  |  |  |
| Capacity                                      | 100L               |  |  |  |  |
| Noise measurements                            | LpA=85,8dB(A)      |  |  |  |  |
| LpA [dB(A)]                                   | LpA =85,8dB(A)     |  |  |  |  |
| LpCpeak (dB)                                  | Less than 130dB(A) |  |  |  |  |
| KpCpeak (dB)                                  |                    |  |  |  |  |
| Lwa [dB(A)]                                   | LwA =96,8dB(A)     |  |  |  |  |
| KwA [dB(A)]                                   | Kwa=3 dB(A)        |  |  |  |  |
| Work mode - vibration emission value a (m/s2) | ah,D=1,695m/s2     |  |  |  |  |
| Uncertainty K (m/s3)                          | K= 1,5 m/s2        |  |  |  |  |

Manufacturer reserves the right to change specifications without notice. Specifications may differ from country to country



#### **Leveling Compound Mixing Station**

- ▲ Hands-free mixing up to 220lbs
- ▲ Ergonomic handle and damping structure angles for easy pouring
- ▲ Removable 1800W mixing machine and large paddle
- Brake transporting castors and lightweight frame
- ▲ Arc-shaped pouring spout and dust cover plate
- Suitable for mixing self-leveling cement, compounds & epoxies with good fluidity

| Technical Data                                |                    |
|---|--------------------|
| Art.No  | MS1900A            |
| Measurement                                   | 29" x 22" x 39"    |
| Net Weight                                    | 73.85 lbs          |
| Power   | 1800W              |
| Voltage/Frequency                             | 110V/560HZ         |
| No load speed                                 | 1st 150-300RPM     |
| No load speed                                 | 2nd 300-650RPM     |
| Mixing Paddle                                 | 11-3/4" x 24"      |
| Capacity                                      | 100L(26Gal)        |
| Noise measurements                            | LpA=85,8dB(A)      |
| LpA [dB(A)]                                   | LpA =85,8dB(A)     |
| LpCpeak (dB)                                  | Less than 130dB(A) |
| KpCpeak (dB)                                  |                    |
| Lwa [dB(A)]                                   | LwA =96,8dB(A)     |
| KwA [dB(A)]                                   | Kwa=3 dB(A)        |
| Work mode - vibration emission value a (m/s2) | ah,D=1,695m/s2     |
| Uncertainty K (m/s3)                          | K= 1,5 m/s2        |
|   |                    |

Manufacturer reserves the right to change specifications without notice. Specifications may differ from country to country




15°





















#### **Battery Handheld Mixer**

- Variable and constant speed
- VDE plug and 3M cable
- Quick assembly mixing paddle
- Electronic soft start function
- ▲ FFU device
- Suitable for mixing cement, paints, tile adhesive, glue etc.

| Technical Data |           |            |           |
|----------------|-----------|------------|-----------|
|                | 1600W     | 1800W      | 2000W     |
| Mixing volume  | 65 litres | 85 litres  | 85 litres |
| Mixing paddle  | 600x140mm | 600x160mm  | 600x160mm |
| Rated voltage  |           | 230/110V   |           |
| Frequency      | 50/60HZ   |            |           |
| Speed I        |           | 250-500RPM |           |
| Speed II       |           | 400-800RPM |           |
| Thread size    |           | M14        |           |
| Protection     |           | Class II   |           |



Battery Powered Tiling Tools



#### **Electric Handheld Mixer**

- Variable and constant speed
- VDE plug and 3m(118") cable
- Quick assembly mixing paddle
- Electronic soft start function
- ▲ FFU device
- Suitable for mixing cement, paints, tile adhesive, glue etc.

| Technical Data |            |            |            |
|----------------|------------|------------|------------|
| Art.No         | MMB1600    | MMB1800    | MMB2000    |
|                | 1600W      | 1800W      | 2000W      |
| Mixing volume  | 17 Gal     | 22 Gal     | 22 Gal     |
| Mixing paddle  | 24"x5-1/2" | 24"x6-3/8" | 24"x6-3/8" |
| Rated voltage  |            | 230/110V   |            |
| Frequency      |            | 50/60HZ    |            |
| Speed I        |            | 250-500RPM |            |
| Speed II       |            | 400-800RPM |            |
| Thread size    |            | M14        |            |
| Protection     |            | Class II   |            |





€

#### **Electric Handheld Mixer 1800W**

- ▲ Paddle designed for fast and effective mixing of viscous materials
- Lightweight, impact-resistant motor housing
- ▲ High-torque for powerful mixing
- Variable speed with soft startup
- ▲ Ergonomic handle helps reduce fatigue
- VDE plug and 3m(118") cable
- Indicator light for overload & carbon brush changing alert
- ▲ Suitable for mixing cement, paints, tile adhesive, glue etc.

| Technical Data      |                         |  |
|---------------------|-------------------------|--|
| Art.No              | MMA1800                 |  |
| Output              | 1800W                   |  |
| Voltage             | 110V/60Hz               |  |
| Speed               | 200-480RPM / 300-750RPM |  |
| Fitting             | M14                     |  |
| Paddle              | 140 x 600mm(5.5"x24")   |  |
| Mixture Volume      | 120L(32Gal)             |  |
| LpA                 | 97 dB(A)                |  |
| LwA                 | 108 dB(A)               |  |
| aw(Vibration)       | 5.5m/s2 K=1.5m/s2       |  |
| Protection class II |                         |  |

#### **Electric Handheld Mixer 1200W**

- ▲ Heavy duty gear system with large torque
- With 300 hours continued working time
- Paddle swing < 0.5mm without fatigue</p>
- ▲ Maximum mixture loading 40L
- Suitable for mixing cement, paints, tile adhesive, glue etc.

| Technical Data |                         |  |
|----------------|-------------------------|--|
| Art.No         | MME1200                 |  |
| Output         | 1200W                   |  |
| Voltage        | 230V/50Hz               |  |
| Speed          | 150-300RPM / 300-650RPM |  |
| Fitting        | M14                     |  |
| Paddle         | 120 x 600mm             |  |
| Protection     | class II                |  |



Soft start and constant speed



Six speed for choosing



Quick installing mixing paddle



#### MIXING PADDLE



#### **Twist Mixing Paddle**

- ▲ M14 steel handle with metal hanger
- ▲ Suitable for mortar, tile adhesive, plaster, screed and filling compounds

| Art.No  | Size           |                     |
|---------|----------------|---------------------|
| MPGZ120 | 120xM14 x600mm | 4-3/4"x5/8"-11x24"  |
| MPGZ600 | 140xM14 x600mm | 5-1/2"x5/8"-11x24") |
| MPGZ160 | 160xM14 x600mm | 6-3/8"x5/8"-11x24"  |



# **Twist Mixing Paddle**

- Quick change design for BIHUI adaptor
- M14 steel handle with metal hanger
- Suitable for mortar, tile adhesive, plaster, screed and filling compounds

| Art.No   | Size           |                    |
|----------|----------------|--------------------|
| MMB-MP01 | 120xM14 x600mm | 4-3/4"x5/8"-11x24" |



# **Spiral Mixing Paddle**

- ▲ M14 steel handle with metal hanger
- Suitable for mortar, tile adhesive, plaster, screed and filling compounds

| Art.No  | Size           |                     |
|---------|----------------|---------------------|
| MPSC120 | 120xM14 x600mm | 4-3/4"x5/8"-11x24"  |
| MPSC600 | 140xM14 x600mm | 5-1/2"x5/8"-11x24") |
| MPSC160 | 160xM14 x600mm | 6-3/8"x5/8"-11x24"  |



#### **Spiral Mixing Paddle**

- Quick change design for BIHUI adaptor
- ▲ M14 steel handle with metal hanger
- Suitable for mortar, tile adhesive, plaster, screed and filling compounds

| Art.No   | Size           |                    |
|----------|----------------|--------------------|
| MMB-MP02 | 120xM14 x600mm | 4-3/4"x5/8"-11x24" |



# **Paint Mixing Paddle**

- ▲ Hexagon shaft to fit drill machine
- Powder coating
- Suitable for mixing mud and paint

| Art.No  | Size       |                       |
|---------|------------|-----------------------|
| MPPS400 | 80x8x400mm | 3-9/64"x5/16"-15-3/4" |



# **Quick Change Adaptor**

- M14 Thread to Fit with Most Machine
- Quick change design with a clamp
- ▲ For use with BIHUI quick change mixing paddle

| Art.No | Size       |                       |
|--------|------------|-----------------------|
| MMBADP | 80x8x400mm | 3-9/64"x5/16"-15-3/4" |



# **Box Mixing Paddle**

- ▲ Hexagon shaft to fit drill machine
- Spraying coating treatment
- Suitable for mixing mortar, tile adhesive, plaster, screed and filling compounds

| Art.No | Size         |                     |
|--------|--------------|---------------------|
| MPD760 | 130x10x860mm | 5-1/8"x3/8"-33-1/2" |




#### Handheld Drill & Mixer

- ▲ 1/2"-13mm-M14 thread
- ▲ Forward/reverse switch
- Rear D-handle rotates 360°
- Variable speed trigger with Lock-on button for continuous operation
- Suitable for mixing and drilling
- UL plug

| Technical Data      |                         |  |
|---------------------|-------------------------|--|
| Art.No              | MMD1214                 |  |
| Output              | 1800W                   |  |
| Voltage             | 110V/60Hz               |  |
| Speed               | 200-480RPM / 300-750RPM |  |
| Fitting             | M14                     |  |
| Padd <b>l</b> e     | 140 x 600mm(5.5"x24")   |  |
| Protection class II |                         |  |

91

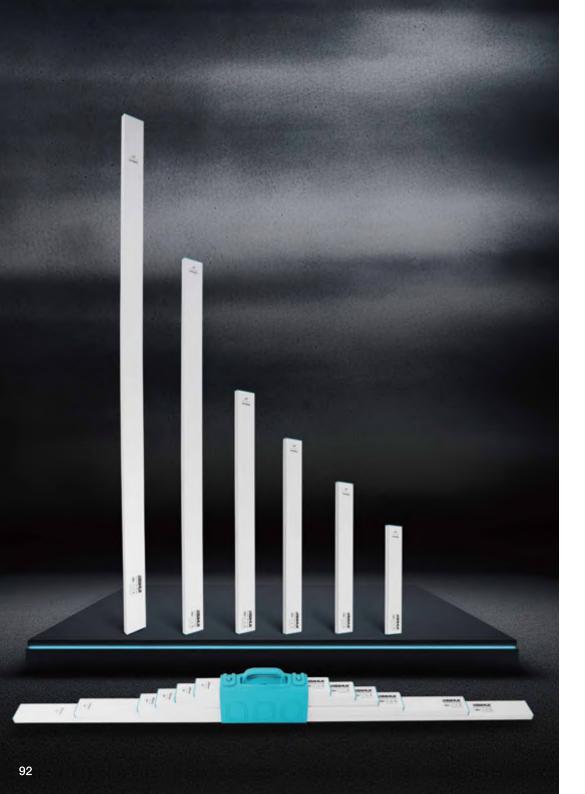



# **Aluminum Box Screed Set**

- Straight edges with BIHUI protection ends
- ▲ Accuracy: ±0.05mm/m(0.0002in/in)
- ▲ Features a heavy duty rectangular construction which provides exceptional straightest, strength and light weight
- ▲ Clear anodized aluminum construction guarantees it will not rust, rot or warp and easy to clean
- ▲ Used for leveling material in concrete paving and landscape work

| Art.No | Size  |
|--------|---|
| TASES6 | 450mm(18"), 600mm(24"),750mm(30"), 900mm(36"), 1350mm(54"), 1800mm(72") |













#### 16 Lines Laser Level

- ▲ Lithium-ion battery powered
- OSRAM green beams
- 360°self-levelling
- Equipped with TFT color screen display
- ▲ Accurate reset function and self-levelling automatically
- Built-in memory function
- Supports tilting at any angle, patented technology
- ▲ Three levels of brightness adjustable
- Perfect for auxiliary levelling in multiple occasions
- Continuous working 5 hours
- Full charging 4 hours



#### Accessories includes:

USB charging Lithium-ion Battery Laser target plate Green glasses Lifting platform

































#### 12 Lines Laser Level

- ▲ Auxiliary tiles fixing, wall decoration, floor tiles fixing, stair handrails, furred ceiling, floor tile, plastering etc
- ▲ Lithium-ion battery powered
- OSRAM green beams
- 360°self-levelling
- ▲ Adjusting bracket with level spirit
- ▲ Magnetic backing bracket and extra adjuster
- Perfect for auxiliary levelling in multiple occasions

| Art.No | Data         |
|--------|--------------|
| LLG12  | 3.7V - 5.2Ah |



USB charging Lithium-ion Battery Laser target plate Green glasses Bracket with adjusting and level spirit Magnetic bracket PV9 & PV6+



























#### **5 Lines Laser Level**

- ▲ Auxiliary tiles fixing, wall decoration, floor tiles fixing, stair handrails, furred ceiling, floor tile, plastering etc
- ▲ Lithium-ion battery powered
- OSRAM green beams
- 360°self-levelling
- Adjusting bracket with level spirit
- ultiple occasions

| erfect for auxil | iary levelling in mu |
|------------------|----------------------|
| Art.No           | Data Data            |
| LLG05            | 3.7V - 5.2Ah         |

#### Accessories includes:

USB charging Lithium-ion Battery Laser target plate Green glasses Bracket with adjusting and level spirit



























- Foldable tripod with 5/8"-11 connection
- ▲ Extra 5/8"-11 to M14 adaptor
- Adjustable height up to 1.5M
- Perfect for BIHUI laser levels

| Art.No  | Size     |               |
|---------|----------|---------------|
| LLG-TRP | 58-150cm | (2-1/4")-(6") |





# **Speed Triangle Square**

- Embossed imperial graduations and common rafter conversion table
- ▲ Features a protractor scale 0-90°
- Use as saw guide for angle measurements and cuts
- Ideal for all building and remodeling projects

| Art.No | Size  |    |
|--------|-------|----|
| TMRT7  | 180mm | 7" |



# Long Tape Measure

- Waterproof fiberglass ruler
- 3 times retracting speed
- Tape in 15mm width and thickness 0.48mm
- ▲ Level 3 accuracy

| Art.No | Size |      |
|--------|------|------|
| TMR30M | 30M  | 100" |



#### **Wide Blade Tape Measure**

- Wear and impact-resistant with nylon bond
- Equipped with a powerful magnetic ruler head
- ▲ Automatic brake and one button to retract

| Art.No | Size                                  | Blade   | e info.   |
|--------|---------------------------------------|---------|-----------|
| TMR5M  | 65x60x30mm<br>(2-1/2"x2-3/8"x1-3/16") | 5M(16') | 22mm-1.9M |
| TMR8M  | 80x75x35mm<br>(2-1/2"x2-3/8"x1-3/16") | 8M(26') | 27mm-2.8M |



#### **Blue Chalk Powder**

- ▲ For use with chalk line reels
- Designed with handy nozzle cap and squeezy bottles
- Meets the basic requirement of RoHS and REACH
- Suitable for both interior and exterior use

| Art.No  | Size |  |
|---------|------|--|
| CTCHALK | 8OZ  |  |



#### **Chalk Line Reel**


- Quick refilling sliding window
- faster retraction
- Powder capacity: 100 grams
- Break strength: 20kg
- Art.No Size CTCKLNR 30Mx Ø1mm



#### **Chalk Reel Kit**

- Blue Chalk Powder with chalk line reels
- ▲ Meets the basic requirement of RoHS and REACH
- faster retraction
- Suitable for both interior and exterior use

| Art.No  | Size           |  |
|---------|----------------|--|
| CTCAKK2 | 30Mx Ø1mm, 8OZ |  |

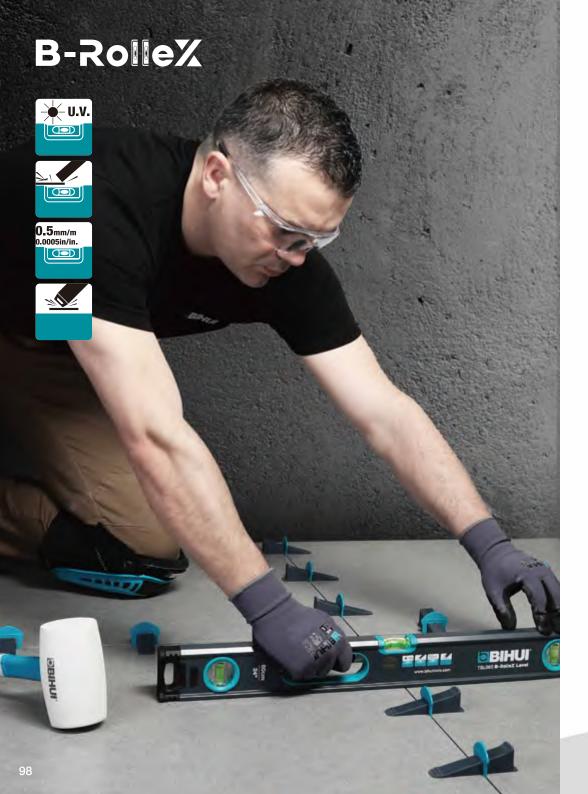

#### Tile Spirit Level

- ▲ Accuracy : 0.5mm/m (0.0005in/in)
- Shock proof rubber end caps
- Comfortable rubber handle
- Magnified horizontal vial for clearest view of the bubble
- 3 Solid acrylic shockproof vials to check horizontal, vertical levels

| Art.No | Size  |         |
|--------|-------|---------|
| TSL060 | 60cm  | 24"     |
| TSL080 | 80cm  | 32"     |
| TSL100 | 100cm | 40"     |
| TSL120 | 120cm | 47-1/4" |
| TSL180 | 180cm | 71"     |
| TSL240 | 240cm | 96"     |





# BIHUI Battery Powered Tiling Tools is ready to hit the market.





# **Electric Vacuum Suction Cup**

- Max. lifting capacity: 170Kg(375lbs)
- Powered by 21V lithium-ion battery
- Digital gauge showing pressure
- Smart sensor monitor maintains optimum suction
- Double layer pad for smooth surfaces
- ▲ Additional pad specifically for textured items
- Continuous working 3 hours
- Full charging 2.5 hours

| Art.No      | Max. Lifting Capacity         |
|-------------|-------------------------------|
| LFBSL       | 170Kg(375lbs)                 |
| LFBSL-RUB   | Pad for smooth surfaces       |
| LFBSL-TXP   | Pad for texture surfaces      |
| BP21-BAT2.0 | Lithium-ion battery 21V-2.0Ah |



#### **Operation Instructions:**



Position the GRABO® to the flat material surface you want to carry



Slide the power switch ON



Press green button when ready



Lift GRABO® handle to carry with



Smart digital pressure sensor



#### **Electric Cordless Vacuum Suction Cup**

Press red

button to

release

- Smart digital pressure sensor
- The portable, electric battery vacuum suction lifter holds securely and firmly on almost any surface
- Extremely high suction power (up to max. 170 kg)
- ▲ Perfect for large formats, natural stone, thick terrace slabs, etc.
- Securely hold even on heavily structured, porous and damp surfaces
- Continuous working for 1.5hours
- Charging time for 2 hours

#### Includes:

- 1 x 4in1 charger(USA,AU,EU,UK)
- 2 x Filter felt
- 1 x User's manual
- 1 x Tool bag

| Art.No | Description                               | Data          |
|--------|---|---------------|
| LFEVC  | V1 with 2 batteries<br>and 2 sealing ring | 14.8V - 2.6Ah |



#### **LVT Battery Suction Cup**

- Perfect for LVT floor laying
- ▲ Automatic air replenishment mechanism
- ▲ Feature with digital display
- Steel plate design for gap adjustment and lifting
- Dual rubber pad guarantee superior sealing
- ■Suitable for both smooth and texture surface











#### **CVT Vibration Tile Beater**

- ▲ Continuously variable transmission speed
- Powered with lithium-ion battery
- ▲ TPR grip handle for maximum comfort
- Suction cup with 35kg lifting capacity
- Designed with spirit level bubble and working light
- ▲ Evenly distribute the adhesive under tiles and big slabs during installation

| Art.No    | Description         | Data      |
|-----------|---------------------|-----------|
| LFTBU     | Include 2 batteries | 16V - 2Ah |
| LFTBV     | Include 1 battery   | 16V - 2Ah |
| LFTBV-BAT | Battery             | 16V - 2Ah |







# Square Beating Block

- Suitable for most suction cups
- ▲ For largely spread the vibration to the tiles
- Overall size 260x180x12mm

| Art.No   | Description        | Data         |
|----------|--------------------|--------------|
| LFTBV-BB | Tile Beating Block | Hole 130x7mm |

# 3 in1 Charger

| Art.No     | Description             | Data       |
|------------|-------------------------|------------|
| LFTBA-CG   | 3in1 charger(USA,UK,EU) | 21V - 1A   |
| LFTBV-CG31 | 3in1 charger(USA,UK,EU) | 16V - 1.4A |

# **Spare Suction Pad**

| Art.No   | Description       | Data  |
|----------|-------------------|-------|
| LFTBA-RB | Spare Suction Pad | 118mm |
| LFTBV-RB | Spare Suction Pad | 128mm |







#### **Vibration Tile Beater**

- Powered with 21V lithium-ion battery
- Eco grip handle for maximum comfort
- Suction cup with 35kg lifting capacity
- Designed with digital control panel with 6 speeds
- Evenly distribute the adhesive under tiles and big slabs during installation

| Art.No     | Description         | Data      |
|------------|---------------------|-----------|
| LFTBA-Plus | Include 2 batteries | 21V - 2Ah |
| LFTBA      | Include 1 battery   | 21V - 2Ah |
| LFTBA-BAT  | Battery             | 21V - 2Ah |







#### **Smart Vibration Tile Beater**

- ▲ Powered with BIHUI lithium-ion battery
- Continuously variable transmission speed
- Anti-vibration auxiliary handle and TPR grip handle for max.comfort
- Designed with spirit level bubble and large fixing clamp
- Suction cup with 35kg(77lbs) lifting capacity
- Evenly distribute the adhesive under tiles and big slabs during installation

| Art.No      | Description         | Data      |
|-------------|---------------------|-----------|
| LFTBS-Plus  | Include 2 batteries | 21V - 2Ah |
| LFTBS       | Include 1 battery   | 21V - 2Ah |
| BP21-BAT2.0 | Battery             | 21V - 2Ah |

#### SUCTION CUP



#### **Electric Battery Pump**

- Working indicator button
- USB charger 30cm / AC/DC charging box

| Art.No   | Size                         | Data          |
|----------|------------------------------|---------------|
| SCBB8-PG | Ø36mmx169mm<br>(1-55/27"x7") | 3.7V / 2000mA |



#### 8" Battery Vacuum Suction Cup Kit

- ▲ Featured with spare electric battery plunger
- ▲ Manual pump and electric pump action
- Manual lifting capacity 110Kg(243lbs)
- ▲ Electric lifting capacity 140Kg(309lbs)
- ▲ Anti-slip plastic handle
- Suitable for both smooth and texture surface
- Packed in BMC box

| Art.No | Size  |    |
|--------|-------|----|
| SCBB8  | 200mm | 8" |



#### 8" Vacuum Suction Cup

- With Pressure Monitor
- Lifting capacity 110Kg (243lbs)
- ▲ Anti-slip soft grip handle
- Durable structure and light weight
- Quick release lever & comfort pump action
- Suitable for both smooth and texture surface
- ▲ Ideal for large porcelain or stone, tiles and glass

| Art.No | Size  |    |
|--------|-------|----|
| SCVB8  | 200mm | 8" |



#### **Battery Vacuum Suction Cup**

- ▲ Automatical air replenishment mechanism guards safety carrying
- ▲ Feature with double monitoring system, digital display and pressure gauge
- Dual rubber and extra rubber ring guarantee superior sealing
- ▲ Large Lithium battery 26500, 3200Ah works longer
- Suitable for both smooth and texture surface
- Suction cup for handling large and heavy tiles

| Art.No | Size  |    |
|--------|-------|----|
| SCBC8  | 200mm | 8" |



#### **Electric Battery Pump**

- Working indicator button
- USB charger 30cm / AC/DC charging box

| Art.No   | Size                       | Data           |
|----------|----------------------------|----------------|
| SCBS8-PG | Ø35mmx172mm<br>(1-3/8"x7") | 3.7V / 1200mAh |



#### 8" Battery Vacuum Suction Cup Kit

- ▲ Featured with spare electric battery plunger
- ▲ Manual pump and electric pump action
- Manual lifting capacity 110Kg(243lbs)
- Electric lifting capacity 140Kg(309lbs)
- ▲ Anti-slip plastic handle
- Suitable for both smooth and texture surface
- Packed in BMC box

| Art.No | Si    | ze |
|--------|-------|----|
| SCBS8  | 200mm | 8" |



#### **Battery Vacuum Suction Cup**

- ▲ Lifting capacity 130Kg (286lbs)
- ▲ Automatical air replenishment mechanism guards safety carrying
- ▲ Feature with double monitoring system, digital display and pressure gauge
- Dual rubber and extra rubber ring guarantee superior sealing
- ▲ Large Lithium battery 21700, 4000mAh works longer
- Suitable for both smooth and texture surface

| Art.No | Si    | ze |
|--------|-------|----|
| SCBA8  | 200mm | 8" |



#### 8" Vacuum Suction Cup

- ▲ Lifting capacity 110Kg (243lbs)
- ▲ Anti-slip plastic handle
- Pump action & quick release lever
- Suitable for both smooth and texture surface

| Art.No | Si    | Size |  |
|--------|-------|------|--|
| SCVU8  | 200mm | 8"   |  |























# 6" Vacuum Suction Cup

- ▲ Lifting capacity 100Kg (220lbs)
- Durable multi-level rubber
- ▲ Heavy duty steel handle & brass tube
- Pump action & quick release lever
- Ideal for large porcelain or stone, tiles and glass





| Art.No | Size  |    | Art.No | Siz   | ze |
|--------|-------|----|--------|-------|----|
| SCVM6  | 150mm | 6" | SCVG6  | 150mm | 6" |






- ▲ Lifting capacity: 40kg (88lbs)
- Made of aluminium with rubber suction cup
- Jumbo ergonomic comfort handle
- Ideal of carrying ceramic tiles, marble and glass

| Art.No | Siz   | :e   |
|--------|-------|------|
| SCSB4  | 122mm | 4.8" |





- ▲ Lifting capacity: 85kg (187lbs)
- ▲ Made of aluminium with rubber suction cup
- Jumbo ergonomic handle and comfort fixing buttons
- Ideal of carrying ceramic tiles, marble and glass

| Art.No | Size  |    |
|--------|-------|----|
| SCDB4  | 125mm | 5" |

# 8" Vacuum Suction Cup

- ▲ Lifting capacity 120Kg (265lbs)
- Durable multi-level rubber
- ▲ Heavy duty steel handle & brass tube
- Pump action & quick release lever
- Ideal for large porcelain or stone, tiles and glass





| Art.No | Size  |    | Art.No | Siz   | ze |
|--------|-------|----|--------|-------|----|
| SCVM8  | 200mm | 8" | SCVG8  | 200mm | 8" |



# Mega Triple Suction Cup

- ▲ Lifting capacity: 110kg (243lbs)
- ▲ Made of aluminium with rubber suction cup
- Jumbo ergonomic handle and comfort fixing buttons
- Julibo ergonomic nandle and connort lixing buttons

| Ideal of carrying ceramic tiles, marble an | asslg t |
|--|---------|
|--|---------|

| Art.No | Siz   | ze |
|--------|-------|----|
| SCTB4  | 125mm | 5" |





# **Reusable Tile Leveling System**

- ▲ Holds tile level & eliminates lippage
- Ideal for walls and floors tiles up to 17mm
- Suitable for tile clearance 1,5-6 mm
- Used in conjunction with other levelling systems or spacers
- ▲ Anti-scratching large cap and fast spin-down handle
- Reusable and all in one, saves both time and money

| Art.No   | Size         |       | Qty    |
|----------|--------------|-------|--------|
| TSL50    | 1.5mm        | 1/16" | 50pcs  |
| TSL250   | 1.5mm        | 1/16" | 250pcs |
| TSL50-SN | T spin nails |       | 50pcs  |





#### **HOW TO USE**




Insert T-pin parallel into the grout joint (For a wider joint, use classic spacers together)




Hold the blue cap in 90° position and spin down the gray handle



Twist the gray handle down to the required level



Return parallelly back for 90° to the grout joint for reuse (Note: remove immediately after the grout has cured, refering to the manufacturer's instruction, no more than 6 hours.)

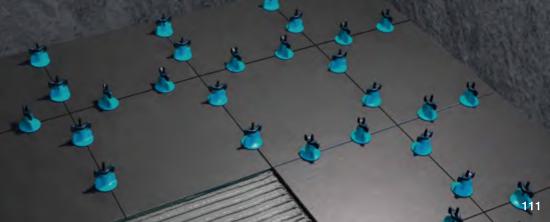





# **Tile Leveling Spacer**

- ▲ Holds tiles level
- Ideal for walls & floors
- Eliminates lippage on uneven tiles

| Art.No  | Size         | Qty     |
|---------|--------------|---------|
| BLSS100 | 0.5mm(1/64") | 100pcs  |
| BLSS250 | 0.5mm(1/64") | 250pcs  |
| BLSS500 | 0.5mm(1/64") | 500pcs  |
| BLSS1K  | 0.5mm(1/64") | 1000pcs |
| BLSS2K  | 0.5mm(1/64") | 2000pcs |



# **Tile Leveling Spacer**

- Holds tiles level
- Ideal for walls & floors
- Eliminates lippage on uneven tiles

| Art.No  | Size       | Qty     |
|---------|------------|---------|
| BLS1100 | 1mm(1/32") | 100pcs  |
| BLS1250 | 1mm(1/32") | 250pcs  |
| BLS1500 | 1mm(1/32") | 500pcs  |
| BLS11K  | 1mm(1/32") | 1000pcs |
| BLS12K  | 1mm(1/32") | 2000pcs |



# Tile Leveling Spacer

- ▲ Holds tiles level
- Ideal for walls & floors
- Eliminates lippage on uneven tiles

| Art.No  | Size         | Qty     |
|---------|--------------|---------|
| BLS2100 | 1.5mm(1/16") | 100pcs  |
| BLS2250 | 1.5mm(1/16") | 250pcs  |
| BLS2500 | 1.5mm(1/16") | 500pcs  |
| BLS21K  | 1.5mm(1/16") | 1000pcs |
| BLS22K  | 1.5mm(1/16") | 2000pcs |



# **Tile Leveling Spacer**

- ▲ Holds tiles level
- Ideal for walls & floors
- Eliminates lippage on uneven tiles

| Art.No  | Size      | Qty     |
|---------|-----------|---------|
| BLS3100 | 3mm(1/8") | 100pcs  |
| BLS3250 | 3mm(1/8") | 250pcs  |
| BLS3500 | 3mm(1/8") | 500pcs  |
| BLS31K  | 3mm(1/8") | 1000pcs |
| BLS32K  | 3mm(1/8") | 2000pcs |
|         |           |         |



# **Tile Leveling Wedge**

- Eliminates lippage on uneven tiles
- Spacer function for 1/32", 5/64", 1/8" and 0.059"
- Used for .1" .8" tile

| Art.No  | Size            |
|---------|-----------------|
| BLSE100 |                 |
| BLSE250 | 4"x7/8"x1-1/16" |
| BLSE500 | 4 X//6 XI-1/16  |
| BLSE1K  |                 |



**Tile Leveling Spacer** 

■ Eliminates lippage on uneven tiles

Size

2mm(5/64")

2mm(5/64")

2mm(5/64")

2mm(5/64")

2mm(5/64")

Qty

100pcs

250pcs

500pcs

1000pcs

2000pcs

■ Ideal for walls & floors

▲ Holds tiles level

Art.No

BLSN100

BLSN250

BLSN500

BLSN1K

BLSN2K

# **Tile Leveling Plier**

- ▲ Improved accuracy and installation speed ▲ 1x Floor and wall plier
- ▲ Fast adjustable space mechanic
- Maximum working depth 1/2"
- Ideal for walls and floors


| Art.No | Size      |
|--------|-----------|
| BLSFP  | Universal |




## **Tile Leveling Kit**

- ▲ 100x Tile level wedge
- 100x Tile level spacer

| Art.No | Size         |
|--------|--------------|
| BLSK1  | 1mm(1/32")   |
| BLSK2  | 1.5mm(1/16") |
| BLSK3  | 3mm(1/8")    |



# SYSTEM 3 tubes to be connect together

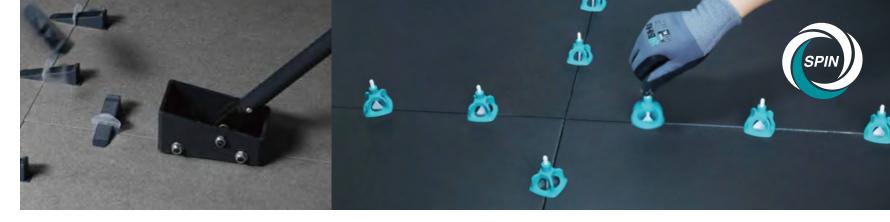

# **Levelling System Removal Roller**


▲ High quality and smooth nylon wheels

BLSRR

- ▲ Chamfer design to prevent tiles from scratching
- ▲ Ergonomic handle and 1.35M length for standing working
- ▲ Triple efficient for removing all types of tile leveling system

| Art.No | Size |
|--------|------|
| ALLINO | Size |
|        |      |


#### HOW TO USE



Place the level base under the tiles 10cm from either end




Use the plier to tighten to the required level



Insert the reusable wedge into each level base



Remove the wedge with BIHUI levelling dozer for reuse







#### **HOW TO USE**



Place the level base under the tiles 10 cm from either end



Apply the level washer and level cap to



Spin down the level cap to the required level to ensure no lippage



dozer for reuse



#### Spin Level Base 1mm

- ▲ Holds tiles level up to 18mm
- Ideal for walls & floors
- Eliminates lippage on uneven tiles

| Art.No | Size       | Qty     |
|--------|------------|---------|
| SL1100 | 1mm(1/32") | 100pcs  |
| SL1500 | 1mm(1/32") | 500pcs  |
| SL11K  | 1mm(1/32") | 1000pcs |



# Spin Level Base 1.5mm

- ▲ Holds tiles level up to 18mm
- Eliminates lippage on uneven tiles

| Art.No | Size         | Qty     |
|--------|--------------|---------|
| SL2100 | 1.5mm(1/16") | 100pcs  |
| SL2500 | 1.5mm(1/16") | 500pcs  |
| SL21K  | 1.5mm(1/16") | 1000pcs |



# Spin Level Base 3mm

- ▲ Holds tiles level up to 18mm
- ▲ Ideal for walls & floors
- Eliminates lippage on uneven tiles

| Art.No | Size      | Qty     |
|--------|-----------|---------|
| SL3100 | 3mm(1/8") | 100pcs  |
| SL3500 | 3mm(1/8") | 500pcs  |
| SL31K  | 3mm(1/8") | 1000pcs |



# Spin Level Base Higher

- ▲ Holds tiles level up to 35mm
- Ideal for walls & floors
- ▲ Eliminates lippage on uneven tiles

| Art.No  | Size      | Qty     |
|---------|-----------|---------|
| SL3H100 | 3mm(1/8") | 100pcs  |
| SL3H500 | 3mm(1/8") | 500pcs  |
| SL3H1K  | 3mm(1/8") | 1000pcs |



# Spin Level Cap

- ▲ Holds tiles level
- Ideal for walls & floors
- ▲ Eliminates lippage on uneven tiles

| Art.No | Size      | Qty    |
|--------|-----------|--------|
| SLC100 | Universal | 100pcs |



114 SL3H1K 3mm(1/8") 1000pcs 115





# Tornado Fast Clip Cap

- ▲ Fast clip design, faster than ever
- ▲ Holds tiles level
- Ideal for walls & floors
- Eliminates lippage on uneven tiles

| Art.No  | Size      |
|---------|-----------|
| BLTF100 | universal |



#### **Tornado Base 1mm**

210

- Holds tiles level up to 18mm
- Ideal for walls & floors
- ▲ Eliminates lippage on uneven tiles

| Art.No  | Size       | Qty     |
|---------|------------|---------|
| BLT1100 | 1mm(1/32") | 100pcs  |
| BLT1250 | 1mm(1/32") | 250pcs  |
| BLT11K  | 1mm(1/32") | 1000pcs |



#### Tornado Base 1.5mm

- Holds tiles level up to 18mm
- Ideal for walls & floors
- Eliminates lippage on uneven tiles

| Art.No  | Size         | Qty     |
|---------|--------------|---------|
| BLT2100 | 1.5mm(1/16") | 100pcs  |
| BLT2250 | 1.5mm(1/16") | 250pcs  |
| BLT21K  | 1.5mm(1/16") | 1000pcs |



#### **Tornado Base 3mm**

- ✓ Holds tiles level up to 18mm
- Ideal for walls & floors
- Eliminates lippage on uneven tiles

| Art.No  | Size      | Qty     |
|---------|-----------|---------|
| BLT3100 | 3mm(1/8") | 100pcs  |
| BLT3250 | 3mm(1/8") | 250pcs  |
| BLT31K  | 3mm(1/8") | 1000pcs |


#### **HOW TO USE**



Place the level base under the tiles 10 cm from either end




Apply the fast dip cap to the level base



Close the cap and spin down to the required level to ensure no lippage Remove the cap with BIHUI rubber mallet and open the cap simply for reuse



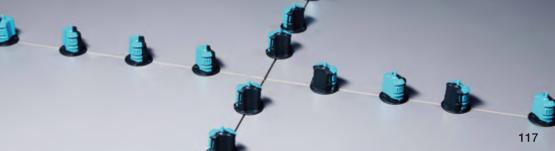






# **Horseshoe Shim**

- ▲ High impact reusable plastic shim
- ▲ For both horizontal and vertical tile installation
- ▲ Easy to install & Easy to remove
- ▲ For aligning marble, granite, porcelain and large format tile

| Art.No | Size  |       | Qty    |
|--------|-------|-------|--------|
| HSB400 | 1.5mm | 1/16" | 400pcs |
| HSP350 | 2mm   | 5/64" | 350pcs |
| HSR300 | 3mm   | 1/8"  | 300pcs |
| HSY220 | 5mm   | 3/16" | 220pcs |
| HSB150 | 6mm   | 1/4"  | 150pcs |



# Tile Spacers

- ▲ 250 pieces per reseal bag
- Ideal for wall and floor tiles

| Art.No  | Size  |       | Qty    |
|---------|-------|-------|--------|
| TSC1250 | 1mm   | 1/32" | 250pcs |
| TS15250 | 1.5mm | 1/16" | 250pcs |
| TSC2250 | 2mm   | 5/64" | 250pcs |
| TSC3250 | 3mm   | 1/8"  | 250pcs |
| TSC5250 | 5mm   | 3/16" | 250pcs |
|         |       |       |        |



# Tile Spacers

- 250 pieces per reseal bag
- Ideal for wall and floor tiles

| Art.No  | S   | ize   | Qty    |
|---------|-----|-------|--------|
| TST2250 | 2mm | 5/64" | 250pcs |
| TST3250 | 3mm | 1/8"  | 250pcs |
| TST4250 | 4mm | 5/32" | 250pcs |
| TST5250 | 5mm | 3/16" | 250pcs |



# Multi Size Spacer

- 50pcs per reseal bag
- ▲ Reusable
- Ideal for wall and floor tiles

| Art.No | Size   | Qty   |
|--------|--------|-------|
| TSM50  | 4 in 1 | 50pcs |



# **Rotate Wedge**

- ▲ Reusable
- Ideal for wall and floor tiles

| Art.No | Size                     | Qty   |
|--------|--------------------------|-------|
| TSR50  | 1-13mm<br>(1/32")-(1/2") | 50pcs |



# Tile Wedge

- 250pcs per reseal bag
- Ideal for wall and floor tiles

| Art.No | Size                       | Qty    |
|--------|----------------------------|--------|
| TSW250 | 0.5-5mm<br>(1/64")-(3/16") | 250pcs |



#### NOTCHED TROWEL



#### **Switchable Pro-Long Notched Trowel Set**

- 2pcs x Switchable soft handle
- ▲ 6pcs x Stainless steel spare blades in 480x130mm
- ▲ Notched 6,8,10,12mm, Tiger notch and Diagonal notch
- Durable storage and drain box


| Art.No | Size                      | Notch Guide         |
|--------|---------------------------|---------------------|
|        | 480x130mm<br>(19"x5-1/8") | 6mm(1/4") SQ notch  |
|        |                           | 8mm(5/16") SQ notch |
| PTSJK9 |                           | 10mm(3/8") SQ notch |
| F133K9 |                           | 12mm(1/2") SQ notch |
|        |                           | Diagonal notch      |
|        |                           | Tiger notch         |

#### **Switchable Jumbo Notched Trowel Set**

- 2pcs x Switchable soft grip handle
- Switch between trowel blades to be used both right and left handed
- ▲ 6pcs x Stainless steel blades in 280x115mm
- ▲ Notched 6,8,10,12mm, Tiger notch and 10x20mm Round Notch
- ▲ 6pcs x Stainless steel blades in 480x130mm
- ▲ Notched 6,8,10,12mm, Tiger notch and Diagonal notch
- Storage and drain box for 280x115mm blades

| Art.No  | Size         | Notch Guide                       |
|---------|--------------|-----------------------------------|
|         |              | 6mm(1/4") SQ notch                |
|         |              | 8mm(5/16") SQ notch               |
|         | 280x115mm    | 10mm(3/8") SQ notch               |
|         | (11"x4-1/2") | 12mm(1/2") SQ notch               |
|         |              | 10x20mm(3/8"x3/4")<br>Round Notch |
| PTSJK15 |              | Tiger notch                       |
| F135K13 |              | 6mm(1/4") SQ notch                |
|         |              | 8mm(5/16") SQ notch               |
|         | 480x130mm    | 10mm(3/8") SQ notch               |
|         | (19"x5-1/8") | 12mm(1/2") SQ notch               |
|         |              | Diagonal notch                    |
|         |              | Tiger notch                       |







#### Easy-Attach

Switch between floats and trowels with the convenience of only one handle



#### Slide-Lock Handle

For secure and adjustable placement along trowels and floats.



#### Blade Lock

Stores trowel and floats securely.



#### **Drain System**

Leaves your blades and floats dry





#### **Switchable Notched Trowel Set**

- Switchable blade 6pcs in different notches
- Switchable TPR handle
- Durable storage and drain box

| Art.No | Size                      | Notch Guide                          |  |
|--------|---------------------------|--------------------------------------|--|
|        |                           | 6mm(1/4") SQ notch                   |  |
|        | 280x115mm                 | 8mm(5/16") SQ notch                  |  |
| PTSJG8 |                           | 10mm(3/8") SQ notch                  |  |
| PISJG8 | (11"x4-1/2")              | 12mm(1/2") SQ notch                  |  |
|        |                           | 10x20mm(3/8"x3/4")<br>Round Notch    |  |
|        |                           | Tiger notch                          |  |
| Art.No | Size                      | Notch Guide                          |  |
| Aithe  | OIZE                      |                                      |  |
|        |                           | 3.2mm(1/8") SQ notch                 |  |
|        |                           | 4.5mm(3/17") SQ notch                |  |
| PTSJA8 | 280x115mm<br>(11"x4-1/2") | 6mm(1/4") SQ notch                   |  |
| PISJA6 |                           | 12mm(1/2") SQ notch                  |  |
|        |                           | 6x12x20mm(1/4"x1/2"x3/4")<br>U Notch |  |



#### **Switchable Handle**

■ Suitable for BIHUI Switch System pads and blades etc.

Tiger notch

■ Quick lock & release clamp

Art.No: PTSJHD



#### Switchable Blade

- Different notches available
- Size: 280x115mm(11"x4-1/2")

Art.No: PTSJ series



#### Switchable Blade

- #420 Stainless Steel
- Different notches available
- Size: 480x130mm(19"x5-1/8")

Art No: PTSJL series





#### Storage Box with Switch Handle

- Switchable soft handle
- Quick lock and release clamp
- Durable storage and drain box
- ▲ Suitable for BIHUI Switch System pads and blades etc.
- Switch Handle and Storage Box Included
- ▲ More than 10+ notch sizes available for choosing

| Art.No | Siz       | ze         |
|--------|-----------|------------|
| PTSJHB | 280x115mm | 11"x4-1/2" |



| Art.No  | Size                      | Notch Guide                                  |
|---------|---------------------------|--|
| PTFACT4 | 280x115mm<br>(11*x4-1/2*) | 1.5x1.5x1.5mm<br>(1/16"x1/16"x1/16")         |
| PTFFCA4 |                           | 1.5x1.5x1.5mm<br>(1/16"x1/16"x1/16")         |
| PTFFFA4 |                           | 1.5x1x1mm<br>(1/16"x1/32"x1/32")             |
| PTFFOW4 |                           | 1.5x3x3mm<br>(1/16"x1/8"x1/8")               |
| PTFRCA4 |                           | 2.5 x 2.5 x 2.5mm<br>(3/32" x 3/32" x 3/32") |
| PTFWHA4 |                           | 1.5x2x1mm<br>(1/16"x5/64"x1/32")             |

# Replacement Switchable Blade

- Durable aluminum rail
- ▲ For use with BIHUI switchable soft handle
- Special notch for flooring job

| Art.No  | Size                          | Notch Guide                                  |
|---------|-------------------------------|--|
| PTQACT4 | 290x110mm<br>(11-3/8"x4-3/8") | 1.5x1.5x1.5mm<br>(1/16"x1/16"x1/16")         |
| PTQFCA4 |                               | 1.5x1.5x1.5mm<br>(1/16"x1/16"x1/16")         |
| PTQFFA4 |                               | 1.5x1x1mm<br>(1/16"x1/32"x1/32")             |
| PTQFOW4 |                               | 1.5x3x3mm<br>(1/16"x1/8"x1/8")               |
| PTQRCA4 |                               | 2.5 x 2.5 x 2.5mm<br>(3/32" x 3/32" x 3/32") |
| PTQWHA4 |                               | 1.5x2x1mm<br>(1/16"x5/64"x1/32")             |





#### **Notched Trowel**

- 0.6mm quality stainless steel
- Range of notch size to suit any job

| _      | * *                       |                     |
|--------|---------------------------|---------------------|
| Art.No | Size                      | Notch Guide         |
| PTSS06 | 280x115mm<br>(11"x4-1/2") | 6mm(1/4") SQ notch  |
| PTSS08 |                           | 8mm(5/16") SQ notch |
| PTSS10 |                           | 10mm(3/8") SQ notch |
| PTSS12 |                           | 12mm(1/2") SQ notch |
| PTSSTG |                           | Tiger notch         |

#### **Notched Trowel**

- ▲ Handle fastened to blade with 6 welded rivets
- 0.6mm quality stainless steel blade
- Range of notch size to suit any job

| Art.No | Size                      | Notch Guide         |
|--------|---------------------------|---------------------|
| PTCD06 | 280x115mm<br>(11"x4-1/2") | 6mm(1/4") SQ notch  |
| PTCD08 |                           | 8mm(5/16") SQ notch |
| PTCD10 |                           | 10mm(3/8") SQ notch |
| PTCD12 |                           | 12mm(1/2") SQ notch |
| PTCDTG |                           | Tiger notch         |

#### **Jumbo Notched Trowel**

- ■ Metal close handle for perfect balance and extra comfort
- ▲ Handle fastened to blade with 12 welded rivets
- 0.8mm quality stainless steel blade
- Range of notch sizes available to suit any job

| ı | Art.No | Size                      | Notch Guide           |
|---|--------|---------------------------|-----------------------|
|   | PTSM08 | 480x120mm<br>(19"x4-3/4") | 8mm(5/16") SQ notch   |
|   | PTSM10 |                           | 10mm(3/8") SQ notch   |
|   | PTSM12 |                           | 12mm(1/2") SQ notch   |
|   | PTSM15 |                           | 15mm(19/32") SQ notcl |
|   | PTSM20 |                           | 20mm(3/4") SQ notch   |
|   | PTSMPL |                           | P <b>l</b> ain        |
|   |        |                           |                       |



#### **Notched Trowel**

- Contoured handle for improved comfort and control
- ▲ Handle support held to blade with 13 mounted rivets
- 0.7mm quality stainless steel blade
- Range of notch size to suit any job

| ı | Art.No        | Size                          | Notch Guide   |
|---|---------------|-------------------------------|---|
|   | PTSL06        | 320x120mm<br>(12-1/2"x4-3/4") | 6mm(1/4") SQ notch  |
|   | PTSL08        |                               | 8mm(5/16") SQ notch   |
|   | PTSL10        |                               | 10mm(3/8") SQ notch   |
|   | PTSL12        |                               | 12mm(1/2") SQ notch   |
|   | PTSLTG        |                               | Tiger notch   |
|   | PTSL10 PTSL12 |                               | 8mm(5/16") SQ notch<br>10mm(3/8") SQ notch<br>12mm(1/2") SQ notch |



#### **Notched Trowel**

- ▲ Handle fastened to blade with 8 mounted rivets
- 0.7mm quality stainless steel blade
- Range of notch size to suit any job

| Art.No | Size                      | Notch Guide         |
|--------|---------------------------|---------------------|
| PTSB03 |                           | 3mm(1/8") SQ notch  |
| PTSB04 | 280x120mm<br>(11"x4-3/4") | 4mm(5/32") SQ notch |
| PTSB06 |                           | 6mm(1/4") SQ notch  |
| PTSB08 |                           | 8mm(5/16") SQ notch |
| PTSB10 |                           | 10mm(3/8") SQ notch |
| PTSB12 |                           | 12mm(1/2") SQ notch |
| PTSB20 |                           | Round Notch         |
| PTSBTG |                           | Tiger notch         |
| PTSBPL |                           | Plain               |





#### BRICKLAYING TROWEL



#### **Plasters Trowel**

- Stainless Steel #420
- Soft grip handle

**Margin Trowel** 

■ Soft grip handle

Art.No

BTCHM5

▲ High strength carbon steel

Size

5"

125mm

| Art.No | Siz   | е  |
|--------|-------|----|
| BTSHP4 | 100mm | 4" |



# **Gauging Trowel**

- ▲ High strength carbon steel
- Soft grip handle

| Art.No | Siz   | ze |
|--------|-------|----|
| BTCHG7 | 180mm | 7" |



#### **Tuck Pointer**

- ▲ High strength carbon steel
- Soft grip handle

| Art.No  | Size |       |
|---------|------|-------|
| BTCHT08 | 8mm  | 5/16" |
| BTCHT10 | 10mm | 3/8"  |
| BTCHT12 | 12mm | 1/2"  |



## **Gauging Trowel**

- ▲ High strength carbon steel
- Soft grip handle

| Art.No | Siz   | ze |
|--------|-------|----|
| BTCHG6 | 180mm | 7" |
| BTCHG8 | 200mm | 8" |



- ▲ High strength carbon steel
- Soft grip handle

| Art.No | Size  |        |
|--------|-------|--------|
| BTCHB4 | 120mm | 4-3/4" |
| BTCHB5 | 140mm | 5-1/2" |
| BTCHB6 | 160mm | 6-3/8" |
| BTCHB7 | 180mm | 7"     |



#### Tile Remover Scraper

- Ideal for removing tiles and adhesives
- 1.2mm thick steel blade
- Rubber pro grip handle
- Steel cap for extra strength

| Art.No | Si    | ze |
|--------|-------|----|
| TRSC4  | 100mm | 4" |

# **Professional Taping Knife**

- Stainless steel blade with mirror-polished for easy cleanup
- ▲ Lightweight, ergonomically designed handle for all-day use

| Art.No | Si    | ze     |
|--------|-------|--------|
| PTK22  | 220mm | 8-5/8" |
| PTK30  | 300mm | 12"    |
| PTK50  | 500mm | 20"    |
| PTK60  | 600mm | 24"    |
| PTKNQ6 | 600mm | 24"    |

# **Bucket Scoop**

- Curved blade design for clean removal of materials
- Designed to fit most mixing and grouting buckets

| Art.No | Siz   | ze     |
|--------|-------|--------|
| PTK165 | 165mm | 6-1/2" |



# **Putty Scraper**

- One piece design with soft cover
- #420 Stainless steel
- ▲ Fine polished soft blade

| Art.No | Size  |        | Art.No   | Siz   | ze  |
|--------|-------|--------|----------|-------|-----|
| PTS1NH | 38mm  | 1-1/2" | PTS6     | 150mm | 6"  |
| PTS2   | 50mm  | 2"     | PTS8     | 200mm | 8"  |
| PTS3   | 75mm  | 3"     | PTS10    | 250mm | 10" |
| PTS4   | 100mm | 4"     | PTS10IN1 | 75mm  | 3"  |
| PTS5   | 125mm | 5"     |          |       |     |



# **Switchable Putty Scraper Kit**

- One handle 5 blades

- Stainless steel #420
- Blades in 1.5", 4", 5", 6", 5N1

| Art.No | Size     |
|--------|----------|
| PTKSK6 | 6pcs kit |








# **Professional Skimming Scraper Kit**

- Ergonomic PVC handle
- 250mm,400mm,600mm,800mm,1000mm
- Telescope handle in 1100mm
- Spare connection handle
- Nylon paint roller in 220mm

| Art.No | Size      |
|--------|-----------|
| PTKJK8 | Universal |



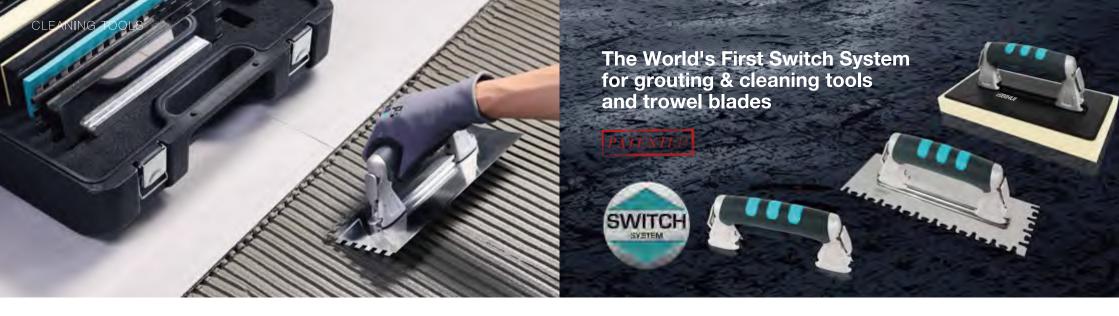

#### **Switchable Grouting & Cleaning System**

- 12pcs kit for grouting and cleaning
- ▲ 1 x sponge float pad
- ▲ 1 x EVA grouting pad
- ▲ 1 x flexible rubber pad
- ▲ 1 x green epoxy pad
- 5 x notched blades
- 1 x interchangeable handle
- ▲ 1 x interchangeable soft handle
- ▲ 1 x tool box

| Art.No  | Size  |
|---------|-------|
| PTSCK12 | 12pcs |





#### Switchable Soft Handle

- Suitable for BIHUI Switch System pads and blades etc.
- Quick lock & release clamp

| Art.No | Size     |
|--------|----------|
| PTSGSH | 220x68mm |



ELUK









#### **Sponge Float Pad**

- Use with switchable soft handle
- ▲ Hydro sponge with block cut
- Ideal for all types of cleaning and decorating

| Art.No | Size                                 |
|--------|--------------------------------------|
| PTSGSG | 280x140x30mm<br>(11"x5-1/2"x1-3/16") |



#### **Cellulose Float Pad**

- Use with switchable soft handle
- ▲ 100% Cellulose
- Ideal for all types of cleaning and decorating

| Art.No | Size                                 |
|--------|--------------------------------------|
| PTSCSP | 280x140x30mm<br>(11"x5-1/2"x1-3/16") |



#### **EVA Grout Float Pad**

- Use with switchable soft handle
- ▲ Ideal for all types of cleaning and decorating

| Art.No | Size                              |
|--------|-----------------------------------|
| PTSEVA | 280x140x8mm<br>(11"x5-1/2"x5/16") |



# **Cleaning Pads**

- Use with switchable soft handle
- Excellent for the removal of grout or adhesive from tile surfaces
- Including 3 pads in super fine, medium and course

| Art.No | Size                      |
|--------|---------------------------|
| PTSCNP | 250x120mm<br>(10"x4-3/4") |



#### **Grout Float Pad**

- Use with switchable soft handle
- Aluminium base with high density EVA
- Rubber pad

| Art.No | Size                     |
|--------|--------------------------|
| PTSGRF | 240x100mm<br>(9-3/8"x4") |



#### **Epoxy Grout Float Pad**

- ✓ Use with switchable soft handle
- ■ Green hard rubber

| Art.No | Size                      |
|--------|---------------------------|
| PTSEPX | 248x116mm<br>(10"x4-1/2") |





# 19L Tile Washing Set

- Durable bucket with wheels and stands
- ▲ Arc-shaped pouring edge and ergonomic handle
- Triple rollers for fast water extraction
- ▲ Heavy duty plastic grid, stay still in place
- Soft grip sponge float with block cut
- Soft grip EVA float with high density
- ▲ Ideal for cleaning floor and wall tiles & applying grouts

| Art.No | Description |
|--------|-------------|
| TWS19  | 6pcs kit    |
| TWS19A | 4pcs kit    |
| TWS19G | Grid        |
| TWS19R | Roller      |



maine:

Durable Plastic grid



Tri-roller, triple efficiency





Arc-Shaped Edge





Rotary wheels and anti-slip stands



**Epoxy Grout Float** 

 ■ Green hard rubber

| Art.No | Size                      |
|--------|---------------------------|
| CFHRL  | 248x116mm<br>(10"x4-1/2") |



# **Grout Float**

- Soft grip handle
- Aluminium base with high density EVA
- Rubber pad

| ize                | Art.No | Size                     |
|--------------------|--------|--------------------------|
| (116mm<br>(4-1/2") | CFERS  | 240x100mm<br>(9-3/8"x4") |
| x4-1/2")           | OI ENO | (9-3/8"x4")              |



# **Epoxy Red Float**

- Solid thermoplastic rubber pad in 12mm
- Durable with TPR handle

| Art.No | Size                |
|--------|---------------------|
| CFSRS  | 89x254mm (3.5"x10") |



# **Professional Sponge Float**

- Soft grip handle

| Art,No  | Size                                 |
|---------|--------------------------------------|
| CFHSS11 | 280x140x30mm<br>(11"x5-1/2"x1-3/16") |



# **EVA Grout Float**

■ Soft grip handle

| Art.No | Size        |
|--------|-------------|
| CFES11 | 280x140x8mm |



# **Cleaning Pads**

- Excellent for the removal of grout or adhesive from tile surfaces
- ✓ Including 3 pads in super fine, medium and course

| Art.No | Size                              |
|--------|-----------------------------------|
| CSPK4  | 250x120mm<br>(10"x4-3/4")         |
| CSPB   | 250x120x20mm<br>(10"x4-3/4"x3/4") |
| CSPW   | 250x120x20mm<br>(10"x4-3/4"x3/4") |

CLEANING TOOLS TILING TOOLS



# **Hydro Grouting Sponge**

- Soft and absorbent
- Ideal for all types of cleaning and decorating
- Round polished edges

| Art.No  | Size                                 |
|---------|--------------------------------------|
| CFHS190 | 190x140x51mm<br>(7-5/8"x 5-1/2"x 2") |



#### **Hydro Scrubbing Sponge**

- Dual combination with hydro sponge
- ▲ Round poilshed edges

| Art.No  | Size                                 |
|---------|--------------------------------------|
| CFHC180 | 180x110x65mm<br>(7"x4-4-3/8"x2-1/2") |



# **Hydro Grouting Sponge**

■ Ideal for cleaning tiles after grouting

| Art.No  | Size                                   |
|---------|--|
| CFHS165 | 165x110x60mm<br>(6-1/2"x4-3/8"x2-3/8") |



# **Cellulose Sponge**

- ▲ 100% Cellulose
- Ideal for all types of cleaning and decorating

| Art.No  | Size                               |
|---------|------------------------------------|
| CFCS165 | 165x110x50mm<br>(6-1/2"x4-3/8"x2") |
| CFCS180 | 180x110x50mm<br>(7"x4-3/8"x2")     |



#### **Brown Hydro Sponge**

■ Ideal for cleaning tiles after grouting

| Art.No  | Size                               |
|---------|------------------------------------|
| CFHB160 | 160x100x60mm<br>(6-3/8"x4"x2-3/8") |



#### Microfiber Sponge

- Dual combination with hydro sponge
- ▲ Round poilshed edges

| Art.No  | Size                               |
|---------|------------------------------------|
| CFHM190 | 190x120x50mm<br>(7-1/2"x4-3/4"x2") |



# **Compound Tile Nipper**

- Triple Power same effort
- Comfort grip handle
- ▲ Maximum tile thickness 12mm
- ▲ Ideal for irregular cuts in ceramic and porcelain tile

| Art.No | Siz   | ze  |
|--------|-------|-----|
| TNC10  | 250mm | 10" |



#### **Straight Tile Nipper**

- Designed to form narrow strips and shapes from wall or floor tiles
- Drop forged
- Carbide tipped-straight jaw
- Soft grip handle

| Art.No | Siz   | ze |
|--------|-------|----|
| TND8   | 200mm | 8" |



#### **Breaking Tile Nipper**

- ▲ A dual purpose tool for cutting and breaking small wall tiles
- ▲ Carbide wheel, metal construction
- Comfort grip handle

| Art.No | Siz   | ze |
|--------|-------|----|
| TNB8   | 200mm | 8" |



# **Economy Grouting Sponge**

- Ideal for cleaning tiles after grouting
- Extremely absorbent
- ▲ High abrasion resistance

| Art.No  | Size                                 |
|---------|--------------------------------------|
| CFSV25  | 190x140x50mm<br>(7-5/8"x 5-1/2"x 2") |
| CFSV100 | 180x110x50mm<br>(7-5/8"x 5-1/2"x 2") |

#### COMING SOON









#### **Multifunction Trim Puller**

- ▲ Plastic handle and stainless steel blade
- ▲ Lighter weight and compact size stop damages to the wall
- Designed for baseboard, trim molding, chair railing, decorative panel etc.

| Art.No | Size                             |
|--------|----------------------------------|
| FTP100 | 270x100x80mm<br>(11"x4"x3-9/64") |

#### **Dust Door "U"**

- ▲ To prevent dust and smell during decoration
- Suitable for 1M wide door
- ▲ Fast and easy setup
- ▲ Made of clear and strong HDPE plastic

| Art.No | Size                            |
|--------|---------------------------------|
| TDZD   | 112x220cm<br>(44-3/32"x86-5/8") |






# Wall Tile Leveling Lifter

- ▲ Convenient adjustment allows for 1-20cm free height adjustment
- Quick release level for minor adjust and removal
- Single loading capacity is 80Kg
- ▲ Ideal for facilitating the laying of large tiles on the wall

| Art.No | Size   |
|--------|--------|
| TAS25  | 1-20cm |



#### **Level Peas**

- High strength self-adhesive backing
- ▲ Flexible vinyl material
- 10pcs per stripe
- Designed to achieve a level and consistent surface when pouring self-leveling and cementitious flooring materials

| Art.No  | Size     |  |
|---------|----------|--|
| MSLP100 | 10-100mm |  |



#### Tiler's Gloves

- Provides excellent grip and movement when handling tile and stone
- Wear-resistant, stain-resistant Elastic ventilate, comfortable

| Size     |
|----------|
| 9/L      |
| 10 / XL  |
| 11 / XXL |
|          |



#### **Automatic Pencil Marker**

- Comes with 1 black lead and 6 spare leads: black, red, white available
- Writes on most surfaces including metal, timber, plastics, bricks, blocks & glass
- Integrated lead sharpener built into the cap
- Belt clip & Interchangeable lead
- Made from high quality ABS stainless steel materials

| Art.No  | Siz   | ze |
|---------|-------|----|
| TCM7    | 150mm | 6" |
| TCM7-SL | 150mm | 6" |



#### **Tile Markers**

- Black, White and Red
- ▲ For marking on variety of surfaces for cutting and drilling jobs

| Art.No | Size  |    |
|--------|-------|----|
| ТСМЗ   | 180mm | 7" |



# **Profile Gauge with Lock**

- Utilizing individually tensioned
- ▲ Low friction plastic blades
- Magnetic for hands-free working
- Metric and imperial scale

| Art.No | Siz   | ze  |
|--------|-------|-----|
| TPL250 | 250mm | 10" |



#### **Anti-vibration Gloves**

- Universal size to fit all
- ▲ Anti-vibration design with thick cushion rubber

| Art.No | Size                      |
|--------|---------------------------|
| TGAVXL | 250X115mm<br>(10"x4-1/2") |



#### **Grout Rake**

- $\ \ \, \blacksquare$  Use to remove old grout between tiles
- 2 x tungsten carbide blades

| Art.No | Siz   | ze |
|--------|-------|----|
| TGRS2  | 200mm | 8" |



#### **Grout Rake Blades**

- 2 x tungsten carbide blades

| Art.No | Size                   |
|--------|------------------------|
| TGRSB2 | Spare blades for TGRS2 |



#### Profile Gauge

- Quick and easy way to copy awkward shapes
- Utilizing individually tensioned
- ▲ Low friction plastic blades
- Ideal for tiling, wallpaper, laying carpet, laminate flooring

| Art.No | Siz   | ze  |
|--------|-------|-----|
| TPG250 | 250mm | 10" |



#### **Rubber Mallet**

■ Soft grip



One Piece Rubber Mallet

Comfort grip

| Art.No | Size |
|--------|------|
| RMWO24 | 24OZ |

| Art.No | Size |
|--------|------|
| RMWS24 | 24OZ |



#### **Tile Corner Protector**

- 4pcs per pack
- Multiple uses
- Mitigates risk of tile damage

| Art.No | Size |        |
|--------|------|--------|
| LFTP06 | 6mm  | 1/4"   |
| LFTP10 | 10mm | 3/8"   |
| LFTP13 | 13mm | 33/64" |



#### **Grout and Sealant Repair Kit**

- Grouting nozzle for cartridge
- ▲ Silicone and sealant removing knifes
- Quick and easy to use and clean

| Art.No | Size      |  |
|--------|-----------|--|
| STARK3 | Universal |  |



#### Silicone Applicator Kit

- ▲ Has half round cut outs to create a quadrant seal
- ▲ Has straight cut edges to provide a triangular seal
- Easy to use tool, no need to tape or mask joints

| Art.No | Size                         |
|--------|------------------------------|
| STAK2  | 60x60mm<br>(2 <b>-</b> 3/8") |



# Silicone Applicator Kit

- ▲ Finishing profiles in 0R,2R,3R,4R, 5R,6R,8R,10R,12R,14R,20R
- Easy to use, no need to tape or mask joints
- Designed to shape silicone sealant for a perfect neat finish

| Art.No | Size                       |  |
|--------|----------------------------|--|
| STAK4  | 46x46mm<br>(1-3/4"x1-3/4") |  |



#### Silicone Applicator Kit

- ▲ Finishing profiles in 3R,4.5R,6R,6,9,12,2C,3C,4C
- ▲ Ergonomic handle design provides better gripper

| Art.No | Size      |  |
|--------|-----------|--|
| STAK10 | Universal |  |



# Caulking Gun

- Single Component Dispenser
- ▲ Mechanical thrust ratio: 26:1 & Stroke: 4mm
- Maximum force: 400kgf (3.9kN)
- ▲ Aluminum alloy handle & Steel trigger
- Patented 360° rotary type of steel riveted carriage
- ✓ Patented no trigger gaps design
- Suitable for cold weather and High viscosity materials

| Art.No | Capacity       |  |
|--------|----------------|--|
| TCG310 | 310ml (10.5oz) |  |



#### **Caulking Gun**

- ▲ Aluminum alloy die-casting material and metal drum
- ▲ Labor-saving handle design
- ▲ Anti-drip function
- ▲ Thrust 135kg
- ▲ The glue bucket can rotate 360 degrees
- Suitable for silicone and structural adhesives

| Art.No | Capacity       |  |
|--------|----------------|--|
| TCG300 | 310ml (10.5oz) |  |



#### Caulking Gun

- ▲ Aluminum alloy die-casting material and metal drum
- ▲ Labor-saving handle design
- ▲ Anti-drip function
- ▲ Thrust 135kg
- ▲ The glue bucket can rotate 360 degrees
- Suitable for silicone and structural adhesives"

| Art.No | Capacity        |  |
|--------|-----------------|--|
| TCG600 | 600ml (20.28oz) |  |



#### Tile Repairing Kit

- With 16 blocks wax in most popular colors
- Perfect for repairing cracked tile, marble, ceramic walls and floor surfaces
- ▲ 1 x hot melt wax application tool
- ▲ 16 x hard wax sticks of different colors
- ▲ 1 x cleaning scraper
- ▲ 1 x textured scraper
- ▲ 1 x PU high-density sponge
- ▲ 1 x cleaning cloth
- ▲ 1 x Type-C charging cable

| Art.No | Size         |  |
|--------|--------------|--|
| TRPK   | 5V - 1200mAh |  |





#### **Gel Knee Pad Max**

 $\leftarrow$ 

- ▲ Large coverage contacts to floor
- Gel pad for maximum cushion
- Elastic belt and buckle fasten

| Art.No | Size      |
|--------|-----------|
| TKPF   | Universal |



# **Leather Knee Pads**

- Soft and broad strap
- Single velcro front fastening strap
- Washable & durable
- ▲ Premium Grade Neoprene
- ▲ Heavy duty closed cell foam cushion



Universal

Size

Universal

Art.No

Art.No



#### Gel Knee Pads

- ▲ Foam core for maximum cushioning
- Gel cover for extra comfort
- Velcro straps & Pressure clip for added security
- ▲ Ergonomic design
- With great stability, preventing ligament and tendons fatigue



# **TPR Knee Pads**

- Waterproof and anti-slip engineered cover
- ▲ Made of breathable diving cloth and oxford fabric
- Durable reinforced stitching & extra foam core
- ▲ Soft gel core and thick cushioned foam core provides superior protection
- Easy & secure velcro fastening system
- ▲ Protects against nails, screws, glass and debris




# **Uncoupling Mat Roller**

- Max loading: 35kg(77lb)
- ▲ Extension handle to be 1.3-2m (40"-78")
- Used to embed the membrane full bond with mortar.
- Can be easier disassembled for transport and storage
- ▲ Reduces effort required to embed membrane

| Art.No | Size             |  |
|--------|------------------|--|
| UMR330 | 1.3-2m (40"-78") |  |







# PROMOTIONAL ITEMS



**Working Tent** 

| Art.No | Size |      |
|--------|------|------|
| BPG10  | 3x3M | 118" |



Roll up

| Art.No | Size     |             |
|--------|----------|-------------|
| BPG11  | 80x200cm | 31-1/2"x78" |



**Display for Tile Spirit Level** 

| Art.No  | Size                               |
|---------|------------------------------------|
| TSL-DSP | 400x632x295mm<br>(15-3/4"x25"x12") |



Display for TSL50

| A  | \rt.No  | Size                                    |
|----|---------|---|
| TS | L50-DSP | 400x210x1330mm<br>(15-3/4"y8"y53-1/16") |



Display for B-RIGID Leveling System

| Art.No  | Size      |
|---------|-----------|
| BLS-DSP | Universal |



**Hanging Poster** 

| Art.No | Si       | ze          |
|--------|----------|-------------|
| BPG12  | 120x60cm | 47-1/4"x24" |



Bench Flag

| Art.No | Si   | ze   |
|--------|------|------|
| BPG09  | 2.8M | 118" |



Thermal Bottle 500ml

| Art.No | Size                        |
|--------|-----------------------------|
| BPG19  | 265x70mm<br>(10-1/4"x2-3/4) |



Display for DBCW20

| Art.No     | Size                                    |
|------------|---|
| DBCW30-DSP | 223x223x174mm<br>(8-5/8"x8-5/8"x6-3/4") |



**Display for Diamond Tools** 

| Art.No   | Size      |
|----------|-----------|
| DBCP-DSP | Universal |



# Gift Bag

| Art.No | Size                                 |
|--------|--------------------------------------|
| BPG17  | 35x37x15cm<br>(1-3/8"x1-1/2"x19/31") |



# Pickleball Set

| Art.No | Size      |
|--------|-----------|
| BPG18  | Universal |




**Tool Storage Box** 

| Art.No | Size      |
|--------|-----------|
| BPG16  | Universal |



**Electric Skating Board** 

| Art.No | Size      |
|--------|-----------|
| BPG20  | Universal |

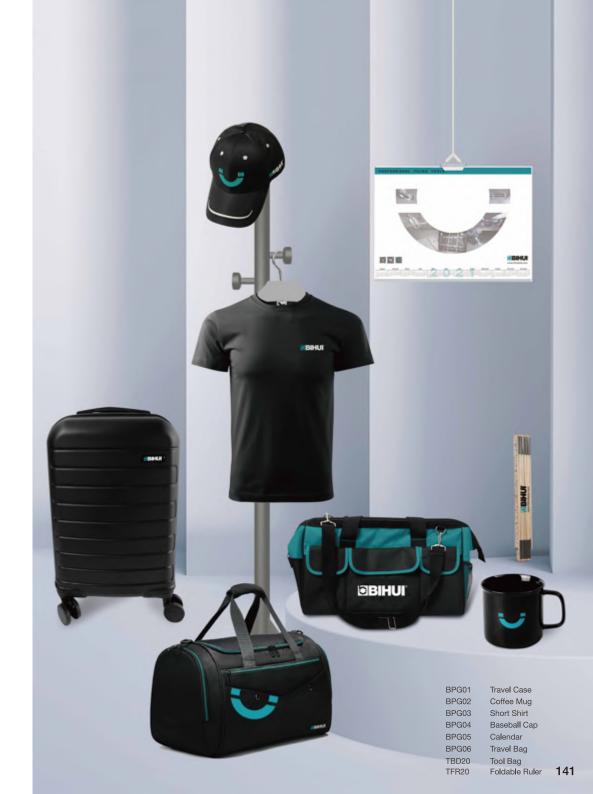

























<sup>\*</sup> Blue dot means best material for cutting

Bevelling











| 40000 | The state of the s |      | al al |      |
|-------|--|------|-------|------|
| DCDA  | DCDT   | DCDF | DCDV  | DCDB |
| •     | •  | •    | •     | •    |
| •     | •  |      |       | •    |
| •     |  |      | •     | •    |
|       |  |      | •     | •    |
| •     |  |      | •     | •    |
|       | •  |      |       |      |
|       |  | •    |       |      |
| •     | •  |      |       | •    |
|       |  | •    |       |      |
|       |  |      |       |      |
| •     | •  |      |       | •    |
| •     | •  |      |       | •    |
| •     | •  |      |       | •    |
|       |  |      |       |      |
|       |  |      |       |      |
|       |  | •    |       |      |
|       |  | •    |       |      |
| •     | •  |      |       | •    |
| •     | •  | •    | •     | •    |
|       |  |      |       |      |
| •     | •  |      | •     | •    |

<sup>\*</sup> Black dot means suitable material for cutting

<sup>\*</sup> Blank means NOT suitable for cutting

















| DSBM | DSBC | DSBS |  |
|------|------|------|--|
| •    | •    | •    |  |
| •    | •    | •    |  |
| •    | •    | •    |  |
| •    | •    | •    |  |
| •    | •    | •    |  |
| •    | •    | •    |  |
| •    | •    | •    |  |
| •    | •    | •    |  |
| •    | •    | •    |  |
| •    | •    | •    |  |
| •    | •    | •    |  |
| •    | •    | •    |  |
| •    | •    | •    |  |
| •    | •    | •    |  |
| •    | •    | •    |  |
| •    | •    | •    |  |
| •    | •    | •    |  |
| •    | •    | •    |  |
| •    | •    | •    |  |
| •    | •    | •    |  |
| •    | •    | •    |  |
| •    | •    | •    |  |
|      |      |      |  |
| •    | •    | •    |  |
|      |      |      |  |
|      |      |      |  |

Bevelling

<sup>\*</sup> For your safety, don't use a cracking or damaged blade

<sup>\*</sup> Black dot means suitable material for cutting

<sup>\*</sup> Blue dot means best material for cutting

# **ICONS AND CERTIFICATIONS**

In order to provide the readers with clear and important information, we have used the following symbols

#### **ICONS CERTIFICATES** DON'T USE A $\epsilon$ READ THE MANUAL CE MARK CRACK BLADE READ THE MANUAL WET & DRY USE NO WATER NEEDED ETL MARK WET USE CAUTION RISK OF CUTTING FDA MARK FC USE WITH CLASS II SCORING WHEEL FCC MARK PROTECTION DRILL MACHINE USE WITH SP RoHS TANK VOLUME CUTTING LENGTH ROHS MARK ANGLE GRINDER SUITABLE FOR DIAGONAL PORCELAIN MOTOR POWER TUV-GS MARK CUTTING LENGTH SPEED $\circ S_{\bullet}$ NO OIL THINCKNESS 0SA (HIGH . MEDIUM) LIFETIME NO FIRE BREAKING FORCE EN13236 EN13236 (LONG . MEDIUM) PERFORMANCE LITHIUM BATTERY \30° MACHINE WASH COLD **RECYCLING CODES** (PERFECT . GOOD) RECYCLING LOGO USE EYE PROTECTION 14 BLADE DIAMETER DO NOT BLEACH PLASTIC BAGS PE 20 PAP CARDBOARD ADHFDSHKFHDHH BLADE BORE DRY FLAT **BOXES** IRON ON **/**21 SEGMENT WIDTH ADHFDSHKFHDHH MAIL BOXES MEDIUM HEAT USE PROTECTIVE DUST AND WATER **22** SEGMENT THICKNESS STICKER **GLOVES** PROTECTION CONFORMS TRIMAN RÉMENTS DIMENSAME SEGMENT WIDTH RISK OF CUTTING TO WEEE USE OF SEGMENTED INTERNATIONAL PATENTED 45° CUTTING BLADES PROHIBITED

DON'T USE FOR

ANGLE CUTTING

PATENTED PANTENTED

**← WWW** CUTTING DIRECTION

