



# PROJOLLY SQUARE

POLISHED, SUPER POLISHED, SANDED AND SATIN FINISH STAINLESS STEEL AISI 304/1.4301-V2A

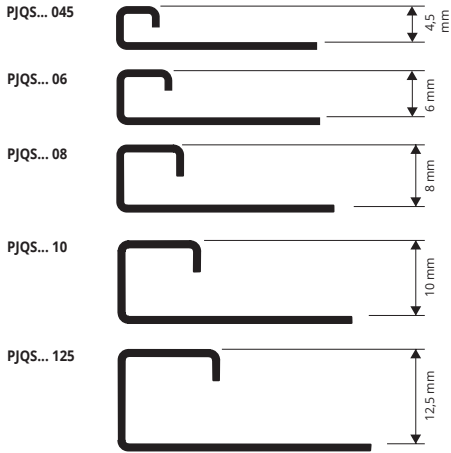

PJQSAC/S 11 & PJQSACML 11 AVAILABLE H 11 MM  
PJQSAC/S 15 & PJQSACML 15 AVAILABLE H 15 MM

### EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

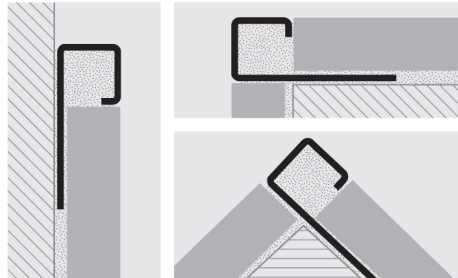

1. Choose "PROJOLLY SQUARE" according to the tile thickness and desired finish. 2. Cut "PROJOLLY SQUARE" to the desired length and apply the adhesive on the support where the profile will be laid. 3. Press the anchoring flange of "PROJOLLY SQUARE" into the adhesive. 4. Lay the tiles, aligning them with the profile leaving a 2 mm joint. Remove immediately all remains of adhesive from the surface of the profile. 5. Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile.

**PROJOLLY SQUARE** is a square corner bead profile in polished, super polished, sanded, satin finish stainless steel AISI 304/1.4301-V2A that can be applied on external corners of coverings. It can be used to close the perimeter of coverings, like a connection profile between step tread and riser of stairs coated with ceramic and natural stone tiles, and also as separation profile for floor and wall coverings. Its particular section, the availability in three different finishes and special pieces such as internal and external corners, end caps and joints make **PROJOLLY SQUARE** a much sought-after profile that allows a workmanlike application even in environments subject to high mechanical stresses.



**POLISHED STAINLESS STEEL AISI 304/1.4301-V2A with protective film**  
bar length 2,7 lm - Pack 20 Pcs - 54 lm (H 4,5 - 108 lm) - 8/10 mm

Article	H mm		
PJQSAC 045	4,5		
PJQSAC 06	6		
PJQSAC 08	8		
PJQSAC 10	10		
PJQSAC 11	11		
PJQSAC 125	12,5		
PJQSAC 15	15		



**SATIN FINISH STAINLESS ST. AISI 304/1.4301-V2A with protective film**  
bar length 2,7 lm - Pack 20 Pcs - 54 lm (H 4,5 - 108 lm) - 8/10 mm

Article	H mm		
PJQSACS 045	4,5		
PJQSACS 06	6		
PJQSACS 08	8		
PJQSACS 10	10		
PJQSACS 11	11		
PJQSACS 125	12,5		
PJQSACS 15	15		

**SUPER POLISHED STAINLESS STEEL AISI 304/1.4301-V2A**

thermo Packed  
bar length 2,7 lm - Pack 20 Pcs - 54 lm - 8/10 mm



Article	H mm		
PJQSACML 045	4,5		
PJQSACML 06	6		
PJQSACML 08	8		
PJQSACML 10	10		
PJQSACML 11	11		
PJQSACML 125	12,5		
PJQSACML 15	15		

**SANDED STAINLESS STEEL AISI 304/1.4301-V2A with protective film**  
bar length 2,7 lm - Pack 20 Pcs - 54 lm - 8/10 mm

Article	H mm		
PJQSACSB 08	8		
PJQSACSB 10	10		
PJQSACSB 125	12,5		


### COLOURS



SUITABLE FOR USE IN CONTACT WITH FOODSTUFFS.

## CAPSULES, END CAPS and THREE-WAYS JOINTS

POLISHED, SUPER POLISHED, SATIN AND SANDED FINISH STAINLESS STEEL AISI 304/1.4301-V2A / PLASTIC

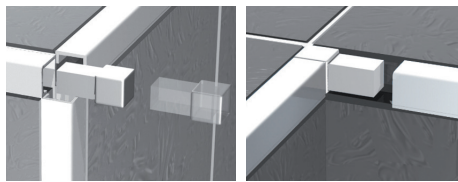

### JOINTS - PLASTIC

Article	H mm	Pack 10 Pcs	Pack 2 Pcs
GIJQ 045/...	4,5		
GIJQ 06/...	6		
GIJQ 08/...	8		
GIJQ 10/...	10		
GIJQ 11/...	11		
GIJQ 125/...	12,5		
GIJQ 15/...	15		

Choose the desired Packaging: E.g.: GIJQ .../10 (Pack 10 Pcs)  
GIJQ .../2 (Pack 2 Pcs)

**CAPSULES and END CAPS - POLISHED STAINLESS STEEL AISI 304/1.4301-V2A**

Article	H mm	Pack 10 Pcs	Pack 2 Pcs
CPJQSAC 045/...	4,5		
CPJQSAC 06/...	6		
CPJQSAC 08/...	8		
CPJQSAC 10/...	10		
CPJQSAC 11/...	11		
CPJQSAC 125/...	12,5		
CPJQSAC 15/...	15		
TPJQSAC 045-06-08-10-11-125-15/...			

Choose the desired Packaging: E.g.: CPJQSAC .../10 (Pack 10 Pcs)  
CPJQSAC .../2 (Pack 2 Pcs)

**CAPSULES - SUPER POLISHED STAINLESS STEEL AISI 304/1.4301-V2A**

Article	H mm	Pack 10 Pcs	Pack 2 Pcs
CPJQSACML 045/...	4,5		
CPJQSACML 06/...	6		
CPJQSACML 08/...	8		
CPJQSACML 10/...	10		
CPJQSACML 11/...	11		
CPJQSACML 125/...	12,5		
CPJQSACML 15/...	15		

Choose the desired Packaging: E.g.: CPJQSACML .../10 (Pack 10 Pcs)  
CPJQSACML .../2 (Pack 2 Pcs)

**CAPSULES AND END CAPS - SATIN FINISH STAINLESS ST. AISI 304/1.4301-V2A**

Article	H mm	Pack 10 Pcs	Pack 2 Pcs
CPJQSACS 045/...	4,5		
CPJQSACS 06/...	6		
CPJQSACS 08/...	8		
CPJQSACS 10/...	10		
CPJQSACS 11/...	11		
CPJQSACS 125/...	12,5		
CPJQSACS 15/...	15		
TPJQASCS 045-06-08-10-11-125-15/...			

Choose the desired Packaging: E.g.: CPJQSACS .../10 (Pack 10 Pcs)  
CPJQSACS .../2 (Pack 2 Pcs)

**CAPSULES - SANDED STAINLESS STEEL AISI 304/1.4301-V2A**

Article	H mm	Pack 10 Pcs	Pack 2 Pcs
CPJQSACSB 08/...	8		
CPJQSACSB 10/...	10		
CPJQSACSB 125/...	12,5		

Choose the desired Packaging: E.g.: CPJQSACSB .../10 (Pack 10 Pcs)  
CPJQSACSB .../2 (Pack 2 Pcs)

\* = Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed

**PROJOLLY SQUARE** is a square corner bead profile in polished stainless steel AISI 304/1.4301-V2A that can be applied on external corners of coverings. It can be used to close the perimeter of coverings, like a connection profile between step tread and riser of stairs coated with ceramic and natural stone tiles, and also as separation profile for floor and wall coverings. Its particular section and the availability of special pieces such as internal and external corners, end caps and joints make **PROJOLLY SQUARE** a much sought-after profile that allows a workmanlike application even in environments subject to high mechanical stresses.

# PROJOLLY SQUARE

POLISHED, SATIN FINISH STAINLESS STEEL  
AISI 316LL/1.4404-V4A



**POLISHED STAINLESS STEEL AISI 316LL/1.4404-V4A with protective film**

bar length 2,7 LM - Pack 20 Pcs - 54 lm - 8/10 mm



Article	H mm		
PJQSACM 08	8		*
PJQSACM 10	10		
PJQSACM 11	11		
PJQSACM 125	12,5		

#### COLOURS



ACM - Polished stainless st.  
AISI 316LL



**SATIN FINISH STAINLESS STEEL AISI 316LL/1.4404-V4A with protective film**

bar length 2,7 LM - Pack 20 Pcs - 54 lm - 8/10 mm




Article	H mm		
PJQSACMS 10	10		*
PJQSACMS 11	11		*
PJQSACMS 125	12,5		*

#### COLOURS



ACMS - Satin finish stainless st.  
AISI 316LL

SUITABLE FOR USE IN CONTACT WITH FOODSTUFFS.

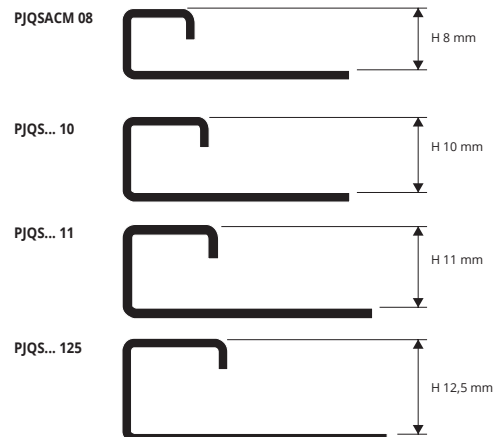

#### INSTRUCTIONS FOR LAYING METHODS

1. Choose "PROJOLLY SQUARE" according to the tile thickness and desired finish. 2. Cut "PROJOLLY SQUARE" to the desired length and apply the adhesive on the support where the profile will be laid. 3. Press the anchoring flange of "PROJOLLY SQUARE" into the adhesive. 4. Lay the tiles, aligning them with the profile leaving a 2 mm joint. Remove immediately all remains of adhesive from the surface of the profile. 5. Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile.

## CAPSULES, END CAPS and THREE-WAYS JOINTS

STAINLESS STEEL AISI 316LL

**CAPSULES and END CAPS - POLISHED STAINLESS STEEL AISI 316LL/1.4404**

Article	H mm	Pack 10 Pcs	Pack 2 Pcs
CPJQSACM 08/...	8		*
CPJQSACM 10/...	10		
CPJQSACM 11/...	11		
CPJQSACM 125/...	12,5		

TPJQSACM 08-10-11-125/..

Choose the desired Packaging: E.g.: CPJQSACM .../10 (Pack 10 Pcs)  
CPJQSACM .../2 (Pack 2 Pcs)

**CAPSULES and END CAPS - SATIN FINISH STAINLESS STEEL AISI 316LL/1.4404**

Article	H mm	Pack 10 Pcs	Pack 2 Pcs
CPJQSACMS 10/...	10		*
CPJQSACMS 11/...	11		*
CPJQSACMS 125/...	12,5		*
CPJQSACMS 10-11-125/..			*

Choose the desired Packaging: E.g.: CPJQSACMS .../10 (Pack 10 Pcs)  
CPJQSACMS .../2 (Pack 2 Pcs)

**JOINTS - PLASTIC**

Article	H mm	Pack 10 Pcs	Pack 2 Pcs
GIJQ 08/...	8		*
GIJQ 10/...	10		
GIJQ 11/...	11		
GIJQ 125/...	12,5		

Choose the desired Packaging: E.g.: GIJQ .../10 (Pack 10 Pcs)  
GIJQ .../2 (Pack 2 Pcs)



\* = Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed