



PROLISTEL ACC

POLISHED, BRUSHED
STAINLESS STEEL AISI 304/1.4301-V2A

PROLISTEL ACC is a listel in polished, brushed, sanded stainless steel AISI 304/1.4301-V2A with a flat and U-shaped (internal use) visible surface, suitable to decorate the wall coverings in ceramic, mosaic and natural stone. Its particular section and availability in different finishes, make **PROLISTEL ACC** a much sought after profile. It can be used with the range of PROJOLLY profiles to decorate the wall coverings and to allow an elegant workmanlike application.

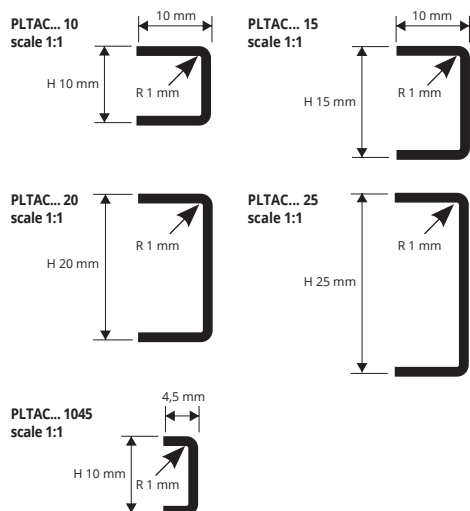

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

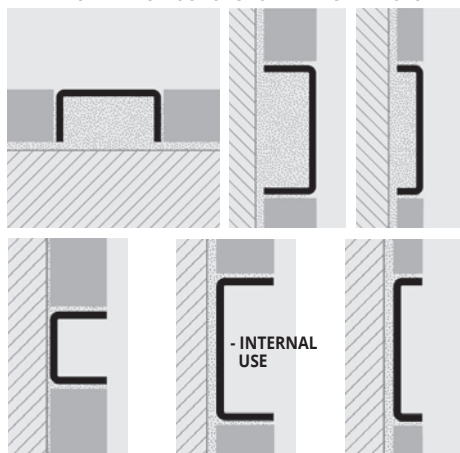

1. Choose "PROLISTEL ACC" according to the width and desired finish. 2. Cut "PROLISTEL ACC" to the desired length and apply the adhesive on the support where the profile will be laid. 3. Press "PROLISTEL ACC" into the adhesive. 4. Lay the tiles, aligning them with the profile leaving a 2 mm joint. Remove immediately all remains of adhesive from the surface of the profile. 5. Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile.

POLISHED STAINLESS ST. AISI 304/1.4301-V2A with protective film
bar length 2,7 lm - pack. 40 Pcs - 108 lm - 8/10mm

Article	HxL mm	€/lm	€/Pc
PLTAC 10	10 x 10	7,44	20,09
PLTAC 1045	10 x 4,5	7,12	19,22
PLTAC 15	15 x 10	9,90	26,73
PLTAC 20	20 x 10	13,20	35,64
PLTAC 25	25 x 10	16,51	44,58

Brushed STAINLESS ST. AISI 304/1.4301-V2A with protective film
bar length 2,7 lm - pack. 40 Pcs - 108 lm - 8/10mm

Article	HxL mm	€/lm	€/Pc
PLTACS 10	10 x 10	8,92	24,08
PLTACS 1045	10 x 4,5	9,07	24,49
PLTACS 15	15 x 10	12,88	34,78
PLTACS 20	20 x 10	17,15	46,31
PLTACS 25	25 x 10	19,01	51,33


COLOURS



PROLISTEL P OTT is a decorative listel in polished, chromed and antique brass with a flat visible surface. The profile is suitable to decorate the wall coverings in ceramic, mosaic and natural stone. Its particular section and availability in different finishes and two widths, make **PROLISTEL P OTT** a much sought after profile. It could be matched with PROJOLLY, PROJOLLY SQUARE e PROTERMINAL profiles to decorate the wall coverings and to allow an elegant workmanlike application.

PROLISTEL P OTT

POLISHED, CHROMED,
ANTIQUE BRASS



POLISHED, CHROMED AND ANTIQUE BRASS thermo packed - Bar length 2,7 lm - pack 40 PCS - 108 lm

Article	H mm	€/lm	€/Pc
PLTPOL 25	25	29,08	78,52
PLTPOC 25	25	43,10	116,37
PLTPOB 25	25	63,33	170,99

COLOURS

OL - Polished brass	OC - Chromed brass	OB - Antique brass

EXAMPLES AND INSTRUCTIONS FOR LAYING



1. Choose "PROLISTEL P OTT" according to the width and desired finish. 2. Cut "PROLISTEL P OTT" to the desired length and apply the adhesive on the support where the profile will be laid. 3. Press "PROLISTEL P OTT" into the adhesive. 4. Lay the tiles, aligning them with the profile leaving a 2 mm joint. Remove immediately all remains of adhesive from the surface of the profile. 5. Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile.


PROLISTEL LED is a listel in anodized and polished aluminium equipped with an integrated LED lighting system that can generate a cold, hot and neutral suffused light. It is suitable to decorate the wall coverings in ceramic, mosaic and natural stone. Its particular section and availability in different finishes, make **PROLISTEL LED** a much sought after profile that decorates the wall coverings.

PROLISTEL LED

ANODIZED AND POLISHED ALUMINIUM



PLTLED... 20
scale 1:1



ANODIZED ALUM. SILVER, POLISHED CHROME ALUMINIUM thermo packed - bar length 2,7 lm - pack. 40 Pcs - 108 lm
ADAPTOR LED, LED & FLAT NOT INCLUDED

Article	H mm	€/lm	€/Pc
PLTLEDAA 20	20	12,78	34,51
PLTLEDBC 20	20	14,46	39,04

ADHESIVE FLEXIBLE LED COIL
length 5 lm - pack. 1 ROLL

Article	€/lm	€/Pack
LEDN	23,14	115,70
LEDF	23,14	115,70
LEDC	23,14	115,70

COLOURS

AA - Anodized silver alum.	BC - Polished chrome alum.

POLYCARBONATE FLAT bar length 2,7 lm - pack. 20 Pc - 54 lm
(AL = transparent / AO = matt)

Article	€/lm	€/Pc
PIAL 17	5,31	14,34
PIAO 17	5,31	14,34

END CAPS - R/L (1 right & 1 left)

Article	H mm	€/Pack
TPLTLEDAA 20/1	20	7,52
TPLTLEDBC 20/1	20	7,52

LED ADAPTOR AC/DC 75W - 12V (15 lm)

Article	€/Pc
ALL 7512	84,74

LED ADAPTOR AC/DC 25W - 12V (5 lm)

Article	€/Pc
ALL 2512	58,11

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS





1. Choose "PROLISTEL LED" according to the width and desired finish. 2. Cut "PROLISTEL LED" to the desired length and apply the adhesive on the support where the profile will be laid. 3. Press "PROLISTEL LED" into the adhesive. 4. Lay the tiles, aligning them with the profile leaving a 2 mm joint. Remove immediately all remains of adhesive from the surface of the profile. 5. Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile.

PROLISTEL P ALL


ANODIZED, POLISHED, BRUSHED
AND STONE LINE ALUMINIUM

PROLISTEL P ALL is a decorative listel in anodized, polished, brushed and varnished Stone Line aluminium with a flat visible surface. The profile is suitable to decorate the wall coverings in ceramic, mosaic and natural stone. Its particular section and availability in different finishes and two widths, make **PROLISTEL P ALL** a much sought after profile. It could be matched with PROJOLLY, PROJOLLY SQUARE e PROTERMINAL profiles to decorate the wall coverings and to allow an elegant workmanlike application.

NEWS
KALEIDOS



EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

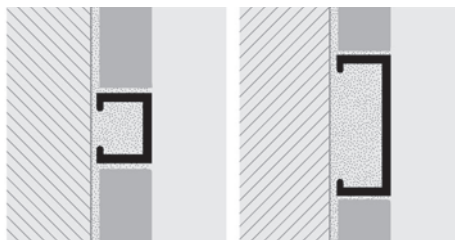

1. Choose "PROLISTEL P ALL" according to the width and desired finish. 2. Cut "PROLISTEL P ALL" to the desired length and apply the adhesive on the support where the profile will be laid. 3. Press "PROLISTEL P ALL" into the adhesive. 4. Lay the tiles, aligning them with the profile leaving a 2 mm joint. Remove immediately all remains of adhesive from the surface of the profile. 5. Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile.

ANODIZED ALUMINIUM

thermo packed - bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	H mm	€/lm	€/Pc
PLTPAA 10	10	5,24	14,15
PLTPAO 10	10	5,55	14,99
PLTPAR 10	10	7,25	19,58
PLTPAT 10	10	7,25	19,58
PLTPNEO 10	10	7,33	19,79
PLTPAA 25	25	8,43	22,76
PLTPAO 25	25	8,82	23,81
PLTPAT 25	25	11,20	30,24
PLTPNEO 25	25	11,43	30,86

POLISHED BRUSHED ALUMINIUM

thermo packed - bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	H mm	€/lm	€/Pc
PLTPBS 10	10	7,59	20,49
PLTPBOS 10	10	7,97	21,52
PLTPTS 10	10	10,09	27,24
PLTPNS 10	10	10,21	27,57
PLTPBS 25	25	10,90	29,43
PLTPBOS 25	25	11,42	30,83
PLTPNS 25	25	13,55	36,59

POLISHED ALUMINIUM

thermo packed - bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	H mm	€/lm	€/Pc
PLTPBC 10	10	7,54	20,36
PLTPBO 10	10	7,91	21,36
PLTPBR 10	10	9,74	26,30
PLTPBT 10	10	9,74	26,30
PLTPBN 10	10	9,86	26,62
PLTPBC 25	25	10,90	29,43
PLTPBO 25	25	11,42	30,83
PLTPBR 25	25	12,29	33,18
PLTPBT 25	25	12,29	33,18
PLTPBN 25	25	12,57	33,94

STONE LINE ALUMINIUM

thermo packed - bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	H mm	€/lm	€/Pc
PLTPA 10-SL01	10	8,00	21,60
PLTPA 10-SL08	10	8,00	21,60
PLTPA 10-...	10	8,00	21,60
PLTPA 25-SL01	25	12,83	34,64
PLTPA 25-SL08	25	12,83	34,64
PLTPA 25-...	25	12,83	34,64

COLOURS

ANODIZED				POLISHED				BLACK LINE		
AA - Anodized silver aluminium	AR - Anodized copper aluminium	AT - Anodized titanium aluminium	AO - Anodized gold aluminium	BC - Polished chrome aluminium	BO - Polished gold aluminium	BR - Polished copper aluminium	BT - Polished titanium aluminium	BN - Polished black aluminium	NEO - Anodized black aluminium	NS - Polished brushed black aluminium
POLISHED BRUSHED										
BS - Polished brushed aluminium	BOS - Polished brushed gold aluminium	TS - Polished brushed titanium aluminium	RS - Polished brushed copper aluminium							

KALEIDOS

STONE LINE						
SL02 - Stone cream	SL03 - Stone greyvory	SL04 - Stone sand	SL05 - Stone gray	SL06 - Stone cristal gray	SL08 - Antrdark	SL13 - Stone oyster grey

PROBORD is a round corner bead profile in polished and brushed stainless steel AISI 304/1.4301-V2A suitable to protect the external corner of wall coverings in ceramic. Its particular section and availability in different finishes, make **PROBORD** a much sought after profile. It can be used with the range of PROLISTEL and PROSHELL profiles to obtain an elegant workmanlike application even in environments subject to high mechanical stresses.

PROBORD

POLISHED AND BRUSHED STAINLESS STEEL
AISI 304/1.4301-V2A



POLISHED STAINLESS ST. AISI 304/1.4301-V2A with protective film
bar length 2,7 lm - pack. 15 Pcs - 40,5 lm - 10/10mm

Article	H mm	€/lm	€/Pc
PEBDAC 08	08	20,39	55,05
PEBDAC 10	10	21,18	57,19
PEBDAC 125	12,5	21,71	58,62

BRUSHED STAINLESS ST. AISI 304/1.4301-V2A with protective film
bar length 2,7 lm - pack. 15 Pcs - 40,5 lm - 10/10mm


Article	H mm	€/lm	€/Pc
PEBDACS 08	08	23,88	64,48
PEBDACS 10	10	24,52	66,20
PEBDACS 125	12,5	25,32	68,36

COLOURS




SUITABLE FOR USE IN CONTACT WITH FOODSTUFFS.

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

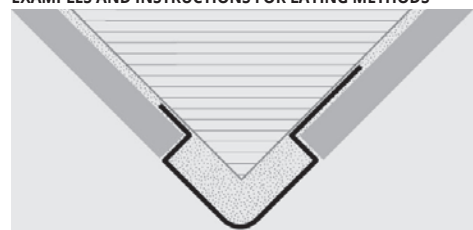


1. Choose "PROBORD" according to the tile thickness and desired finish. 2. Cut "PROBORD" to the desired length and apply the adhesive on the support where the profile will be laid. 3. Press the anchoring flange of "PROBORD" into the adhesive. 4. Lay the tiles, aligning them with the profile leaving a 2 mm joint. Remove immediately all remains of adhesive from the surface of the profile. 5. Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile.


PEBDAC/ACS 08
scale 1:1

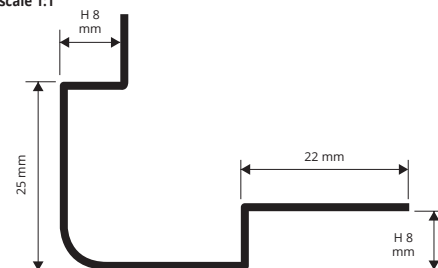

PEBDAC/ACS 10
scale 1:1

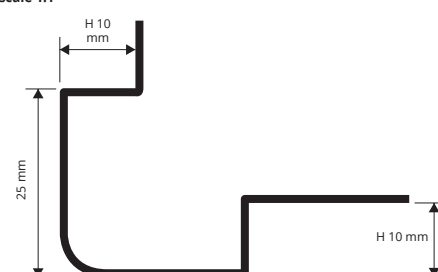

PEBDAC/ACS 125
scale 1:1

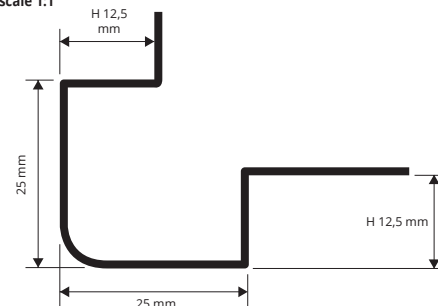

PROEDGE FLEX

SHOCKPROOF NON - TOXIC CO-EXTRUDED
COLORED VINYL RESIN




CO-EXTRUDED PVC - L 40 X 40 mm
bar length 2,7 lm - pack. 15 Pcs - 40,5 lm

Article	H mm	€/lm	€/Pc
PFC01 40	40	8,57	23,14


CO-EXTRUDED PVC WITH ADHESIVE - L 40 X 40 mm
bar length 2,7 lm - pack. 15 Pcs - 40,5 lm

Article	H mm	€/lm	€/Pc
PFC01 40A	40	11,47	30,97

COLOURS



PFC... 40/40A
scale 1:2



EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS




1. Choose "PROEDGE FLEX" according to the desired colour. 2. Cut "PROEDGE FLEX" to the desired length. 3. Remove carefully any remains of oil, fat and dirt from the surface where the profile will be laid. 4. When the surface is perfectly dry, remove the protective film (version with adhesive), place correctly the profile and press it without hitting / apply the silicone on the surface where the profile will be laid (version without adhesive) and press it without hitting.

PROEDGE AC

POLISHED AND BRUSHED
STAINLESS STEEL AISI 304/1.4301-V2A

PROEDGE AC is a corner bead profile in polished and brushed stainless steel AISI 304/1.4301-V2A, with a radius of curvature of 1.5 mm, suitably shaped to protect the external corner of wall coverings. Its particular section, the availability in two finishes and different widths make **PROEDGE AC** a much sought-after profile that allows a workmanlike application even in environments subject to high mechanical stresses.

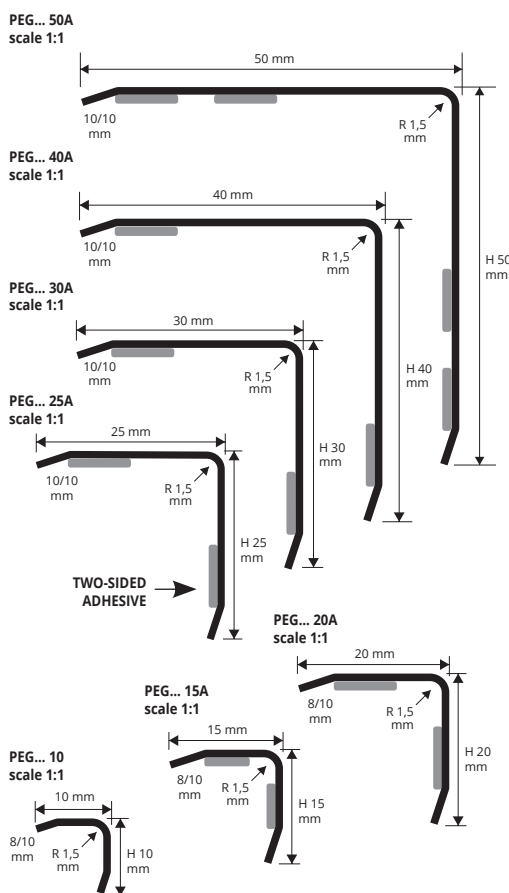

POLISHED AND BRUSHED STAINLESS STEEL
with protective film - bar length 2,7 lm - pack. 81 lm - 8/10 mm

Article	LxH mm	€/lm	€/Pc
PEGAC 10	10 x 10	6,70	18,09
PEGACS 10	10 x 10	8,59	23,19

POLISHED AND BRUSHED STAINLESS STEEL WITH ADHESIVE
with protective film - bar length 2,7 lm - pack. 81 lm - 8/10 mm

Article	LxH mm	€/lm	€/Pc
PEGAC 15A	15 x 15	9,87	26,65
PEGACS 15A	15 x 15	11,77	31,78
PEGAC 20A	20 x 20	11,19	30,21
PEGACS 20A	20 x 20	13,10	35,37

For items without adhesive, write the item without the last A.
E.g.: PEGAC 15 and deduct 1,50 €/lm from the gross price.

COLOURS

	
AC - Polished stainless steel AISI 304/1.4301-V2A	ACS - Brushed stainless steel AISI 304/1.4301-V2A

Suitable for use in contact with foodstuffs.



POLISHED AND BRUSHED STAINLESS STEEL WITH ADHESIVE
with protective film - bar length 2,7 lm - pack. 40,5 lm - 10/10 mm

Article	LxH mm	€/lm	€/Pc
PEGAC 25A	25 x 25	12,50	33,75
PEGACS 25A	25 x 25	14,46	39,04
PEGAC 30A	30 x 30	17,76	47,95
PEGACS 30A	30 x 30	20,09	54,24

For items without adhesive write the item without the last A.
E.g.: PEGAC 10 and deduct 1,50 €/lm from the gross price.

POLISHED AND BRUSHED STAINLESS STEEL WITH ADHESIVE
with protective film - bar length 2,7 lm - pack. 27 lm - 10/10 mm

Article	LxH mm	€/lm	€/Pc
PEGAC 40A	40 x 40	22,50	60,75
PEGACS 40A	40 x 40	25,48	68,80
PEGAC 50A	50 x 50	26,17	70,66
PEGACS 50A	50 x 50	28,28	76,36

For items without adhesive, write the item without the last A.
E.g.: PEGAC 40 and deduct 1,50 €/lm from the gross price.


PEG... 40A / 50A on demand with thickness 12/10.
Quantity, timing and prices to be agreed.

PROEDGE OT

POLISHED AND CHROMED BRASS

PROEDGE OT is a corner bead profile in polished and chromed brass, with a radius of curvature of 1.5 mm, suitably shaped to protect the external corner of wall coverings. Its particular section, the availability in two finishes and different widths make **PROEDGE OT** a much sought-after profile that allows an elegant workmanlike application.

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

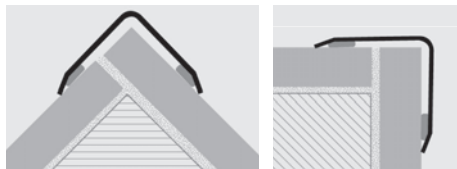

1. Choose "PROEDGE OT" according to the desired finish and width.
2. Cut "PROEDGE OT" to the desired length.
3. Remove carefully any remains of oil, fat and dirt from the surface where the profile will be laid.
4. When the surface is perfectly dry, remove the protective film, place correctly the profile and press it without hitting / apply the silicone on the surface where the profile will be laid (version without adhesive) and press it without hitting.

COLOURS

	
OC - Chromed brass	OL - Polished Brass



POLISHED AND CHROMED BRASS
bar length 2,7 lm - pack. 54 lm - 8/10 mm

Article	LxH mm	€/lm	€/Pc
PEGOL 10	10 x 10	11,72	31,64
PEGOC 10	10 x 10	16,63	44,90

POLISHED AND CHROMED BRASS WITH ADHESIVE
bar length 2,7 lm - pack. 54 lm - 8/10 mm

Article	LxH mm	€/lm	€/Pc
PEGOL 15A	15 x 15	13,39	36,15
PEGOC 15A	15 x 15	19,90	53,73
PEGOL 20A	20 x 20	17,15	46,31
PEGOC 20A	20 x 20	24,53	66,23

For items without adhesive, write the item without the last A.
E.g.: PEGOL 15 and deduct 1,50 €/lm from the gross price.



POLISHED BRASS WITH ADHESIVE
bar length 2,7 lm - pack. 27 lm - 10/10 mm

Article	LxH mm	€/lm	€/Pc
PEGOL 25A	25 x 25	18,10	48,87
PEGOL 30A	30 x 30	24,60	66,42

MIRROR
LINE

MIRROR
LINE


PROEDGE AL is a corner bead profile in anodized and varnished aluminium suitably shaped to protect the external corner of wall coverings. Its particular section and the availability in four different finishes make **PROEDGE AL** a much sought-after profile that allows a workmanlike application.

PROEDGE AL

ANODIZED AND VARNISHED ALUMINIUM



PEG... 25A
PEGA 25-01A
scale 1:1



EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS



1. Choose "PROEDGE AL" according to the desired finish and width.
2. Cut "PROEDGE AL" to the desired length.
3. Remove carefully any remains of oil, fat and dirt from the surface where the profile will be laid.
4. When the surface is perfectly dry, remove the protective film, place correctly the profile and press it without hitting / apply the silicone on the surface where the profile will be laid (version without adhesive) and press it without hitting.

ANODIZED ALUM. (gold, silver and bronze) **WITH ADHESIVE**
thermo packed - bar length 2,7 lm - pack. 30 Pcs - 81 lm




Article	LxH mm	€/lm	€/Pc
PEGAO 25A	25 x 25	7,31	19,74
PEGAA 25A	25 x 25	7,31	19,74
PEGAB 25A	25 x 25	7,31	19,74

For items without adhesive, write the article without the last A.
E.g.: PEGAO 25 and deduct 1,50 €/lm from the gross price.

WHITE VARNISHED ALUMINIUM - WITH ADHESIVE
thermo packed - bar length 2,7 lm - pack. 30 Pcs - 81 lm

Article	LxH mm	€/lm	€/Pc
PEGA 25-01A	25 x 25	9,12	24,62

COLOURS

ANODIZED		
		
AO - Anodized gold alum.	AA - Anodized silver alum.	AB - Anod. bronze alum.
		
01 - White varnished alum.		

PROEDGE PVC is a corner bead profile in shockproof non-toxic co-extruded white vinyl resin suitably shaped to protect the external corner of wall coverings. Its particular section and the availability in four different widths make **PROEDGE PVC** a much sought-after profile that allows a workmanlike application.

PROEDGE PVC

SHOCKPROOF NON - TOXIC CO-EXTRUDED
WHITE VINYL RESIN



SHOCKPROOF VINYL RESIN WITH ADHESIVE
bar length 2,7 lm - pack. 30 Pcs - 81 lm

Article	LxH mm	€/lm	€/Pc
PEG 25-01A	25 x 25	6,18	16,69
PEG 30-01A	30 x 30	6,99	18,87

SHOCKPROOF VINYL RESIN WITHOUT ADHESIVE
bar length 2,7 lm - pack. 30 Pcs - 81 lm

Article	LxH mm	€/lm	€/Pc
PEG 25-01	25 x 25	4,21	11,37
PEG 30-01	30 x 30	5,04	13,61

COLOURS

01 - White


SHOCKPROOF VINYL RESIN WITH ADHESIVE
bar length 2,7 lm - pack. 15 Pcs - 40,5 lm

Article	LxH mm	€/lm	€/Pc
PEG 40-01A	40 x 40	7,81	21,09
PEG 50-01A	50 x 50	8,64	23,33

SHOCKPROOF VINYL RESIN WITHOUT ADHESIVE
bar length 2,7 lm - pack. 15 Pcs - 40,5 lm

Article	LxH mm	€/lm	€/Pc
PEG 40-01	40 x 40	5,85	15,80
PEG 50-01	50 x 50	6,68	18,04

1. Choose "PROEDGE PVC" according to the desired width.
2. Cut "PROEDGE PVC" to the desired length.
3. Remove carefully any remains of oil, fat and dirt from the surface where the profile will be laid.
4. When the surface is perfectly dry, remove the protective film, place correctly the profile and press it without hitting / apply the silicone on the surface where the profile will be laid (version without adhesive) and press it without hitting.

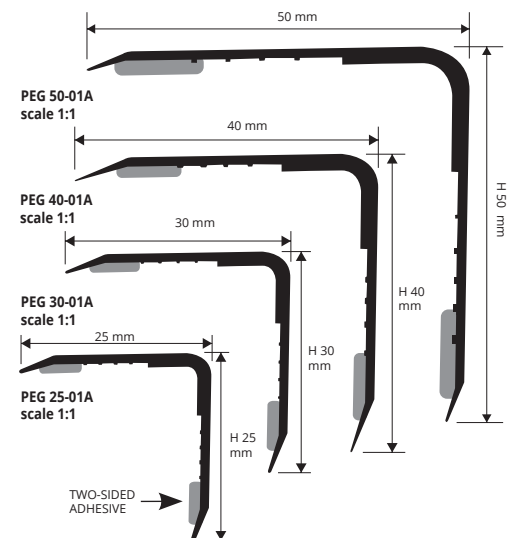


EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS




PROINTER AC

POLISHED AND BRUSHED
STAINLESS STEEL AISI 316/1.4401-V4A

PROINTER AC 316 is a cove-shaped profile in polished, super polished and brushed stainless steel AISI 316 / 1.404 - V4A. It is particularly suitable to ensure cleanliness and hygiene in every kind of environment where high resistance to mechanical and chemical stresses are required. Its particular section and the availability in three finishes and special pieces, such as internal and external corners, make **PROINTER AC 316** a much sought after profile. The profile is easy to match with the wall covering and allows a workmanlike application even in environments subject to high mechanical stresses.

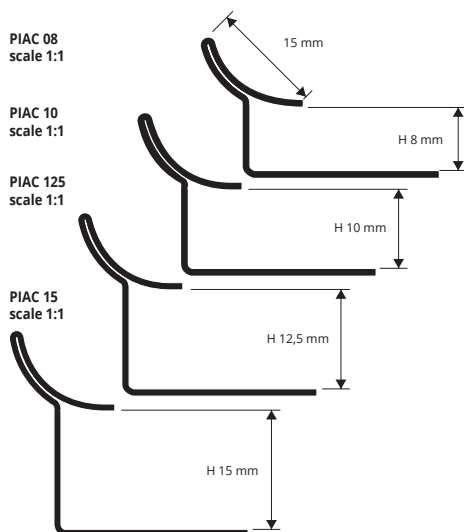

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

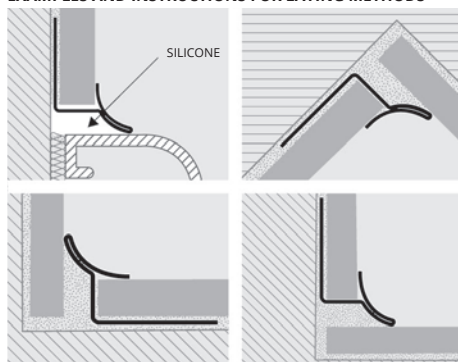

1. Choose "PROINTER AC 316" according to the tile thickness and desired finish.
2. Cut "PROINTER AC 316" to the desired length and apply the adhesive on the support where the profile will be laid.
3. Press the anchoring flange of "PROINTER AC 316" into the adhesive.
4. Lay the tiles, aligning them with the profile leaving a 2 mm joint. Remove immediately all remains of adhesive from the surface of the profile.
5. Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile.



POLISHED STAINLESS STEEL AISI 316/1.4404-V4A
bar length 2,7 lm - pack. 20 Pcs - 54 lm - 10/10 mm



Article	H mm	€/lm	€/Pc
PIACM 08	8	19,50	52,65
PIACM 10	10	20,62	55,67
PIACM 125	12,5	26,29	70,98



BRUSHED STAINLESS STEEL AISI 316/1.4404-V4A
bar length 2,7 lm - pack. 20 Pcs - 54 lm - 10/10 mm




Article	H mm	€/lm	€/Pc
PIACMS 08	8	24,45	66,02
PIACMS 10	10	28,03	75,68
PIACMS 125	12,5	29,07	78,49

COLOURS

ACM - Polished stainless steel AISI 316/1.4404-V4A	ACMS - Brushed stainless steel AISI 316/1.4404-V4A

JOINTS CAN ALSO BE USED FOR PROINTER KL ACC

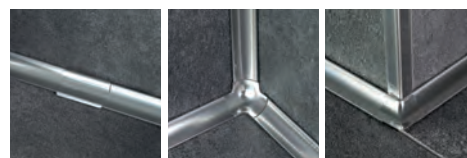

PROINTER JUNCTIONS

Polished stainless steel AISI 316/1.4404-V4A

Article	€/Pc
RIPISACM/1	7,73
RITPISACM/1	7,73
REPISACM/1	7,73
GPISACM/1	4,64
TPISACM/1	6,70

PROINTER JUNCTIONS

Brushed stainless steel AISI 316/1.4404-V4A


Article	€/Pc
RIPISACMS/1	8,24
RITPISACMS/1	8,24
REPISACMS/1	8,24
GPISACMS/1	5,15
TPISACMS/1	7,21

PROINTER KL ACC


STAINLESS STEEL AISI 316/1.4401-V4A

PROINTER KL ACC 316 is a cove-shaped profile in stainless steel AISI 316/1.4404-V4A. The profile allows to connect the floor and wall coverings in ceramic and mosaic also with low thickness. It is particularly suitable to ensure cleanliness and hygiene in every kind of environment where good resistance to mechanical and chemical stresses are required. Its particular section makes **PROSHELL KL ALL 316** a much sought after profile.

PIKL... 15
scale 1:1



EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

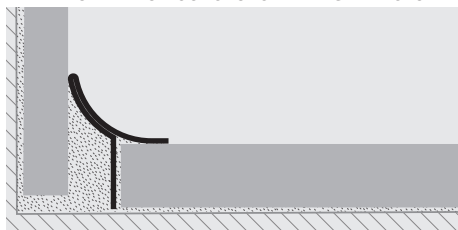

1. Choose "PROINTER KL ACC 316" according to the desired finish.
2. Cut "PROINTER KL ACC 316" to the desired length.
3. Apply the silicone along the floor-wall connection.
4. Press the arrowhead of "PROINTER KL ACC 316" into the silicone evenly until it is completely adherent to the floor and wall.

SUITABLE FOR USE IN CONTACT WITH FOODSTUFFS



POLISHED STAINLESS STEEL AISI 316/1.4404-V4A
bar length 2,7 lm - pack. 20 Pcs - 54 lm - 10/10 mm



Article	H mm	€/lm	€/Pc
PIKLACM 15	15	16,89	45,6

COLOURS

ACM - Polished stainless steel AISI 316/1.4404-V4A	ACMS - Brushed stainless steel AISI 316/1.4404-V4A



BRUSHED STAINLESS STEEL AISI 316/1.4404-V4A
bar length 2,7 lm - pack. 20 Pcs - 54 lm - 10/10 mm




Article	H mm	€/lm	€/Pc
PIKLACMS 15	15	21,34	57,62

IT IS POSSIBLE TO USE THE JOINTS OF PROINTER AC

PROINTER KL ACC is a cove-shaped profile in stainless steel AISI 304/1.4301-V2A. The profile allows to connect the floor and wall coverings in ceramic and mosaic also with low thickness. It is particularly suitable to ensure cleanliness and hygiene in every kind of environment where good resistance to mechanical and chemical stresses are required. Its particular section makes **PROSHELL KL ALL** a much sought after profile.


PROINTER KL ACC

POLISHED AND BRUSHED
STAINLESS STEEL AISI 316/1.4401-V4A

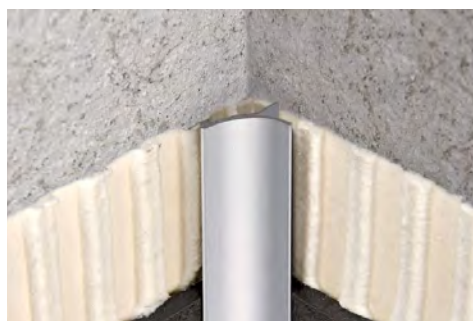

POLISHED STAINLESS ST. AISI 304/1.4301-V2A with protective film
bar length 2,7 lm - pack. 40 Pcs - 108 lm - 8/10mm

Article	H mm	€/lm	€/Pc
PIKLAC 15	15	13,00	35,10

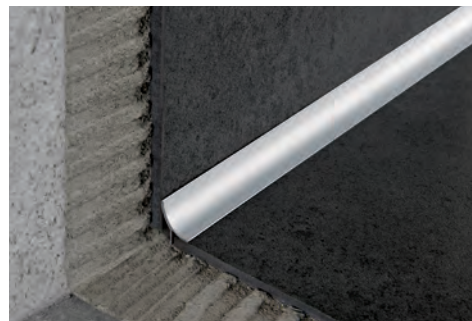

BRUSHED STAINLESS ST. AISI 304/1.4301-V2A with protective film
bar length 2,7 lm - pack.. 40 Pcs - 108 lm - 8/10mm


Article	H mm	€/lm	€/Pc
PIKLACS 15	15	16,42	44,33

COLOURS




SUITABLE FOR USE IN CONTACT WITH FOODSTUFFS

PIKL... 15
scale 1:1



EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

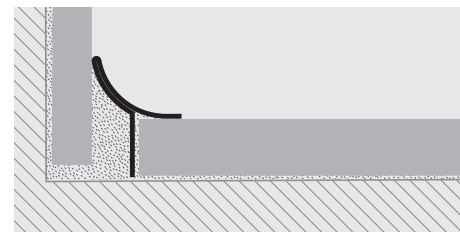

1. Choose "PROINTER KL ACC" according to the desired finish. 2. Cut "PROINTER KL ACC" to the desired length. 3. Apply the silicone along the floor-wall connection. 4. Press the arrowhead of "PROINTER KL ACC" into the silicone evenly until it is completely adherent to the floor and wall.

PROSHELL KL ALL is a cove-shaped profile in polished and chromed brass and anodized and polished aluminium. The profile allows to connect the floor and wall coverings in ceramic and mosaic also with low thickness. It is particularly suitable to ensure cleanliness and hygiene in every kind of environment where good resistance to mechanical and chemical stresses are required. Its particular section and availability in five different finishes, make **PROSHELL KL ALL** a much sought after profile.

PROINTER KL ALL

POLISHED AND CHROMED BRASS AND
ANODIZED AND POLISHED ALUMINIUM



POLISHED / CHROMED BRASS thermo packed
bar length 2,7 lm - pack. 40 Pcs - 108 lm


Article	H mm	€/lm	€/Pc
PIKLLOL 045	4,5	15,70	42,39
PIKLLOC 045	4,5	24,53	66,23

CAPS - VARNISHED PLASTIC

Article	€/Pcs
TPIKLLOL .../1	1,69
TPIKLLOC .../1	1,69



COLOURS



POLISHED CHROME ALUMINIUM / GOLD thermo packed
bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	H mm	€/lm	€/Pc
PIKLBC 045	4,5	8,69	23,46
PIKLBO 045	4,5	8,69	23,46

ANODIZED SILVER ALUMINIUM thermo packed
bar length 2,7 lm - pack. 40 Pcs - 108 lm


Article	H mm	€/lm	€/Pc
PIKLAA 045	4,5	6,09	16,44

CAPS - VARNISHED PLASTIC


Article	€/Pcs
TPIKLAA .../1	1,69
TPIKLBC .../1	1,69
TPIKLBO .../1	1,69




COLOURS



PIKL... 045
scale 1:1



EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

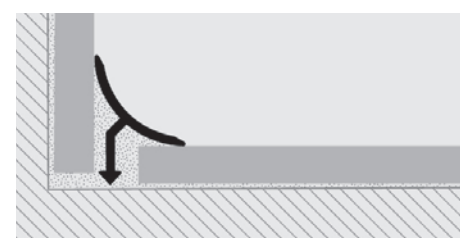


1. Choose "PROINTER KL ALL" according to the desired finish. 2. Cut "PROINTER KL ALL" to the desired length. 3. Apply the silicone along the floor-wall connection. 4. Press the arrowhead of "PROINTER KL ALL" into the silicone evenly until it is completely adherent to the floor and wall.


PROINTER AL

ANODIZED AND POLISHED ALUMINIUM

PROINTER AL is a cove-shaped profile in anodized and polished aluminium. It is particularly suitable to ensure cleanliness and hygiene is suitable in indoors environment where good resistance to mechanical and chemical stresses are required. Its particular section and the availability in four finishes and special pieces, such as internal and external corners, make **PROINTER AL** a much sought after profile. The profile is easy to match with the wall covering and allows a workmanlike application.

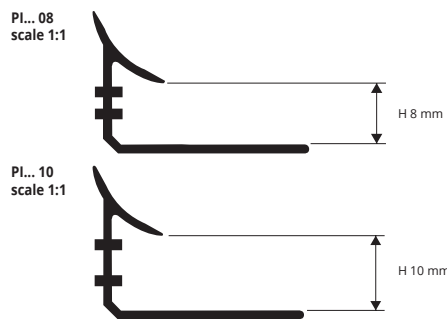

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

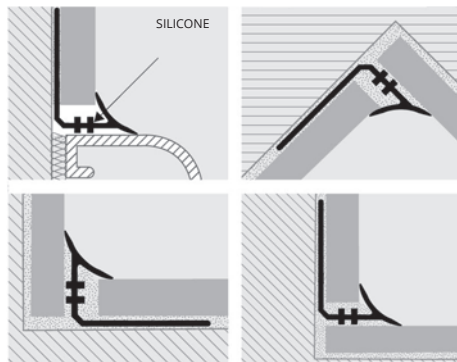

1. Choose "PROINTER AL" according to the tile thickness and desired finish.
2. Cut "PROINTER AL" to the desired length and apply the adhesive on the support where the profile will be laid.
3. Press the anchoring flange of "PROINTER AL" into the adhesive.
4. Lay the tiles, aligning them with the profile leaving a 2 mm joint. Remove immediately all remains of adhesive from the surface of the profile.
5. Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile.



ANODIZED GOLD OR SILVER ALUMINIUM thermo packed
bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	H mm	€/lm	€/Pc
PIAA 08	8	7,18	19,39
PIAA 10	10	7,66	20,68

INTERNAL, EXTERNAL, THREE-WAYS PROINTER CORNER JOINTS ANODIZED GOLD

Article	€/Pc
REPIAA	14,37
RIPIAA	15,02
RITPIAA	14,37

COLOURS

AA - Anodized silver alum.	BC - Polished chrome alum.
----------------------------	----------------------------




POLISHED GOLD OR CHROMED ALUMINIUM thermo packed
bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	H mm	€/lm	€/Pc
PIBC 08	8	11,05	29,84
PIBC 10	10	12,94	34,94

INTERNAL, EXTERNAL, THREE-WAYS PROINTER CORNER JOINTS POLISHED GOLD

Article	€/Pc
REPIBC	17,30
RIPIBC	17,96
RITPIBC	17,30




PROTERMINAL, PROJOLLY SQUARE
PROJOLLY QUART
(NO PROINTER)



PROINTER is a cove-shaped profile in shockproof non - toxic colored vinyl resin. It is particularly suitable to ensure cleanliness and hygiene in public and industrial environments. Its particular section and the availability in different colors and special pieces, such as internal and external corners, make **PROINTER** a much sought after profile. It can be easily matched with the wall covering and allows an elegant workmanlike application.

PROINTER

SHOCKPROOF NON - TOXIC COLORED VINYL RESIN

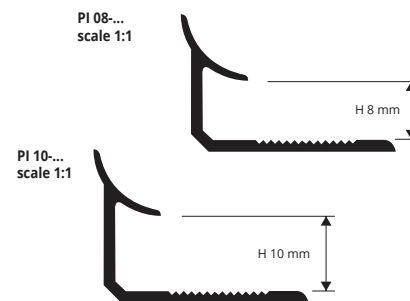

GAMMA COLORI

01 - White	0106 - White ivory	02 - Light grey
03 - Cement gray	11 - Black	18 - Grey


NON-TOXIC SHOCKPROOF VINYL RESIN

bar length 2,7 lm - pack. 20 Pcs - 54 lm (white 108 lm)

Article	H mm	€/lm	€/Pc
PI 08-...	8	1,67	4,51
PI 10-...	10	1,90	5,13

The code of the selected colour must be added to the article code.
E.g.: PI 10-... (chosen colour white) PI 10-01.

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

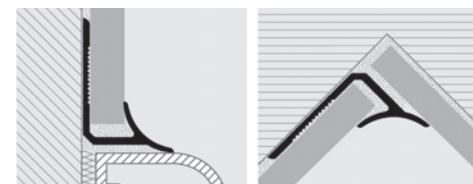

1. Choose "PROINTER" according to the tile thickness and desired colour. 2. Cut "PROINTER" to the desired length and apply the adhesive on the support where the profile will be laid. 3. Press the anchoring flange of "PROINTER" into the adhesive. 4. Lay the tiles, aligning them with the profile leaving a 2 mm joint. 5. Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation.

CORNER JOINTS

SHOCKPROOF NON - TOXIC COLORED VINYL RESIN

INTERNAL, EXTERNAL, THREE-WAYS PROINTER CORNER JOINTS

VARNISHED PLASTIC (Vinyl Resin) - pack. 1 Pcs

Article	€/pc.
REPI .../1	5,40
RIPI .../1	5,40
RITPI .../1	5,40


The code of the selected colour must be added to the article code.
E.g.: RIPI.../1 (Chosen colour white 01) RIPI 01/1.
PLEASE CHOOSE THE DESIRED COLOUR CODE FROM OUR COLOUR CHART. SPECIFICATION OF THE HEIGHT IS NOT REQUIRED.

GAMMA COLORI


01 - White	0106 - White ivory	02 - Light grey
03 - Cement gray	11 - Black	18 - Grey



RIPI...



REPI...




RITPI...

PROSHELL

POLISHED AND BRUSHED
STAINLESS STEEL AISI 316L/1.4404-V4A

PROSHELL is a cove-shaped profile in polished and brushed stainless steel AISI 316L/1.4404-V4A particularly suitable to ensure cleanliness and hygiene in every kind of environment where high resistance to mechanical and chemical stresses are required. Its particular section and the availability in two finishes, four heights and special pieces, such as internal and external corners, end caps and junctions, make **PROSHELL** a much sought-after profile that allows a workmanlike application even in environments subject to high mechanical stresses.

internal seal hygienic profiles

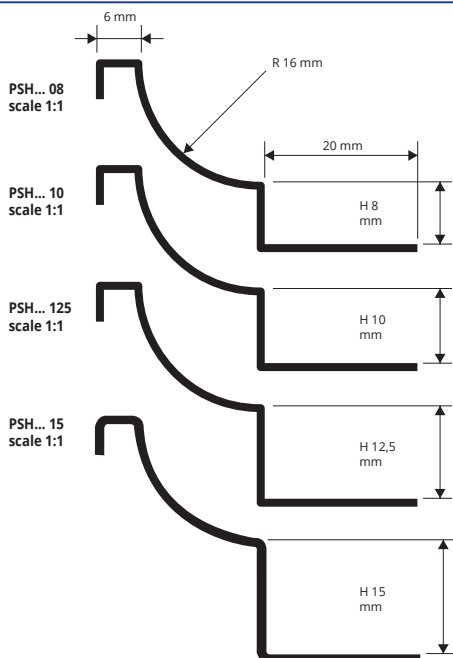

POLISHED STAINLESS STEEL AISI 316L/1.4404-V4A
with protective film

- bar length 2,7 lm - pack. 20 Pcs - 54 lm - 10/10 mm

Article	H mm	€/lm	€/Pc
PSHACM 08	8	23,08	62,32
PSHACM 10	10	24,29	65,58
PSHACM 125	12,5	25,83	69,74
PSHACM 15	15	27,20	73,44

BUY PROTERMINAL PVC TO CREATE THE DUAL HEIGHT (SEE BELOW):

Use proterminal PT 06 to reach H 8 mm
Use proterminal PT 08 to reach H 10 mm



BRUSHED STAINLESS STEEL AISI 316L/1.4404-V4A
with protective film

- bar length 2,7 lm - pack. 20 Pcs - 54 lm - 10/10 mm

Article	H mm	€/lm	€/Pc
PSHACMS 08	8	25,66	69,28
PSHACMS 10	10	26,96	72,79
PSHACMS 125	12,5	27,53	74,33
PSHACMS 15	15	29,25	78,98

Use proterminal PT 10 to reach H12,5 mm
Use proterminal PT 12,5 to reach H 15 mm

EXAMPLES AND INSTRUCTIONS FOR LAYING



1. Choose "PROSHELL" according to the tile thickness and desired finish. (*) 2. Cut "PROSHELL" to the desired length and apply the adhesive on the support where the profile will be laid. 3. Press the anchoring flange of "PROSHELL" into the adhesive. 4. Lay the tiles on floor and wall aligning them with the profile leaving a 2 mm joint. Remove immediately all remains of adhesive from the surface of the profile. 5. Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile. (*) to obtain double height, use the joint of the same size as the selected profile and choose the PROTERMINAL PVC according to the required thickness, see INSTRUCTIONS FOR LAYING.

COLOURS



PREWELDED CORNER, CAPS and THREE-WAYS JOINTS

POLISHED AND BRUSHED STAINLESS STEEL

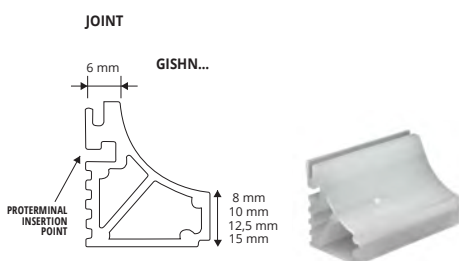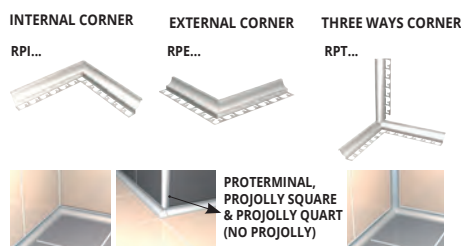

PREWELDED CORNER - POLISHED STAINLESS STEEL L 100 mm

Article	H mm	€/Pc.
RPIACM ...	08/10/125	29,27
RPIACM 15	15	31,08
RPEACM ...	08/10/125	29,27
RPEACM 15	15	31,08
RPTACM ...	08/10/125	38,35
RPTACM 15	15	40,41

Specify height of joint: E.g.: RPI 8 for H 8 mm.

OVERLAPPING JOINTS POLISHED AISI 316/.4404 V4A STAINLESS STEEL

Article	€/Pc.
RPSIACM	9,07
RPSEACM	9,07
RPSTACM	9,07
GPSACM	4,17
TPSACM	4,17

PREWELDED CORNER - BRUSHED STAINLESS STEEL L 100 mm

Article	H mm	€/Pc.
RPIACMS ...	08/10/125	31,42
RPIACMS 15	15	33,71
RPEACMS ...	08/10/125	31,42
RPEACMS 15	15	33,71
RPTACMS ...	08/10/125	40,41
RPTACMS 15	15	42,73


Specify height of joint: E.g.: RPIS 8 for H 8 mm.

OVERLAPPING JOINTS BRUSHED AISI 316/.4404 V4A STAINLESS STEEL

Article	€/Pc.
RPSIACMS	9,53
RPSEACMS	9,53
RPSTACMS	9,53
GPSACMS	4,37
TPSACMS	4,37

END CAPS R / L - PLASTIC pack. 2 Pcs (1 right and 1 left) PLASTIC JOINTS

Article	€/Pc.
TPSHAC	9,68
TPSHACS	9,68
GISHN 08	4,15
GISHN 10	4,55
GISHN 125	4,99
GISHN 15	5,47

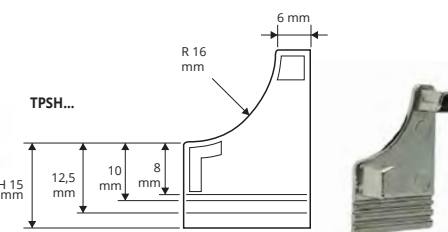

PROSHELL D ALL is a profile in anodized and polished aluminum with a visible 45° sloping surface. The profile allows to connect the floor and wall coverings in ceramic and mosaic with low thickness. It is particularly suitable to ensure cleanliness and hygiene in every kind of environment where good resistance to mechanical and chemical stresses are required. Its particular section and availability in three different finishes, make **PROSHELL D ALL** a much sought after profile.

PROSHELL D ALL

ANODIZED SILVER, POLISHED CHROME AND
GOLD ALUMINIUM




ANODIZED SILVER ALUMINIUM thermo packed
bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	H mm	€/lm	€/Pc
PSHDAA 045	4,5	8,57	23,14




POLISHED CHROME/GOLD ALUMINIUM thermo packed
bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	H mm	€/lm	€/Pc
PSHDBC 045	4,5	10,90	29,43
PSHDBO 045	4,5	10,90	29,43

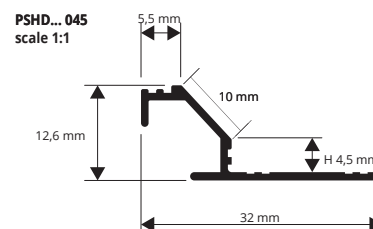


EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

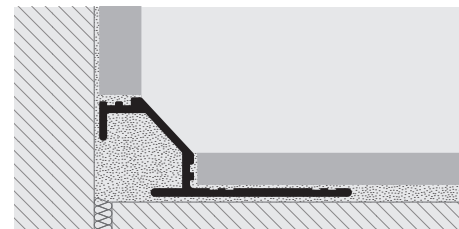

1. Choose "PROSHELL D ALL" according to the desired finish.
2. Cut "PROSHELL D ALL" to the desired length and apply the adhesive on the support where the profile will be laid.
3. Press the anchoring flange of "PROSHELL D ALL" into the adhesive.
4. Lay the tiles, aligning them with the profile leaving a 2 mm joint. Remove immediately all remains of adhesive from the surface of the profile.
5. Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile.

COLOURS



PROSHELL R ALL is a cove-shaped profile in anodized and polished aluminum. The profile allows to connect the floor and wall coverings in ceramic and mosaic with low thickness. It is particularly suitable to ensure cleanliness and hygiene in every kind of environment where good resistance to mechanical and chemical stresses are required. Its particular section and availability in three different finishes, make **PROSHELL R ALL** a much sought after profile.

PROSHELL R ALL

ANODIZED SILVER, POLISHED CHROME AND
GOLD ALUMINIUM





ANODIZED SILVER ALUMINIUM thermo packed
bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	H mm	€/lm	€/Pc
PSHRAA 045	4,5	8,57	23,14


POLISHED CHROME/GOLD ALUMINIUM thermo packed
bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	H mm	€/lm	€/Pc
PSHRBC 045	4,5	10,90	29,43
PSHRBO 045	4,5	10,90	29,43

COLOURS

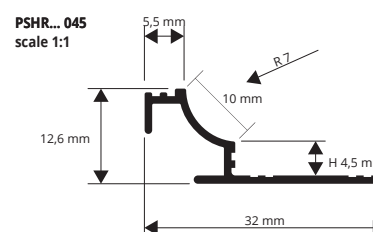

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

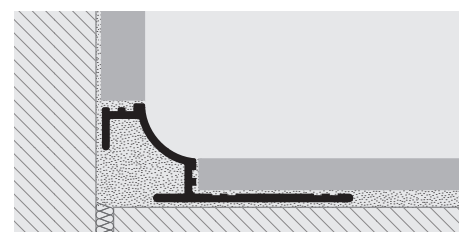


1. Choose "PROSHELL R ALL" according to the desired finish.
2. Cut "PROSHELL R ALL" to the desired length and apply the adhesive on the support where the profile will be laid.
3. Press the anchoring flange of "PROSHELL R ALL" into the adhesive.
4. Lay the tiles, aligning them with the profile leaving a 2 mm joint. Remove immediately all remains of adhesive from the surface of the profile.
5. Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile.

PROSHELL ALL


ANODIZED, POLISHED ALUMINIUM

PROSHELL ALL is a cove-shaped profile in anodized, polished and varnished aluminium particularly suitable to ensure cleanliness and hygiene in indoors environment where good resistance to mechanical and chemical stresses are required. Its particular section and the availability in three finishes, three heights and special pieces, such as internal and external corners, end caps and junctions, make **PROSHELL ALL** a much sought-after profile that allows a workmanlike application.


PSH... 8
scale 1:1

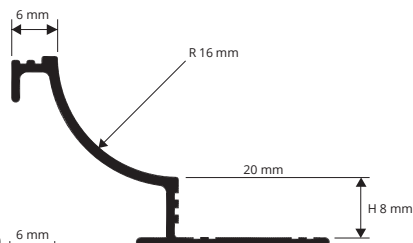

PSH... 10
scale 1:1

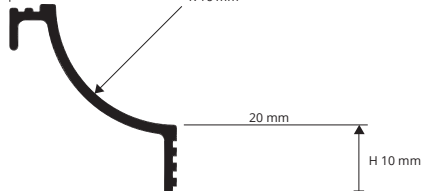

PSH... 125
scale 1:1

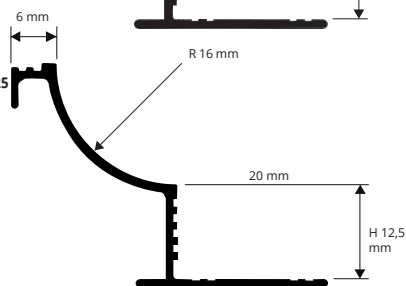


BUY PROTERMINAL PVC OR ALUMINIUM
TO CREATE THE DUAL HEIGHT (SEE NEXT PIC):
Use proterminal PT 08 to reach H 10 mm
Use proterminal PT 10 to reach H 12,5 mm
Use proterminal PT 12,5 to reach H 15 mm



ANODIZED SILVER ALUMINIUM thermo packed
bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	H mm	€/lm	€/Pc
PSHAA 08	8	11,04	29,81
PSHAA 10	10	11,17	30,16
PSHAA 125	12,5	11,36	30,67


COLOURS



POLISHED CHROME ALUMINIUM thermo packed
bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	H mm	€/lm	€/Pc
PSHBC 10	10	15,60	42,12

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

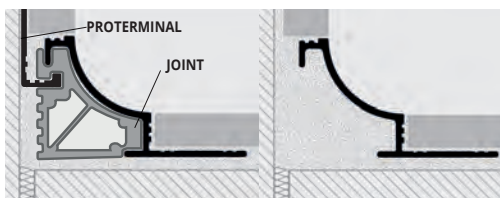

1. Choose "PROSHELL ALL" according to the tile thickness and desired finish. 2. Cut "PROSHELL ALL" to the desired length and apply the adhesive on the support where the profile will be laid. 3. Press the anchoring flange of "PROSHELL ALL" into the adhesive. 4. Lay the tiles on floor and wall aligning them with the profile leaving a 2 mm joint. Remove immediately all remains of adhesive from the surface of the profile. 5. Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile. (*) to obtain double height, use the joint of the same size as the selected profile and choose the PROTERMINAL PVC or ALUMINIUM according to the required thickness, see INSTRUCTIONS FOR LAYING.

CORNERS, END CAPS and JOINTS

SILVER ANODIZED, POLISHED CHROME ALUMINIUM / PLASTIC



EXTERNAL/INTERNAL CORNER - ANODIZED SILVER ALUMINIUM

Article	H mm	€/Pc
RPSHIAA .../1	08/10/125	21,30
RPSHEAA .../1	08/10/125	21,30

EXTERNAL/INTERNAL CORNER POLISHED CHROME ALUMINIUM

Article	H mm	€/Pc
RPSHIBC 10/1	10	25,45
RPSHEBC 10/1	10	25,45

JOINTS IN RIGID GREY PLASTIC

Article	H mm	€/Pc
GISHN 08	8	4,15
GISHN 10	10	4,55
GISHN 125	12,5	4,99

END CAPS R / L - ANOD. ALU./POLISHED ALU.

pack. 2 Pcs (1 right and 1 left)

Article	H mm	€/Pack
TPSHAA 08	8	26,51
TPSHAA 10	10	26,51
TPSHBC 10	10	33,15
TPSHAA 125	12,5	33,15

INTERNAL CORNER
RPSHI.../1

EXTERNAL CORNER
RPSHE.../1



END CAP
TPSH.../1

JOINT
GISHN...



NEW
KALEIDOS

PROSHELL ALL is a cove-shaped profile in anodized, polished and varnished aluminium particularly suitable to ensure cleanliness and hygiene in indoors environment where good resistance to mechanical and chemical stresses are required. Its particular section and the availability in three finishes, three heights and special pieces, such as internal and external corners, end caps and junctions, make **PROSHELL ALL** a much sought-after profile that allows a workmanlike application.

PROSHELL ALL

STONE LINE / EASY LINE ALUMINIUM



STONE LINE ALUMINIUM thermo packed
bar length 2,7 M - pack 20 Pcs - 54 lm

Article	H mm	€/lm	€/Pc
PSHA 10-SL...	10	17,87	48,25
PSHA 125-SL...	12,5	18,18	49,09

The code of the selected colour must be added to the article code.
E.g.: PSHA 10-SL... (chosen colour stone white) PSHA 10-SL01.

EASY LINE ALUMINIUM thermo packed
bar length 2,7 M - pack 20 Pcs - 54 lm

Article	H mm	€/lm	€/Pc
PSHA 10-EYP01	10	13,17	35,56
PSHA 10-EYP11	10	13,17	35,56
PSHA 125-EYP01	12,5	15,35	41,45
PSHA 125-EYP11	12,5	15,35	41,45




COLOURS


KALEIDOS

STONE LINE		
SL01 - Stone white	SL02 - Stone cream	SL04 - Stone sand
SL05 - Stone gray	SL12 - Stone black	

EASY LINE	
EYP01 - MATT white varnished (RAL 9016)	EYP11 - MATT black varnished

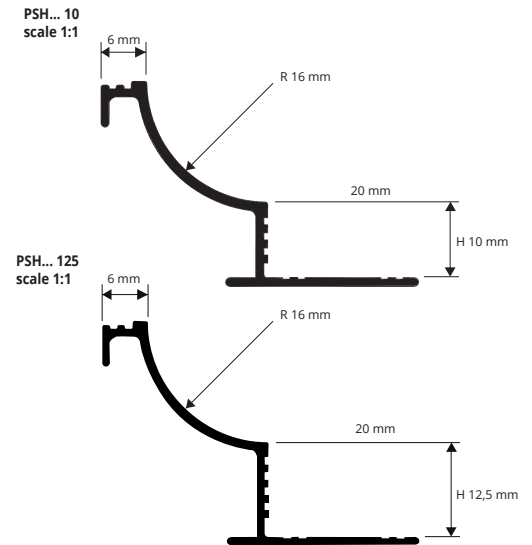

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

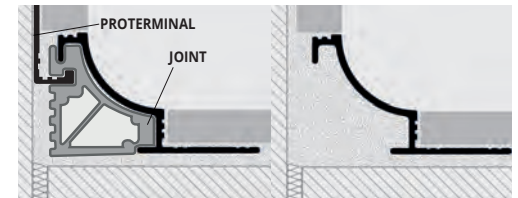

1. Choose "PROSHELL ALL" according to the tile thickness and desired finish.
2. Cut "PROSHELL ALL" to the desired length and apply the adhesive on the support where the profile will be laid.
3. Press the anchoring flange of "PROSHELL ALL" into the adhesive.
4. Lay the tiles on floor and wall aligning them with the profile leaving a 2 mm joint. Remove immediately all remains of adhesive from the surface of the profile.
5. Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile. (*) to obtain double height, use the joint of the same size as the selected profile and choose the PROTERMINAL PVC or ALUMINIUM according to the required thickness, see INSTRUCTIONS FOR LAYING.

CORNERS, END CAPS and JOINTS

STONE LINE, EASY LINE ALUMINIUM / PLASTIC

EXTERNAL/INTERNAL CORNER - STONE LINE ALUMINIUM

Article	H mm	€/Pc
RPSHIA ...-SL.../1	10/12,5	26,64
RPSHEA ...-SL.../1	10/12,5	26,64

END CAPS R / L - STONE LINE ALUMINIUM

pack 2 Pcs (1 right and 1 left)

Article	H mm	€/Pack
TPSHA ...-SL.../1	10/12,5	17,46

JOINTS IN RIGID GREY PLASTIC

Article	H mm	€/Pc
GISHN 10	10	4,55
GISHN 125	12,5	4,99

EXTERNAL/INTERNAL CORNER - EASY LINE ALUMINIUM

Article	H mm	€/Pc
RPSHIA 10-EYP01/1	10	26,64
RPSHIA 10-EYP11/1	10	26,64
RPSHIA 125-EYP01/1	125	26,64
RPSHIA 125-EYP11/1	125	26,64
RPSHEA 10-EYP01/1	10	26,64
RPSHEA 10-EYP11/1	10	26,64
RPSHEA 125-EYP01/1	125	26,64
RPSHEA 125-EYP11/1	125	26,64

END CAPS R / L - EASY LINE ALUMINIUM

pack 2 Pcs (1 right and 1 left)

Article	H mm	€/Pack
TPSHA 10/EYP01	10	17,46
TPSHA 10/EYP11	10	17,46
TPSHA 125/EYP01	125	17,46
TPSHA 125/EYP11	125	17,46



INTERNAL CORNER
RPSHI.../1



EXTERNAL CORNER
RPSHE.../1



END CAP
TPSH.../1



JOINT
GISHN.../1







PROSGUSCIO DA is a cove-shaped profile in shockproof non - toxic coloured vinyl resin particularly suitable to ensure cleanliness and hygiene in in public and industrial environments. Its particular section, the availability in four heights and special pieces, such as internal and external corners, end caps and junctions, make **PROSGUSCIO DA** a much sought-after profile that allows a workmanlike application.

PROSGUSCIO DA

SHOCKPROOF NON - TOXIC COLOURED VINYL RESIN



EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

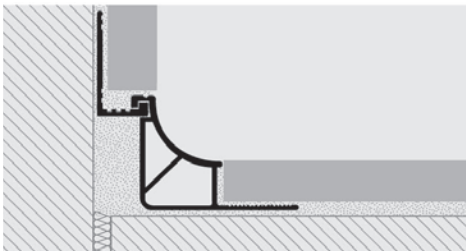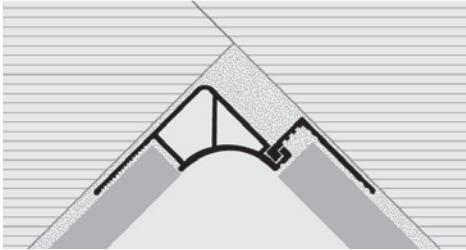

1. Choose "PROSGUSCIO DA" according to the tile thickness and desired colour. 2. Cut "PROSGUSCIO DA" to the desired length and apply the adhesive on the support where the profile will be laid. 3. Press the anchoring flange of "PROSGUSCIO DA" into the adhesive. 4. Lay the tiles on floor and wall aligning them with the profile leaving a 2 mm joint. 5. Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation.


NON-TOXIC SHOCKPROOF VINYL RESIN
bar length 2,5 lm - pack. 20 Pc - 50 lm

Article	H mm	€/lm	€/Pc
PS 06-...	6	4,14	10,35
PS 08-...	8	4,50	11,25
PS 10-...	10	4,70	11,75
PS 125-...	12,5	5,19	12,98

The code of the selected colour must be added to the article code. E.g.: PS 06... (chosen colour white) PS 06-01. The interchangeable flange corresponds to white Proterminal pvc H 6-8-10 mm.

COLOURS

01 - White	03 - Cement gray
------------	------------------

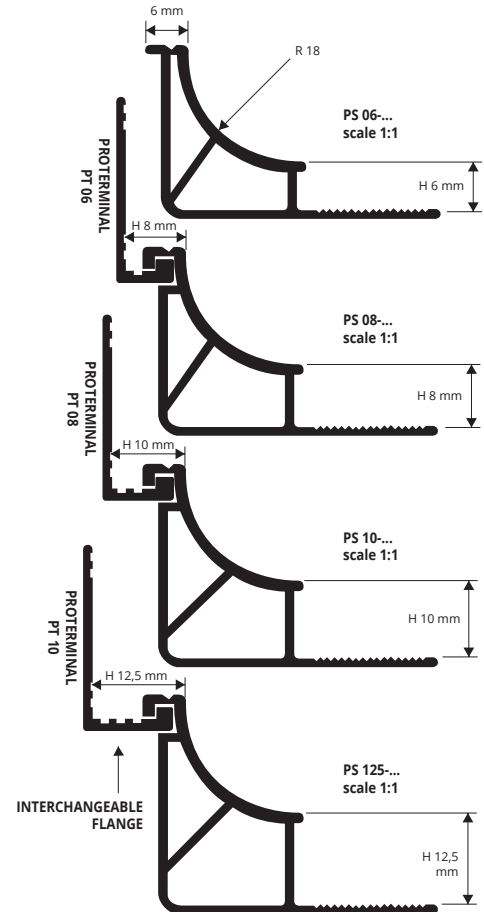

BUY WHITE PROTERMINAL TO CREATE THE DUAL HEIGHT:
Use proterminal PT 06 to reach H 8 mm
Use proterminal PT 08 to reach H 10 mm
Use proterminal PT 10 to reach H 12,5 mm

CORNERS, END CAPS and JOINTS

NON- TOXIC VINYL RESIN

EXTERNAL / INTERNAL CORNER - RVA COLOURED

Article	H mm	€/Pc
RAI ...-.../1	06/08/10/125	2,75
RAE ...-.../1	06/08/10/125	2,75

The code of the selected colour must be added to the article code. E.g.: RAI 06-... (chosen colour white) RAI 06-01.



END CAP 1 RT + 1 LF - RVA COLOURED

Article	H mm	€/Pc
TCE 06-.../1	08/10/125	4,97

The code of the selected colour must be added to the article code. E.g.: TCE 08-... (chosen colour white) TCE 08-01.

JOINTS - RVA COLOURED

Article	H mm	€/Pc
GIN ...-...	06/08/10/125	2,42



PROJOLLY - PROJOLLY QUART

INTERNAL CORNER
RAI...-.../1.

EXTERNAL CORNER
RAE...-.../1.



END CAP
TCE...-.../1.

JOINT
GIN...-.../...




PROROUND

POLISHED AND BRUSHED STAINLESS STEEL AISI 304/1.4301-V2A


PROROUND is a cove-shaped profile in polished and brushed stainless steel AISI 304/1.4301-V2A particularly suitable to ensure cleanliness and hygiene in every kind of environment where high resistance to mechanical and chemical stresses are required. Its particular section and the availability in two finishes and special pieces, such as internal and external corners, make **PROROUND** a much sought-after profile that allows a workmanlike application even in environments subject to high mechanical stresses.

internal seal hygienic profiles

PRDAC/S 35
PRDAC/S 35A
scale 1:1

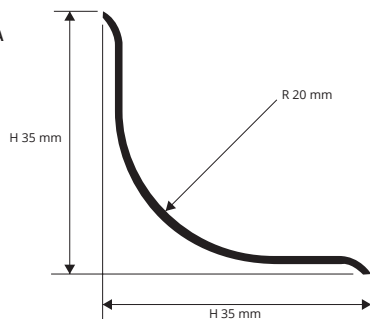

EXAMPLES OF LAYING

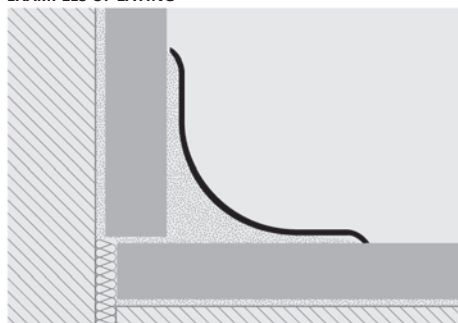

POLISHED STAINLESS ST. AISI 304/1.4301-V2A with protective film
35 x 35 mm - bar length 2,7 lm - pack. 20 Pcs - 54 lm - 10/10 mm

Article	H mm	€/lm	€/Pc
PRDAC 35	35	14,99	40,47
PRDAC 35A	35	18,60	50,22



BRUSHED STAINLESS ST. AISI 304/1.4301-V2A with protective film
35 x 35 mm - bar length 2,7 lm - pack. 20 Pcs - 54 lm - 10/10 mm

Article	H mm	€/lm	€/Pc
PRDACS 35	35	18,18	49,09
PRDACS 35A	35	21,81	58,89

1. Choose "PROROUND" according to the desired finish and width. 2. Cut "PROROUND" to the desired length. 3. Remove carefully any remains of oil, fat and dirt from the surface where the profile will be laid. 4. When the surface is perfectly dry, remove the protective film, place correctly the profile and press it without hitting / apply the silicone on the surface where the profile will be laid (version without adhesive) and press it without hitting.

COLOURS




Suitable for use in contact with foodstuffs.

© 2020 All rights reserved by Progress Profiles. Printed in Italy

PREWELDED CORNERS and THREE-WAYS JOINTS without gaps

POLISHED AND BRUSHED STAINLESS STEEL

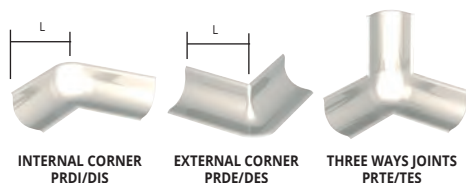

POLISHED STAINLESS STEEL AISI 304/1.4301-V2A

Article	L mm	€/Pc
PRDI/1	100	22,52
PRDE/1	100	22,52
PRTE/1	80	33,75

Brushed STAINLESS STEEL AISI 304/1.4301-V2A

Article	L mm	€/Pc
PRDIS/1	100	23,90
PRDES/1	100	23,90
PRTES/1	80	36,52


PROSANI STRIP & PROSANI STRIP KIT

NON-TOXIC FLEXIBLE WHITE VINYL RESIN


PROSANI STRIP and **PROSANI STRIP KIT** are profiles in non-toxic flexible white vinyl resin particularly suitable to ensure cleanliness and hygiene along the connection between the wall tile coverings and sinks, bathtubs and shower trays. **PROSANI STRIP KIT** is provided with a double-sided butyl tape while **PROSANI STRIP** can be applied with silicone. Their particular section and ease of application, and make **PROSANI STRIP KIT** and **PROSANI STRIP** a much sought after profiles that allow a workmanlike application.

internal seal hygienic profiles


PSS 10
scale 1:1



PSS 1035
scale 1:1



EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

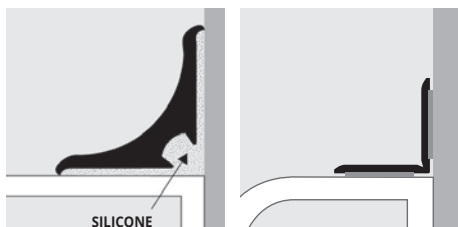

1. Choose the desired profile. 2. Cut the profile to the desired length. 3. Remove carefully any remains of oil, fat and dirt from the surface where the profile will be laid. 4. When the surface is perfectly dry, remove the protective film (PROSANI STRIP KIT), place correctly the profile and press it without hitting / apply the equipment double-sided butyl tape on the back of the profile (PROSANI STRIP), apply the silicone along the floor-wall joint and place the profile.



FLEXIBLE WHITE VINYL RESIN

roll 25 lm

Article	LxH mm	€/lm	€/Pc
PSS 10	10 X 10	4,36	109,00

PROSANI STRIP KIT ROLL - WHITE

roll 3,5 lm

Article	LxH mm	€/lm	€/Pc
PSS 1035	11 X 11	0,96	3,36



COLOURS

