

PROSEAL 50 is a cove-shaped profile in shockproof non - toxic coextruded coloured vinyl resin particularly suitable to ensure cleanliness and hygiene in public and industrial environments. Its particular section and the availability in two different colours and special pieces, such as internal and external corners, end caps and joints, make **PROSEAL 50** a much sought-after profile that allows a workmanlike application.

PROSEAL 50

SHOCKPROOF NON - TOXIC COEXTRUDED
COLORED VINYL RESIN




COEXTRUDED VINYL RESIN NON-TOXIC SHOCKPROOF
2,5 lm - Pack. 40 LM

Article	€/lm	€/Pc
PSA 50-...	9,59	23,98

The code of the selected colour must be added to the article code.
E.g.: PSA 50... (chosen colour white) PSA 50-01.



PSA 50-... / PSAA 50-...
scale 1:1

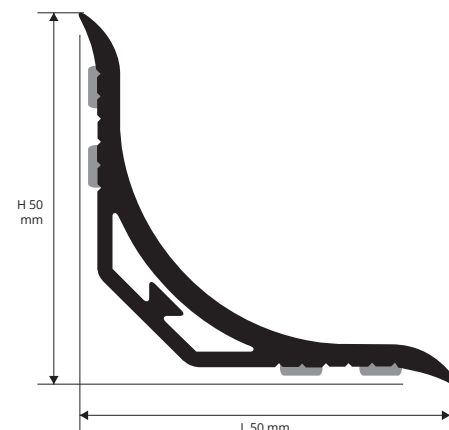


COEXTRUDED VINYL RESIN NON-TOXIC SHOCKPROOF - ADHESIVE
bar length 2,5 lm - Pack. 30 LM

Article	€/lm	€/Pc
PSAA 50-...	13,26	33,15

The code of the selected colour must be added to the article code.
E.g.: PSAA 50... (chosen colour white) PSAA 50-01.

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

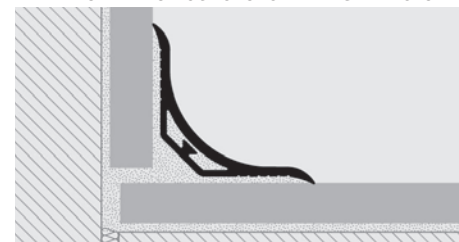

1. Choose "PROSEAL 50" according to the tile thickness and desired finish. 2. Cut "PROSEAL 50" to the desired length. 3. Remove carefully any remains of oil, fat and dirt from the surface where the profile will be laid. 4. When the surface is perfectly dry, remove the protective film (version with adhesive), place the profile and press it without hitting / apply the double-sided butyl tape on the back of the profile (version without adhesive), apply the silicone along the floor-wall joint and place the profile.

COLOURS

01 - White	03 - Cement Grey
------------	------------------


CORNERS and END CAPS

NON - TOXIC VINYL RESIN

INTERNAL / EXTERNAL CORNER AND END CAPS

Article	€/Pack. 10 Pc
TRI 50-.../10	45,76
TRE 50-.../10	45,76
TRT 50-.../10	45,76
TRC 50-.../10	45,76
TGN 50-.../10	45,76


The code of the selected colour must be added to the article code.
E.g.: TRI 50-.../10 (chosen colour white) TRI 50-01/10.

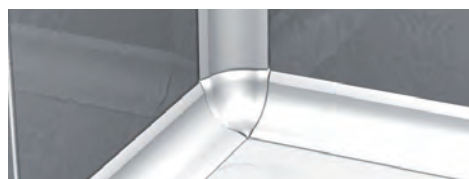


EXTERNAL CORNER



TRE 50-.../10




TRT 50-.../10



END CAP



TRC 50-.../10




JOINTS



TGN 50-.../10

INTERNAL CORNER




TRI 50-.../10

PROSEAL 25

SHOCKPROOF NON - TOXIC COEXTRUDED COLORED VINYL RESIN

internal seal hygienic profiles

PSA 25-...
PSAA 25-...
scale 1:1



EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS



1. Choose "PROSEAL 25" according to the tile thickness and desired finish. 2. Cut "PROSEAL 25" to the desired length. 3. Remove carefully any remains of oil, fat and dirt from the surface where the profile will be laid. 4. When the surface is perfectly dry, remove the protective film (version with adhesive), place the profile and press it without hitting / apply the double-sided butyl tape on the back of the profile (version without adhesive), apply the silicone along the floor-wall joint and place the profile.

PROSEAL 25 is a cove-shaped profile in shockproof non - toxic coextruded coloured vinyl resin particularly suitable to ensure cleanliness and hygiene in public and industrial environments. Its particular section and the availability in three different colours and special pieces, such as internal and external corners, end caps and joints, make **PROSEAL 25** a much sought-after profile that allows a workmanlike application.



COEXTRUDED VINYL RESIN NON-TOXIC SHOCKPROOF

bar length 2,5 lm - pack. 50 LM

Article	€/lm	€/Pc
PSA 25-...	4,42	11,05

The code of the selected colour must be added to the article code.
E.g.: PSA 25-... (chosen colour white) PSA 25-01..

COEXTRUDED VINYL RESIN NON-TOXIC SHOCKPROOF ADHESIVE

bar length 2,5 lm - pack. 50 LM

Article	€/lm	€/Pc
PSAA 25-...	7,06	17,65

The code of the selected colour must be added to the article code.
E.g.: PSAA 25-... (chosen colour white) PSAA 25-01..

COLOURS

01 - White	03 - Cement gray
------------	------------------




PROSEAL KIT 25 (1 Pc of 1,80 LM + 2 Pcs of 0,90 lm + 2 INTERNAL CORNERS and 2 END CAPS 1 R and 1 L)

Description	Article	€/KIT
Kit PROSEAL 25	KTPSA 25-01	36,32

CORNERS, END CAPS and THREE-WAYS JOINTS

NON - TOXIC VINYL RESIN



INTERNAL CORNER
TRI 25-.../10



THREE WAYS
TRT 25-.../10



EXTERNAL CORNER
TRE 25-.../10



END CAP
TRC 25-.../10






JOINTS
TGN 25-.../10

INTERNAL / EXTERNAL CORNERS AND END CAPS (for PROSEAL 25)

Article	€/Pack. 10 Pc
TRI 25-.../10	28,12
TRE 25-.../10	28,12
TRT 25-.../10	28,12
TRC 25-.../10	26,89
TGN 25-.../10	26,89


The code of the selected colour must be added to the article code.
E.g.: TRI 25-.../10 (chosen colour white) TRI 25-01/10.

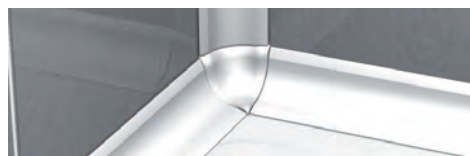

PROSEAL FLEX

NON-TOXIC FLEXIBLE VINYL RESIN

PSF 15
PSF 20
PSF 25



INSTRUCTIONS FOR LAYING

1. Apply a suitable adhesive for resilient flooring on the support. 2. Place "PROSEAL FLEX" over the adhesive. 3. Apply the adhesive on the profile and the support and lay the resilient flooring.



FLEXIBLE BLACK NON-TOXIC VYNIL RESIN

bar length 2,5 lm - pack. 40 Pcs - 100 lm

Article	L x H mm	€/lm	€/Pc
PSF 15-11	15x15	1,34	3,35
PSF 20-11	20x20	1,63	4,08
PSF 25-11	25x25	2,02	5,05

COLOURS

11 - Black

PROBATH is a cove-shaped profile in shockproof non - toxic coextruded white vinyl resin particularly suitable to ensure cleanliness and hygiene along the connection between the wall tile coverings and sinks, bathtubs and shower trays. Its particular section and the availability in two different height and special pieces, such as internal and external corners, (only for PSB-20) end caps and joints, make **PROBATH** a much sought-after and easy to lay profile that allows a workmanlike application.

PROBATH

SHOCKPROOF NON - TOXIC
COEXTRUDED VINYL RESIN

internal seal hygienic profiles




CO-EXTRUDED VINYL RESIN NON - TOXIC IMPACT - RESISTANT
bar length 2,5 lm - pack. 40 Pcs - 100 lm

Article	H mm	€/lm	€/Pc
PSB 15-01	15	4,72	11,80
PSB 20-01	20	6,07	15,18

AVAILABLE ONLY IN WHITE

COLOURS




01

FOR OTHER COLORS MINIMUM ORDER 400 pcs



PROBATH KIT

Description	Article	€/KIT
Kit PROBATH	KTPSB 20-01	35,65
1 Pc PROBATH of 1,80 lm	PSB 20-01	
2 Pc PROBATH of 0,90 lm	PSB 20-01	
2 Internal Corner	TRI 25-01	
2 End caps	TRC 25-01	

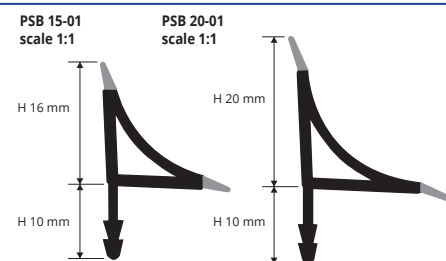

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS



1. Choose "PROBATH" according to the desired height. 2. Cut "PROBATH" to the desired length. 3. Remove carefully any remains of oil, fat and dirt from the surface where the profile will be laid. 4. When the surface is perfectly dry apply the silicone on the back of the profile and place it without hitting.

PROBATH FLEX is a cove-shaped profile in shockproof non - toxic flexible white vinyl resin particularly suitable to ensure cleanliness and hygiene along the connection between the wall tile coverings and sinks, bathtubs and shower trays. Its particular section and the availability in two different height and special pieces, such as internal and external corners, (only for PSB-20) end caps and joints, make **PROBATH FLEX** a much sought-after and easy to lay profile that allows a workmanlike application.

PROBATH FLEX

SHOCKPROOF NON - TOXIC FLEXIBLE
VINYL RESIN

internal seal hygienic profiles




FLEXIBLE WHITE VYNIL RESIN
2,5 lm 40 Pcs - 100 lm

Article	H mm	€/lm	€/Pc
PSBF 15-01	15	5,50	13,75
PSBF 20-01	20	6,86	17,15

AVAILABLE ONLY IN WHITE



01 - White

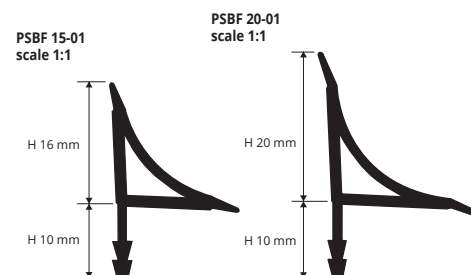

1. Choose "PROBATH FLEX" according to the desired height. 2. Cut "PROBATH FLEX" to the desired length. 3. Remove carefully any remains of oil, fat and dirt from the surface where the profile will be laid. 4. When the surface is perfectly dry apply the silicone on the back of the profile and place it without hitting.

CORNERS, END CAPS and THREE-WAYS JOINTS

NON-TOXIC VINYL RESIN

CORNERS INTERNAL / EXTERNAL, THREE-WAYS, JOINTS AND END CAP

Article	€/Pc
TRI 25-01/1	2,96
TRE 25-01/1	2,96
TRT 25-01/1	2,96
TRC 25-01/1	2,70
TGN 25-01/1	2,70

CORNERS INTERNAL / EXTERNAL AND END CAP - (for PSB 15 - PSBF 15)

Article	€/Pc
TPSB 15-01/1	2,70
RIPSB 15-01/1	2,96
REPSB 15-01/1	2,96



EXTERNAL
CORNER
REPSB 15-01



END CAP
TPSB 15-01



INTERNAL
CORNER
RIPSB 15-01



INTERNAL
CORNER
TRI 25-01



EXTERNAL
CORNER
TRE 25-01




END CAP
TRC 25-01



JOINTS
TGN 25-01




THREE
WAYS
TRT 25-01

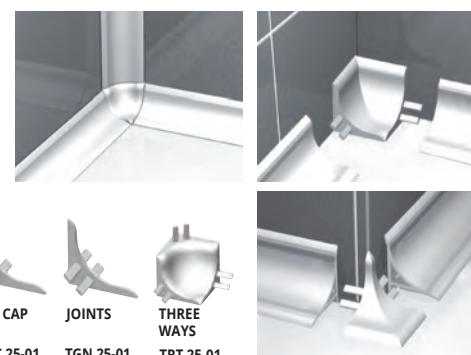

PROKERLAM LINE

POLISHED AND BRUSHED STAINLESS STEEL AISI 304/1.4301-V2A

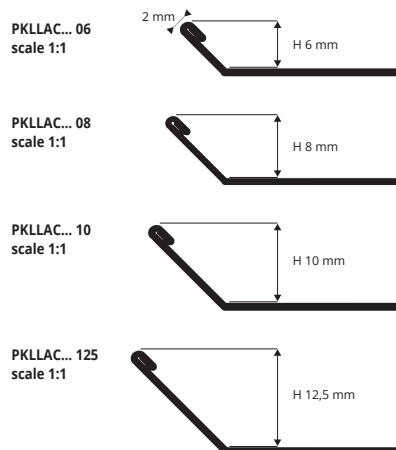

LAYING INSTRUCTIONS



PROKERLAM LINE is a profile in polished and brushed stainless steel AISI 304/1.4301-V2A suitable to protect the external corners of coverings in low thickness. It can be used like connection profile between step tread and riser of stairs coated with ceramic and mosaic with low thickness. Its particular section and the availability in three different heights and finishes and special pieces such as internal and external corners, end caps and joints make **PROKERLAM LINE** a much sought-after profile that allows a workmanlike application even with low thickness coverings.



POLISHED STAINLESS ST. AISI 304/1.4301-V2A with protective film
Bar lenght 2,7 lm - Pack 40 PCS - 108 lm

Article	H mm	€/lm	€/Pc
PKLLAC 045	4,5	8,21	22,17
PKLLAC 06	6	8,46	22,84
PKLLAC 08	8	8,83	23,84
PKLLAC 10	10	9,27	25,03
PKLLAC 125	12,5	9,82	26,51

1. Choose "PROKERLAM LINE" according to the desired finish.
2. Cut "PROKERLAM LINE" to the desired length and apply the adhesive on the support where the profile will be laid.
3. Press the anchoring flange of "PROKERLAM LINE" into the adhesive.
4. Lay the tiles, aligning them with the profile leaving a 2 mm joint. Remove immediately all remains of adhesive from the surface of the profile.
5. Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile.



BRUSHED STAINLESS ST. AISI 304/1.4301-V2A with protective film
2,7 lm 40 PCS - 108 lm

Article	H mm	€/lm	€/Pc
PKLLACS 045	4,5	10,20	27,54
PKLLACS 06	6	10,57	28,54
PKLLACS 08	8	11,06	29,86
PKLLACS 10	10	11,57	31,24
PKLLACS 125	12,5	12,31	33,24


COLOURS



AC - Polished stainless steel AISI 304/1.4301-V2A ACS - Brushed stainless steel AISI 304/1.4301-V2A

PROKERLAM LINE

ANODIZED, POLISHED, VARNISHED STONE LINE ALUMINIUM

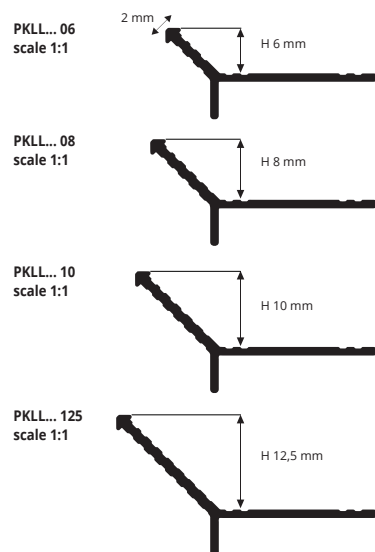

LAYING INSTRUCTIONS



1. Choose "PROKERLAM LINE" according to the desired finish.
2. Cut "PROKERLAM LINE" to the desired length and apply the adhesive on the support where the profile will be laid.
3. Press the anchoring flange of "PROKERLAM LINE" into the adhesive.
4. Lay the tiles, aligning them with the profile leaving a 2 mm joint. Remove immediately all remains of adhesive from the surface of the profile.
5. Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile.

PROKERLAM LINE is a Y-shaped profile in anodized and polished aluminium suitable to protect the external corners of coverings in low thickness. It can be used like connection profile between step tread and riser of stairs coated with ceramic and mosaic with low thickness. Its particular section and the availability in three different heights and finishes and special pieces such as internal and external corners, end caps and joints make **PROKERLAM LINE** a much sought-after profile that allows a workmanlike application even with low thickness coverings.



ANODISED SILVER ALUMINIUM thermo packed
2,7 lm 40 PCS - 108 lm

Article	H mm	€/lm	€/Pc
PKLLAA 045	4,5	5,55	14,99
PKLLAA 06	6	5,88	15,88
PKLLAA 08	8	6,27	16,93
PKLLAA 10	10	6,66	17,98
PKLLAA 125	12,5	7,19	19,41

COLOURS

ANODIZED	POLISHED
AA	BC - Polished chrome alu.

STONE LINE		
SL01 - Stone white	SL02 - Stone cream	SL03 - Stone greywory
SL05 - Stone grey	SL08 - Stone antrdark	SL18 - Stone white cement
SL12 - Stone black		



POLISHED CHROME ALUMINIUM thermo packed
Bar lenght 2,7 lm - Pack 40 PCS - 108 lm

Article	H mm	€/lm	€/Pc
PKLLBC 10	10	11,29	30,48
PKLLBC 125	125	12,02	32,45

STONE LINE ALUMINIUM thermo packed
Bar lenght 2,7 lm - Pack 40 PCS - 108 lm

Article	H mm	€/lm	€/Pc
PKLLA 06-SL...	6	9,45	25,52
PKLLA 08-SL...	8	10,07	27,19
PKLLA 10-SL...	10	10,71	28,92
PKLLA 125-SL...	12,5	11,55	31,19

The code of the selected colour must be added to the article code. E.g.: PKLLA 06-... (chosen colour stone cream) PKLLA 06-SL02.

PROKERLAM SQUARE is a square corner bead profile in anodized and polished aluminium suitable to protect the external corners of coverings with low thickness. It can be used like connection profile between step tread and riser of stairs coated with ceramic and mosaic with low thickness. Its particular section and the availability in three different finishes make **PROKERLAM SQUARE** a much sought-after profile that allows a workmanlike application even with low thickness coverings.

PROKERLAM SQUARE

ANODIZED SILVER, POLISHED CHROME AND GOLD ALUMINIUM



ANODIZED SILVER ALUMINIUM thermo packed
bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	H mm	€/lm	€/Pc
PKLQAA 045	4,5	7,06	19,06



POLISHED GOLD ALUMINIUM thermo packed
bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	H mm	€/lm	€/Pc
PKLQBO 045	4,5	10,90	29,43


COLOURS

AA - Anodized silver alum.	BC - Polished chrome alum.	BO - Polished gold alum.

POLISHED CHROME ALUMINIUM thermo packed
bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	H mm	€/lm	€/Pc
PKLQBC 045	4,5	10,90	29,43

PKLQ... 045
scale 1:1

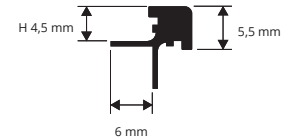

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS



1. Choose "PROKERLAM SQUARE" according to the desired finish.
2. Cut "PROKERLAM SQUARE" to the desired length and apply the adhesive on the support where the profile will be laid.
3. Press the anchoring flange of "PROKERLAM SQUARE" into the adhesive.
4. Lay the tiles, aligning them with the profile leaving a 2 mm joint. Remove immediately all remains of adhesive from the surface of the profile.
5. Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile.

PROKERLAM JOLLY is a quarter-circle rounded bead profile in anodized and polished aluminium suitable to protect the external corners of coverings with low thickness. It can be used like connection profile between step tread and riser of stairs coated with ceramic and mosaic with low thickness. Its particular section and the availability in three different finishes make **PROKERLAM JOLLY** a much sought-after profile that allows a workmanlike application even with low thickness coverings.

PROKERLAM JOLLY

ANODIZED AND POLISHED ALUMINIUM SILVER, CHROME AND GOLD



ANODIZED SILVER ALUMINIUM thermo packed
bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	H mm	€/lm	€/Pc
PKLJAA 045	4,5	6,83	18,44

COLOURS

AA - Anodized silver alum.	BC - Polished chrome alum.	BO - Polished gold alum.




POLISHED CHROME ALUMINIUM thermo packed
bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	H mm	€/lm	€/Pc
PKLJBC 045	4,5	10,64	28,73

POLISHED GOLD ALUMINIUM thermo packed
bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	H mm	€/lm	€/Pc
PKLJBO 045	4,5	10,64	28,73

PKLJ... 045
scale 1:1

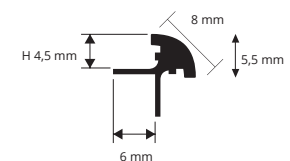

EXAMPLE FOR LAYING



1. Choose "PROKERLAM Jolly" according to the desired finish.
2. Cut "PROKERLAM Jolly" to the desired length and apply the adhesive on the support where the profile will be laid.
3. Press the anchoring flange of "PROKERLAM Jolly" into the adhesive.
4. Lay the tiles, aligning them with the profile leaving a 2 mm joint. Remove immediately all remains of adhesive from the surface of the profile.
5. Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile.

KALEIDOS®




NEWS
KALEIDOS

PROSHADOW CEILING is an aluminum profile, anodized or painted, for use on gypsum board ceilings. An LED strip can be applied in the cavity that is created and possibly closed with a polycarbonate plate. The profile allows for a 20 mm perimeter rabbet at the ceiling. **PROSHADOW CEILING** in aluminum is suitable as a perimeter rabbet in any indoor environment.

PROSHADOW CEILING

VARNISHED ALUMINIUM EASY LINE

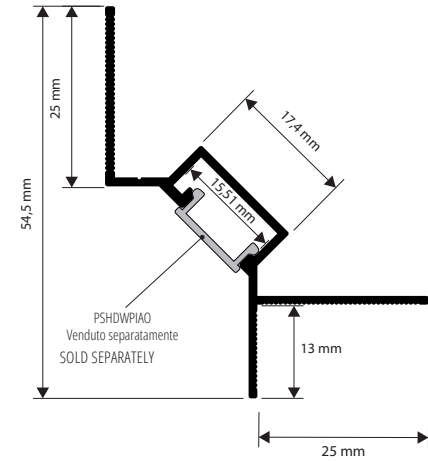

ALUMINIUM EASY LINE thermo packed

bar length 2 lm - pack 20 Pcs - 40 lm

Article	h / H mm	€/lm	€/Pc
PSHDWCE 13-EYP01	25	22,20	44,40
PSHDWCE 13-EYP11	25	22,20	44,40

COLOURS

KALEIDOS

EASY LINE	
EYP01 - MATT white varnished (RAL 9016)	EYP11 - MATT black varnished



POLYCARBONATE COVER LED PROFILE

bar length 2 ml

Article	€/ml	€/Pcs
PSHDWPIAO	5,39	10,78


1. Choose PROSHADOW CEILING depending on the desired finish; 2. Cut PROSHADOWGAP CEILING to desired length 3. Secure the profile to the wall with adhesive 4. Lay the gypsum board taking care to align it with the horizontal section 5. Immediately remove product residue from the profile surface.

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

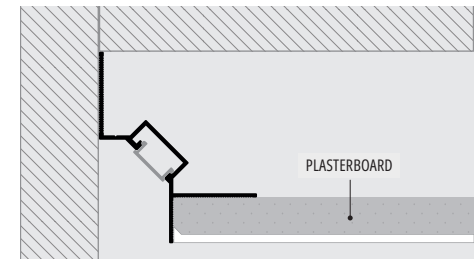

PROTOP

ANODIZED AND POLISHED ALUMINIUM

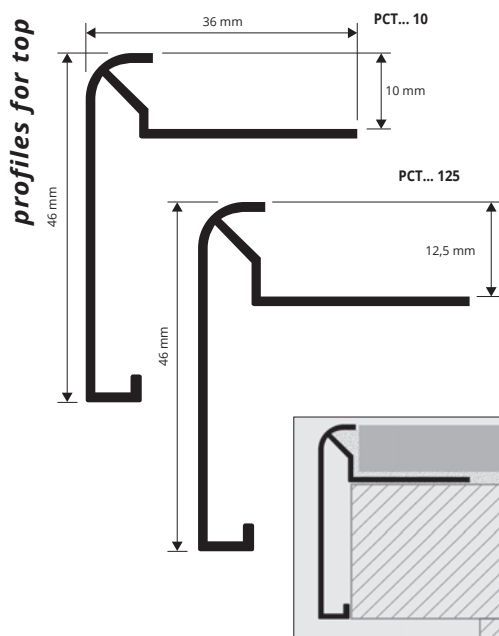


PROTOP is a rounded profile in anodized and polished aluminium. The profile protects the tile edges and decorates the countertops of kitchens realized with ceramic. Its particular section and elegance, the availability of three different finishes and special pieces such as internal and external corner at 90° and 135°, make **PROTOP** a much sought-after profile that allows an elegant workmanlike application.



ANODIZED SILVER ALUMINIUM
bar length 2,7 lm - pack. 10 Pcs - 27 lm

Article	H mm	€/lm	€/Pc
PCTAA 10	10	13,94	37,64
PCTAA 125	12,5	14,30	38,61

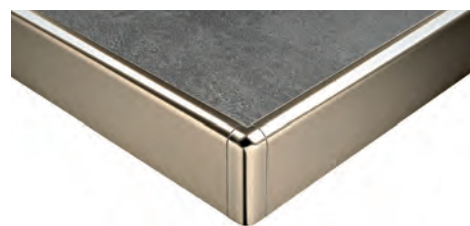


POLISHED TITANIUM ALUMINIUM
2,7 lm 10 Pcs - 27 lm

Article	H mm	€/lm	€/Pc
PCTBT 10	10	23,27	62,83

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

1. Choose "PROTOP" according to the tile thickness and desired finish. 2. Cut "PROTOP" to the desired length and apply the adhesive on the support where the profile will be laid. 3. Press the anchoring flange of "PROTOP" into the adhesive. 4. Lay the tiles, aligning them with the profile leaving a 2 mm joint. Remove immediately all remains of adhesive from the surface of the profile. 5. Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile.


COLOURS



CORNERS

INTERNAL / EXTERNAL CORNERS ANODIZED SILVER ALUMINIUM

Article	€/Pc
EPCTAA 90/1 (90°)	20,45
IPCTAA 90/1 (90°)	20,45
EPCTAA 135/1 (135°)	20,45
IPCTAA 135/1 (135°)	20,45



EXTERNAL CORNER
EPCT... 90



EXTERNAL CORNER
EPCT... 135




INTERNAL CORNER
IPCT... 90



INTERNAL CORNER
IPCT... 135

PROTOP T

ANODIZED AND POLISHED ALUMINIUM

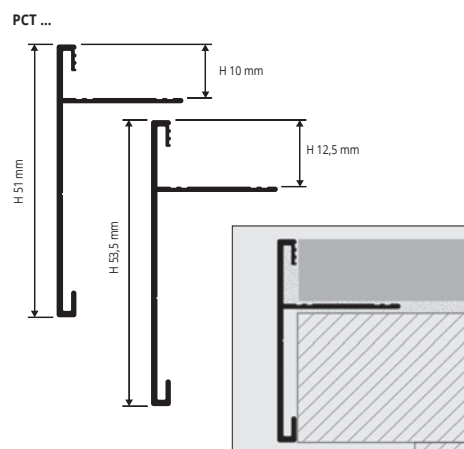

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

1. Choose "PROTOP T" according to the tile thickness and desired finish. 2. Cut "PROTOP T" to the desired length and apply the adhesive on the support where the profile will be laid. 3. Press the anchoring flange of "PROTOP T" into the adhesive. 4. Lay the tiles, aligning them with the profile leaving a 2 mm joint. Remove immediately all remains of adhesive from the surface of the profile. 5. Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile.



ANODIZED SILVER ALUMINIUM
2,7 lm 10 Pcs - 27 lm

Article	H mm	€/lm	€/Pc
PCTAA 10T	10	13,94	37,64
PCTAA 125T	12,5	14,30	38,61



POLISHED CHROME ALUMINIUM
bar length 2,7 lm - pack. 10 Pcs - 27 lm

Article	H mm	€/lm	€/Pc
PCTBC 10T	10	23,27	62,83
PCTBC 125T	12,5	23,62	63,77

INTERNAL / EXTERNAL CORNER ANODIZED SILVER ALUMINIUM

Article	€/Pc
IEPCTAA 12590T/1 (90°)	20,45
IEPCTAA 1090T/1 (90°)	20,45
IEPCTAA 10135T/1 (135°)	20,45
IEPCTAA 125135T/1 (135°)	20,45



IEPCT... 90T



IEPCT... 135T

INTERNAL / EXTERNAL CORNER ANODIZED CHROME ALUMINIUM

Article	€/Pc
IEPCTBC 12590T/1 (90°)	20,45
IEPCTBC 1090T/1 (90°)	20,45
IEPCTBC 10135T/1 (135°)	20,45
IEPCTBC 125135T/1 (135°)	20,45

COLOURS



