



PROSOL 18-30-35-40 in steel are self-adhesive joint - covers in stainless steel 1.4016 available in various widths. They are used to join floors of the same or differing material and thickness. The rounded shape also allows the profile to be used to edge shallow floors max. 5 mm thick. **PROSOL** is normally used to cover flaws and defects created during laying of ceramic/wood/parquet floors by covering the joint/threshold. **PROSOL** is recommended for all sorts of public environments: hotels, offices, shops and private dwellings; it guarantees an impeccable and attractive finish.

PROSOL 18-30-35-40

STAINLESS STEEL 1.4016 WITH
SELF-ADHESIVE WITH PROTECTIVE FILM

FLOORS



STAINLESS ST. 1.4016 with adhesive thermo packed
bar length 2,7 lm - pack. 40 Pcs - 108 lm (L 35/40 mm - 54 lm)

Article	Width-thick.	€/lm	€/Pc
PLSAC 18A	18 mm - 10/10	5,75	15,53
PLSAC 30A	30 mm - 10/10	6,31	17,04
PLSAC 35A	35 mm - 10/10	7,12	19,22
PLSAC 40A	40 mm - 12/10	9,95	26,87

STAINLESS ST. 1.4016 with adhesive
thermo packed - bar length 0,83 lm - pack. 20 Pcs 

Article	Width-thick.	€/Pc
PLSAC 308A	30 mm - 10/10	5,25
PLSAC 358A	35 mm - 10/10	5,91

STAINLESS ST. 1.4016 with adhesive
thermo packed - bar length 0,93 lm - pack. 20 Pcs 

Article	Width-thick.	€/Pc
PLSAC 309A	30 mm - 10/10	5,86
PLSAC 359A	35 mm - 10/10	6,72

COLOURS



AC - Polished stainless
steel 1.4016



STAINLESS ST. 1.4016 with adhesive
thermo packed - bar length 0,83 lm - pack. 20 Pcs

Article	Width-thick.	€/Pc
PLSAC 308AS	30 mm - 10/10	6,57
PLSAC 358AS	35 mm - 10/10	6,96

STAINLESS ST. 1.4016 with adhesive
thermo packed - bar length 0,93 lm - pack. 20 Pcs 


Article	Width-thick.	€/Pc
PLSAC 309AS	30 mm - 10/10	7,23
PLSAC 359AS	35 mm - 10/10	7,77
PLSAC 409AS	40 mm - 12/10	10,44

STAINLESS ST. 1.4016 with adhesive
thermo packed - bar length 1,03 lm - pack. 20 Pcs 

Article	Width-thick.	€/Pc
PLSAC 3010AS	30 mm - 10/10	7,96


STAINLESS ST. 1.4016 with adhesive
thermo packed - bar length 1,66 lm - pack. 20 Pcs 

Article	Width-thick.	€/Pc
PLSAC 3016AS	30 mm - 10/10	12,50
PLSAC 3516AS	35 mm - 10/10	13,57

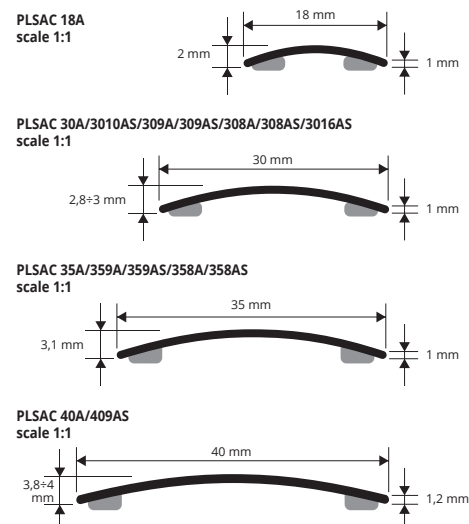


threshold - joint-cover profiles

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

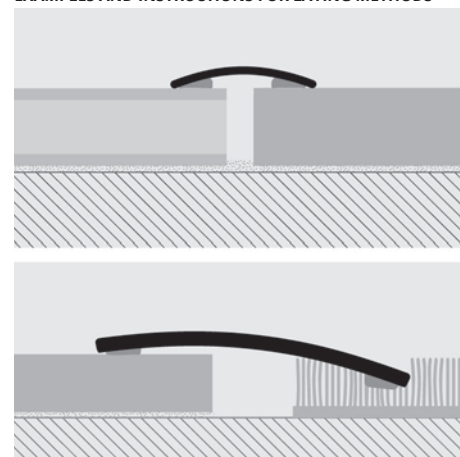

1. Choose the suitable profile and cut it to the necessary length.
2. Degrease, wash and clean the solid surface thoroughly.
3. Remove the protective paper from the adhesive.
4. Lay the profile by applying pressure evenly over the whole surface without using a hammer.

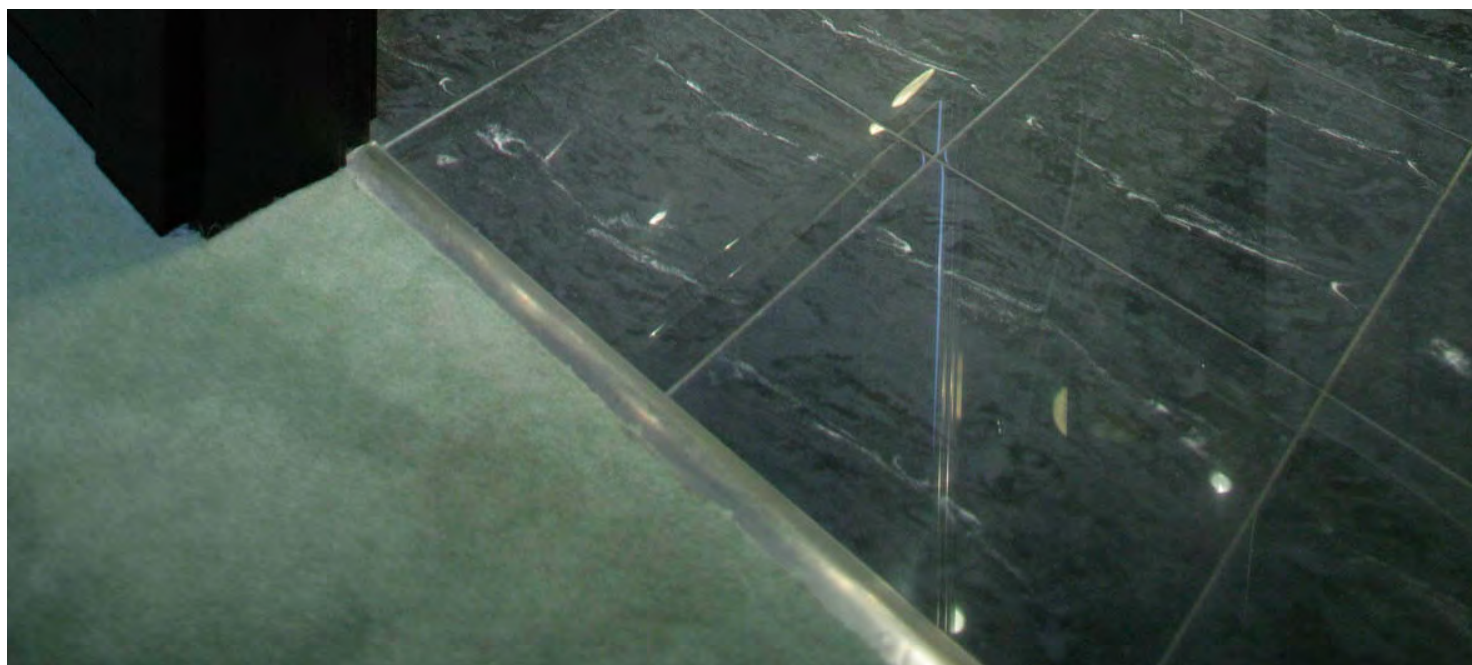


PROSOL 30-35-40


PUNCHED STAINLESS STEEL 1.4016 WITH PROTECTIVE FILM

PROSOL 30-35-40 in steel are punched joint - covers in stainless steel 1.4016 available in various widths. They are used to join floors of the same or differing material and thickness. The rounded shape also allows the profile to be used to edge shallow floors max. 5 mm thick. **PROSOL** is normally used to cover flaws and defects created during laying of ceramic/wood/parquet floors by covering the joint/threshold. **PROSOL** is recommended for all sorts of public environments: hotels, offices, shops and private dwellings; it guarantees an impeccable and attractive finish.


PLSAC 30F/308F/309F/308FS/309FS/3010FS/3016FS
scale 1:1




PLSAC 35F/358F/359F/358FS/359FS/3516FS
scale 1:1



PLSAC 40F/409FS
scale 1:1



EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

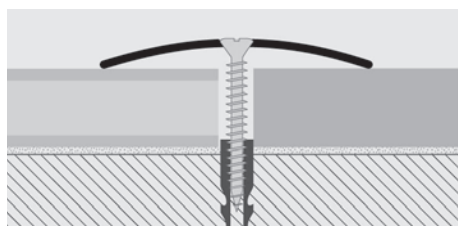

STAINLESS ST. 1.4016 punched - with protective film
bar length 2,7 lm - pack. 20 Pcs - 54 lm (L 30 mm - 108 lm)

Article	Width-thick.	€/lm	€/Pc
PLSAC 30F	30 mm - 10/10	4,80	12,96
PLSAC 35F	35 mm - 10/10	5,72	15,44

STAINLESS ST. 1.4016 punched with screws and screw anchors
thermo packed - bar length 0,93 lm - pack. 20 Pcs

Article	Width-thick.	€/lm
PLSAC 309FS	30 mm - 10/10	5,86



SELF
PACK



AC - Polished stainless
Steel 1.4016

1. Choose the suitable profile and cut it to the necessary length.
2. Mark the position of the holes using the existing holes in the profile as reference.
3. Insert the screw anchors into the drilled holes.
4. Fix the profile using flathead screws suitable for the relative slots in the profile.

PROSOL 30-35-40

PUNCHED POLISHED BRASS WITH PROTECTIVE FILM

PROSOL 30-35-40 in brass are punched joint - covers in polished brass available in various widths. They are used to join floors of the same or differing material and thickness. The rounded shape also allows the profile to be used to edge shallow floors max. 5 mm thick. **PROSOL** is normally used to cover flaws and defects created during laying of ceramic/wood/parquet floors by covering the joint/threshold. **PROSOL** is recommended for all sorts of public environments: hotels, offices, shops and private dwellings; it guarantees an impeccable and attractive finish.

PLSOL 30F/308F/309F/3010F/3016F/308FS/309FS/3010FS/3016FS
scale 1:1





PLSOL 35F/358F/359F/358FS/359FS/3510FS/3516FS
scale 1:1



PLSOL 40F/409F/409FS/4016FS
scale 1:1



EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

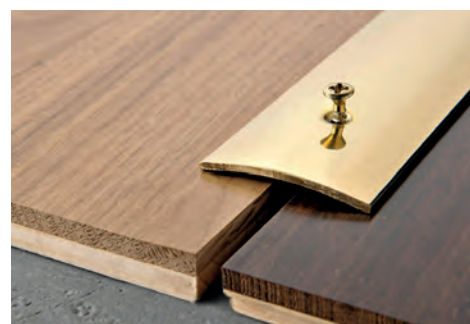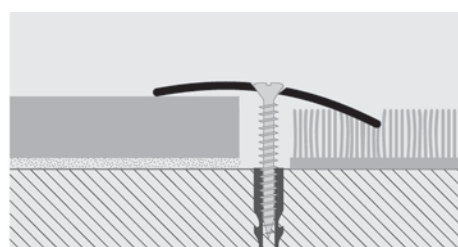


POLISHED BRASS punched with protective film

bar length 2,7 lm - pack. 40 Pcs - 108 lm (L 35/40mm - 54 lm)

Article	Width-thick.	€/lm	€/Pc
PLSOL 30F	30 mm - 10/10	7,39	19,95

COLOURS



OL - Polished brass

1. Choose the suitable profile and cut it to the necessary length.
2. Mark the position of the holes using the existing holes in the profile as reference.
3. Insert the screw anchors into the drilled holes.
4. Fix the profile using flathead screws suitable for the relative slots in the profile.

PROSOL 18-30-35-40 in brass are self-adhesive joint - covers in polished brass available in various widths. They are used to join floors of the same or differing material and thickness. The rounded shape also allows the profile to be used to edge shallow floors max. 5 mm thick. **PROSOL** is normally used to cover flaws and defects created during laying of ceramic/wood/parquet floors by covering the joint/threshold. **PROSOL** is recommended for all sorts of public environments: hotels, offices, shops and private dwellings; it guarantees an impeccable and attractive finish.

PROSOL 18-30-35-40

POLISHED BRASS WITH SELF-ADHESIVE
WITH PROTECTIVE FILM



POLISHED BRASS with adhesive thermo packed
bar length 2,7 lm - pack. 40 Pcs - 108 lm (L 35/40mm - 54 lm)

Article	Width-thick.	€/lm	€/Pc
PLSOL 18A	18 mm - 10/10	8,54	23,06
PLSOL 30A	30 mm - 10/10	9,20	24,84
PLSOL 35A	35 mm - 10/10	11,29	30,48
PLSOL 40A	40 mm - 10/10	21,14	57,08

POLISHED BRASS with adhesive thermo packed  **ECO BLISTER**
bar length 0,90 lm - pack. 20 Pcs

Article	Width-thick.	€/lm	€/Pc
PLSOL 189A	10 mm - 10/10	8,83	

POLISHED BRASS with adhesive thermo packed  **ECO BLISTER**
bar length 0,93 lm - pack. 20 Pcs

Article	Width-thick.	€/lm	€/Pc
PLSOL 309A	30 mm - 10/10	8,54	

POLISHED BRASS with adhesive thermo packed  **ECO BLISTER**
bar length 1,03 lm - pack. 20 Pcs

Article	Width-thick.	€/lm	€/Pc
PLSOL 3010A	30 mm - 10/10	9,49	



POLISHED BRASS with adhesive thermo packed  **SELF PACK**
bar length 0,83 lm - pack. 20 Pcs

Article	Width-thick.	€/lm	€/Pc
PLSOL 308AS	30 mm - 10/10	8,83	
PLSOL 358AS	35 mm - 10/10	10,70	

POLISHED BRASS with adhesive thermo packed  **SELF PACK**
bar length 0,93 lm - pack. 20 Pcs

Article	Width-thick.	€/lm	€/Pc
PLSOL 309AS	30 mm - 10/10	9,61	
PLSOL 359AS	35 mm - 10/10	11,87	
PLSOL 409AS	40 mm - 10/10	21,23	


POLISHED BRASS with adhesive thermo packed  **SELF PACK**
bar length 1,03 lm - pack. 20 Pcs

Article	Width-thick.	€/lm	€/Pc
PLSOL 3010AS	30 mm - 10/10	10,77	
PLSOL 3510AS	35 mm - 10/10	13,10	

POLISHED BRASS with adhesive thermo packed  **SELF PACK**
bar length 1,66 lm - pack. 20 Pcs


Article	Width-thick.	€/lm	€/Pc
PLSOL 3016AS	30 mm - 10/10	17,22	
PLSOL 3512AS	35 mm - 10/10	15,42	
PLSOL 3516AS	35 mm - 10/10	21,04	

COLOURS




OL - Polished brass


PLSOL 18A/189A
scale 1:1




PLSOL 30A/308A/309A/3010A/3016A/308AS/309AS/3010AS/3016AS
scale 1:1



PLSOL 35A/359A/358AS/359AS/3510AS/3516AS
scale 1:1





PLSOL 40S/409S/409SS/416SS
scale 1:1



threshold - joint-cover profiles

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

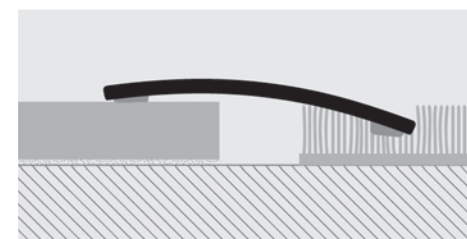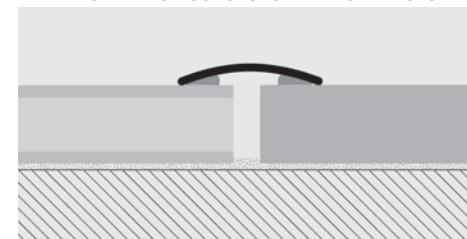


1. Choose the suitable profile and cut it to the necessary length.
2. Degrease, wash and clean the solid surface thoroughly.
3. Remove the protective paper from the adhesive.
4. Lay the profile by applying pressure evenly over the whole surface without using a hammer.

PROSOL 30-35-40


ANODIZED, POLISHED ALUMINIUM
WITH SELF-ADHESIVE AND PUNCHED

PROSOL 30-35-40 are self-adhesive or punched joint - covers in polished brass available in various widths. They are used to join floors of the same or differing material and thickness. The rounded shape also allows the profile to be used to edge shallow floors max. 5 mm thick. **PROSOL** is normally used to cover flaws and defects created during laying of ceramic/wood/parquet floors by covering the joint/threshold. **PROSOL** is recommended for all sorts of public environments: hotels, offices, shops and private dwellings; it guarantees an impeccable and attractive finish.


PLS... 30A/309A/308AS/309AS/3010AS/3016AS
scale 1:1




PLS... 35A
scale 1:1




PLS... 40A
scale 1:1




PLS... 30F/309F/308FS/309FS/3016FS
scale 1:1






PLS... 35F
scale 1:1



PLS... 40F
scale 1:1



EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

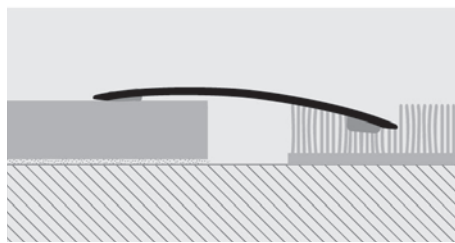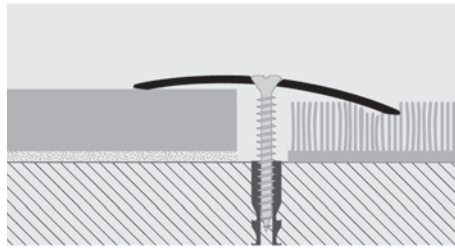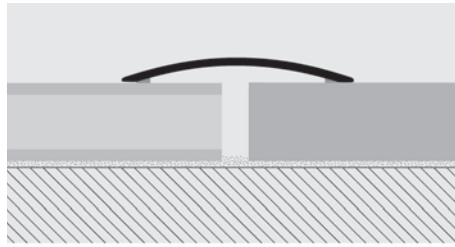

1. Choose the suitable profile and cut it to the necessary length.
- Adhesive version**
2. Degrease, wash and clean the solid surface thoroughly.
3. Remove the protective paper from the adhesive.
4. Lay the profile by applying pressure evenly over the whole surface without using a hammer.
- Punched version**
2. Mark the position of the holes using the existing holes in the profile as reference.
3. Insert the screw anchors into the drilled holes.
4. Fix the profile using flathead screws suitable for the relative slots in the profile.



ANODIZED ALUMINIUM punched thermo packed

bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	Width-thick.	€/lm	€/Pc
PLSAA 30F	30 mm - 1,3	4,20	11,34
PLSAA 35F	35 mm - 1,5	5,40	14,58
PLSAA 40F	40 mm - 2	6,63	17,90

ANODIZED ALUM. punched with screws and screw anchors

thermo packed - bar length 0,93 lm - pack. 20 Pcs



Article	Width-thick.	€/Pc
PLSAA 309FS	30 mm - 10/10	5,40

ANODIZED ALUMINIUM with adhesive

thermo packed - bar length 1,66 lm - pack. 20 Pcs



Article	Width-thick.	€/Pc
PLSAA 3016AS	30 mm - 10/10	11,39

ANODIZED ALUMINIUM with adhesive

thermo packed - bar length 0,93 lm - pack. 20 Pcs



Article	Width-thick.	€/Pc
PLSAA 309A	30 mm - 10/10	5,40
PLSAO 309A	30 mm - 10/10	5,40



ANODIZED ALUMINIUM with adhesive thermo packed

bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	Width-thick.	€/lm	€/Pc
PLSAA 30A	30 mm - 1,3	5,81	15,69
PLSAO 30A	30 mm - 1,3	5,81	15,69
PLSAB 30A	30 mm - 1,3	5,81	15,69
PLSAA 35A	35 mm - 1,5	6,98	18,85
PLSAA 40A	40 mm - 2	8,16	22,03
PLSAO 40A	40 mm - 2	8,16	22,03
PLSAB 40A	40 mm - 2	8,16	22,03

ANODIZED ALUMINIUM with adhesive

thermo packed - bar length 0,83 lm - pack. 20 Pcs



Article	Width-thick.	€/Pc
PLSAA 308AS	30 mm - 10/10	5,86

ANODIZED ALUMINIUM with adhesive

thermo packed - bar length 0,93 lm - pack. 20 Pcs



Article	Width-thick.	€/Pc
PLS... 309AS	30 mm - 10/10	6,56


ANODIZED ALUMINIUM with adhesive

thermo packed - bar length 1,03 lm - pack. 20 Pcs



Article	Width-thick.	€/Pc
PLSAA 3010AS	30 mm - 10/10	7,18

COLOURS



PROLEVALL 25-35-38-50 are joint - covers in anodized aluminium with gold, silver and bronze finish in various widths with a more or less knurled flat surface, available with self-adhesive backing or punched in various lengths. They are used to join floors of the same or differing material e.g. ceramic tiles, wood, marble, parquet or laminated, mainly to cover flaws created during laying or expansion joints. The chamfered edges ensure perfect adhesion to the floor, while the flat top allows perfect door closure. Recommended for dwellings and public environments with intense pedestrian traffic. Easy to lay; the high-strength elastomer adhesive ensures an excellent grip.

PROLEVALL 25-35-38-50

ANODIZED ALUMINIUM
WITH SELF-ADHESIVE AND PUNCHED

FLOORS



ANODIZED ALUMINIUM with adhesive thermo packed
bar length 2,7 lm - pack. 40 Pcs - 108 lm


Article	Width mm	€/lm	€/Pc
PLVAA 25A	25	5,81	15,69
PLVAO 25A	25	5,81	15,69
PLV... 35A	35	6,90	18,63
PLVAA 38A	38	7,54	20,36
PLVAO 38A	38	7,54	20,36
PLVAA 50A	50	9,14	24,68
PLVAO 50A	50	9,14	24,68

The code of the selected colour must be added to the article code.
E.g.: PLV... 25A (chosen finish anod. silver) PLVAA 25A.

ANODIZED ALUMINIUM with adhesive thermo packed - bar length 0,93 lm - pack. 20 Pcs

Article	Width mm	€/Pc
PLVAA 259AS	25	6,56
PLVAA 359AS	35	7,54
PLVAO 359AS	35	7,54
PLVAB 359AS	35	7,54
PLVAA 389AS	38	8,21
PLVAO 389AS	38	8,21
PLVAB 389AS	38	8,21

COLOURS



ANODIZED ALUMINIUM punched thermo packed
bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	Width mm	€/lm	€/Pc
PLVAA 25F	25	4,28	11,56
PLV... 35F	35	5,40	14,58
PLV... 38F	38	6,00	16,20
PLVAA 50F	50	7,84	21,17

The code of the selected colour must be added to the article code.
E.g.: PLV... 25F (chosen finish anod. silver) PLVAA 25F.

ANODIZED ALUM. punched with screws and screw anchors thermo packed - bar length 0,93 lm - pack. 20 Pcs


Article	Width mm	€/Pc
PLVAA 259FS	25	5,46
PLVAA 359FS	35	6,43
PLVAB 389FS	38	6,77

ANODIZED ALUMINIUM with adhesive thermo packed - bar length 1,66 lm - pack. 20 Pcs


Article	Width mm	€/Pc
PLVAA 3516AS	35	13,26

ANODIZED ALUMINIUM with adhesive thermo packed - bar length 1,03 lm - pack. 20 Pcs

Article	Width mm	€/Pc
PLVAA 3510AS	35	8,27

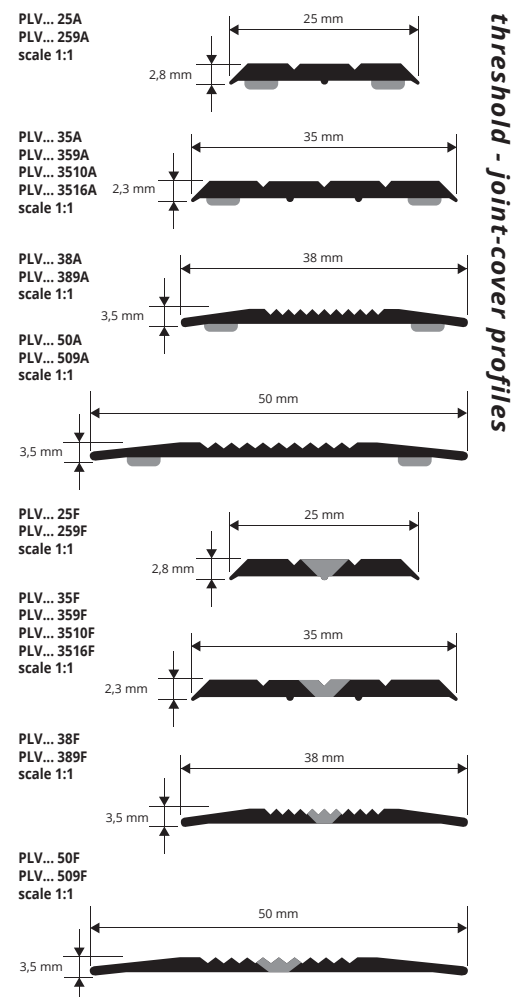

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

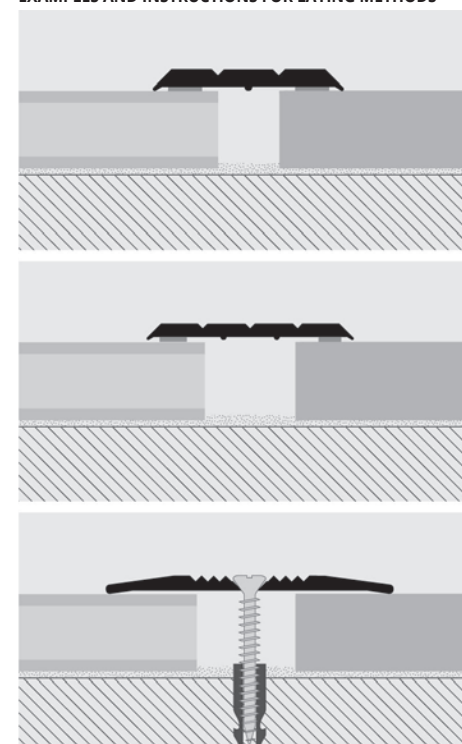


1. Choose the suitable profile and cut it to the necessary length.
- Adhesive version**
2. Degrease, wash and clean the solid surface thoroughly.
3. Remove the protective paper from the adhesive.
4. Lay the profile by applying pressure evenly over the whole surface without using a hammer.
- Punched version**
2. Mark the position of the holes using the existing holes in the profile as reference.
3. Insert the screw anchors into the drilled holes.
4. Fix the profile using flathead screws suitable for the relative slots in the profile.

PROMOQUETTE


ANODIZED ALUMINIUM
WITH OR WITHOUT SELF-ADHESIVE

PROMOQUETTE is an anodized aluminium rounded edging profile with tap-down edge, which is ideal for the clean-cut, elegant finishing of carpeted floors. The carpeting is inserted inside the curved/rounded section, which is then pressed down until the carpeting is secured, thereby also protecting the edge. **PROMOQUETTE** ensures a perfect finish, covering any flaws created during laying and protecting the edge. Easy to lay with the self-adhesive backing ensuring perfect adherence to the floor.

carpet gripper profiles

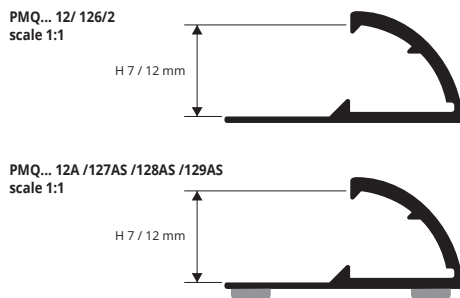

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

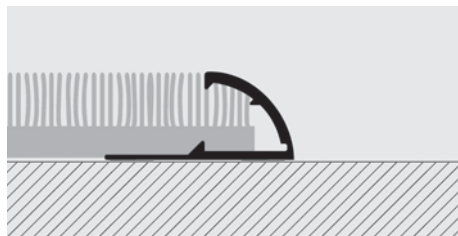

1. Cut the profile to the necessary length. 2. Fix the "PROMOQUETTE" to the floor using screws/nails or double-sided adhesive tape. 3. Insert the carpeting into the curved side with the necessary tension. 4. Apply pressure evenly over the edge of the profile until it closes over and secures the carpeting.


ANODIZED GOLD and SILVER ALUMINUM ADHESIVE thermo packed - bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	H mm	€/lm	€/Pc
PMQAA 12A	7/12	5,93	16,01
PMQAO 12A	7/12	5,93	16,01
PMQAB 12A	7/12	5,93	16,01
PMQAA 12	7/12	4,55	12,29
PMQAO 12	7/12	4,55	12,29

"A" at the end of the product code = Item with adhesive

The code of the selected colour must be added to the article code.
E.g.: PMQ... 12A (chosen colour Anodized gold alum.) PMQAO 12A.

COLOURS



ANODIZED GOLD and SILVER ALUMINUM thermo packed - bar length 0,67 lm - pack. 2 Pcs

Article	H mm	€/Pc
PMQAA 126/2	7/12	8,01
PMQAO 126/2	7/12	8,01

ANODIZED SILVER ALUMINUM ADHESIVE thermo packed - bar length 0,73 lm - pack. 20 Pcs

Article	H mm	€/Pc
PMQAA 127AS	7/12	5,46
PMQAO 127AS	7/12	5,46

ANODIZED GOLD, SILVER and BRONZE ALUM. ADHESIVE thermo packed - bar length 0,93 lm - pack. 20 Pcs


Article	H mm	€/Pc
PMQAA 129AS	7/12	6,71
PMQAO 129AS	7/12	6,71

PROMOQUETTE FIX


ANODIZED SILVER ALUMINIUM
PUNCHED OR NOTCHED

PROMOQUETTE FIX is a profile in anodized aluminium made as a terminal profile to edge carpeted floors held under tension or simply laid with double-sided adhesive tape. Two versions are available: notched or with holes/notches for laying under tension and then permanently fixed with screws/nails; or the punched version to edge without holding under tension. **PROMOQUETTE FIX** ensures an impeccable finish to the edge of carpeting that is not always perfectly cut. It speeds up laying time and the result is attractive.

carpet gripper profiles

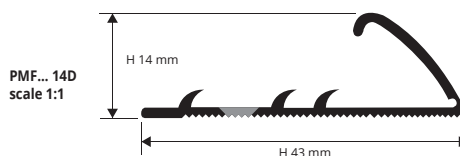

EXAMPLES OF LAYING

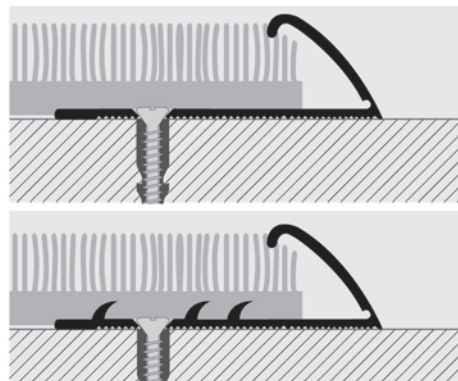

ANODIZED SILVER ALUMINIUM thermo packed - bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	H mm	€/lm	€/Pc
PMFAA 14D	14	7,74	20,90

"D" at the end of the product code = Item with notched
"F" at the end of the product code = Punched Item

The code of the selected colour must be added to the article code.
E.g.: PMF... 14F (chosen colour anodized gold alum.) PMFAO 14F.

INSTRUCTIONS FOR LAYING

1. Cut the profile to the necessary length. 2. Fix the "PROMOQUETTE FIX" to the floor using screws/nails. 3. Insert the carpeting into the curved side with the necessary tension. 4. Apply pressure evenly over the edge of the profile until it closes over and secures the carpeting.

COLOURS



AA - Anodized silver alum.

PROMOQUETTE GIN is a profile in anodized aluminium with tap-down edge for edging or joining floors in carpeting, PVC, linoleum, ceramic tiles/wood, etc. Two versions are available: punched for laying under tension and then permanently fixed with screws/nails or the adhesive version for laying with glue and which can be taken up if required. **PROMOQUETTE GIN** guarantees an impeccable finish and offers the dual function of both joining and of covering any flawed edges of the floors. It speeds up laying time and the result is attractive.

PROMOQUETTE GIN

ANODIZED ALUMINIUM
WITH SELF-ADHESIVE AND PUNCHED

FLOORS



ANODIZED GOLD, SILVER AND BRONZE ALUMINIUM ADHESIVE thermo packed - bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	H mm	€/lm	€/Pc
PMGAA 813A	8/13	9,81	26,49




ANODIZED GOLD, SILVER AND BRONZE ALUMINIUM PUNCHED thermo packed - bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	H mm	€/lm	€/Pc
PMGAA 813F	8/13	7,74	20,90
PMGAO 813F	8/13	7,74	20,90
PMGAB 813F	8/13	7,74	20,90
PMGAT 813F	8/13	7,74	20,90


COLOURS

AA - Anodized silver alum.	AO - Anodized gold alum.	AT - Anodized titanium alum.
AB - Anodized bronze alum.		

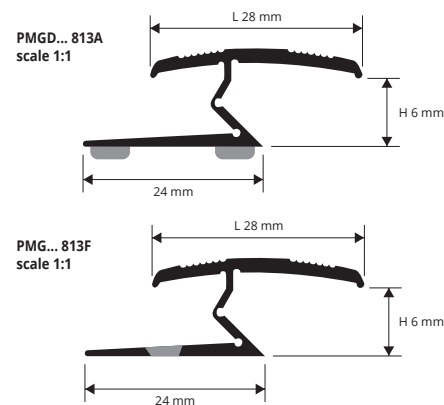

carpet gripper profiles

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

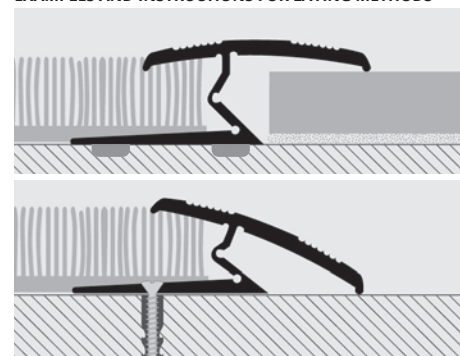

1. Cut the profile to the necessary length. 2. Fix the "PROMOQUETTE GIN" to the floor using screws/nails or two-sided adhesive tape. 3. Lay the required floor, inserting the carpeting, PVC, linoleum, ceramic tile or wood under the upper curved part. 4. Apply pressure evenly on the edges of the profile until they close and secure the flooring on both sides.





**PROENTRANCE
MATT
SYSTEM**




PROENTRANCE MATT SYSTEM

PROENTRANCE MATT SYSTEM is an entrance mat, made of aluminium guides and joined by a PVC joint. It is an effective barrier to retain dust, moisture and dirt. The strong materials used and the modern design ensure a high durability, significantly reduce the possibility of slipping. Suitable for environments subject to heavy pedestrian traffic such as airports, hotels, offices, shopping centers, shops, leisure places. Available in 4 heights: 10, 13, 17 and 22 mm.

FLOORS



4 HEIGHTS AVAILABLE

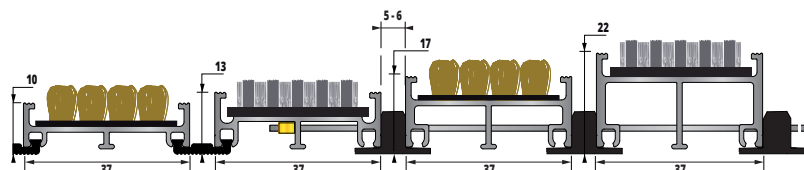

PROENTRANCE MATT BRUSH


Article	H insert mm	H total mm	Colour	€/m²
PENTSP10GC	10	15	GC	487,00 *
PENTSP10GA	10	15	GA	487,00 *
PENTSP13GC	13	17	GC	512,00 *
PENTSP13GA	13	17	GA	512,00 *
PENTSP17GC	17	21	GC	546,00 *
PENTSP17GA	17	21	GA	546,00 *
PENTSP22GC	22	26	GC	594,00 *
PENTSP22GA	22	26	GA	594,00 *

PROENTRANCE MATT BRUSH AND DRY

Article	H insert mm	H total mm	Colour	€/m²
PENTSA10GC	10	14	GC	593,00 *
PENTSA10GA	10	14	GA	593,00 *
PENTSA13GC	13	17	GC	619,00 *
PENTSA13GA	13	17	GA	619,00 *
PENTSA17GC	17	20	GC	653,00 *
PENTSA17GA	17	20	GA	653,00 *
PENTSA22GC	22	25	GC	701,00 *
PENTSA22GA	22	25	GA	701,00 *

PROENTRANCE MATT CARPET

Article	H insert mm	H total mm	Colour	€/m²
PENTMO10GC	10	14	GC	631,00 *
PENTMO10GA	10	14	GA	631,00 *
PENTMO13GC	13	17	GC	677,00 *
PENTMO13GA	13	17	GA	677,00 *
PENTMO17GC	17	20	GC	695,00 *
PENTMO17GA	17	20	GA	695,00 *
PENTMO22GC	22	25	GC	769,00 *
PENTMO22GA	22	25	GA	769,00 *



BRUSH



GA
ANTHRACITE GREY



GC
LIGHT GREY



BRUSH AND DRY



GA
ANTHRACITE GREY



GC
LIGHT GREY



CARPET




GA
ANTHRACITE GREY




GC
LIGHT GREY

PROENTRANCE MATT SLIM SYSTEM

PROENTRANCE MATT SLIM SYSTEM is an entrance mat with raw aluminium structure glued on a polyethylene terephthalate (PET) mat. It constitutes a real cleaning barrier: it ensures optimal protection and the permanence of soils subjected to intense traffic: pedestrians, supermarket trolleys and shopping centers. Lightweight, easy to handle and easy to maintain, it is installed on the back or in a recessed position, inside or outside under shelter (as an entrance airlock).

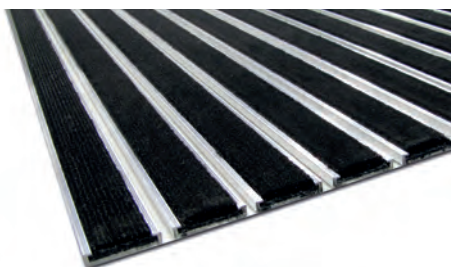

3 TYPES OF INSERT

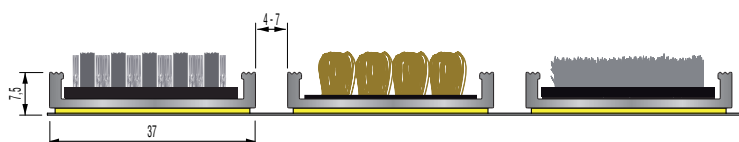

PROENTRANCE MATT SLIM BRUSH

Article	H insert mm	H total mm	Colour	€/m²
PENTSSPGC	7,5	12	GC	504,00 *
PENTSSPGA	7,5	12	GA	504,00 *

PROENTRANCE MATT SLIM BRUSH AND DRY

Article	H insert mm	H total mm	Colour	€/m²
PENTSSAGC	7,5	11	GC	611,00 *
PENTSSAGA	7,5	11	GA	611,00 *

PROENTRANCE MATT SLIM CARPET

Article	H insert mm	H total mm	Colour	€/m²
PENTSMOGC	7,5	11	GC	643,00 *
PENTSMOGA	7,5	11	GA	643,00 *




BRUSH



GA
ANTHRACITE GREY



GC
LIGHT GREY



BRUSH AND DRY



GA
ANTHRACITE GREY



GC
LIGHT GREY



CARPET



GA
ANTHRACITE GREY





GC
LIGHT GREY

ORDER FORM

Order form to be returned to your local agent

Company name		Date	
First name		Ref. Building site	
Tel.		Delivery address	
E-mail		Ref. Product / Cod.Prod.	

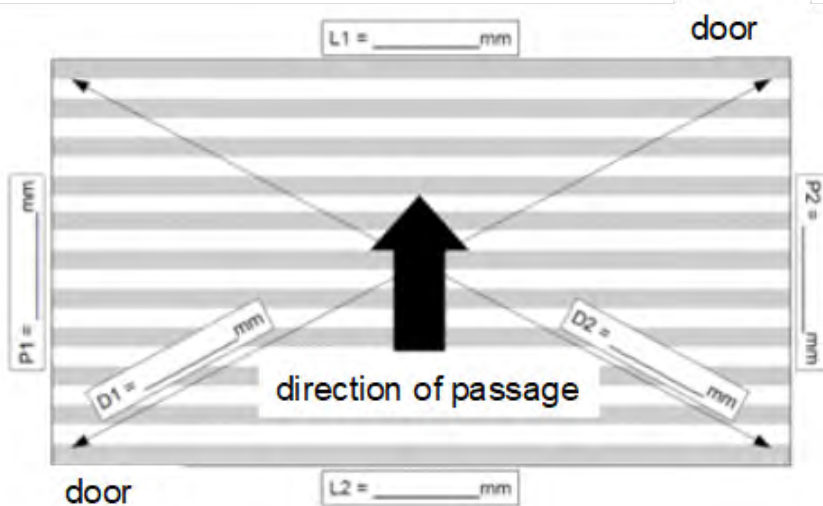

Rubber finishing profiles supplied on L1 and L2, can be cut when laying the carpet

Please write on the floor plan the internal dimensions of the frame (we will calculate the dimensions of the carpet). Measure and write the dimensions of the 4 sides and the dimensions of the 2 diagonals of the carpet.

Legenda:

- L1 and L2 = Guide length
- P1 and P2 = Depth
- D1 and D2 = Diagonal
- Direction of passage

Important;

When the length of the rails (L1 and L2) is >3,500 mm, in case of installation of the Proentrance Matt Slim model, or >4,000 mm in case of installation of Proentrance Matt, The width of the door and its position on the floor plan must be indicated.

In case of "Irregular" dimensions or particular shapes, a cost increase of 15% will be applied on the list price.

Tolerance of production:

- Depth P1 and P2 = +/- 6 mm
- Length L1 and L2 = +/- 2 mm

Signature and stamp