


PRONIVO

ANODIZED ALUMINIUM


PRONIVO is a transition and edging profile with a rounded shape in anodized aluminium with tap-down edge. It is ideal to give a clean-cut, elegant finish when joining and compensating differences in level of floors that are already laid and in differing or same materials e.g. ceramic tiles-wood-parquet. With its rounded shape it compensates for differences in thickness between 7 and 13 mm where no profile was installed at the time of laying. **PRONIVO** ensures a perfect finish and is easy to lay with the self-adhesive backing guaranteeing perfect adherence to the floor.

transition profiles

PNV... 713A
scale 1:1



EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

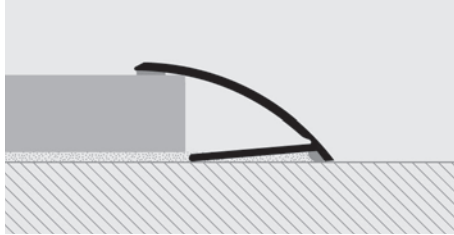


1. Choose the suitable profile and cut it to the necessary length.
2. Degrease, wash and clean the solid surface thoroughly.
3. Remove the protective paper from the adhesive.
4. Lay the profile by applying pressure evenly over the whole surface without using a hammer.



ANODIZED ALUMINIUM self-adhesive thermo packed
bar length 2,7 lm - pack 30 Pcs - 81 lm

Article	H mm	€/lm	€/Pc
PNVAA 713A	7/13	7,59	20,49

COLOURS




PROTRANS

ANODIZED ALUMINIUM


PROTRANS is a transition and edging profile with a rounded shape in anodized aluminium. It is ideal to give a clean-cut, elegant finish when joining and compensating differences in level of floors that are already laid and in differing or same materials e.g. ceramic tiles-wood-parquet. With its rounded shape it compensates for differences in thickness between 6 and 13 mm where no profile was installed at the time of laying. **PROTRANS** ensures a perfect finish and is easy to lay with the self-adhesive backing guaranteeing perfect adherence to the floor.

transition profiles

PTS... 613A
PTS... 6139AS
scale 1:1

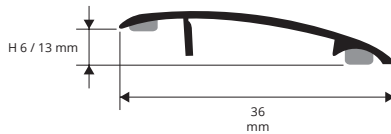

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

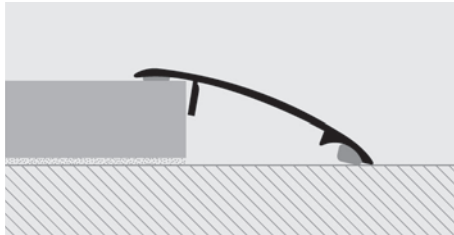

1. Choose the suitable profile and cut it to the necessary length.
2. Degrease, wash and clean the solid surface thoroughly.
3. Remove the protective paper from the adhesive.
4. Lay the profile by applying pressure evenly over the whole surface without using a hammer.



ANODIZED ALUMINIUM self-adhesive thermo packed
bar length 2,7 lm - pack 40 Pcs - 108 lm


Article	H mm	€/lm	€/Pc
PTSAA 613A	6 / 13	7,25	19,58

ANODIZED ALUMINIUM self-adhesive thermo packed - bar length 0,90 lm - pack 20 Pcs




Article	H mm	€/lm	€/Pc
PTSAA 6139AS	6 / 13	/	7,66
PTSAO 6139AS	6 / 13	/	7,66

COLOURS



PROFLOOR 712 is a self-adhesive sloping terminal transition profile in AISI 304/1.4301-V2A stainless steel with protective film. It is used to give a clean-cut, elegant finish when joining and compensating differences in level of floors that are already laid and in differing or same materials e.g. ceramic tiles-wood-parquet-marble. It joins and compensates a thickness between 7 and 12mm. **PROFLOOR 712** ensures a perfect finish with little height, covering any flaws created during laying of the floor. Easy to lay; the high-strength elastomer adhesive ensures an excellent grip.

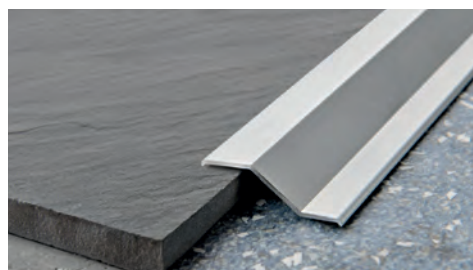

POLISHED STAINLESS ST. AISI 304/1.4301-V2A self-adhesive thermo packed - bar length 0,93 lm - pack. 20 Pcs

Article	L x H mm	€/lm	€/Pc
PFRAC 7129AS	38 X 7/12	/	9,75

POLISHED STAINLESS ST. AISI 304/1.4301-V2A self-adhesive thermo packed - bar length 1,66 lm - pack. 20 Pcs

Article	L x H mm	€/lm	€/Pc
PFRAC 71216AS	38 X 7/12	/	17,17

POLISHED STAINLESS ST. AISI 304/1.4301-V2A self-adhesive thermo packed - bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	L x H mm	€/lm	€/Pc
PFRAC 712A	38 X 7/12	9,24	24,95

POLISHED STAINLESS ST. AISI 304/1.4301-V2A self-adhesive thermo packed - bar length 1,03 lm - pack. 20 Pcs

Article	L x H mm	€/lm	€/Pc
PFRAC 71210AS	38 X 7/12	/	10,72

COLOURS




AC - Polished stainless steel AISI 304/1.4301-V2A


PROFLOOR 712

POLISHED STAINLESS STEEL
AISI 304/1.4301-V2A WITH SELF-ADHESIVE

PFRAC 712A/7128AS/7129AS/71210AS/71216AS
scale 1:1

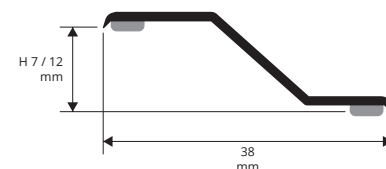

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

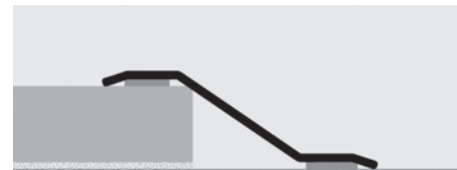

1. Choose the suitable profile and cut it to the necessary length.
2. Degrease, wash and clean the solid surface thoroughly.
3. Remove the protective paper from the adhesive.
4. Lay the profile by applying pressure evenly over the whole surface without using a hammer.

transition profiles

FLOORS

PROFLOOR 712 is a self-adhesive sloping terminal transition profile in polished brass with protective film. It is used to give a clean-cut, elegant finish when joining and compensating differences in level of floors that are already laid and in differing or same materials e.g. ceramic tiles-wood-parquet-marble. It joins and compensates a thickness between 7 and 12mm. **PROFLOOR 712** ensures a perfect finish with little height, covering any flaws created during laying of the floor. Easy to lay; the high-strength elastomer adhesive ensures an excellent grip.



POLISHED BRASS self-adhesive thermo packed bar length 0,93 lm - pack. 20 Pcs

Article	L x H mm	€/lm	€/Pc
PFROL 7129AS	38 X 7/12	/	13,75

POLISHED BRASS self-adhesive thermo packed bar length 1,66 lm - pack. 20 Pcs

Article	L x H mm	€/lm	€/Pc
PFROL 71216AS	38 X 7/12	/	24,32

POLISHED BRASS self-adhesive thermo packed bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	L x H mm	€/lm	€/Pc
PFROL 712A	38 X 7/12	13,47	36,37


POLISHED BRASS self-adhesive thermo packed bar length 0,83 lm - pack. 20 Pcs

Article	L x H mm	€/lm	€/Pc
PFROL 7128AS	38 X 7/12	/	12,31

POLISHED BRASS self-adhesive thermo packed bar length 1,03 lm - pack. 20 Pcs

Article	L x H mm	€/lm	€/Pc
PFROL 71210AS	38 X 7/12	/	15,18

COLOURS




OL - Polished brass


PROFLOOR 712

POLISHED BRASS
WITH SELF-ADHESIVE

PFROL 712A/7128AS/7129AS/71210AS/71216AS
scale 1:1

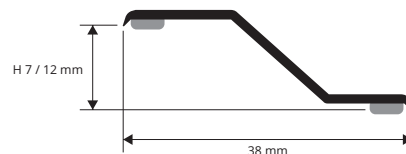


EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

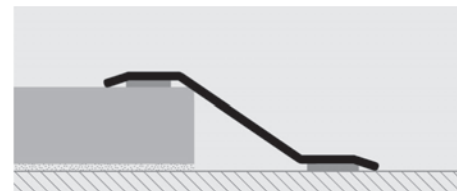

1. Choose the suitable profile and cut it to the necessary length.
2. Degrease, wash and clean the solid surface thoroughly.
3. Remove the protective paper from the adhesive.
4. Lay the profile by applying pressure evenly over the whole surface without using a hammer.


transition profiles

PROFLOOR 712 is a self-adhesive sloping terminal transition profile in anodized aluminium with silver-gold-bronze finish with protective film. It is used to give a clean-cut, elegant finish when joining and compensating differences in level of floors that are already laid and in differing or same materials e.g. ceramic tiles-wood-parquet-marble. It joins and compensates a thickness between 7 and 12mm. **PROFLOOR 712** ensures a perfect finish with little height, covering any flaws created during laying of the floor. Easy to lay; the high-strength elastomer adhesive ensures an excellent grip.

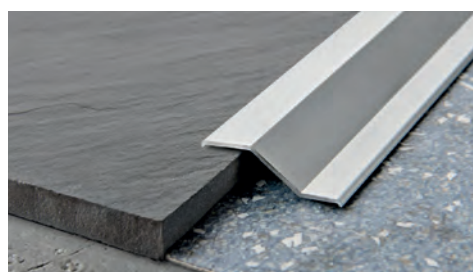

Anodized ALUMINIUM self-adhesive thermo packed bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	L x H mm	€/lm	€/Pc
PFR... 712A	38 X 7/12	7,31	19,74

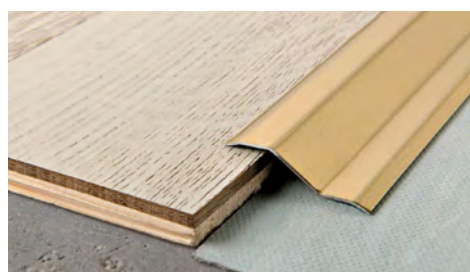

Anodized ALUMINIUM self-adhesive thermo packed - bar length 0,93 lm - pack. 20 Pcs

Article	L x H mm	€/lm	€/Pc
PFR... 7129AS	38 X 7/12	/	8,21


PROFLOOR 712

ANODIZED GOLD, SILVER AND BRONZE
ALUMINIUM WITH SELF-ADHESIVE

PFR... 712A/7129AS
scale 1:1



COLOURS



AA - Anodized silver alum. AO - Anodized gold alum. AB - Anodized Bronze Alum.

transition profiles

The code of the selected colour must be added to the article code. E.g.: PFR... 712A (chosen colour anodized gold alum.) PFR... 712A.

PROPRESS 712


POLISHED STAINLESS STEEL AISI 304/1.4301
AND POLISHED BRASS WITH SELF-ADHESIVE

PROPRESS 712 is a self-adhesive sloping terminal transition profile in stainless steel 1.4301 and polished brass with protective film. It is used to give a clean-cut, elegant finish when joining and compensating differences in level of floors that are already laid and in differing or same materials e.g. ceramic tiles-wood-parquet-marble, etc. It joins and compensates a thickness between 7 and 12mm.


PROPRESS 712 ensures a perfect finish with little height, covering any flaws created during laying of the floor. Easy to lay; the high-strength elastomer adhesive ensures an excellent grip.

transition profiles

PR SAC 712A/7129AS
PR SOL 712A/7129AS
scale 1:1



EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

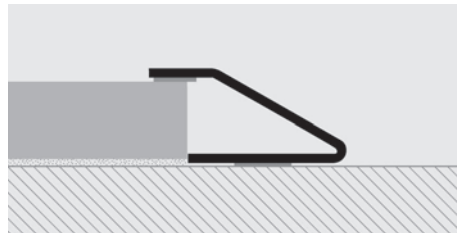

1. Choose the suitable profile and cut it to the necessary length.
2. Degrease, wash and clean the solid surface thoroughly.
3. Remove the protective paper from the adhesive.
4. Lay the profile by applying pressure evenly over the whole surface without using a hammer.



POLISHED STAINLESS ST. AISI 304/1.4301-V2A self-adhesive thermo packed - bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	H x L mm	€/lm	€/Pc
PR SAC 712A	27 X 7/12	12,25	33,08

POLISHED STAINLESS ST. AISI 304/1.4301-V2A self-adhesive thermo packed - bar length 0,90 lm - pack. 20 Pcs




Article	L x H mm	€/Pc
PR SAC 7129AS	27 X 7/12	13,42

COLOURS



AC - Polished stainless steel AISI 304/1.4301-V2A

OL - Polished brass

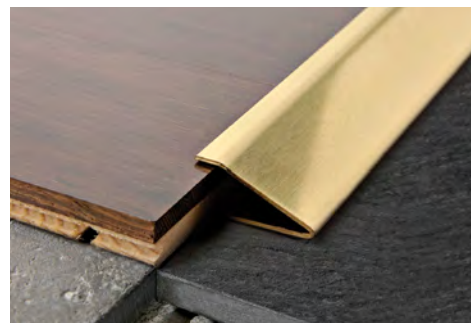

POLISHED BRASS self-adhesive thermo packed - bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	H x L mm	€/lm	€/Pc
PR SOL 712A	27 X 7/12	15,86	42,82

POLISHED BRASS self-adhesive thermo packed - bar length 0,90 lm - pack. 20 Pcs



Article	L x H mm	€/Pc
PR SOL 7129AS	27 X 7/12	16,21


PROFLOOR 1216

POLISHED STAINLESS STEEL AISI 304/1.4301
AND POLISHED BRASS WITH SELF-ADHESIVE


PROFLOOR 1216 is a self-adhesive chamfered terminal transition profile in stainless steel AISI 304/1.4301-V2A and polished brass with protective film. It is used to give a clean-cut, elegant finish when joining and compensating differences in level of floors that are already laid and in differing or same materials e.g. ceramic tiles-wood-parquet-marble, etc. It joins and compensates a thickness between 12 and 16mm. **PROFLOOR 1216** ensures a perfect finish with little height, covering any flaws created during laying of the floor. Easy to lay; the high-strength elastomer adhesive ensures an excellent grip.

transition profiles

PFRAC 1216A/12169AS
PFR OL 1216A/12169AS
scale 1:1

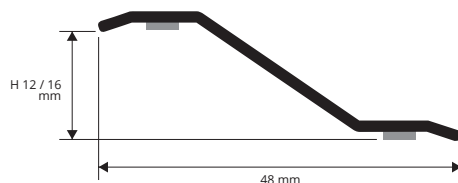

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

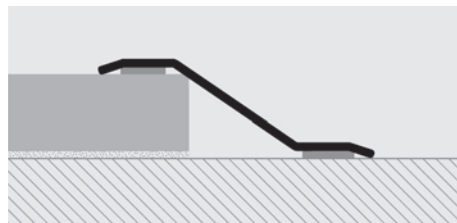

1. Choose the suitable profile and cut it to the necessary length.
2. Degrease, wash and clean the solid surface thoroughly.
3. Remove the protective paper from the adhesive.
4. Lay the profile by applying pressure evenly over the whole surface without using a hammer.



POLISHED STAINLESS ST. AISI 304/1.4301-V2A self-adhesive thermo packed - bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	L x H mm	€/lm	€/Pc
PFRAC 1216A	48 X 12/16	14,12	38,12

POLISHED STAINLESS ST. AISI 304/1.4301-V2A self-adhesive thermo packed - bar length 0,93 lm - pack. 20 Pcs



Article	L x H mm	€/Pc
PFRAC 12169AS	48 X 12/16	13,85



POLISHED BRASS self-adhesive thermo packed - bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	L x H mm	€/lm	€/Pc
PFR OL 1216A	48 X 12/16	20,40	55,08

POLISHED BRASS self-adhesive thermo packed - bar length 0,93 lm - pack. 20 Pcs



Article	L x H mm	€/Pc
PFR OL 12169AS	48 X 12/16	20,50

COLOURS



AC - Polished stainless steel AISI 304/1.4301-V2A

OL - Polished brass


PROLINOLEUM is a self-adhesive transition profile in anodized aluminium with gold/silver finish. It is used to give a clean-cut, elegant finish to hardwearing surfaces in PVC or linoleum and other thin materials between 2-3 mm thick. **PROLINOLEUM** ensures a perfect finish with little height, covering any flaws created during laying of the floor. Easy to lay; the high-strength elastomer adhesive ensures an excellent grip.

PROLINOLEUM

ANODIZED SILVER ALUMINIUM
WITH AND WITHOUT SELF-ADHESIVE



COLOURS



AA - Anodized silver alum.

ANODIZED SILVER ALUMINIUM thermo packed
bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	H x L mm	€/lm	€/Pc
PLUAA 16	2,5 X 16	4,42	11,93


ANODIZED SILVER ALUMINIUM thermo packed - WITH ADHESIVE -
bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	H x L mm	€/lm	€/Pc
PLUAA 16A	2,5 X 16	5,59	15,09

PLU ... 16
PLU ... 16A
scale 1:1



EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

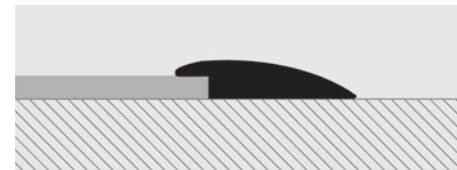

1. Choose the suitable profile and cut it to the necessary length.
2. Degrease, wash and clean the solid surface thoroughly.
3. Remove the protective paper from the adhesive.
4. Lay the profile by applying pressure evenly over the whole surface without using a hammer.

profiles for low thicknesses

PROFLOOR 24 is a self-adhesive transition profile with chamfered edges in stainless steel 1.4301 and polished brass with protective film. It is used to give a clean-cut, elegant finish to hardwearing surfaces in PVC and linoleum - carpeting and other thin materials between 2 and 5mm thick. **PROFLOOR 24** ensures a perfect finish with little height, covering any flaws created during laying of the floor. Easy to lay; the high-strength elastomer adhesive ensures an excellent grip.

PROFLOOR 24

POLISHED STAINLESS STEEL AISI 304/1.4301
AND POLISHED BRASS WITH SELF-ADHESIVE



POLISHED STAINLESS ST. AISI 304/1.4301-V2A self-adhesive thermo packed - bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	L x H mm	€/lm	€/Pc
PFRAC 24A	2/4,5 X 30	6,99	18,87

POLISHED STAINLESS ST. AISI 304/1.4301-V2A self-adhesive thermo packed - bar length 0,93 lm - pack. 20 Pcs



Article	L x H mm	€/Pc
PFRAC 249AS	2/4,5 X 30	7,71



POLISHED BRASS self-adhesive thermo packed
bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	L x H mm	€/lm	€/Pc
PFROL 24A	2/4,5 X 30	10,21	27,57

POLISHED BRASS self-adhesive thermo packed
bar length 0,93 lm - pack. 20 Pcs



Article	L x H mm	€/Pc
PFROL 249AS	2/4,5 X 30	10,86


COLOURS




AC - Polished stainless steel AISI 304/1.4301-V2A

OL - Polished brass

PFRAC 24A/249A
PFROL 24A/249A
scale 1:1



EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

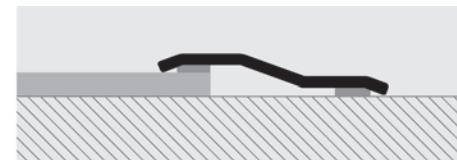

1. Choose the suitable profile and cut it to the necessary length.
2. Degrease, wash and clean the solid surface thoroughly.
3. Remove the protective paper from the adhesive.
4. Lay the profile by applying pressure evenly over the whole surface without using a hammer.

profiles for low thicknesses


PROSLIDER KL ALL

ANODIZED SILVER ALUMINIUM

PROSLIDER KL ALL is a slide shape progressive transition terminal square suitable for connecting perfectly without steps two floor levels. The particular strength of the square allows to resist and bear heavy loads and frequent passages of manual trolleys and motor vehicles besides protecting the edge of the higher floor. The **PROSLIDER KL ALL** is especially used to connect LA Kerlite/Laminam and thin ceramic tiles to each other or else it is used with wood and/or a pre-existing floor. Available in anodized aluminium.

profiles for low thicknesses

PDKLAA 045
scale 1:1

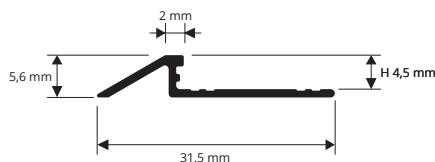

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS



1. Choose the profile with the required finish.
2. Fill the profile cavity with adhesive and apply the adhesive onto the area of application.
3. Lay the "PROSLIDER KL ALL".
4. Align it flush with the floor/covering.
5. Use the adhesive to seal any empty interstices.

ANODIZED SILVER ALUMINIUM thermo packed
bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	H mm	€/lm	€/Pc
PDKLAA 045	4,5	6,71	18,12

COLOURS



AA - Anodized silver alum.


PROCOVER 1045 ALL

ANODIZED AND POLISHED

PROCOVER 1045 ALL is a joint cover profile in anodized aluminium. It is applied at the end of the laying process between two adjoining floors placed at the same level, with a gap of 3 to 6 mm between the two kerlite /laminam/ or thin ceramic tile floors laid with the adhesive. It protects the external edge of the floor/covering. It is easy to lay and aesthetically pleasing. The design of the profile with lower vertical arrowhead part allows excellent anchorage with silicone / adhesive.

profiles for low thicknesses

PCR...1045
scale 1:1



EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS



COLOURS

AA - Anodized silver alum.	AT - Anod. titanium alum.	AG - Anod. grey gun alum.
BC - Polished chrome alum.	BO - Polished gold alum.	BR - Polished copper alum.

ANODIZED ALUMINIUM thermo packed
bar length 2,7 lm - pack. 40 Pcs - 108 lm


Article	H mm	€/lm	€/Pc
PCRAA 1045	4,5	3,66	9,88
PCRAT 1045	4,5	4,39	11,85
PCRAG 1045	4,5	6,70	18,09

POLISHED ALUMINIUM thermo packed
bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	H mm	€/lm	€/Pc
PCRBC 1045	4,5	6,28	16,96
PCRBO 1045	4,5	6,28	16,96
PCRBR 1045	4,5	7,54	20,36

1. Choose "PROCOVER 1045 ALL" in the desired finish considering a side lap of 2/3 mm.
2. Fill the gap with single-pack silicone or with the adhesive used for laying the floor.
3. Bury the profile into the adhesive, making sure that both side laps of the profile rest on the coverings to be joined.

IMPORTANT: Take care of the external edges of the aluminium "PROCOVER 1045 ALL". They must be protected from aggressive substances such as adhesives and sealants and from smoothing or scraping action.

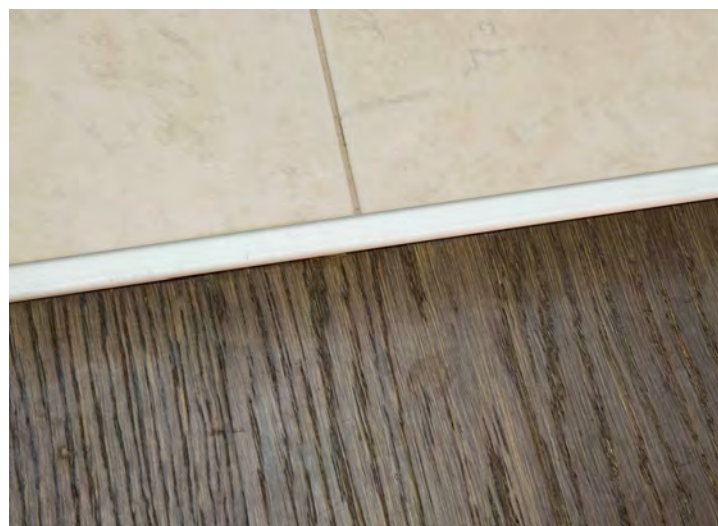




PROCOVER


POLISHED AND BRUSHED
STAINLESS STEEL AISI 304/1.4301-V2A

PROCOVER is a joint-cover profile in stainless steel (polished or brushed) with aluminium supports. It is applied at the end of laying two adjoining floors with the same height, having left a 6 - 24 mm gap between the two floors set in a thin bed of adhesive. It protects the outside edges of the floor/covering. It is easy to lay and attractive. The design of the profile with lower vertical arrowhead part allows excellent anchorage with the silicone/adhesive. The aluminium structure with the stainless steel lining provides it with a high level of resistance to cuts and deformation.

threshold - joint-cover profiles

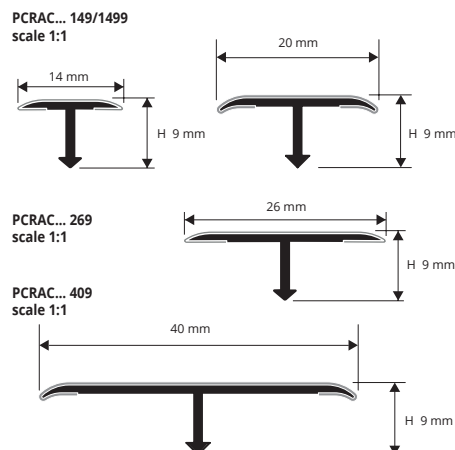

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS



1. Choose the "PROCOVER" with the width suitable for the gap between the two floors to be joined, taking into consideration 2/3 mm side lap. 2. Fill the gap with single-pack silicone or with the adhesive used for laying the floor. 3. Bury the profile into the adhesive, making sure that both side laps of the profile rest on the coverings to be joined.



POLISHED STAINLESS ST. AISI 304/1.4301-V2A
with protective film - bar length 2,7 lm

Article	Pcs/Pack	L x H mm	€/lm	€/Pc
PCRAC 149	40	14 X 9	11,19	30,21
PCRAC 209	40	20 X 9	14,54	39,26
PCRAC 269	30	26 X 9	15,99	43,17
PCRAC 409	20	40 X 9	21,37	57,70

COLOURS



BRUSHED STAINLESS ST. AISI 304/1.4301-V2A
with protective film - bar length 2,7 lm - 4/10 mm

Article	Pcs/Pack	L x H mm	€/lm	€/Pc
PCRACS 149	40	14 X 9	14,12	38,12
PCRACS 209	40	20 X 9	16,06	43,36
PCRACS 269	30	26 X 9	20,10	54,27
PCRACS 409	20	40 X 9	24,23	65,42

bar length 0,90 lm


Article	Pcs/Pack	L x H mm	€/lm	€/Pc
PCRAC 1499	20	14 X 9	11,87	
PCRACS 1499	20	14 X 9	14,55	

PROCOVER


POLISHED, CHROMED AND ANTIQUE BRASS

PROCOVER is a joint-cover profile in polished, chromed and antique brass. It is applied at the end of laying two adjoining floors with the same height, having left a 6 - 24 mm gap between the two floors set in a thin bed of adhesive. It protects the outside edges of the floor/covering. It is easy to lay and attractive. The design of the profile with lower vertical arrowhead part allows excellent anchorage with the silicone/adhesive.

threshold - joint-cover profiles

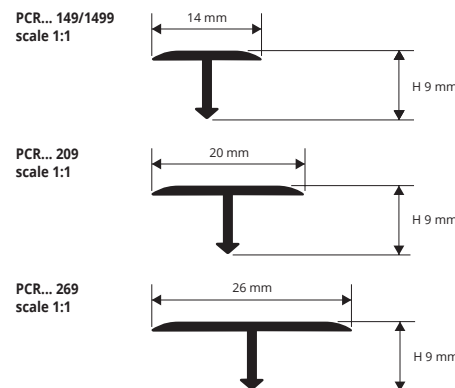

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS



1. Choose the "PROCOVER" with the width suitable for the gap between the two floors to be joined, taking into consideration 2/3 mm side lap. 2. Fill the gap with single-pack silicone or with the adhesive used for laying the floor. 3. Bury the profile into the adhesive, making sure that both side laps of the profile rest on the coverings to be joined. Profiles in natural or polished brass may be subject to oxidation in environments with high degrees of humidity. Resulting marks may be easily removed by polishing the profiles with specific products to be found on sale such as Sidol, Smac and similar.



POLISHED BRASS thermo packed - bar length 2,7 lm

Article	Pcs/Pack	L x H mm	€/lm	€/Pc
PCROL 149	20	14 X 9	8,15	22,01
PCROL 209	20	20 X 9	12,32	33,26
PCROL 269	20	26 X 9	14,87	40,15

bar length 0,90 lm - pack. 40 Pcs

Article	Pcs/Pack	L x H mm	€/lm	€/Pc
PCROL 1499	40	14 X 9	8,31	

CHROMED BRASS (polished stainless st. effect) thermo packed
bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	L x H mm	€/lm	€/Pc
PCROC 149	14 X 9	16,36	44,17
PCROC 209	20 X 9	19,03	51,38
PCROC 269	26 X 9	22,61	61,05




ANTIQUÉ BRASS thermo packed
bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	L x H mm	€/lm	€/Pc
PCROB 149	14 X 9	26,12	70,52
PCROB 209	20 X 9	29,56	79,81
PCROB 269	26 X 9	32,65	88,16

BRUSHED BRASS thermo packed
bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	L x H mm	€/lm	€/Pc
PCROS 149	14 X 9	8,15	22,01
PCROS 209	20 X 9	12,32	33,26
PCROS 269	26 X 9	14,87	40,15

COLOURS

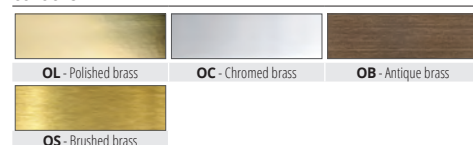

PROCOVER is a joint-cover profile in anodized aluminium. It is applied at the end of laying two adjoining floors with the same height, having left a 6 - 24 mm gap between the two floors set in a thin bed of adhesive. It protects the outside edges of the floor/covering. It is easy to lay and attractive. The design of the profile with lower vertical arrowhead part allows excellent anchorage with the silicone/adhesive.

PROCOVER

ANODIZED AND POLISHED



POLISHED ALUMINIUM thermo packed
bar length 2,7 lm - pack 40 Pcs - 108 lm

Article	Pcs/Pack	L x H mm	€/lm	€/Pc
PCRBC 149	40	14 X 9	7,16	19,33
PCRBO 149	40	14 X 9	7,16	19,33

bar length 0,90 lm - pack 40 Pcs


Article	Pcs/Pack	L x H mm	€/lm	€/Pc
PCRAA 1499	40	14 X 9	4,97	
PCRDB 1499	40	14 X 9	6,37	
PCRBC 1499	40	14 X 9	7,31	
PCRAA 2699	40	26 X 9	6,46	

ANODIZED ALUMINIUM
thermo packed - bar length 2,7 lm




Article	Pcs/Pack	L x H mm	€/lm	€/Pc
PCRAA 149	40	14 X 9	4,20	11,34
PCRAO 149	40	14 X 9	5,05	13,64
PCRAB 149	40	14 X 9	5,05	13,64
PCRAT 149	40	14 X 9	5,05	13,64
PCRDB 149	40	14 X 9	5,38	14,53
PCRAG 149	40	14 X 9	7,26	19,60
PCRNEO 149	40	14 X 9	7,82	21,11
PCRAA 209	40	20 X 9	4,50	12,15
PCRAO 209	40	20 X 9	5,40	14,58
PCRAB 209	40	20 X 9	5,40	14,58
PCRAT 209	40	20 X 9	5,40	14,58
PCRDB 209	40	20 X 9	5,84	15,77
PCRAG 209	40	20 X 9	7,67	20,71
PCRNEO 209	40	20 X 9	8,42	22,73
PCRAA 269	40	26 X 9	5,59	15,09
PCRAO 269	40	26 X 9	6,72	18,14
PCRAB 269	40	26 X 9	6,72	18,14
PCRAT 269	40	26 X 9	6,72	18,14
PCRDB 269	40	26 X 9	7,28	19,66
PCRAA 409	20	40 X 9	8,21	22,17


PCR... 149/1499
scale 1:1



PCR... 209
scale 1:1




PCR... 269
PCRAA 409
scale 1:1



COLOURS

AA - Anodized silver alum.	DB - Anod. dark bronze alum.	AT - Anodized titanium alum.
AB - Anodized bronze alum.	AO - Anodized gold alum.	AG - Anod. grey gun alum.
BC - Polished chrome alum.	BO - Polished gold alum.	NEO - Anod. black alum.

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS



PROCOVER WOOD is a joint-cover profile in aluminium covered with a very strong film available in 77 wooden finishes (72 on demand). It is applied at the end of laying two adjoining floors with the same height, having left a 6 - 24 mm gap between the two floors set in a thin bed of adhesive. It protects the outside edges of the floor/covering. It is easy to lay and attractive. The design of the profile with lower vertical arrowhead part allows excellent anchorage with the silicone/adhesive.

ALUMINUM COVERED WOODEN FINISHES thermo packed
bar length 2,7 lm - pack 40 Pcs - 108 lm (L 26 mm - 54 lm)

Article	L x H mm	€/lm	€/Pc
PCRA... 149	14 X 9	6,80	18,36
PCRA... 269	26 X 9	11,96	32,29

The code of the selected colour must be added to the article code.
Es.: PCRA... 149 (chosen finish light oak) PCRA04W 149.




COLOURS

05W - Light oak (strip)	29W - White oak	30W - Grey oak
-------------------------	-----------------	----------------

PROCOVER WOOD

ALUMINIUM COVERED WITH PROTECTIVE FILM
IN WOODEN FINISHES


PCRA... 149
scale 1:1



PCRA... 269
scale 1:1



EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS



1. Choose the "PROCOVER" with the width suitable for the gap between the two floors to be joined, taking into consideration 2/3 mm side lap.
2. Fill the gap with single-pack silicone or with the adhesive used for laying the floor.
3. Bury the profile into the adhesive, making sure that both side laps of the profile rest on the coverings to be joined.

PROCOVER INSERT for inserting Procover profiles

VINYL RESIN / BLACK RUBBER

Vinyl resin/rubber profile "U-form" for inserting PROCOVER with PINBFT 45 or PINBFT 40 Proinsert System base.


VINYL RESIN/RUBBER

length 2,7 lm and/or in rolls 100 lm


Article	lm	€/lm	€/Pc	€/rotolo
PCPCR	2,7	3,80	10,56	/
PCPCR	100	3,80	/	391,40

PROINSERT BASE 45 AND BASE 40 - alum. punched - perfored
bar length 2,7 lm - pack 20 Pcs - 54 lm

Article	Larg. mm	€/lm	€/Pc
PINBFT 45	45	6,56	17,71
PINBFT 40	40	6,48	17,5

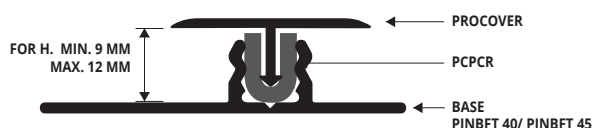

INSERT
+BASE 45/40
scale 1:1

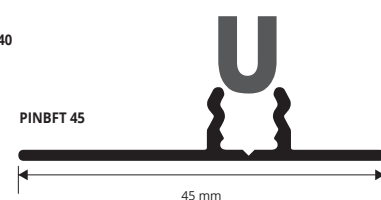


PINBFT 40



PROPLATE

POLISHED STAINLESS 1.4016 STEEL
SELF-ADHESIVE OR PUNCHED

PROPLATE is a flat joint-cover profile with special profiled edges for perfect adherence to flooring. Made in stainless steel 1.4016 with a protective film and available with or without adhesive or for certain widths also in the punched version. Available in widths of 20 - 30 - 40 - 60 - 80 mm with protective film.

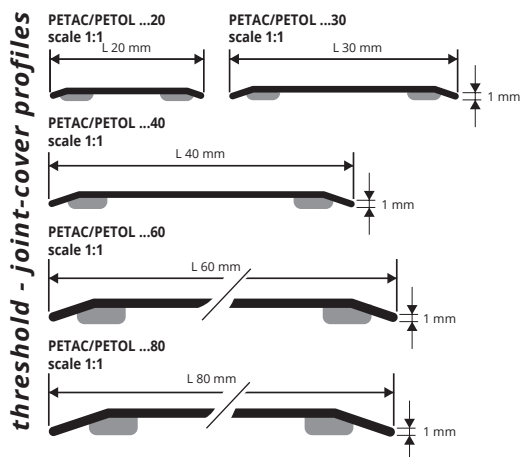

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS



1. Choose "PROPLATE" in the required width and material and whether punched or with self-adhesive backing. 2. Cut the profile to the required length. When laying the self-adhesive Proplate, clean, degrease and dry the surface, checking that the temperature for application is at least 15°. 3. Remove the protective paper from the adhesive and lay the profile correctly applying a uniform vertical pressure by hand without moving the profile and without using iron/steel hammers. 4. When laying the punched version, align the profile and mark the position of the holes using the holes in the profile as reference. 5. Insert suitable screw anchors (usually Ø 3mm screws & 5x25mm screw anchors) 6. Align the profile and tighten the galvanised or brassed flathead screws.



POLISHED STAINLESS 1.4016 ST. thermo packed - ADHESIVE
bar length 2,70 lm - pack. 20 Pcs - 54 lm (L 20 - 30mm - 108 lm) - 10/10 mm


Article	Width	€/lm	€/Pc
PETAC 20A	20mm	6,53	17,63
PETAC 30A	30mm	6,99	18,87
PETAC 40A	40mm	10,11	27,30
PETAC 60A	60mm	17,66	47,68
PETAC 80A	80mm	22,31	60,24

POLISHED STAINLESS 1.4016 STEEL thermo packed - without holes
bar length 2,70 lm - pack. 20 Pcs - 54 lm - 10/10 mm

Article	Width	€/lm	€/Pc
PETAC 60	60mm	15,51	41,88
PETAC 80	80mm	20,14	54,38

PUNCHED POLISHED STAINLESS 1.4016 ST. with protective film
bar length 2,70 lm - pack. 20 Pcs - 54 lm (L 30mm - 108 lm) - 10/10 mm

Article	Width	€/lm	€/Pc
PETAC 30F	30mm	5,45	14,72
PETAC 40F	40mm	8,54	23,06

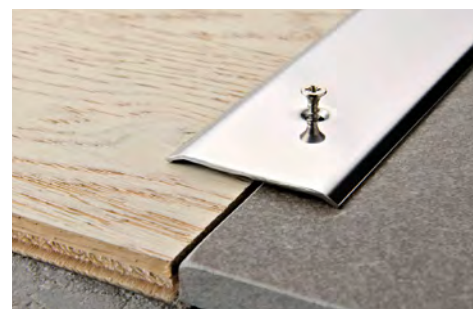

POLISHED STAINLESS 1.4016 ST. thermo packed - ADHESIVE bar length 0,93 lm - pack. 20 Pcs - 10/10 mm

Article	Width	€/Pc
PETAC 309AS	30mm	7,03
PETAC 609AS	60mm	17,47
PETAC 809AS	80mm	22,45

POLISHED STAINLESS 1.4016 ST. thermo packed - PUNCHED WITH SCREWS
bar length 0,93 lm - pack. 20 Pcs - 10/10 mm

Article	Width	€/Pc
PETAC 309FS	30mm	5,72

COLOURS




30F - ITEM AVAILABLE WHILE STOCKS LAST.

PROPLATE


POLISHED BRASS
SELF-ADHESIVE OR PUNCHED

PROPLATE is a flat joint-cover profile with special profiled edges for perfect adherence to flooring. Made in polished brass with a protective film and available with or without adhesive or for certain widths also in the punched version. Available in widths of 20 - 30 - 40 - 60 - 80 mm with protective film.

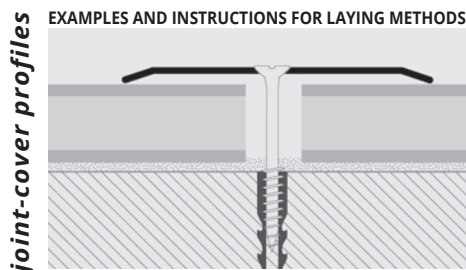

1. Choose "PROPLATE" in the required width and material and whether punched or with self-adhesive backing. 2. Cut the profile to the required length. When laying the self-adhesive Proplate, clean, degrease and dry the surface, checking that the temperature for application is at least 15°. 3. Remove the protective paper from the adhesive and lay the profile correctly applying a uniform vertical pressure by hand without moving the profile and without using iron/steel hammers. 4. When laying the punched version, align the profile and mark the position of the holes using the holes in the profile as reference. 5. Insert suitable screw anchors (usually Ø 3mm screws & 5x25mm screw anchors) 6. Align the profile and tighten the galvanised or brassed flathead screws.

COLOURS




POLISHED BRASS thermo packed ADHESIVE
bar length 2,70 lm - pack. 20 Pcs - 54 lm (L 20/30mm - 108 lm) - 10/10 mm

Article	Width	€/lm	€/Pc
PETOL 20A	20mm	9,52	25,70
PETOL 30A	30mm	9,77	26,38
PETOL 40A	40mm	12,35	33,35
PETOL 60A	60mm	21,63	58,40

POLISHED BRASS thermo packed WITHOUT HOLES
bar length 2,70 lm - pack. 20 Pcs - 54 lm (L 20 mm - 108 lm) - 10/10 mm

Article	Width	€/lm	€/Pc
PETOL 20	20mm	7,68	20,74
PETOL 60	60mm	19,76	53,35

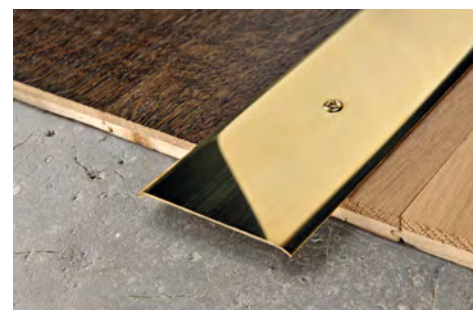

POLISHED BRASS thermo packed ADHESIVE bar length 0,83 lm - pack. 20 Pcs - 10/10 mm

Article	Width	€/Pc
PETOL 308AS	30mm	9,37
PETOL 408AS	40mm	11,52

POLISHED BRASS thermo packed bar length 0,93 lm - pack. 20 Pcs - 10/10 mm

Article	Width	€/Pc
PETOL 309AS	30mm	10,42
PETOL 309FS	30mm	9,05
PETOL 409AS	40mm	13,39
PETOL 409FS	40mm	11,87

"AS" at the end of the product code = Item with adhesive
"FS" at the end of the product code = Punched item


PROPLATE 80 ALZ is a new aluminium joint cover, threshold cover. It is very resistant and suitable for covering the expanding joint of two different supporting structures, or to connect a floor with an adjoining one of the same or different kind. Particularly used in Industrial field, in the malls, sport facilities and gyms equipped with wood and/or resin floors.

PROPLATE 80 ALZ


KNURLED ANODIZED SILVER ALUMINIUM



PETAA 80ZA
PETAA 80Z



EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

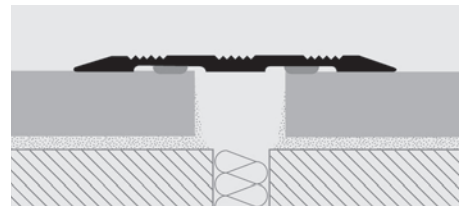

1. Choose "PROPLATE 80ALZ" model with or without sticker and cut it to the required length.

Adhesive version

2. Degrease, wash and clean accurately the solid floor. 3. Remove the protective label from the sticker (sticker model). 4. Rest the square pressing evenly without hammering.

Punched version

2. Perforate on one side and insert the nogs in the holes. 3. Fix and screw the square equipped with flared head screws suitable to the holes made.

ANODIZED SILVER ALUMINIUM thermo packed ADHESIVE
bar length 2,7 lm - pack. 20 Pcs - 54 lm (PETAA 80Z - 40,5 lm)

Article	Width mm	€/lm	€/Pc
PETAA 80ZA	80	20,03	54,08

ANODIZED SILVER ALUMINIUM thermo packed
bar length 2,7 lm - pack. 20 Pcs - 54 lm (PETAA 80Z - 40,5 lm)

Article	Width mm	€/lm	€/Pc
PETAA 80Z	80	18,64	50,33

COLOURS



AA - Anodized silver alum.

threshold - joint-cover profiles


PROCOVER 14PT is a small aluminium joint cover / threshold cover square. It is used to finish technically floors laid at the same level in ceramic tiles/ ceramics ceramics / wood. It covers eventual laying flaws and guarantees that the floors which are underneath expand enough. In Gold-Silk anodized Aluminium and Bronze with sticker.

PROCOVER 14PT


ANODIZED SILVER, GOLD AND BRONZE ALUMINIUM



PCRAA 14PTA
PCRAO 14PTA
PCRAB 14PTA
scale 1:1



EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

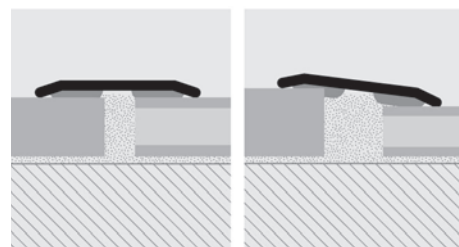

1. Choose the superficial finish of "PROCOVER 14PT" and cut it to the required length. 2. Degrease, wash and clean accurately the solid floor. 3. Remove the protective label from the sticker. 4. Lay the square pressing evenly without hammering.

ANODIZED ALUMINIUM WITH ADHESIVE thermo packed
bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	Width mm	€/lm	€/Pc
PCRAA 14PTA	14	5,24	14,15
PCRAO 14PTA	14	5,24	14,15
PCRAB 14PTA	14	5,24	14,15

COLOURS



AA - Anodized silver alum.

AO - Anodized gold alum.

AB - Anodized bronze alum.

threshold - joint-cover profiles