




An interpretation of:
Petronas Towers, César Pelli, KUALA LUMPUR (Malaysia), 1996

PROFILES FOR TERRACES


PROTERRACE DOUBLE DRIP

VARNISHED ALUMINIUM

PROTERRACE DOUBLE DRIP is an edging profile in varnished aluminium, designed to protect the edges of the tiles on terraces and balconies and to allow the downflow of water. The profile is provided with a flange that ensures the right fixing and an adhesive stripe, which protect the outflow holes to be closed by silicone. The double drip allows the drainage water to flow out in case of application with PRODES DRAIN draining membrane. To reach a right connection between profile and the waterproofing system it's needed to use **PROBAND 150** with **PROBAND KOLL/AB**. The product is also available on request with a **SPECIAL SEASIDE PRE-TREATMENT** which increases its resistance to corrosion when installed at sea front environments.

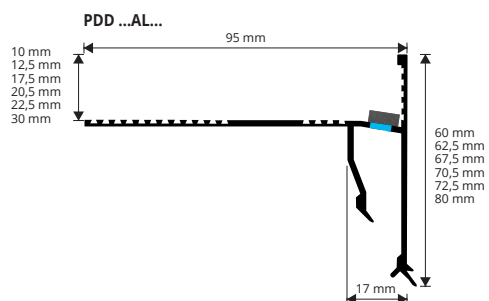


EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

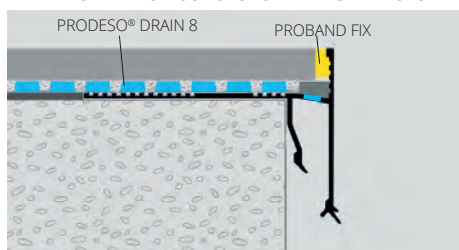

1. Choose PROTERRACE DOUBLE DRIP according to the tile thickness and desired colour.
2. Nail the outside corners to the screed.
3. Cut the PROTERRACE DOUBLE DRIP at desired length joining it to the corners using the linking elements and fix it with nails to the substrate.
4. Lay the desired waterproofing system.
5. Lay the tiles leaving at 5 mm between the tile and the profile.
6. Seal the space between tile and profile with **PROBAND FIX**.

HOW TO REQUEST SEASIDE TREATMENT

When placing your order please add S to the article's number
Example: PDD 175ALGF (seaside) = **PDD 175ALGFS**
price for seaside treatment +50% on the gross price.

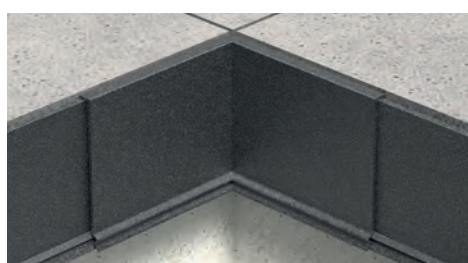

INTERNAL ANGULAR JUNCTION

Article	€/Pc
AICPDD 10AL.../1	44,29
AICPDD 125AL.../1	45,32
AICPDD 175AL.../1	46,35
AICPDD 205AL.../1	47,38
AICPDD 225AL.../1	48,41
AICPDD 30AL.../1	51,50



VARNISHED/COATED ALUMINIUM

bar length 2,7 lm - pack. 5 Pcs - 13,5 lm

Article	H mm	€/lm	€/Pc
PDD 10AL...	10	38,11	102,90
PDD 125AL...	12,5	39,66	107,08
PDD 175AL...	17,5	41,72	112,64
PDD 205AL...	20,5	43,26	116,80
PDD 225AL...	22,5	44,81	120,99
PDD 30AL...	30	53,05	143,24

Available in the colours: BF - GF - A - TF.
The code of the selected colour must be added to the article code.
E.g.: PDD 175AL... (white) PDD 175ALBF.

JOINTS - pack. 1 Pc

Article	H mm	€/Pc
GINPDD 10AL.../1	10	10,30
GINPDD 125AL.../1	12,5	10,82
GINPDD 175AL.../1	17,5	12,36
GINPDD 205AL.../1	20,5	12,88
GINPDD 225AL.../1	22,5	13,39
GINPDD 30AL.../1	30	14,94



GINPDD ...AL...




EXTERNAL CORNERS - pack. 1 Pc

Article	H mm	€/Pc
AEPDD 10AL.../1	10	48,41
AEPDD 125AL.../1	12,5	48,93
AEPDD 175AL.../1	17,5	50,47
AEPDD 205AL.../1	20,5	52,53
AEPDD 225AL.../1	22,5	54,59
AEPDD 30AL.../1	30	56,65


INTERNAL CORNERS - pack. 1 Pc

Article	H mm	€/Pc
AIPDD 10AL.../1	10	50,47
AIPDD 125AL.../1	12,5	50,99
AIPDD 175AL.../1	17,5	52,53
AIPDD 205AL.../1	20,5	54,59
AIPDD 225AL.../1	22,5	56,65
AIPDD 30AL.../1	30	58,71

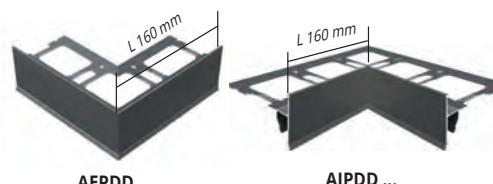

AEPDD ...

AIPDD ...

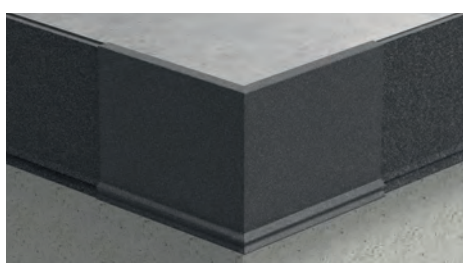

EXTERNAL ANGULAR JUNCTION

Article	€/Pc
AECPDD 10AL.../1	42,23
AECPDD 125AL.../1	43,26
AECPDD 175AL.../1	45,32
AECPDD 205AL.../1	46,35
AECPDD 225AL.../1	47,38
AECPDD 30AL.../1	50,47



END CAP

Article	Pcs/Pack	€/Pack
TPDD AL.../1	1	3,23

The code of the selected colour must be added to the article code.
E.g.: TPDD AL... (white) TPDD ALBF



COLOURS


EMBOSS			
BF - White (9010)	GF - Grey (7038)	A - Anthracite grey (no RAL)	TF - Dark brown (8019)

NEWS
KALEIDOS

PROTERRACE DOUBLE DRIP is an edging profile in varnished aluminium, designed to protect the edges of the tiles on terraces and balconies and to allow the downflow of water. The profile is provided with a flange that ensures the right fixing and an adhesive stripe, which protect the outflow holes to be closed by silicone. The double drip allows the drainage water to flow out in case of application with PRODESOL DRAIN draining membrane. To reach a right connection between profile and the waterproofing system it's needed to use **PROBAND 150** with **PROBAND KOLL/AB**. The product is also available on request with a **SPECIAL SEASIDE PRE-TREATMENT** which increases its resistance to corrosion when installed at sea front environments.

PROTERRACE DOUBLE DRIP

STONE LINE ALUMINIUM

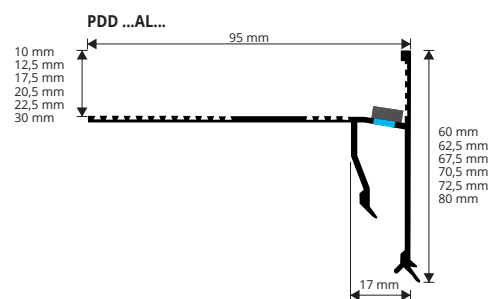

STONE LINE ALUMINIUM
bar length 2,7 lm - pack. 5 Pcs - 13,5 lm

Article	H mm	€/lm	€/Pc
PDD 10-SL...	10	41,92	113,18
PDD 125-SL...	12,5	43,62	117,77

Available in the colours: SL04-SL05-SL10-SL12-SL15.
The code of the selected colour must be added to the article code.
E.g.: PDD 10-SL... (Stone sand) PDD 10-SL04.

EXTERNAL CORNERS - pack. 1 Pc

Article	H mm	€/Pc
AEPDD 10-SL.../1	10	53,25
AEPDD 125-SL.../1	12,5	53,82

JOINTS - pack. 1 Pc


Article	H mm	€/Pc
GINPDD 10-SL.../1	10	11,33
GINPDD 125-SL.../1	12,5	11,90

INTERNAL CORNERS - pack. 1 Pc


Article	H mm	€/Pc
AIPDD 10-SL.../1	10	55,52
AIPDD 125-SL.../1	12,5	56,08



GINPDD ...AL...




AEPDD ...



AIPDD ...


EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

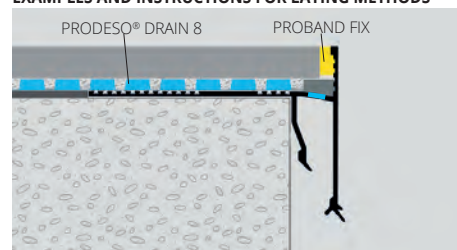

1. Choose PROTERRACE DOUBLE DRIP according to the tile thickness and desired colour.
2. Nail the outside corners to the screed.
3. Cut the PROTERRACE DOUBLE DRIP at desired length joining it to the corners using the linking elements and fix it with nails to the substrate.
4. Lay the desired waterproofing system.
5. Lay the tiles leaving at 5 mm between the tile and the profile.
6. Seal the space between tile and profile with **PROBAND FIX**.


HOW TO REQUEST SEASIDE TREATMENT

When placing your order please add S to the article's number
Example: PDD 175ALGF (seaside) = **PDD 175ALGFS**
price for seaside treatment +50% on the gross price.

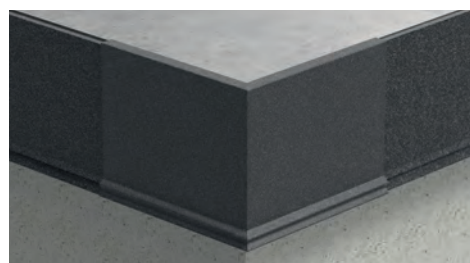

EXTERNAL ANGULAR JUNCTION

Article	€/Pc
AACPDD 10-SL.../1	46,45
AACPDD 125-SL.../1	47,59

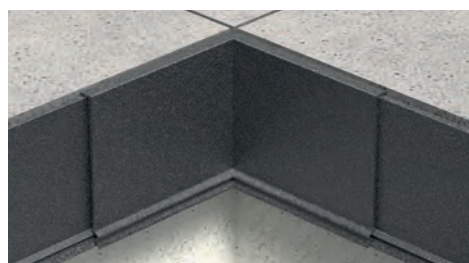

INTERNAL ANGULAR JUNCTION


Article	€/Pc
AICPDD 10-SL.../1	48,72
AICPDD 125-SL.../1	49,85



END CAP

Article	Pcs/Pack	€/Pc
TPDD SL.../1	1	3,55

The code of the selected colour must be added to the article code.
E.g.: TPDD SL... (Stone sand) TPDD SL-04.



COLOURS

KALEIDOS


STONE LINE				
SL04 - Stone sand	SL05 - Stone gray	SL10 - Stone Corten	SL12 - Stone black	SL15 - Stone grey smoke

KALEIDOS®

Profiles for terraces in line with the latest architecture and exterior design trends.



PROTERRACE DOUBLE DRIP & PRODES® DRAIN 8 SYSTEM

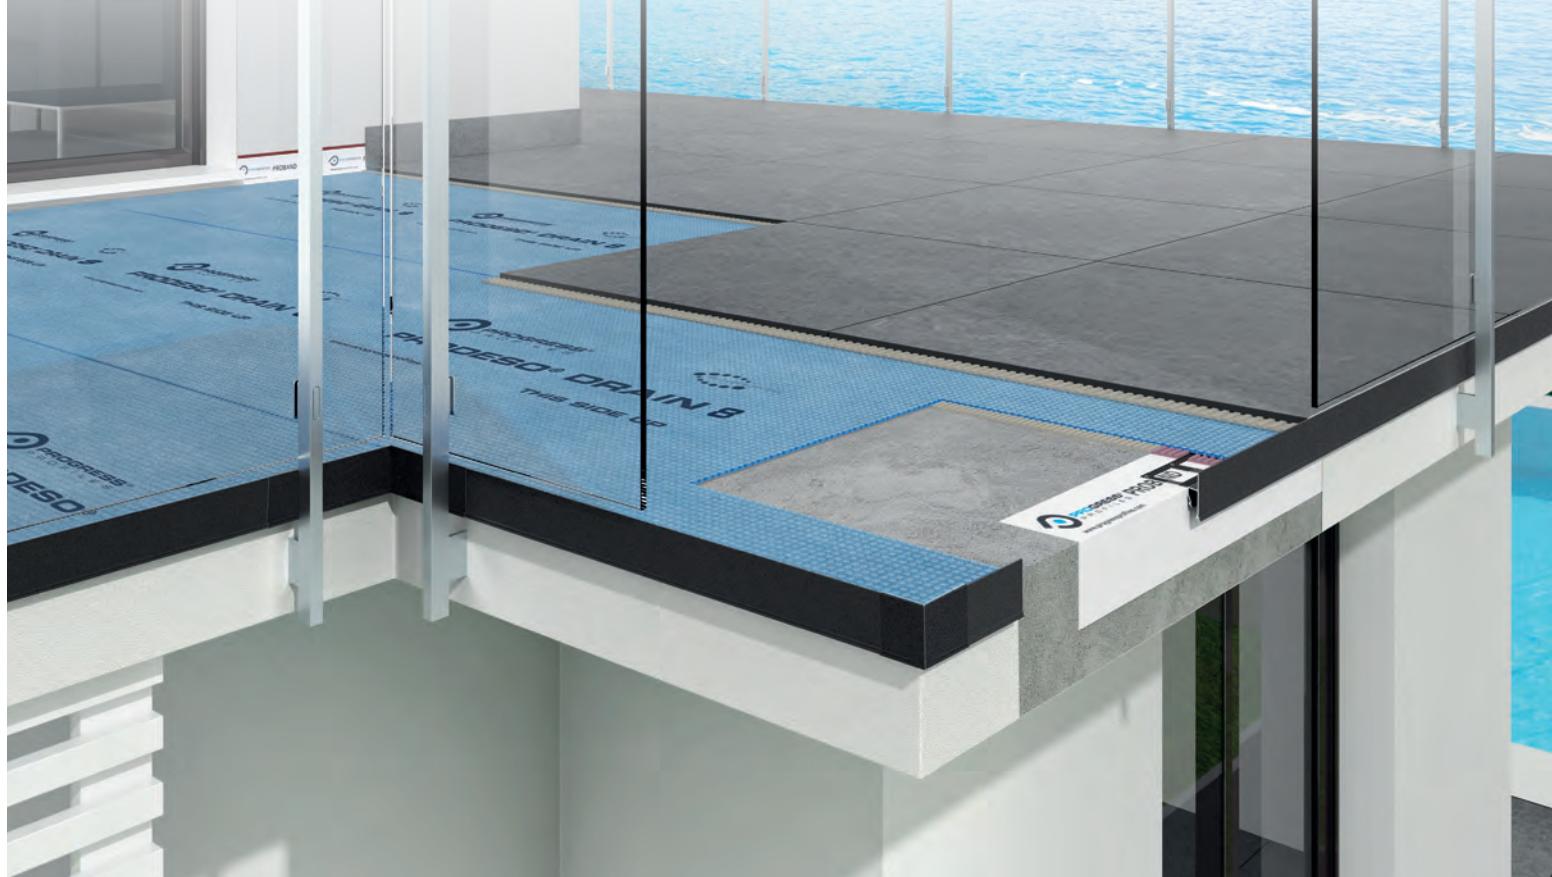

PROFILES
FOR TERRACES

© 2026 All rights reserved by Progress Profiles. Printed in Italy

Functions



UNCOUPLING



WATERPROOFING



DRAINAGE



VAPOUR MANAGEMENT



MICRO-VENTILATION



WATER RUNOFF

Solutions for your terrace

Thanks to **PRODES® DRAIN 8 MEMBRANE** and **PROTERRACE DOUBLE DRIP**, PROGRESS PROFILES has patented a new system capable of combining a correct uncoupling, a safe waterproofing and drainage with a right runoff of rainwater. **PRODES® DRAIN 8** is a draining, uncoupling and waterproofing membrane that helps the drying of the undertile adhesive and inhibits the formation of efflorescence and triacetate ascents. It also guarantees long life for flooring. **PROTERRACE DOUBLE DRIP** is a drip profile that protects the edges of the tiles, prevents water filtration inside the screed and ensures proper outflow of rainwater. Two systems of excellence that combined enhance and protect quality exteriors and restore full livability, in ideal continuity with the internal environments.




PROTERRACE DRAIN FDP


VARNISHED/COATED ALUMINIUM

PROTERRACE DRAIN FDP is an edging profile in varnished aluminium designed to protect the edges of the tiles laid on terraces and balconies and to allow a correct water discharge. The profile is equipped with a punched flange that ensures its fixing to the support. The profile is also provided with holes that allow the discharge of the water filtered between the profile and tiles. To reach a right connection between profile and the waterproofing system it's needed to use **PROBAND 150** with **PROBAND KOLL/AB**. The product is also available on request with a **SPECIAL SEASIDE PRE-TREATMENT** which increases its resistance to corrosion when installed at sea front environments.

PFD 10AL...
scale 1:2

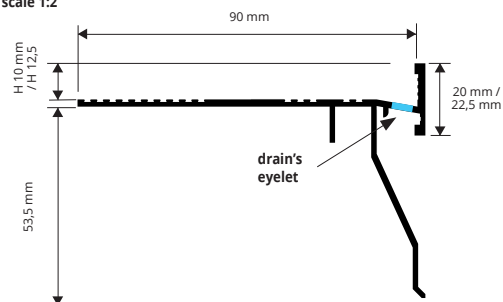


EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

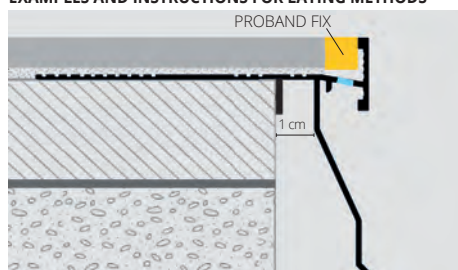

1. Choose PROTERRACE DRAIN FDP according to the tile thickness and desired colour. 2. Fix the external corners to the screed with nails taking care to separate them at least 1 cm from it. 3. Cut "PROTERRACE DRAIN FDP" to the desired length. Lay the profile and fix it with nails. Connect it with the corners using the junctions. 4. Apply the desired waterproofing system. 5. Lay the tiles, leaving about 5 mm between tiles and profile. 6. Seal the space between tiles and profile with **PROBAND FIX**.

HOW TO REQUEST SEASIDE TREATMENT

When placing your order please add S to the article's number
Example: PFD 10ALGF (seaside) = **PFD 10ALGFS**
price for seaside treatment +50% on the gross price.

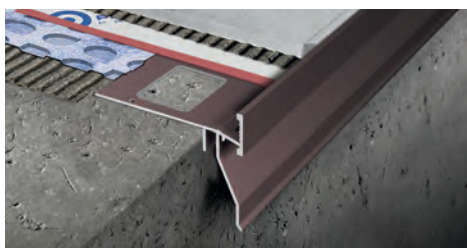

VARNISHED/COATED ALUMINIUM
bar length 2,7 lm - pack. 5 Pcs - 13,5 lm

Article	H mm	€/lm	€/Pc
PFD 10AL...	10	29,87	80,65
PFD 125AL...	12,5	30,90	83,43

Available in the colours: BF - GF - A - TF - EF - B - G - T.
The code of the selected colour must be added to the article code.
E.g.: PFD 10 AL... (white) PFD 10 ALB.

COLOURS

EMBOSSED			
BF - White (9010)	GF - Grey (7038)	A - Anthracite grey (no RAL)	TF - Dark brown (8019)
EMBOSSED		SEMIGLOSSY	
EF - Beige (1019)	B - White (9010)	G - Grey (7038)	T - Dark brown (8019)



EXTERNAL CORNERS - pack. 1 Pcs

Article	€/Pc
AEPFD 10AL.../1	43,30
AEPFD 125AL.../1	43,70


INTERNAL CORNERS - pack. 1 Pcs

Article	€/Pc
AIPFD 10AL.../1	47,68
AIPFD 125AL.../1	48,08

JOINTS - pack. 1 Pc upper + 1 Pc lower

Article	H mm	€/Pack.
GINFD ...AL .../1	10/125	7,94


Available in the colours: BF - GF - A - TF - EF - B - G - T.
Choose the desired height and finish.
E.g.: 10 mm joint with finish A - GINFD 10ALA/1




AEPFD 10/125AL...



GINFD 10/125AL .../1



AIPFD 10/125AL...

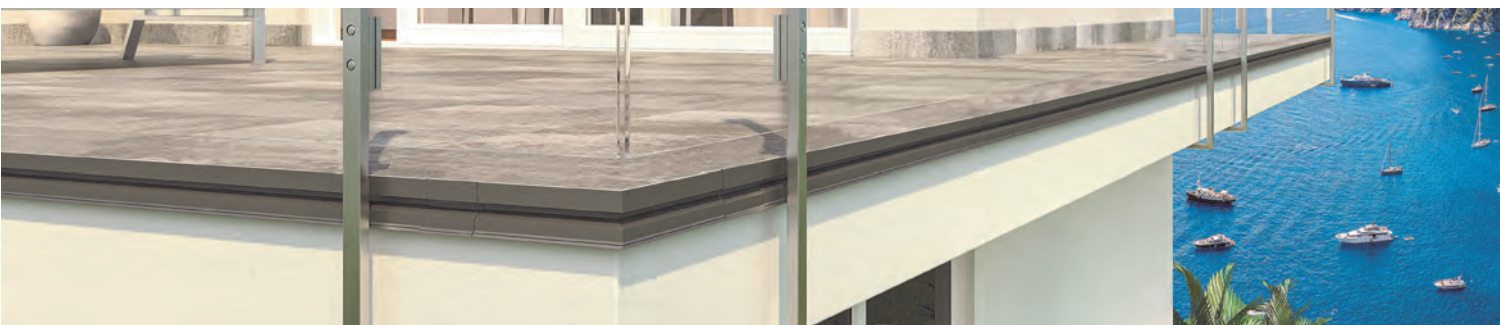

PROTERRACE PU


Open cell polyurethane foam adhesive sponge to ensure proper water drainage of the profiles.

PROTERRACE PU


Article	thick./(mm)	ml / roll	€/mt	€/roll
PRTPU	5 X 10	10,8	2,94	31,75



PRTPU

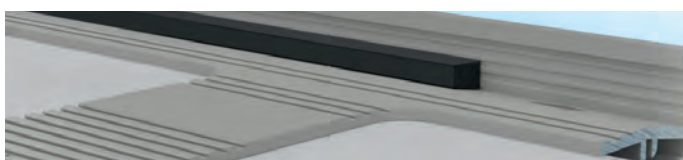

*IN COMBINATION WITH PROTERRACE DRAIN FDP AND PROSIDE WALK



NEWS
KALEIDOS

PROSIDE WALK is a painted aluminium profile designed to protect the edges of tiles placed on sidewalks. It is designed to protect the edges of the tiles and the screed on pavements. The profile is equipped with a punched flange that ensures its fixing to the support. The flange is also provided with small holes that allow the momentary fixing of the profile with nails. To reach a right connection between profile and the waterproofing system it's needed to use **PROBAND 150** with **PROBAND KOLL/AB**. The product is also available on request with a **SPECIAL SEASIDE PRE-TREATMENT** which increases its resistance to corrosion when installed at sea front environments.

PROSIDE WALK

VARNISHED/COATED, STONE LINE ALUMINIUM



VARNISHED EMBOSSED ALUMINIUM

bar length 2,7 lm - pack. 5 Pcs - 13,5 lm (PSDWK 10AL... 10 Pcs - 27 lm)

Article	h mm	H mm	L	€/lm	€/Pc
PSDWK 10AL...	10	45	80	21,86	59,02
PSDWK 125AL...	12,5	45	80	22,21	59,97
PSDWK 15AL...	15	45	80	22,53	60,83
PSDWK 20AL...	20	45	80	23,83	64,34

Choose the desired finish.

Es.: PSDWK 10AL... (Beige) - **PSDWK 10ALB**

EXTERNAL CORNERS - pack. 1 Pc

Article	h mm	H mm	L	€/Pc
AEPSDWK 10AL.../1	10	45	80	23,55
AEPSDWK 125AL.../1	12,5	45	80	24,22
AEPSDWK 15AL.../1	15	45	80	25,56
AEPSDWK 20AL.../1	20	45	80	27,49

Choose the desired finish.

Es.: AEPSDWK 10AL.../1 (Beige) - **AEPSDWK 10ALB/1**

JOINTS - pack. 1 Pc

Article	H mm	€/Pc
GINSDWK ...AL.../1	10/125/15/20	6,73

Choose the desired finish.

Es.: GINSDWK ...AL.../1. (Beige) - **GINSDWK 10ALB/1**



VARNISHED EMBOSSED ALUMINIUM

bar length 2,7 lm - pack. 5 Pcs - 13,5 lm

Article	h mm	H mm	L	€/lm	€/Pc
PSDWK 10-SL...	10	45	80	24,04	64,91

Choose the desired finish.

Es.: PSDWK 10-SL... (Stone Sand) - **PSDWK 10-SL04**

EXTERNAL CORNERS - pack. 1 Pc

Article	h mm	H mm	L	€/Pc
AEPSDWK 10-SL.../1	10	45	80	25,90

Choose the desired finish.


Es.: AEPSDWK 10-SL.../1 (Stone Sand) - **AEPSDWK 10-SL04/1**

JOINTS - pack. 1 Pc

Article	H mm	€/Pc
GINSDWK 10-SL.../1	10	7,40

Choose the desired finish.

Es.: GINSDWK 10-SL.../1 (Stone Sand) - **GINSDWK 10-SL04/1**




COLOURS

EMBOSSÉ		
A - Anthracite grey (no RAL)	GF - Gray (7038)	TF - Dark brown (8019)
BF - White (9010)	EF - Beige (1019)	


KALEIDOS

STONE LINE		
SL04 - Stone sand	SL05 - Stone gray	SL10 - Stone Corten
SL12 - Stone black	SL15 - Stone grey smoke	

PSDWK 10AL / 125AL / 15AL / 20AL

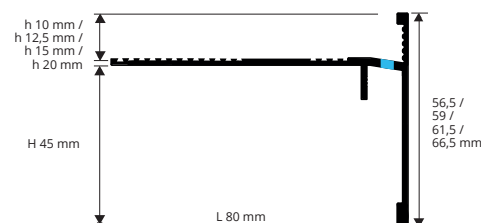

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

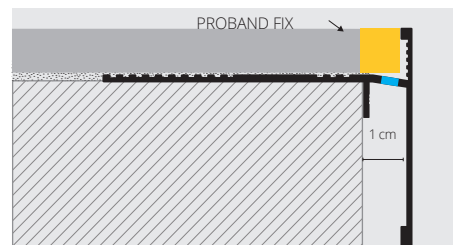

1. Choose PROSIDE WALK according to the tile thickness and desired colour. 2. Waterproof with PROBAND 150 and PROBAND KOLL the front of the screed. 3. Fix the external corners with nails. 4. Cut PROSIDE WALK to the desired length and fix it with nails; connect it with the corners using the junction element. 5. Lay the tiles, leaving about 5 mm between tiles and profile. 6. Seal the space between tiles and profile with **PROBAND FIX**.

HOW TO REQUEST SEASIDE TREATMENT

When placing your order please add S to the article's number

Example: PSDWK 10ALGF (seaside) = **PSDWK 10ALGFS**

price for seaside treatment +50% on the gross price.






PROTERRACE ECO DRIP


VARNISHED/COATED, STONE LINE ALUMINIUM

NEWS
KALEIDOS

PROTERRACE ECO DRIP is an edging profile in aluminium designed to protect the front of the screed from water penetration and the edges of the tiles laid on terraces and balconies. The profile is equipped with a punched flange that ensures its fixing to the support. The front the profile is equipped with a double drip to improve the push away of water from the wall. To reach a right connection between profile and the waterproofing system it's needed to use **PROBAND 150** with **PROBAND KOLL/AB**. The product is also available on request with a **SPECIAL SEASIDE PRE-TREATMENT** which increases its resistance to corrosion when installed at sea front environments.

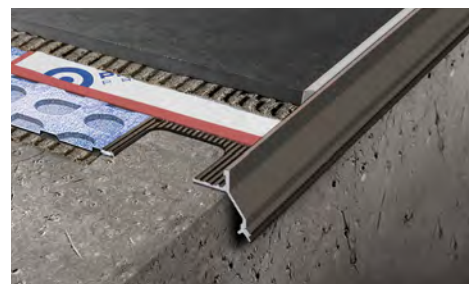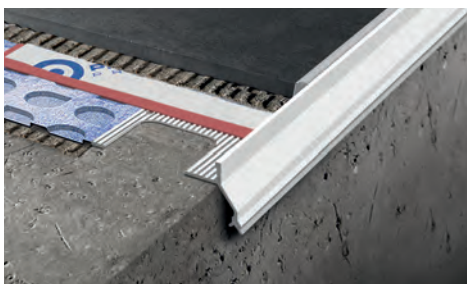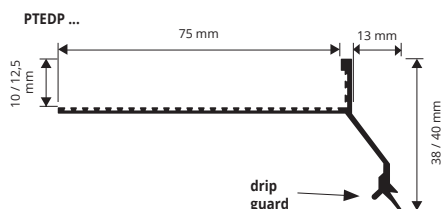

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

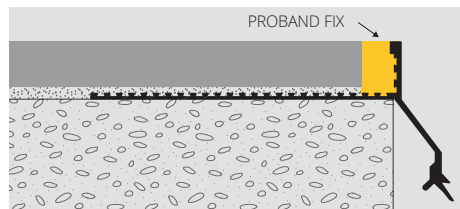

1. Choose "PROTERRACE ECO DRIP" according to the tile thickness.
2. Cut "PROTERRACE ECO DRIP" to the desired length and fix it to the support with nails.
3. Apply the desired waterproofing system, sealing the joint between profile and waterproofing.
4. Lay the tiles, leaving about 5 mm between tiles and profile.
5. Seal the space between tiles and profile using **PROBAND FIX**.

HOW TO REQUEST SEASIDE TREATMENT

When placing your order please add S to the article's number
Example: PTEDP 10ALGF (seaside) = **PTEDP 10ALGFS**
price for seaside treatment +50% on the gross price.

VARNISHED/COATED ALUMINIUM bar length 2,7 lm - pack. 10 Pcs - 27 lm

Article	H mm	€/lm	€/Pc
PTEDP 10AL...	10	16,45	44,42
PTEDP 125AL...	12,5	17,76	47,95

Available in the colours: BF - GF - A - TF - EF.
The code of the selected colour must be added to the article code.
E.g.: PTEDP 10AL... (gray) PTEDP 10GFAL.

EXTERNAL CORNER - pack 1 Pc

Article	€/Pc
AEEDP 10AL.../1	22,87
AEEDP 125AL.../1	23,50


JOINTS - pack. 1 Pc

Article	€/Pc
GINEDP 10AL... /1	7,25
GINEDP 125AL.../1	8,55

GINEDP 10/125ALGF



AEEDP 10/125ALGF



STONE LINE ALUMINIUM bar length 2,7 lm - pack. 10 Pcs - 27 lm

Article	H mm	€/lm	€/Pc
PTEDP 10-SL...	10	18,10	48,87

Available in the colours: SL04-SL05-SL10-SL12-SL15.
The code of the selected colour must be added to the article code.
E.g.: PTEDP 10-SL... (Stone black) PTEDP 10-SL12.

EXTERNAL CORNER - pack 1 Pc

Article	€/Pc
AEEDP 10-SL.../1	25,15

JOINTS - pack. 1 Pc

Article	€/Pc
GINEDP 10-SL... /1	7,97

GINEDP 10-SL12



AEEDP 10-SL12



EXTERNAL ANGULAR JUNCTION

Article	€/Pc
AECDP 10AL.../1	20,09
AECDP 125AL.../1	20,60

INTERNAL ANGULAR JUNCTION

Article	€/Pc
AICDP 10AL.../1	21,63
AICDP 125AL.../1	22,15

Available in the colours: BF - GF - A - TF - EF.
The code of the selected colour must be added to the article code.
E.g.: AICDP 10AL... /1(Beige) AICDP 10ALB/1.

EXTERNAL ANGULAR JUNCTION

Article	€/Pc
AECDP 10-SL.../1	22,09

INTERNAL ANGULAR JUNCTION

Article	€/Pc
AICDP 10-SL.../1	23,79

Available in the colours: SL04-SL05-SL10-SL12-SL15.
The code of the selected colour must be added to the article code.
E.g.: AICDP 10-SL.../1 (Stone black) AICDP 10-SL12/1.

COLOURS

EMBOSS

BF - White (9010)	GF - Grey (7038)	A - Anthracite grey (no RAL)	TF - Dark brown (8019)	EF - Beige (1019)
-------------------	------------------	------------------------------	------------------------	-------------------

KALEIDOS

STONE LINE

SL04 - Stone sand	SL05 - Stone gray	SL10 - Stone Corten	SL12 - Stone black	SL15 - Stone grey smoke
-------------------	-------------------	---------------------	--------------------	-------------------------

PROTERRACE ECO is a natural aluminium edging profile designed to protect the edges of the tiles laid on terraces and balconies. The profile is provided with a punched flange that ensures its fixing to the support. The front side of the profile protects the tile edges and is equipped with grooves that facilitate the grout grip. Thanks to its ease of application **PROTERRACE ECO** is a much sought after profile. To reach a right connection between profile and the waterproofing system it's needed to use **PROBAND 150** with **PROBAND KOLL/AB**. The product is also available on request in **BENDABLE VERSION**. The product is also available on request with a **SPECIAL SEASIDE PRE-TREATMENT** which increases its resistance to corrosion when installed at sea front environments.

PROTERRACE ECO

ALUMINIUM, VARNISHED ALUMINIUM



NATURAL ALUMINIUM thermo packed


bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	H mm	€/ml	€/Pce
PTEE 08AN	8	5,67	15,31
PTEE 10AN	10	6,32	17,06
PTEE 125AN	12,5	7,11	19,20


SILVER ANODIZED ALUMINIUM thermo packed

bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	H mm	€/ml	€/Pce
PTEE 08AA	8	6,80	18,36
PTEE 10AA	10	7,52	20,30
PTEE 125AA	12,5	8,24	22,25

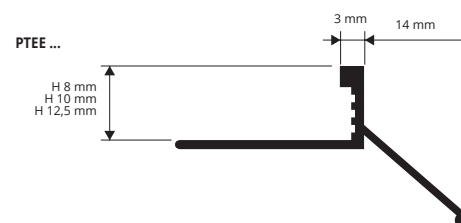

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

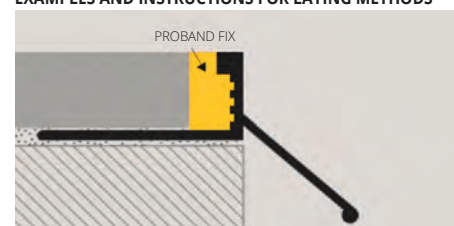


1. Choose "PROTERRACE ECO" according to the tile thickness.
2. Cut "PROTERRACE ECO" to the desired length and fix it to the support with nails.
3. Apply the desired waterproofing system, sealing the joint between profile and waterproofing.
4. Lay the tiles, leaving about 5 mm between tiles and profile.
5. Seal the space between tiles and profile using **PROBAND FIX (PRBFX)**.

VARNISHED/COATED ALUMINIUM bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	H mm	€/ml	€/Pce
PTEE 08AL...	8	9,58	25,87
PTEE 10AL...	10	9,84	26,57
PTEE 125AL...	12,5	10,09	27,24

The code of the selected colour must be added to the article code.
E.g.: PTEE 10AL... (grey) PTEE 10ALGF.

COLOURS



EMBOSSED			
BF - White (9010)	GF - Grey (7038)	A - Anthracite grey (no RAL)	TF - Dark brown (8019)

ARTICLES NOT FOR SALE SINGLY


PROTERRACE PC is a painted aluminium perimeter profile designed to protect the screed on terraces and balconies. The profile is equipped with a punched flange that ensures its fixing to the support. The flange is also provided with small holes that allow the momentary fixing of the profile with nails. To reach a right connection between profile and the waterproofing system it's needed to use **PROBAND 150** with **PROBAND KOLL/AB**. The product is also available on request with a **SPECIAL SEASIDE PRE-TREATMENT** which increases its resistance to corrosion when installed at sea front environments.

PROTERRACE PC

VARNISHED/COATED ALUMINIUM




EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

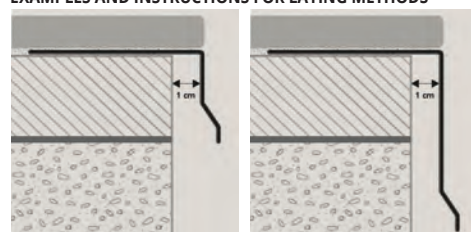

1. Choose "PROTERRACE PC" according to the desired colour and height.
2. Fix the external corners to the screed with nails taking care to separate them at least 1 cm from it.
3. Cut "PROTERRACE PC" to the desired length. Lay the profile and fix it with nails.
4. Connect it with the corners using the junctions.
5. Lay the tiles.

PC 8055AL scale 1:2

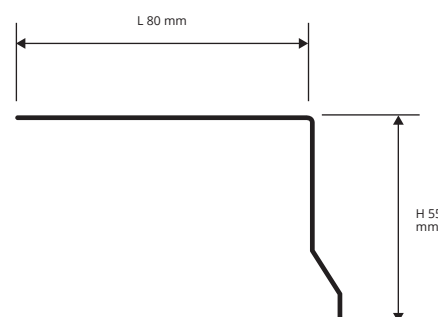

VARNISHED/COATED ALUMINIUM - bar length 2,7 lm pack. 5 Pcs - 13,5 lm

Article	L x H mm	€/lm	€/Pc
PC 8055AL...	80 x 55	22,18	59,89

The code of the selected colour must be added to the article code.
E.g.: PC 8055AL... (white) PC 8055ALB.

EXTERNAL CORNERS - pack. 1 Pc

Article	€/Pc
AEPC 55AL.../1	32,45

The code of the selected colour must be added to the article code. E.g.: AEPC 55AL... /1(white) AEPC 55ALB/1.

JOINTS - pack. 1 Pc

Article	€/Pc
GINC 55AL.../1	6,27


HOW TO REQUEST SEASIDE TREATMENT

When placing your order please add S to the article's number
Example: PC 8055ALGF (seaside) = **PC 8055ALGFS**
price for seaside treatment +50% on the gross price.

COLOURS

EMBOSSED			
BF - White (9010)	GF - Grey (7038)	A - Anthracite grey (no RAL)	TF - Dark brown (8019)
SEMIGLOSSY			
G - Grey (7038)			

AEPC external corners (welded)




GINC joints



PROTERRACE PCG

POLISHED STAINLESS STEEL AISI 304/1.4301-V2A


PROTERRACE PCG is an edging profile in polished stainless steel INOX AISI 304/1.4301-V2A designed to protect the edges of the tiles laid on terraces and balconies and to allow a correct water discharge. The profile is equipped with a punched flange that ensures its fixing to the support. The flange is also provided with small holes that allow the momentary fixing of the profile with nails. The availability of special pieces such as external corners and junctions make **PROTERRACE PCG** a much sought after and easy to lay profile.

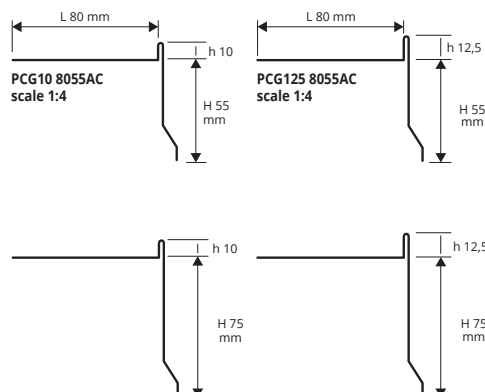


POLISHED STAINLESS STEEL AISI 304/1.4301-V2A with protective film
bar length 2,7 lm - pack. 5 Pcs - 13,5 lm (H 55 mm - 18,9 lm)

Article	h x H x L mm	€/lm	€/Pc
PCG10 8055AC	10 x 55 x 80	35,46	95,74
PCG10 8075AC	10 x 75 x 80	39,34	106,22
PCG10 8095AC	10 x 95 x 80	44,06	118,96
PCG125 8055AC	12,5 x 55 x 80	35,78	96,61

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

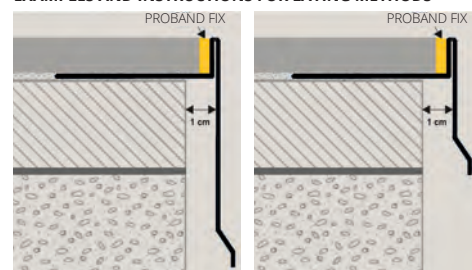

1. Choose "PROTERRACE PCG" according to the tile thickness. 2. Fix the external corners to the screed with nails taking care to separate them at least 1 cm from it. 3. Cut "PROTERRACE PCG" to the desired length. Lay the profile and fix it with nails. Connect it with the corners using the junctions. 4. Apply the desired waterproofing system. 5. Lay the tiles, leaving about 5 mm between tiles and profile. 6. Seal the space between tiles and profile with **PROBAND FIX**.



AEPG external corner (welded)



GING joints

EXTERNAL CORNERS - pack. 1 Pc

Article	€/Pc
AEPG10 ...AC/1	59,23
AEPG125 55AC/1	59,23

EX.: AEPG10 ...AC/1 (55) - AEPG10 55AC/1.


JOINTS - pack. 1 Pc

Article	€/Pc
GING10...AC/1	7,57
GING125 55AC/1	7,57

PROTERRACE PCG

VARNISHED/COATED ALUMINIUM

PROTERRACE PCG is an edging profile designed to protect the edges of the tiles laid on terraces and balconies and to allow a correct water discharge. The profile is equipped with a punched flange that ensures its fixing to the support and which is also provided with small holes that allow the momentary fixing of the profile with nails. The availability of special pieces such as external corners and junctions make **PROTERRACE PCG** a much sought after and easy to lay profile. To reach a right connection between profile and the waterproofing system it's needed to use **PROBAND 150** with **PROBAND KOLL/AB**. The product is also available on request with a **SPECIAL SEASIDE PRE-TREATMENT** which increases its resistance to corrosion when installed at sea front environments.

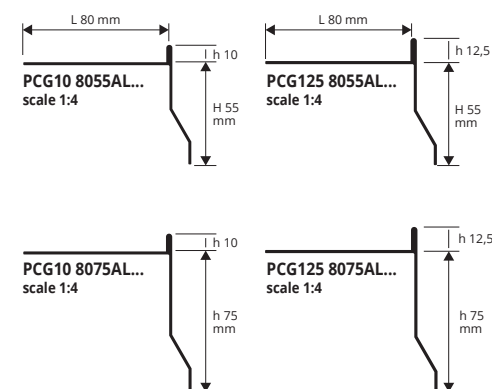


VARNISHED/COATED ALUMINIUM
bar length 2,7 lm - pack. 5 Pcs - 13,5 lm (H 55 mm - 18,9 lm)

Article	h x H x L mm	€/lm	€/Pc
PCG10 8055AL...	10 x 55 x 80	22,15	59,81
PCG10 8055ALG	10 x 55 x 80	22,15	59,81
PCG10 8075AL...	10 x 75 x 80	25,24	68,15
PCG10 8075ALG	10 x 75 x 80	25,24	68,15
PCG10 8095AL...	10 x 95 x 80	28,33	76,49
PCG10 8095ALG	10 x 95 x 80	28,33	76,49
PCG125 8055AL...	12,5 x 55 x 80	23,43	63,26

HOW TO REQUEST SEASIDE TREATMENT

When placing your order please add S to the article's number
Example: PCG10 8055ALGF (seaside) = **PCG10 8055ALGFS**
price for seaside treatment +50% on the gross price.




AEPG external corner (welded)



GING joints

EXEMPLES OF LAYING (for laying instructions, see above)

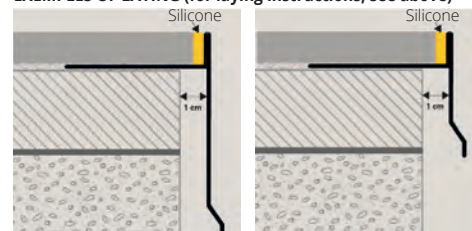

EXTERNAL CORNERS - pack. 1 Pc

Article	€/Pc
AEPG10 55AL.../75AL.../95AL.../1	33,58
AEPG125 55AL.../1	33,58

JOINTS - pack. 1 Pc

Article	€/Pc
GING10 55AL.../75AL.../95AL.../1	6,63
GING125 55AL.../1	6,63

EX.: GING10 55AL.../1 (BF) - GING10 55ALBF/1.

Available in the colours: BF - White - A - TF - EF - B - G - T.
(G only PCG10 8055ALG / PCG10 8075ALG / PCG10 8095ALG / PCG125 8095ALG)
The code of the selected colour must be added to the article code.
E.g.: PCG10 8055AL... (white) PCG10 8055ALB.


COLOURS

EMBOSSED			
BF - White (9010)	GF - Grey (7038)	A - Anthracite grey (no RAL)	TF - Dark brown (8019)
EMBOSSED		SEMIGLOSSY	
EF - Beige (1019)	B - White (9010)	G - Grey (7038)	T - Dark brown (8019)

PROTERRACE UNDER EDGE L is a perimetric profile in aluminium designed to be installed under the edges of tiles or marbles laid on terraces and balconies, or can be installed as a terminal of lower edges of outdoor terraces with drip function and to ensure proper water outflow. Thanks to its ease of application and availability in different colors it is a highly appreciated profile. The product is also available on request with a **SPECIAL SEASIDE PRE-TREATMENT** which increases its resistance to corrosion when installed at sea front environments.

PROTERRACE UNDER EDGE L

VARNISHED ALUMINIUM

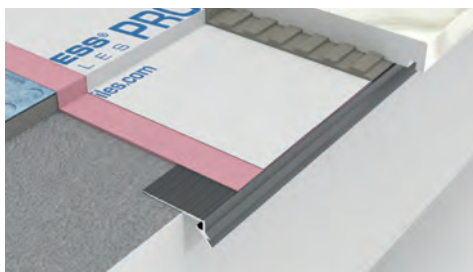

PROTERRACE UNDER EDGE L Varnished aluminium
Bar length 2.7 Lm - pack 20 pcs - 54 LM

Article	H mm	€/ml	€/Pc
PTUEL...	15	17,04	46,01

CAPSULES


Varnished aluminium - pack 1 Pc

Article	€/Pc
CPPTUE...S/1 (left)	15,90
CPPTUE...D/1 (right)	15,90

COLOURS



EMBOSSED		
BF - White (9010)	GF - Grey (7038)	A - Anthracite grey (no RAL)

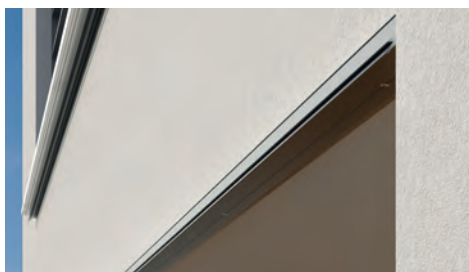

JOINTS



Varnished aluminium

Article	€/Pc
GINPTUE.../1	5,11


END CAPS

Varnished aluminium - pack 1 Pc


Article	€/Pc
TPPTUE...S/1 (left)	5,68
TPPTUE...D/1 (right)	5,68

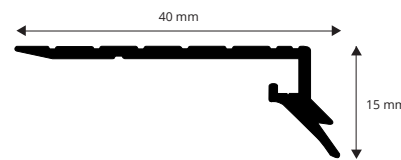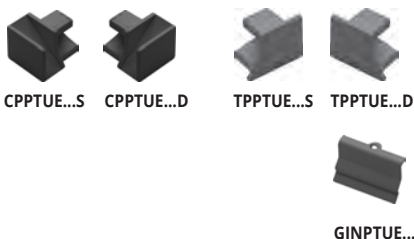

EXAMPLES AND INSTALLATION INSTRUCTIONS

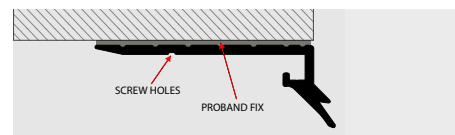

INSTALLATION ON LOWER EDGES OF TERRACES AND BALCONIES: 1. Choose proterrace under edge L according to the desired colour. 2. Cut proterrace under edge L to the required size and secure it with proband fix and screws to the substrate taking care to leave 2 mm between two adjacent bars. 3. Fix the joints by gluing them with proband fix.

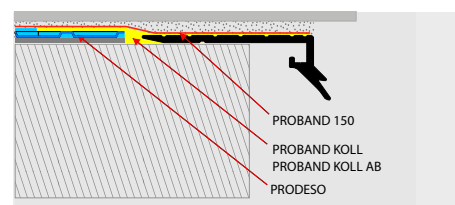


INSTALLATION UNDER TILES OR MARBLES: 1. Choose proterrace under edge L according to the desired colour. 2. Cut proterrace under edge L to the required size and fix it with nails to the substrate taking care to leave 2 mm between two adjacent bars. 3. Apply the desired waterproofing system. 4. Lay the flooring. 5. Fix the joints with proband fix.

PROTERRACE UNDER EDGE C is a perimetric profile in aluminium designed to be installed under the edges of tiles or marbles laid on terraces and balconies and to ensure proper water outflow. Thanks to its ease of application and availability in different colors it is a highly appreciated profile. The product is also available on request with a **SPECIAL SEASIDE PRE-TREATMENT** which increases its resistance to corrosion when installed at sea front environments.

PROTERRACE UNDER EDGE C

VARNISHED ALUMINIUM

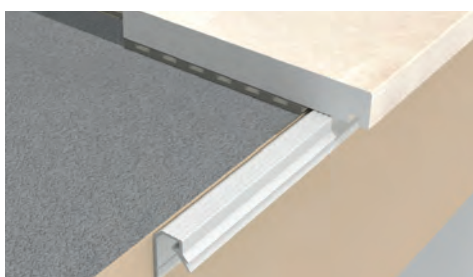

PROTERRACE UNDER EDGE C Varnished aluminium
Bar length 2.7 Lm - pack 20 pcs - 54 LM

Article	H mm	€/ml	€/Pc
PTUEC...	15	17,26	46,60

CAPSULES

Varnished aluminium - pack 1 Pc

Article	€/Pc
CPPTUE...S/1 (left)	15,90
CPPTUE...D/1 (right)	15,90

COLOURS



EMBOSSED		
BF - White (9010)	GF - Grey (7038)	A - Anthracite grey (no RAL)



JOINTS



Varnished aluminium

Article	€/Pc
GINPTUE.../1	5,11


END CAPS

Varnished aluminium - pack 1 Pc

Article	€/Pc
TPPTUE...S/1 (left)	5,68
TPPTUE...D/1 (right)	5,68

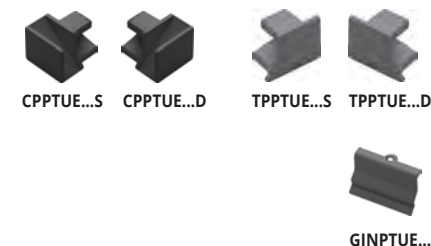

EXAMPLES AND INSTALLATION INSTRUCTIONS

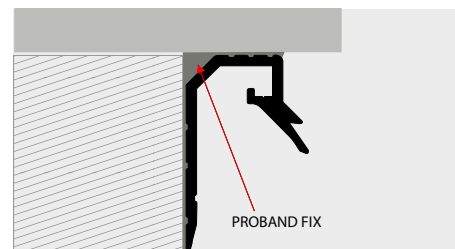

INSTALLATION UNDER TILES OR MARBLES: 1. Choose proterrace under edge c according to the desired colour; 2. Cut proterrace under edge c to the required size; 3. Glue the profile to the structure with proband fix and secure it with screws, taking care to leave 2 mm between two adjacent bars; 4. Attach the joints with proband fix.