




An interpretation of:
**Museum of the Future, Shaun Killa,
The Frame, Fernando Domis, DUBAI (United Arab Emirates), 2018**

MEMBRANE AND PANELS

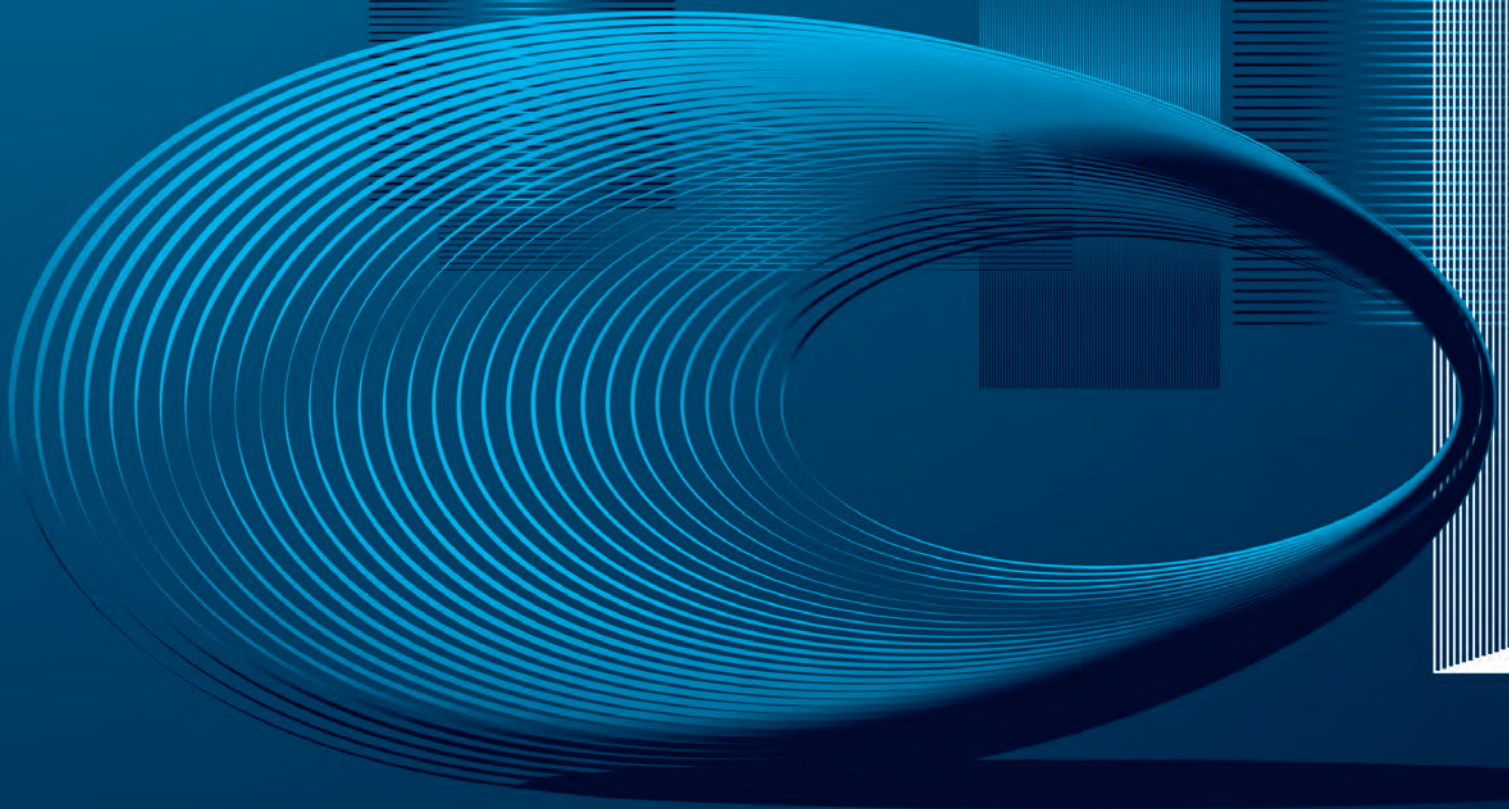

PRODESO® DRAIN 8 SYSTEM

PATENTED

WEBSITE



MEMBRANE
AND PANELS

PATENTED

102018000005884

© 2023 All rights reserved by Progress Profiles. Printed in Italy

Discover Prodeso® Drain 8!! The essential drainage and waterproofing function guaranteed by the most advanced system in the world.

PRODESO® DRAIN 8 is a draining, uncoupling and waterproofing patented membrane, with a total thickness of 8 mm, which can be installed even on not perfectly cured supports. The "air chamber" below the floor drains the water that has penetrated below it, it facilitates a fast drying of the adhesive and drastically reduces the rise of triacetates and the appearance of efflorescence.

The system, ideal for a correct laying on terraces and balconies even of large slabs, is completed with a band in polyethylene and elastic polypropylene and with a bicomponent waterproof adhesive. Quick and easy to install, the PRODESO® DRAIN 8 is very versatile and guarantees long life for outdoor flooring.

Functions




UNCOUPLING




WATERPROOFING



VAPOUR MANAGEMENT



DRAINAGE



MICRO VENTILATION

PRODESO® DRAIN 8 MEMBRANE is a waterproofing, uncoupling and draining membrane with 5 layers ideal for outdoor environments.


PRODESO® DRAIN 8 SYSTEM



5 LAYERS
MEMBRANE

PRODESO® DRAIN 8 MEMBRANE

Article	H Roll (m)	L Roll (m)	Thickness (mm)	Roll x Pallet	€/m	€/Roll	€/Pallet
PDESDR 151	1	15	8	8	25,70	385,50	3.084,00

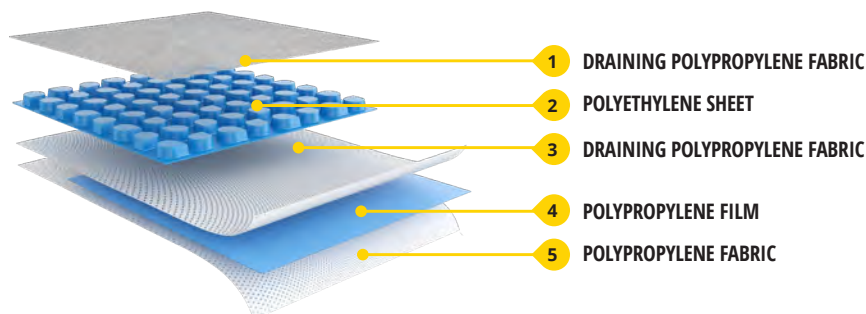

PROBAND 150/250 is a waterproofing polyethylene tape with nonwoven polypropylene fabric on both side that guarantees high adhesion to the support.

PROBAND 250

ROLLS IN HDPE AND PP

PROBAND 250

Article	H Roll (mm)	L Roll (m)	Thickness (mm)	Roll x Pack	€/m	€/Roll	€/Pallet
PRBPE 2530	250	30	0,42	3	7,91	237,30	711,90

For the indicative consumption of proband koll AB during the installation of the PROBAND, consult the technical data sheet of PROBAND 150/250



PROBAND KOLL AB is a bicomponent hydrophobic adhesive for the sealing of PROBAND 150/250 on PRODESO® MEMBRANE and PRODESO® HEAT/GRIP MEMBRANE.

PROBAND KOLL AB

BICOMPONENT HYDROPHOBIC ADHESIVE

PROBAND KOLL AB

Article	Kg/Pack	Pack/pallet	Kg/Pallet	€/kg	€/Pack	€/Pallet
PRBKLAB	15	27	405	11,59	173,81	4.692,87

For the indicative consumption of proband koll AB during the installation of the PROBAND, consult the technical data sheet of PROBAND 150/250



AREA OF USE


Balconies, terraces, bathrooms, kitchens, saunas and external surfaces of any size.

Internal and external preformed corners in polyethylene provided on both side with nonwoven polypropylene fabric that guarantees its adhesion to the support.

PRE-WELDED CORNERS

PRE-WELDED CORNERS

Article	H mm	L mm	Pcs/Pack	€/Pc	€/Pack
PRBI	60	120	10	8,48	84,80
PRBE	60	120	10	8,48	84,80

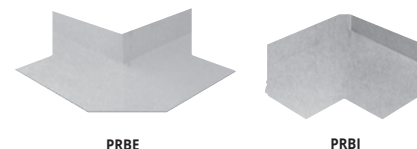

Adhesive junction tape.

PRODESO® SOUND TAPE

PRODESO® SOUND TAPE - height 50 mm


Article	lm/roll	Pc/Pack	Pc/box	€/roll	€/pack	€/box
PDSNDTP 550	50	6	36	12,73	76,38	2.749,68





PRODESO® DRAIN 4 SYSTEM

WEBSITE

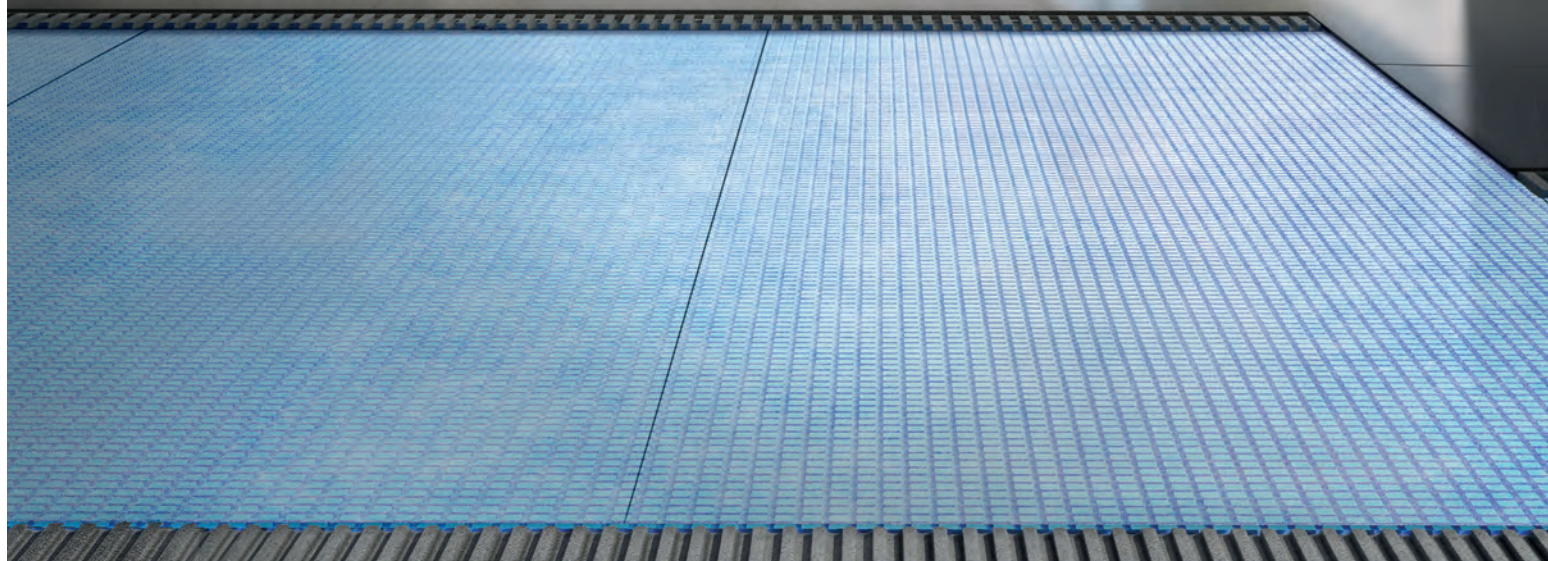

MEMBRANE
AND PANELS

Certified

- 12004 - Adhesion to the Substrate
- 12004 - Adhesion to the Tiles
- 12004 - Resistance to Substrate shear
- 12004 - Resistance to Tile shear
- ASTM C627-18 - Robinson Test with Screed
- ASTM C627-18 - Robinson Test with Plywood
- ANSI A118.12 - Uncoupling
- UNI EN 12667:2002 - Heat Resistance

The essential micro-ventilation, drainage and uncoupling functions for a right internal installation of large size tiles.

PRODESO® DRAIN 4 is a uncoupling membrane which creates an "air chamber" below the floor favoring the the drainage of the water and the micro-ventilation. This "air chamber" guarantees a fast and smooth drying of the adhesive, even in case of large size tiles, and reduces

significantly efflorescence formation and triacetate rising in joints. The uncoupling and vapour management properties of PRODESO® DRAIN 4 guarantees the laying even in not perfectly cured supports. Easy and quick to install, PRODESO® DRAIN 4 has an overall thickness of only 4 mm.

Functions



UNCOUPLING



VAPOUR MANAGEMENT



DRAINAGE



MICRO VENTILATION



HEATING DISTRIBUTION

PRODESO® DRAIN 4 MEMBRANE is a 3-layers uncoupling and draining membrane ideal for indoor environments.



PRODESO® DRAIN 4 SYSTEM



3 LAYERS
MEMBRANE

PRODESO® DRAIN 4 MEMBRANE

Article	H Roll (m)	L Roll (m)	Thickness (mm)	Roll x Pallet	€/m	€/Roll	€/Pallet
PDES DR 251	1	25	4	9	21,53	538,25	4.844,25

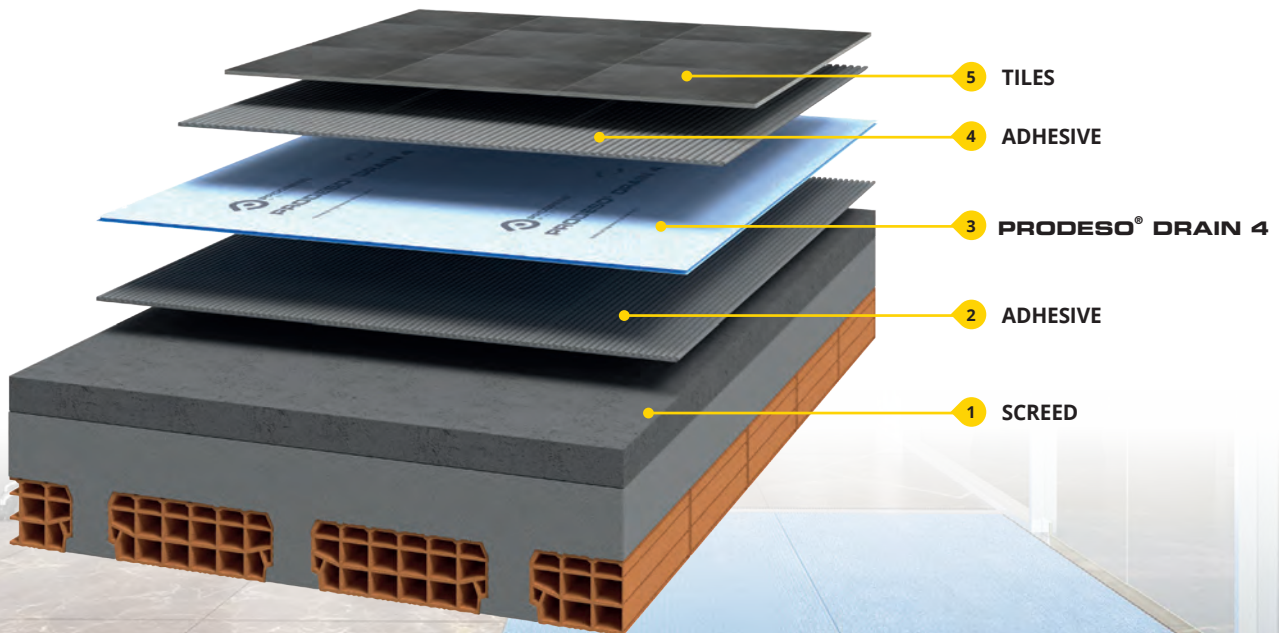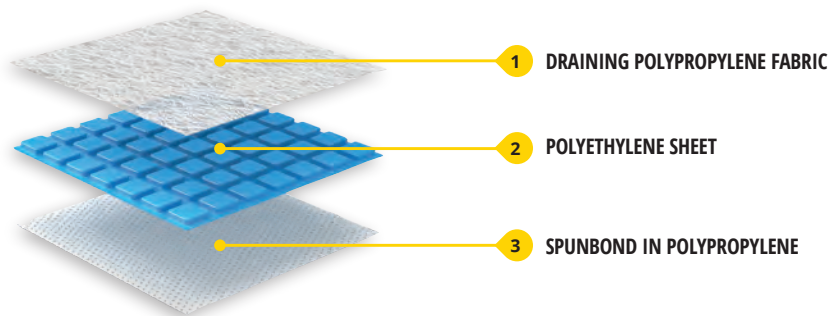



PRODESO® MEMBRANE SYSTEM

LAYING
VIDEO



PATENTED




PATENTED


003368984

Uncoupling and waterproofing system, particularly good for problematic screeds substrates.


PRODESO® MEMBRANE SYSTEM SECTION

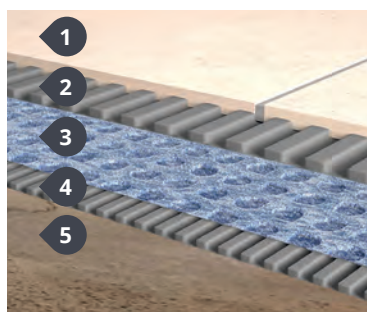


1. Ceramic / Stone or Porcelain Tiles
2. Adhesive
3. PRODESO®
4. Adhesive
5. Screed, Plywood, OSB etc.

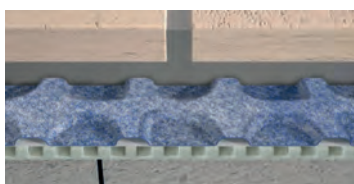


UNCOUPLING

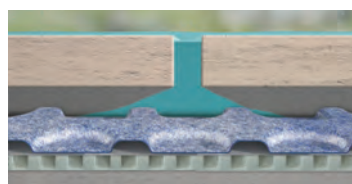


WATERPROOFING

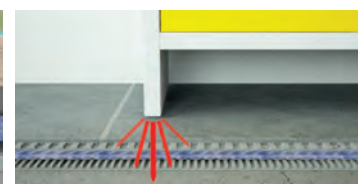

SUPPORT/LOAD DISTRIBUTION

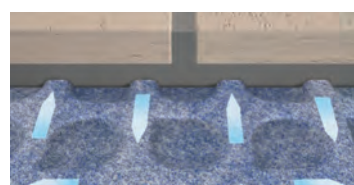

VAPOR AND MOISTURE MANAGEMENT

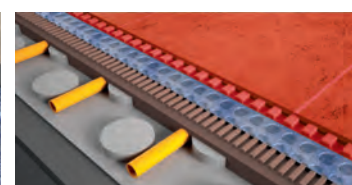

FLOOR HEATING DISTRIBUTION

It is an uncoupling and waterproofing membrane for problematic substrates, balconies, terraces and horizontal surfaces of any size without expansion joints in the screed before the laying of ceramic and natural stone. **PRODESO®** ensures the laying of the flooring and the waterproofing of the substrate also in case of old tiles, on cracked and not perfectly cured substrates, and therefore with possible vapour pressure.

PRODESO® MEMBRANE

UNCOUPLING & WATERPROOFING
MEMBRANE

PRODESO® MEMBRANE

Article	H roll (m)	L roll (m)	Thickness (mm)	Rolls/Pallet	€/m	€/Roll	€/Pallet
PDES 3530/EN	1	30	3,5	8	19,87	596,10	4.768,80
PDES 3505/EN	1	5	3,5	40	23,13	115,65	4.626,00

WHY USE PRODESO® MEMBRANE SYSTEM


Time Efficient: PRODESO® Membrane reduces drastically the installation times because from the installation of the membrane up to the laying of flooring you can work without interruption.

Flexible: it is suitable for every types of subfloor including very large surfaces both indoor and outdoor.

Safe: it is suitable for substrates with cracks as it does not transmit tension of the substrate to the tile coverings and vice versa. It is also suitable on substrates not perfectly cured since it allows the vapour management.

WARNINGS

Do not lay tiles with a size less than 5 x 5 cm. The technical and application details can be found in the **PRODESO® MEMBRANE SYSTEM** brochure. For other informations not described in the brochure **PRODESO® MEMBRANE SYSTEM**, refer to the technical department.

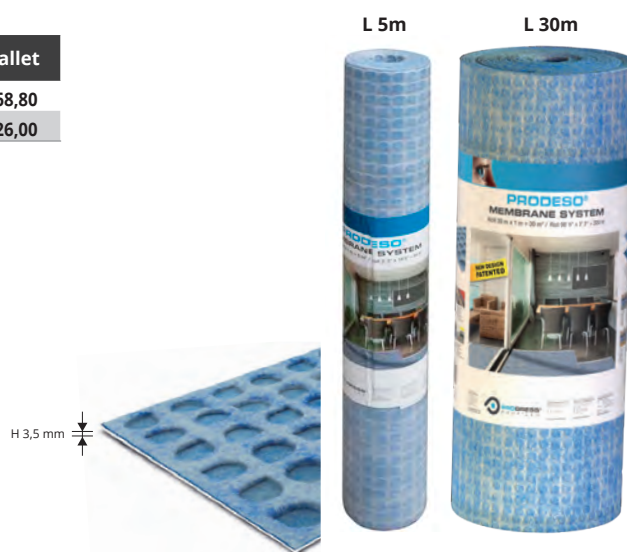

PROBAND 150/250 is a waterproofing polyethylene tape with nonwoven polypropylene fabric on both side that guarantees high adhesion to the support.

PROBAND 150/250

ROLLS IN HDPE AND PP

PROBAND 150/250

Article	H roll (m)	L roll (m)	Thickness (mm)	Rolls/Pallet	€/m	€/Roll	€/Pack.
PRBPE 1507	150	7,5	0,42	16	5,87	44,03	704,48
PRBPE 1530	150	30	0,42	6	4,31	129,30	775,80
PRBPE 2530	250	30	0,42	3	7,91	237,30	711,90

For the indicative consumption of proband koll AB during the installation of the PROBAND, consult the technical data sheet of PROBAND 150/250



AREA OF USE

- Use** - Terraces, balconies and outside surfaces of any dimension, bathrooms, showers, swimming pools and tanks. To realize waterproofing joints between floor and wall and along two adjacent rolls of **PROFOIL**, **PRODESO® MEMBRANE SYSTEM** and **PRODESO® HEAT/GRIP SYSTEM**
- Don't use** - On bituminous coverings, over thermal-insulating layer and lightweight screed. With adhesives containing solvents.

WARNINGS

Store in a cool and dry place avoiding direct sunlight and sources of heat. Read the data sheet before applying; in case of special applications call the technical department

RECOMMENDED ADHESIVES FOR THE LAYING OF PRODESO® MEMBRANE (grey color)

KERAKOLL The GreenBuilding Company H40 NO LIMITS H40 REVOLUTION H40 EXTREME	Litokol X-GEL S1 C2 TE S1 POWERGEL S1+ C2 TE S1 FASTGEL S1+ C2 FTE S1	index A Sika Company FLEXBOND C2S1 FLEXBOND LIGHT C2S1 WETBOND RAPID C2F	Grigolin evoluzioni costruttive GRIGOKOLL TEX GRIGOKOLL MAX GRIGOKOLL VELOX	Sika CERAM 255 STARFLEX CERAM 255 EASY S1 CERAM 270 MULTIFLOW	Weber SAINT-GOBAIN ULTRAGRES 400 ULTRAGRES FLEX ULTRAGRES FAST	PCI Für Bau-Profis PERICOL R-FLEX PERICOL EXTRA FLEX PERICOL FLEX	kedil perché creare per l'edilizia KEDIFLEX S1 KEDYTOP FAST MAXI
LATICRETE 335 MAXI S 335 SUPER FLEX 325 RAPID FL	ARDEX ARDEX X 78 ARDEX X 90 OUTDOOR ARDEX AF 495	MUREXIN MUREFLEX MFK 45 ADESIVO FBS 75 MAXIMO M 41	Opera POSSA LA QUALITÀ RT UNIVERSAL RT HI TECH RT RAPID FLEX	sey SEYFLEX S1 SEYULTRA T TIXOSEY	Imo KRISTAL C2TE EXTRA C2S1	FASSA BORTOLO QUALITÀ PER L'EDILIZIA AZ 59 RAPID MAXI SPECIAL ONE	CERMIX SOLUTIONS EXPERTES POUR LA CONSTRUCTION CERMIPLUS 2.0 CERMIPLUS XL FLEX 2.0
COLMEF NEOFIL F10 TECH S1 SILIKOLL FLEX S1 NEOFIL F50 RAPID	AQUILAPREM FORTEM MAXIM	Benfer® BENFERFLEX+S1 BENFERFLEX C2 BENFERFLEX + FAST-S1	CerCal Adesivi e prodotti speciali per l'edilizia F.55 CERMONO PLUS F.55 CERFIX F.55 CERMONO RAPIDO	ADESITAL ADESIVI E SISTEMI PER COSTRUZIONI EXTRA 30 MAXI ADEFLEX GREEN S1 EXTRA 30 POWER	codex POWER CX 3 POWER CX 7 POWER RX 6 TURBO	MAPEI KERAFLEX EASY ULTRALITE S1 KERAFLEX MAXI S1	grupopuma FLEX C2TES1 MAX C2TES1 ELITE C2TES2 FLEX C2FTES1



PRODESO® HEAT GRIP 5 SYSTEM

INSTRUCTION VIDEO



PATENTED

PATENTED

002748822
EP 3,183,505 B1
US 8,176,694 B2
US 9,188,348 B2
US 9,416,979 B2
US 9,518,746 B2
US 9,625,163 B2
US 9,719,265 B2
US 9,777,931 B2
US 10,107,505 B2
US 10,006,644 B2
US 10,215,423 B2
US 10,408,469 B2
US 10,712,020 B2
US 10,739,016 B2
Patents Pending

MEMBRANE
AND PANELS

© 2023 All rights reserved by Progress Profiles. Printed in Italy

A World of warmth and comfort in harmony with the nature.

The electric underfloor and wall heating system **PRODESO® HEAT GRIP 5 SYSTEM**, designed, manufactured and patented by Progress Profiles, is an innovative system that allows to obtain in a short time and at low cost a pleasantly warm and extremely comfortable environment. The system is applied using normal cementitious adhesives and thanks to its uncoupling and waterproofing properties can be installed on cracked substrates and also during shrinkage. Thanks to the latest generation Wi-Fi thermostat, the system can be programmed daily even

remotely and this allows you to optimize comfort and reduce consumption. Easy and quick to install in any environment, it has an overall thickness, including the adhesive, of only 7 mm and does not require any maintenance over time. An intelligent technology and a responsible choice that puts in the foreground the values of eco-sustainability and energy saving in tune with the trends of contemporary architecture and the most advanced home automation. A world of warm well-being in harmony with nature.

Functions




UNCOUPLING / CRACK ISOLATION



WATERPROOFING



VAPOR AND MOISTURE
MANAGEMENT



LOAD DISTRIBUTION

PRODESO® HEAT GRIP 5 MEMBRANE is an uncoupling membrane, waterproofing in polyethylene, equipped with reliefs that allow the attachment of the electric heating cable.

PRODESO® HEAT GRIP 5 SYSTEM

PRODESO® HEAT GRIP 5 MEMBRANE

Article	H Roll (m)	L Roll (m)	Thickness (mm)	Roll/Pallet	€/m	€/Roll	€/Pallet
PDESHG5 151	1	15	5,5	9	22,15	332,25	2.990,25
PDESHG5 051	1	5	5,5	30	24,21	121,05	3.631,50

NEWS

It is a constant power electric heating cable to be embedded between the reliefs of PRODESO® HEAT GRIP 5 MEMBRANE. The cable distance can be 6.2 or 9.3 cm

PRODESO® HEAT GRIP 5 CABLE

PRODESO® HEAT CABLE

Article	Cable Length (m)	Heated surface on the WALL (6,2 cm)	Heated surface on the FLOOR (9,3 cm)	Total Power W	Intensità corrente A	€/Roll
PDHG5CBM 20	19,8	1,19 m²	2,0 m²	250 W	1,09 A	175,00
PDHG5CBM 26	25,8	1,55 m²	2,5 m²	325 W	1,41 A	215,00
PDHG5CBM 31	30,6	1,83 m²	3,0 m²	385 W	1,67 A	247,00
PDHG5CBM 36	36,0	2,14 m²	3,5 m²	450 W	1,96 A	285,00
PDHG5CBM 40	40,2	2,38 m²	4,0 m²	500 W	2,17 A	325,00
PDHG5CBM 46	46,2	2,74 m²	4,5 m²	575 W	2,50 A	365,00
PDHG5CBM 52	52,2	3,10 m²	5,0 m²	650 W	2,83 A	405,00
PDHG5CBM 62	61,8	3,69 m²	6,0 m²	775 W	3,37 A	475,00
PDHG5CBM 72	72,0	4,29 m²	7,0 m²	900 W	3,91 A	545,00
PDHG5CBM 82	82,2	4,88 m²	8,0 m²	1.025 W	4,46 A	630,00
PDHG5CBM 94	94,2	5,60 m²	9,0 m²	1.175 W	5,11 A	730,00
PDHG5CBM 104	103,8	6,19 m²	10,0 m²	1.300 W	5,65 A	760,00
PDHG5CBM 114	114,0	6,80 m²	11,0 m²	1.425 W	6,20 A	830,00

PRODESO® HEAT GRIP 5 CABLE - 450 M

Article	Cable Length (m)	€/Roll
PDHG5CBM450	450	2.600,00

NEWS

It is composed by a digital or analogic programmable thermostat, flush-mounting box, corrugated pipe and two floor temperature sensors.

PRODESO® HEAT GRIP 5 THERMOSTAT

MEMBRANE AND PANELS


PRODESO® HEAT GRIP 5 DIGITAL THERMOSTAT - TOUCH SCREEN - WI-FI

Article	€/Kit
PDHTSMWTK	226,60
PDHTSMWTKW	226,60



DIGITAL WIFI THERMOSTAT

Article	€/PC
PDHTSMWT 230	195,70
PDHTSMWTW 230	195,70



PRODESO® HEAT GRIP 5 THERMOSTAT KIT - ANALOGIC

Article	€/Kit
PDHTSK 230V	180,25



ANALOGIC THERMOSTAT

Article	€/Kit
PDHTSM 230	144,20



PRODESO® HEAT GRIP 5 SYSTEM OPTIONAL

ROLLER FOR CABLE INSTALLATION

Aluminum roller 15 cm long, facilitates and speeds up the insertion of the heating cables between the reliefs of the membranes PRODESO®HEAT e PRODESO® HEAT GRIP.

Article	L cm	Pc/Pack	€/Pc
PSC	15	1	88,80



PRODESO® HEAT GRIP 5 CABLE KIT

Article	Lm shrink sheath	Cable Lugs Lm	€/Kit
PDHGCK110	1	10	15,01
PDHGCK550	5	50	73,13



PRODESO® HEAT GRIP 5 CABLE CLIP

Plastic Clip to hold heating cable on PRODESO® HEAT GRIP 5 MEMBRANE (40 mm x 5 mm)

Article	Pc/Pack	€/Pc	€/Pack
PCBLF	200	1,63	326,00



PROECOFOFON

Roll of closed-cell polyethylene with adhesive used as edging between the wall and screed or where there are expansion joints - Pack. 2 Pcs

Article	Thick. x H mm	Lm/Roll	€/Lm	€/Pack
PEF 550A	5 X 50	25	-	56,25



PRODESO® HEAT GRIP POWER CABLE

Article	Lm/Roll	€/Lm	€/Roll
PDHGCBF	2,5	18,29	45,73



PRODESO® HEAT GRIP 5 KIT SYSTEM

Floor and wall electric heating system kit, composed of 3 pieces: PRODESO® HEAT GRIP 5 MEMBRANE, PRODESO® HEAT GRIP 5 CABLE AND PRODESO® HEAT GRIP 5 THERMOSTAT KIT. The polyethylene membrane, with its uncoupling, waterproofing and vapour management properties, has a thickness of just 5,5 mm.




PRODESO® HEAT KIT GRIP 5 SYSTEM

Wall and floor electric heating system

Article	m² membrane	Panels x kit	Cable	Power tot W	Thermostat kit	Wall heated surface (with a cable distance of 6,2 cm)	Floor heated surface (with a cable distance of 9,3 cm)	price € / kit
PDESHK 4	3,2	4	PDHG5CBM 20	250	1	1,40	2,20	648,90
PDESHK 7	5,6	7	PDHG5CBM 40	500	1	2,50	3,80	865,20
PDESHK 10	8,0	10	PDHG5CBM 62	775	1	3,70	5,50	1.071,20

heating cable PDHCB included in the kit

PRODESO® HEAT GRIP 5 THERMOSTAT KIT: digital touch screen thermostat, 2 temperature sensors, flush mounting box, flexible corrugated pipe.

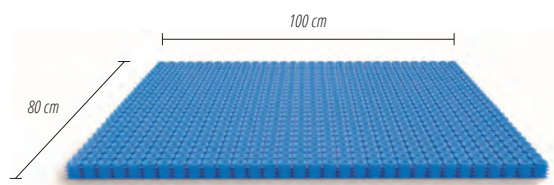

PRODESO® HEAT GRIP 5
MEMBRANE



PRODESO® HEAT GRIP 5
CABLE



DIGITAL TOUCH



PRODESO® HEAT GRIP 5 THERMOSTAT KIT




Uncoupling and waterproofing membrane in polyethylene with a thickness of 5.5 mm. The membrane is provided on top with pseudo-square reliefs which create channels for fixing the electric heating cable. On the back of the membrane there is a layer of adhesive which guarantees its fixing to the support, clean plywood, OSB, metal or old flooring.

PRODESO® HEAT GRIP 5 STICK SYSTEM

PRODESO® HEAT GRIP 5 STICK MEMBRANE

Article	H roll (m)	L roll (m)	Thickness (mm)	Rolls/Pallet	€/m	€/Roll	€/Pallet
PDESHG5STSB 151	1	15	5,5	9	28,24	423,60	3.812,40
PDESHG5STSB 051	1	5	5,5	30	30,30	151,50	4.545,00

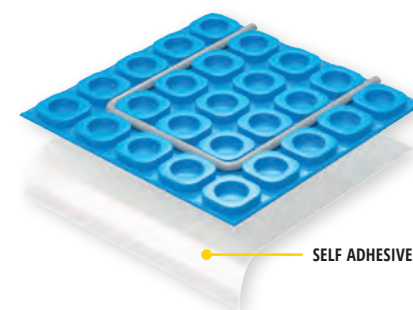

SELF ADHESIVE

L 5m



L 15m



INSTRUCTION
VIDEO



PRODESO® ECO is an uncoupling membrane, which allows vapour management and heat distribution with only 4 mm thickness. It is composed of a polyethylene sheet, with square base truncated pyramid cavities, to which a polypropylene non-woven fabric is thermowelded and ensures the membrane is bonded to the support. The uncoupling and vapour management features of PRODESO® ECO allow it to be laid even on not perfectly cured supports. Also available in self-adhesive version **PRODESO® ECO STICK**.

PRODESO® ECO / PRODESO® ECO STICK MEMBRANE

UNCOUPLING & WATERPROOFING MEMBRANE


PRODESO® ECO MEMBRANE

Article	H roll (m)	L roll (m)	Thickness (mm)	Rolls/Pallet	€/m	€/Roll	€/Pallet
PDESEC 3530	1	30	4	9	16,79	503,70	4.533,30


PRODESO® ECO STICK MEMBRANE

Article	H roll (m)	L roll (m)	Thickness (mm)	Rolls/Pallet	€/m	€/Roll	€/Pallet
PDESECSTB 3530	1	30	4	9	22,09	662,70	5.964,30

PRODESO® ECO



PRODESO® ECO
STICK



L 30m




PRODESO® ECO

L 30m



PRODESO® ECO
STICK

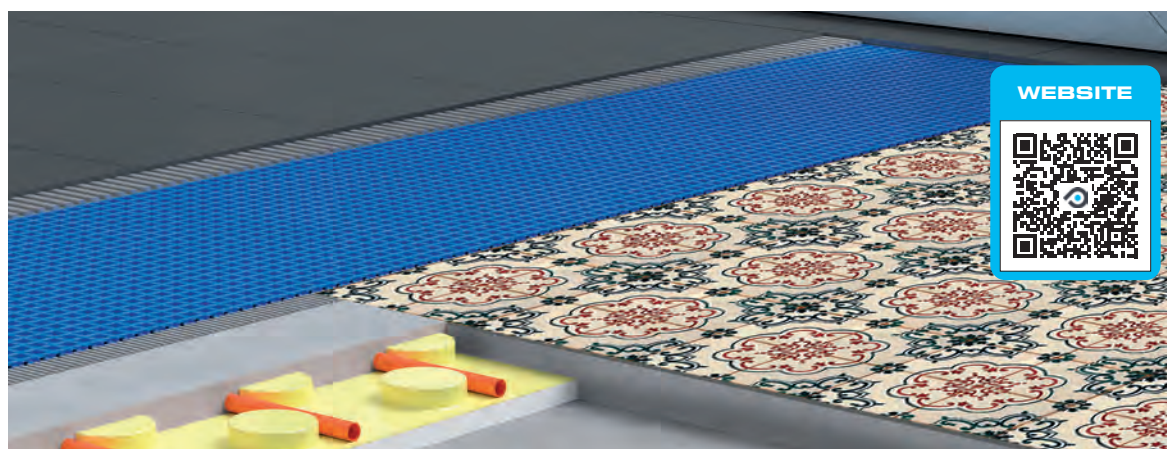

WEBSITE




PREFORMED CORNERS

Internal and external preformed corners in polyethylene provided on both side with nonwoven polypropylene fabric that guarantees its adhesion to the support.



PRBE
EXTERNAL CORNER



PRBI
INTERNAL CORNER

PREFORMED CORNERS


Article	H mm	L mm	Pc/Pack	€/Pc	€/Pack
PRBI	60	120	10	8,48	84,80
PRBE	60	120	10	8,48	84,80

Don't use - On bituminous coverings, over thermal-insulating layer and lightweight screed. With adhesives containing solvents. adhesive.

PROBAND BU

BUTYLE TAPE

PROBAND BU is an adhesive tape in butyle provided on one side with non-woven polypropylene that guarantees high adhesion. use for the Realization of perimeter junctions in case of bituminous coverings, PVC, wood, polycarbonate, glass, plastic and metal on balconies, terraces and external surfaces of any size.



PROBAND BU

Article	H Roll (mm)	L Roll (m)	Thickness (mm)	Rolls/Pack	€/m	€/Roll	€/Pack
PRBBU 7515	75	15	1	8	4,03	60,45	483,60

WARNINGS: **Don't use** - On dirty, incoherent and wet surfaces.

PROBAND BU

BUTYLE TAPE

Complete kits made of polypropylene with V0 self-extinguishing degree, ideal for installation in environments where maximum fire resistance is required.

NEWS



PROBAND BU

Articolo	H Roll (mm)	L Roll (m)	Thickness (mm)	€/m	€/Roll
PRBBU 4050	90	15	1	14,94	224,10

PROBAND KOLL

SINGLE-COMPONENT WATERPROOF SEALANT

PROBAND KOLL is a single-component hygro-hardener adhesive for the sealing of PROBAND 150/250 on PRODES® MEMBRANE.



PROBAND KOLL

Article	Kg/Pack	Box/Pallet	kg/Pallet	€/kg	€/Pack	€/Pallet
PRBKLN	7	84	588	11,30	79,09	6.643,56

For the indicative consumption of proband koll during the installation of the PROBAND, consult the technical data sheet of PROBAND 150/250

PROBAND KOLL AB

BICOMPONENT HYDROPHOBIC ADHESIVE

PROBAND KOLL AB is a bicomponent hydrophobic adhesive for the sealing of PROBAND 150/250 on PRODES® MEMBRANE and PRODES® HEAT/GRIP MEMBRANE.



PROBAND KOLL AB

Article	Kg/Pack	Box/Pallet	kg/Pallet	€/kg	€/Pack	€/Pallet
PRBKLAB	15	27	405	11,59	173,81	4.692,87

For the indicative consumption of proband koll AB during the installation of the PROBAND, consult the technical data sheet of PROBAND 150/250

AREA OF USE

Balconies, terraces, bathrooms, kitchens, saunas and external surfaces of any size.

PROBAND KOLL 1K

ONE-COMPONENT HYDROPHOBIC ADHESIVE

PROBAND KOLL 1K - Red one-component hydrophobic adhesive for PROBAND 150 waterproof sealing with PRODES® family membranes. For indoor use



PRBK1KS



PRBK1KB

PROBAND KOLL 1K

Article	Kg/Pack	Box/Pallet	kg/Pallet	€/kg	€/Pack	€/Pallet
PRBK1KS	25 KG (5 X 5 KG)	10	250	6,85	171,24	1.712,40
PRBK1KB	5 KG	30	150	8,24	41,20	1.236,00

Sold exclusively by the pallet.

PROECOFON is a roll of closed-cell polyethylene used as edging between the wall and screed or where there are expansion joints. It should be used in all floor-laying work to ensure long life of the floor.

PROECOFON

EXPANDED POLYETHYLENE CLOSED - CELL WITH ADHESIVE

CLOSED-CELL EXPANDED POLYETHYLENE WITH ADHESIVE - (PEF 550A - Pack 2 Pcs)

Article	Thick. x H mm	lm/roll	€/lm	€/Pack
PEF 550A	5 X 50	25	-	56,25
PEF 5100A	5 X 100	100	-	91,00



Adhesive junction tape for the membrane PRODES® SOUND

PRODES® SOUND TAPE

PRODES® SOUND TAPE - height 50 mm

Article	lm/roll	Pc/Pack	Pc/box	€/roll	€/pack	€/box
PDSNDTP 550	50	6	36	12,73	76,38	458,28



PROSHOWER LATERAL AND VERTICAL DRAIN KIT are 2 central drain systems with lateral or vertical outflow equipped with a siphon, grate support, stainless steel grate, butyl double-sided ring for the fixing of the waterproof section, waterproof section and a protection cap with template function too that allows the correct positioning of the butyl ring and the waterproof section. LATERAL AND VERTICAL DRAIN KIT ensure a correct flow of rainwater.

PROSHOWER DRAIN KIT

LATERAL AND VERTICAL DRAINS

Article	Description	Pc/Pack.	€/Pc
PSHLDK	PROSHOWER DRAIN LATERAL KIT	1	163,24
PSHVDK	PROSHOWER DRAIN VERTICAL KIT	1	137,12

AREA OF USE

- Use** - For the realization of drains on balconies, terraces and external surfaces of any size waterproofed with polymer-cement system and PRODES® MEMBRANE SYSTEM.
- Don't use** - In environments subject to heavy traffic and where washing with acidic and strong alkaline substances is foreseen.

WARNINGS

After the drain installation, apply the protective cap. Before applying the butyl double-sided adhesive ring on the flange of the drain, thoroughly clean the flange of any dirt residue that may compromise its adhesion. Apply the butyl double-sided adhesive ring and the waterproofing section during the application of the waterproofing system.



PROSHOWER DRAIN
LATERAL KIT
PSHLDK

PROSHOWER DRAIN
VERTICAL KIT
PSHVDK

PRODRIP is a perimeter drain in ASA (Modified ABS) equipped with wall-floor junction. The junction is covered with non-woven polypropylene to ensure sealing with the used waterproofing system.

PRODRIP

SCARICO PERIMETRALE

PERIMETER DRAIN

pack. per pallet = 192

Article	Pcs/Pack.	€/Pc	€/Pack.
PDRP	4	25,56	102,24



AREA OF USE

- Use** - For the realization of perimeter drains on balconies, terraces and external surfaces of any size waterproofed with liquid sheaths and membranes of the PRODES® family.
- Don't use** - With bituminous waterproofing and as vertical drain.

WARNINGS

Do not heat with direct flames and do not use adhesive with solvents.

Consult the data sheet prior to application in the case of special applications, we recommend that you consult the technical department.

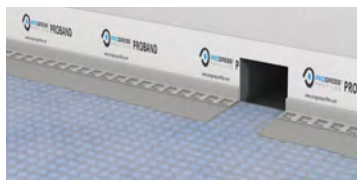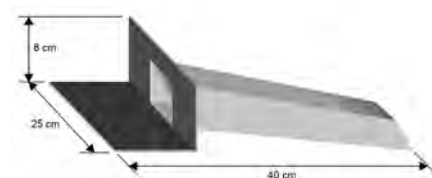

PROBAND FIX is a moisture-cure sealant with high adhesion and elasticity. It guarantees the adhesion of PROBAND 150/250 with aluminium frames, plastic and metal and between adjacent sheets of PROFOIL. Don't use On bitumen membranes. To seal proband with PRODES®.

PROBAND FIX

MOISTURE-CURE SEALANT

MOISTURE-CURE SEALANT

pack. of 12 cartridges - B (white) - G (grey)

Article	Cartridge lm	€/Pc	€/Pack.
PRBFXB	290	18,17	218,04
PRBFXG	290	18,17	218,04



PRBFX..

PRODESO® SOUND


UNCOUPLING AND SOUNDPROOF
MEMBRANE

It is a membrane in high density polyethylene. It is covered on top with a polypropylene spunbond and on the back with a non-woven fabric in polypropylene. Both of them are thermo-welded to the polyethylene sheet to guarantee the adhesion of the membrane with the adhesive. PRODESO® SOUND is an uncoupling and soundproof membrane, with a thickness of 2,3 mm, which does not require any expansion joints before tiling with ceramic or natural stone. **PRODESO® SOUND** guarantees the laying of any flooring and the soundproofing up to 17dB in any indoor environment, even in the case of problematic supports and old tiles.

L 20m



H 2,3 mm



PRODESO® SOUND MEMBRANE

Article	H roll (m)	L roll (m)	Thickness (mm)	Rolls/Pallet	€/m	€/Roll	€/Pallet
PDSND 30	1	20	2,3	12	31,20	624,00	7.488,00

AREA OF USE

- **Use** - Uncoupling and soundproof membrane also for cracked screeds. It can be laid on cement and gypsum based screed, old ceramic, natural stone floorings, concrete and wood structure. Very resistant to saline solutions, acids and alkalis, alcohol and oils. In case of particular products, contact our technical department.
- **Don't use** - On lightweight screeds not suitable for the laying of flooring. Do not lay with adhesives containing solvents.

MEMBRANE
AND PANELS



© 2020 All rights reserved by Progress Profiles. Printed in Italy



PRODESO® SOUND STICK is an uncoupling and soundproofing membrane, with a thickness of 2.5 mm, composed of a high density polyethylene sheet to which two polypropylene nonwoven fabrics are heat-sealed. Due to its uncoupling properties, it is not necessary to respect any joint in the screed before the laying of tiles and natural stones. PRODESO® SOUND STICK guarantees an acoustic wave reduction from foot traffic up to 17dB.

PRODESO® SOUND STICK

UNCOUPLING AND SOUNDPROOF MEMBRANE

PRODESO® SOUND STICK MEMBRANE

Article	H roll (m)	L roll (m)	Thickness (mm)	Rolls/Pallet	€/m	€/Roll	€/Pallet
PDSNDST 20	1,05	20	2,5	16	39,14	782,80	12.524,80

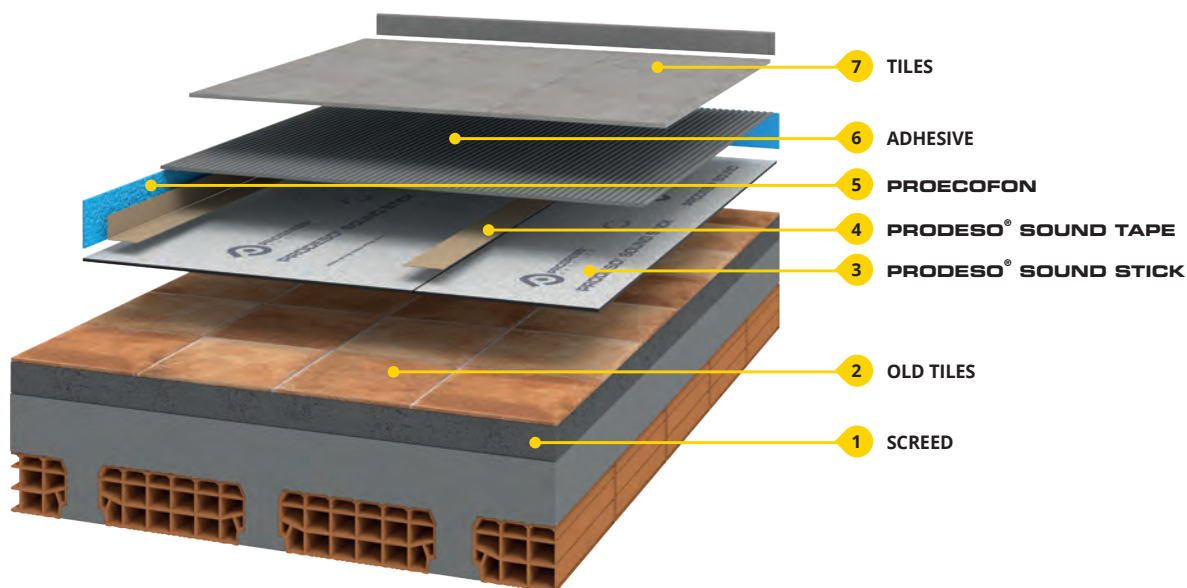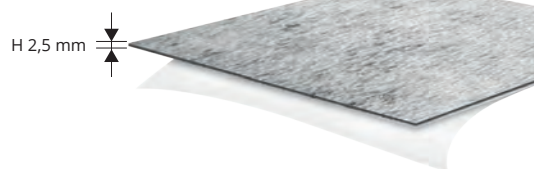


L 20m



PRODRAIN 10

DRAINING MEMBRANE

PRODRAIN 10 is a drainage membrane composed by an high density polyethylene (HDPE) sheet provided with truncated cone reliefs. On the top of the reliefs a non-woven polypropylene fabric, in grey colour, permeable to water is thermowelded.



H 10 mm

PRODRAIN 10 MEMBRANE

Article	H roll (m)	L roll (m)	Thickness (mm)	Rolls/Pallet	€/m	€/Roll	€/Pallet
PDR1 10	0,96	12,5	10	6	15,49	185,88	1.115,28

AREAS OF USE

- **Use.** Outside on concrete sloping suitably waterproofed such as terraces, balconies and pavements and in contact with waterproofed vertical structures such as foundation walls. Highly resistant to saline solutions, acid and alkaline, alcohol and oils. In case of special products consult the technical department.
- **Don't use.** On concrete waterproofed without adequate slope to the drained water runoff. As soundproof and thermal-insulating layer.



PROBAND 150/250

ELASTIC ROLLS IN HDPE AND PP

PROBAND 150/250 is a waterproofing polyethylene tape with nonwoven polypropylene fabric on both side that guarantees high adhesion to the support.



PROBAND 150/250

Article	H Roll (mm)	L Roll (m)	Thickness (mm)	Roll/Pack	€/m	€/Roll	€/Pallet
PRBPE 1507	150	7,5	0,42	16	5,87	44,03	704,48
PRBPE 1530	150	30	0,42	6	4,31	129,30	775,80
PRBPE 2530	250	30	0,42	3	7,91	237,30	711,90

PREFORMED CORNERS and PIPE COLLAR


Internal and external preformed corners and pipe collar in polyethylene provided on both side with nonwoven polypropylene fabric that guarantees its adhesion to the support. Use on Terraces, balconies and outside surfaces of any dimension, bathrooms, showers, swimming pools and tanks. To realize waterproofing joints between floor and wall and along two adjacent rolls of PROFOIL, PRODESOL® MEMBRANE SYSTEM and PRODESOL® HEAT GRIP SYSTEM



EXTERNAL CORNER
PRBE



INTERNAL CORNER
PRBI



PIPE COLLAR
PRBT

PREFORMED CORNERS AND PIPE COLLAR IN HDPE AND PP

Thickness 0,42 mm

Articolo	H x L mm	€/PZ	€/conf.
PRBI	60 x 120	8,48	84,80
PRBE	60 x 120	8,48	84,80
PRBT	125 x 125	7,51	75,10

WARNINGS

Don't use - On bituminous coverings, over thermal-insulating layer and lightweight screed. With adhesives containing solvents. adhesive.

PROFOIL is a waterproofing polyethylene membrabe with nonwoven polypropylene fabric on both side that guarantes high adhesion to the support.

PROFOIL PRO is a waterproofing elastic polyethylene membrane with nonwoven polypropylene fabric on both side that guarantees high adhesion to the support.

PROFOIL PROFOIL PRO

ROLLS IN HDPE AND PP

PROFOIL PRO MEMBRANE

Article	H roll (m)	L roll (m)	Thickness (mm)	Rolls/Pallet	€/m	€/Roll	€/Pallet
PFLOPR 0430	1	30	0,42	40	16,77	503,10	20.124,00

PROFOIL MEMBRANE

Article	H roll (m)	L roll (m)	Thickness (mm)	Rolls/Pallet	€/m	€/Roll	€/Pallet
PFLO 0430	1	30	0,42	40	14,28	428,40	17.136,00
PFLO 0405	1	5	0,42	154	19,87	99,35	15.299,90

L 5m L 30m



PROFOIL PRO




PROFOIL



PROFOIL PANEL

HIGH DENSITY EXTRUDED
POLYSTYRENE PANEL

PROFOIL PANEL are high density extruded polystyrene panels covered on both sides with a steam- and waterproofing membrane. The membrane is waterproofing and the adhesive to fix them reinforces the panels for a quick and inexpensive laying.

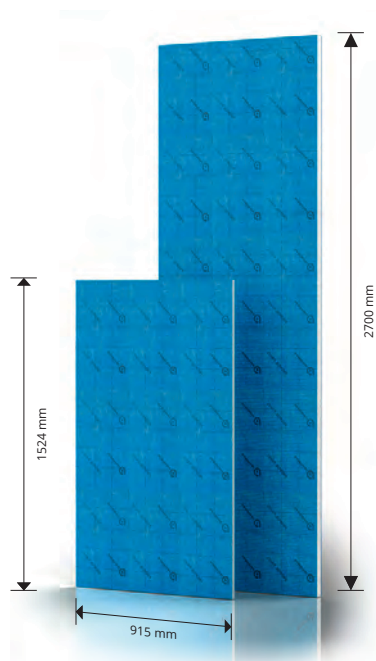

PROFOIL PANEL 2700 mm - high density extruded polystyrene
915 mm x 2700 mm = 2,470 m²


Article	H mm	Pcs/pallet	Mq/pallet	€/Mq	€/Pc	€/Pallet
PFLPAN927	9,50	80	197,60	47,82	118,12	9.449,60 *
PFLPAN1327	12,70	60	148,20	49,48	122,22	7.333,20
PFLPAN1627	15,9	50	123,50	53,20	131,41	6.570,50 *
PFLPAN2527	25,00	30	74,10	59,48	146,92	4.407,60
PFLPAN3827	38,10	20	49,40	65,58	161,97	3.239,40 *
PFLPAN5027	50,80	10	24,70	83,28	205,69	2.056,90

PROFOIL PANEL 1524 mm - high density extruded polystyrene
915 mm x 1524 mm = 1,394 m²

Article	H mm	Pcs/pallet	Mq/pallet	€/Mq	€/Pc	€/Pallet
PFLPAN6	6,35	85	118,49	38,93	54,27	4.612,95

PROFOIL PANEL THICKNESS

9,5 mm
12,7 mm
15,9 mm
25 mm
38,1 mm
50,8 mm

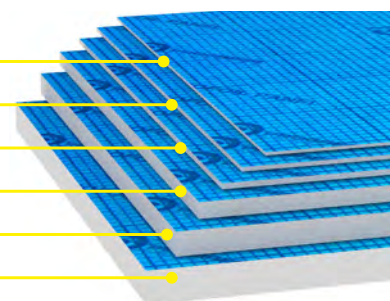

PROFOIL PANEL 2600 mm - high density extruded polystyrene
600 mm x 2600 mm = 1,56 m²

Article	H mm	Pcs/pallet	Mq/pallet	€/Mq	€/Pc	€/Pallet
PFLPAN7626	7	160	249,60	42,95	67,00	10.720,00
PFLPAN10626	10	112	174,72	43,59	68,00	7.616,00
PFLPAN13626	12,5	60	93,60	46,15	72,00	4.320,00
PFLPAN20626	20	56	87,36	56,41	88,00	4.928,00
PFLPAN25626	25	30	46,80	60,45	94,00	2.820,00
PFLPAN30626	30	24	37,44	60,26	96,00	2.304,00
PFLPAN48626	48	14	21,84	85,26	133,00	1.862,00

PROFOIL PANEL 1300 mm - high density extruded polystyrene
600 mm x 1300 mm = 0,78 m²

Article	H mm	Pcs/pallet	Mq/pallet	€/Mq	€/Pc	€/Pallet
PFLPAN7613	7	160	124,80	43,59	34,00	5.440,00
PFLPAN10613	10	112	87,36	44,87	35,00	3.920,00
PFLPAN13613	12,5	60	46,80	47,36	37,00	2.220,00
PFLPAN20613	20	56	43,68	58,97	46,00	2.576,00
PFLPAN25613	25	30	23,40	61,44	48,00	1.440,00
PFLPAN30613	30	24	18,72	64,1	50,00	1.200,00
PFLPAN48613	48	14	10,92	89,74	70,00	980,00

PROFOIL AND PROBAND DOWELS, WASHERS, SCREWS

STAINLESS STEEL/ZINC-COATED METAL/GLASS FIBER NET




PROFOIL DOWELS - ZINC-COATED METAL - pack. 250 Pc

Article	L mm	€/Pc	€/Pack.
TZPFP 110	100	1,75	437,50
TZPFP 140	140	1,95	487,50
TZPFP 170	170	2,15	537,50
TZPFP 200	200	2,35	587,50



PROFOIL DOWELS - STAINLESS STEEL - pack. 250 Pc

Article	L mm	€/Pc	€/Pack.
TIPFP 110	110	3,38	845,00
TIPFP 140	140	3,64	910,00
TIPFP 170	170	3,90	975,00
TIPFP 200	200	4,16	1.040,00
TIPFP 250	250	4,84	1.210,00



PROFOIL PANEL SCREWS (ZINC-COATED METAL)

Article	Pcs/Pack.	L mm	€/Pc	€/Pack.
VACFPF 35	1000	35	0,04	40
VACFPF 55	1000	45	0,05	50
VACFPF 80	1000	80	0,10	100



PROFOIL PANEL WASHERS (ZINC-COATED METAL) - pack. 100 Pc

Article	Pcs/Pack.	ø mm	€/Pc	€/Pack.
RFPFP 36	100	35	0,33	33

PROFOIL PANEL NICHE are prefabricated built-in elements of PROFOIL PANEL to make indoor wall niches and support surfaces. The niches can be linked to the waterproofing systems PROFOIL and PROFOIL PANEL. The fixing of the shelf inside the niche is optional. The shelf, part of the, can be fixed at the needed height. It is available in 4 sizes. The insert is adjustable or removable.


PROFOIL PANEL NICHE

HIGH DENSITY EXTRUDED POLYSTYRENE


PROFOIL PANEL NICHE - WATERPROOFING NICHE

Article	Description	Pcs/Pack.	€/Pc
PFLPANICH 88	WATERPROOFING NICHE MADE OF PROFOIL PANEL of 12,5mm, Inside size of the niche 203,2 x 203,2 mm	1	71,76
PFLPANICH 1212	WATERPROOFING NICHE MADE OF PROFOIL PANEL of 12,5mm, Inside size of the niche 304,8 x 304,8 mm	1	83,44
PFLPANICH 821	WATERPROOFING NICHE MADE OF PROFOIL PANEL of 12,5mm, Inside size of the niche 203,2 x 533,4 mm	1	110,34
PFLPANICH 1221	WATERPROOFING NICHE MADE OF PROFOIL PANEL of 12,5mm, Inside size of the niche 304,8 x 533,4 mm	1	123,94


PFLPANICH 88




PFLPANICH 1212




PFLPANICH 821




PFLPANICH 1221




PFLPANICH 1212




PFLPANICH 88



PFLPANICH 1221

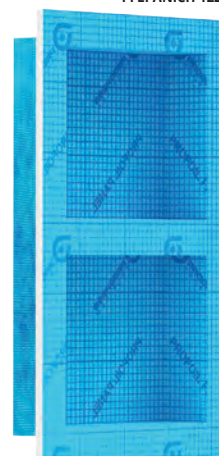

PFLPANICH 821

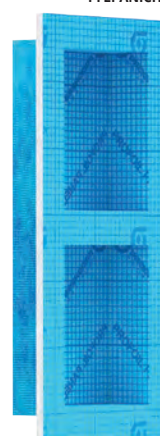



PROFOIL PANEL SYSTEM

Total Waterproofing

MEMBRANE
AND PANELS

One product and many solutions
for a creative, practical and fast installation.

