





An interpretation of:
Kaufmann "Fallingwater" House, Frank L.I. Wright, Pennsylvania (USA), 1939

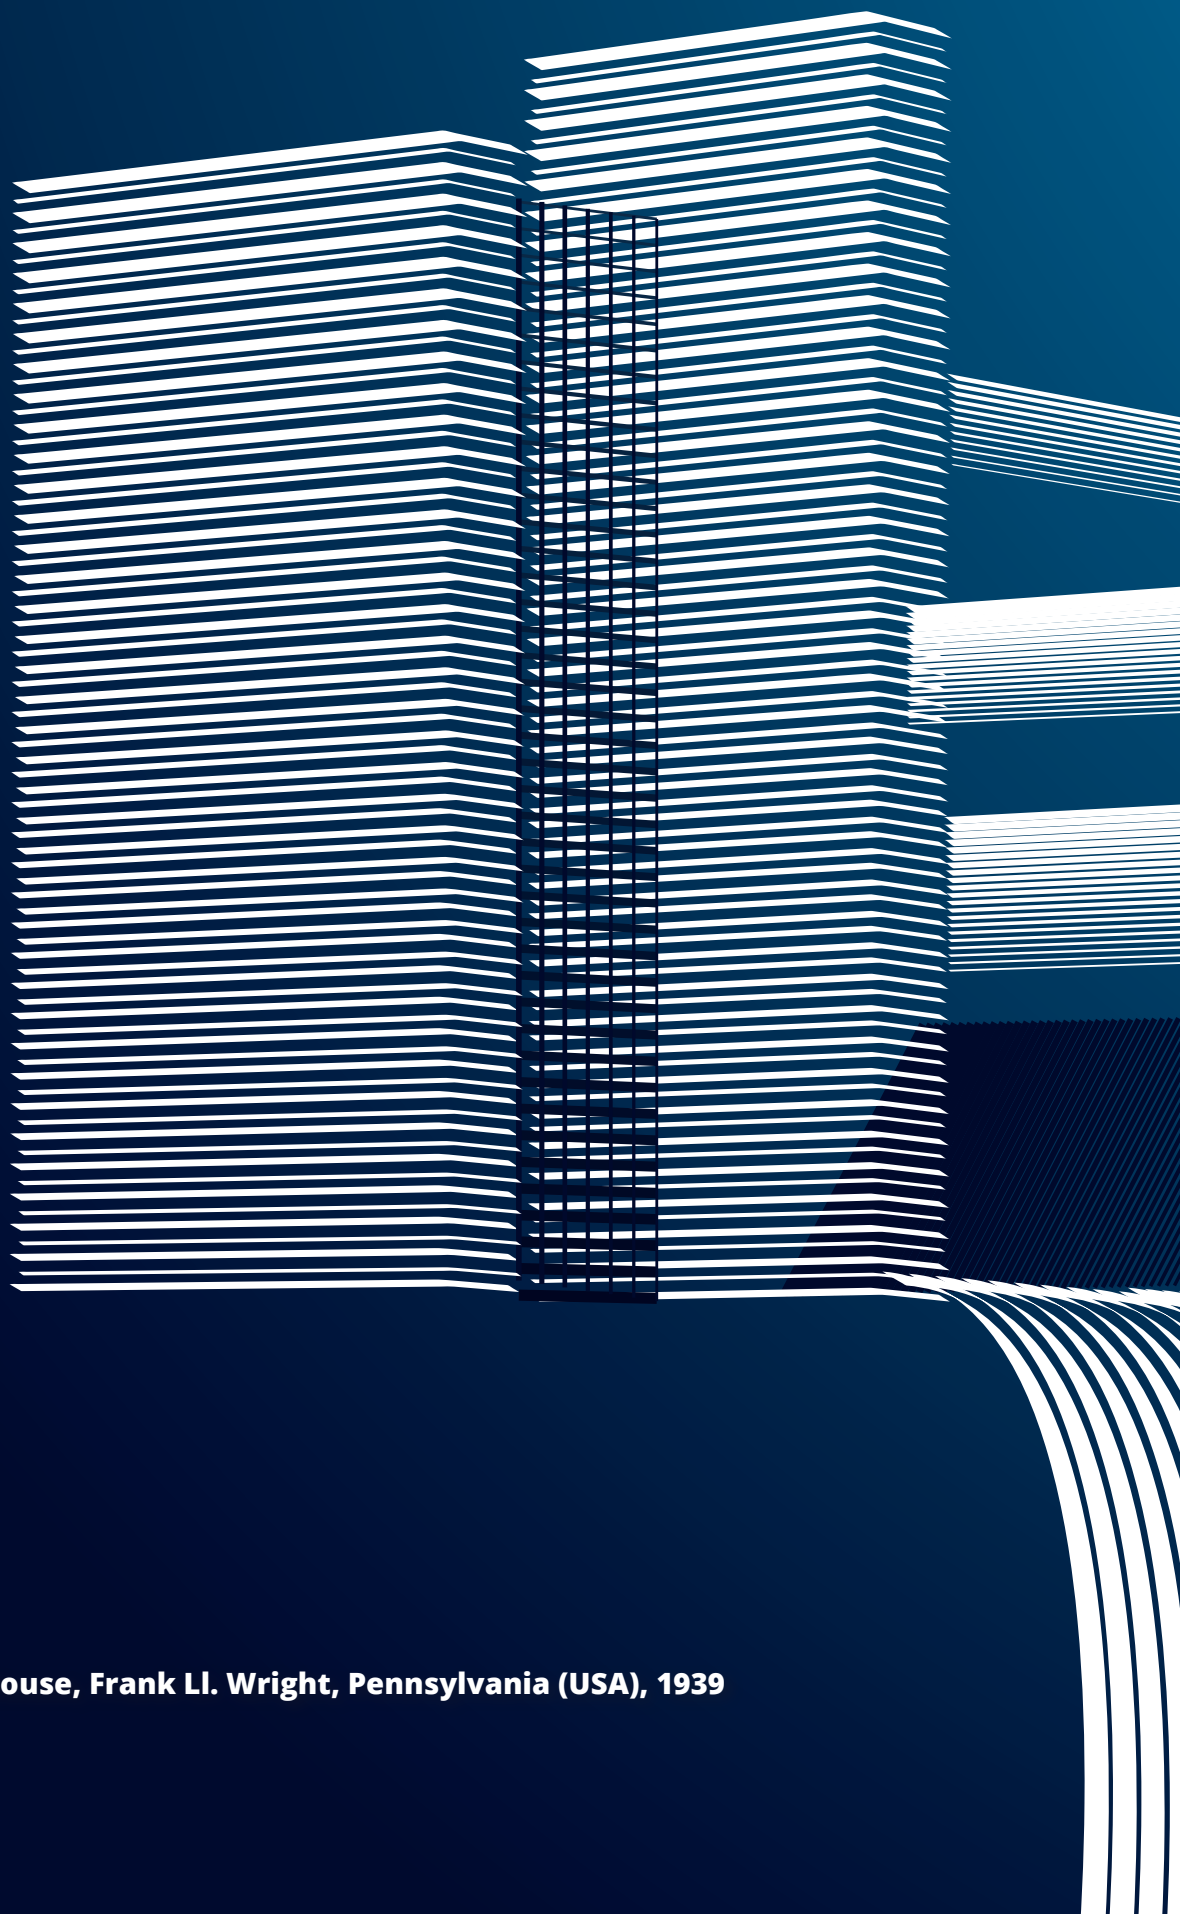

SHOWER AND DRAINAGE SYSTEMS

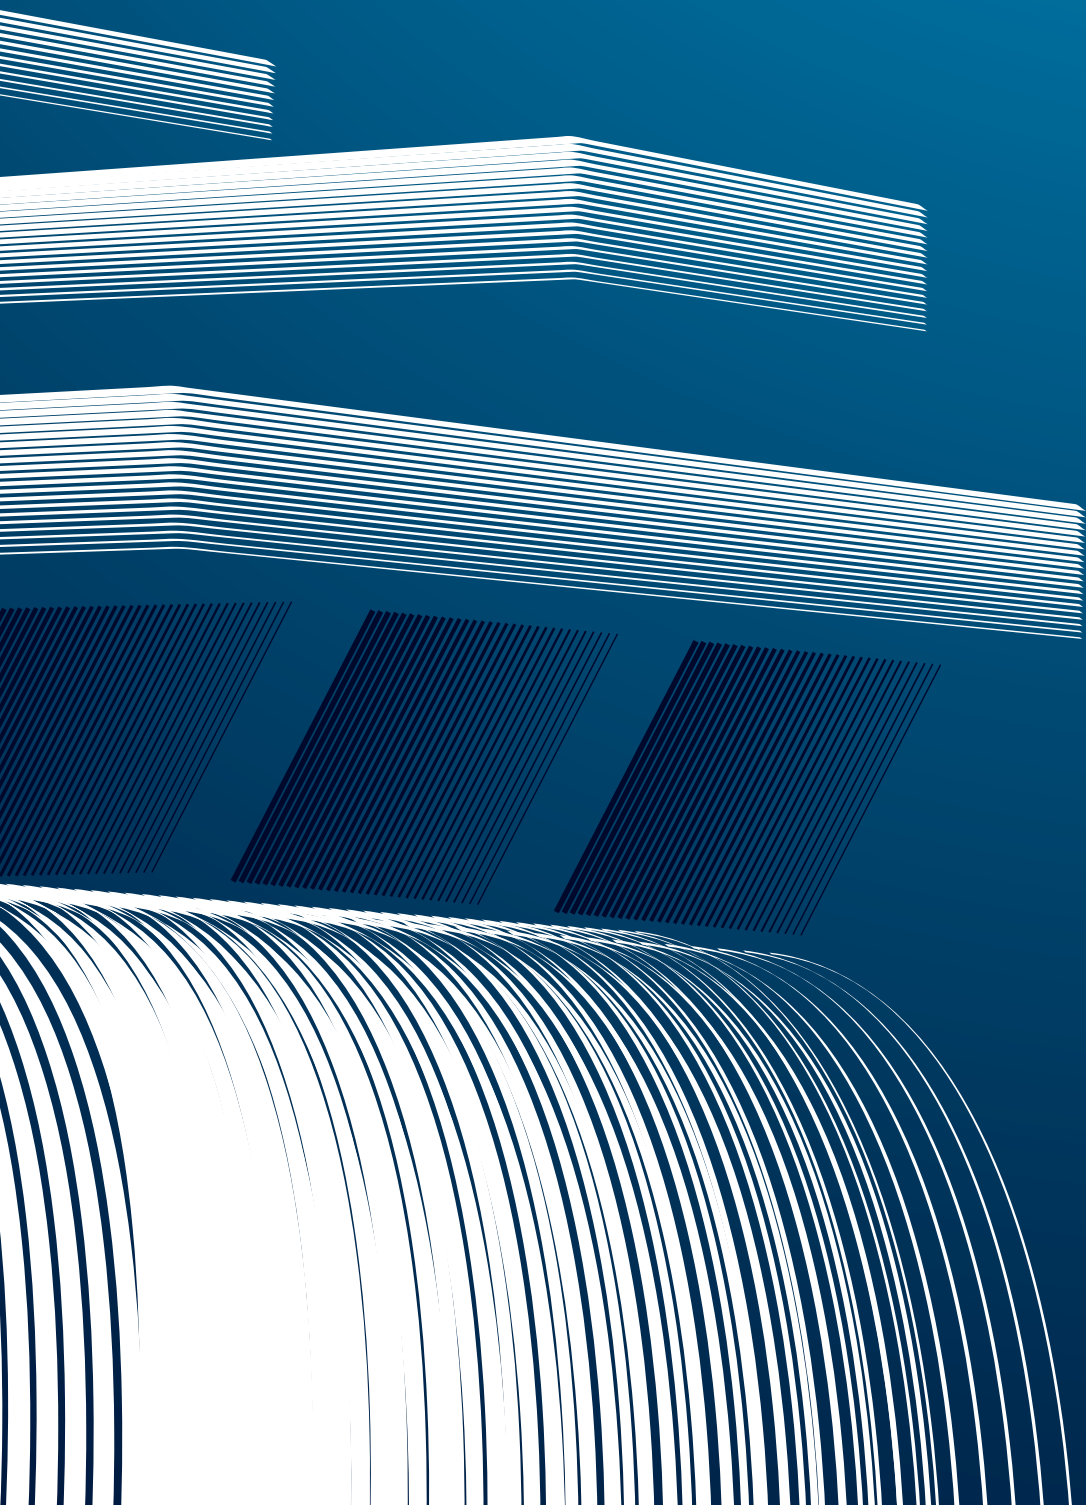

KALEIDOS®

PROSHOWER BASE L is a channel body in stainless steel AISI 304/1.4301 – V2A steel for the realisation of floor-level shower. The body channel, with an overall height of 85 mm, is completed by 6 different grids in stainless steel. **PROSHOWER BASE L** undergoes electro-polishing and subsequent passivation, which guarantees excellent resistance in any environment. Its low thickness combined with the fully adjustable siphon, the modularity and the high number of grids make it a much sought-after solution.

PROSHOWER BASE L



SUPER POLISHED STAINLESS STEEL
AISI 304/1.4301-V2A



* L 30 cm

DUCT BODY MADE OF AISI 304 STAINLESS STEEL

Article	Description	Pc/Pack.	€/Pc
PSHWDL 30	PROSHOWER BASE L-ACC-L 30 x 8 cm	1	343,00
PSHWDL 70	PROSHOWER BASE L-ACC-L 70 x 8 cm	1	437,15
PSHWDL 80	PROSHOWER BASE L-ACC-L 80 x 8 cm	1	464,05
PSHWDL 90	PROSHOWER BASE L-ACC-L 90 x 8 cm	1	490,96
PSHWDL 100	PROSHOWER BASE L-ACC-L 100 x 8 cm	1	517,85
PSHWDL 120	PROSHOWER BASE L-ACC-L 120 x 8 cm	1	585,11

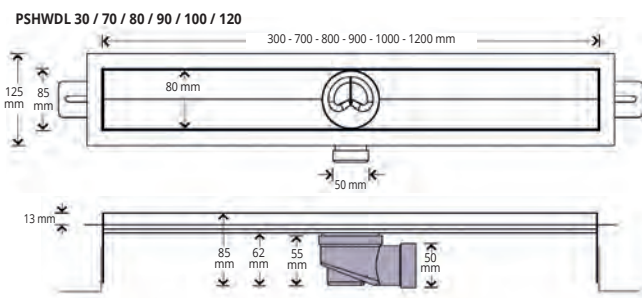

UPON REQUEST

PROSHOWER BASE L with vertical siphon complete of installed Profoil membrane (code ref. PSHWDVS...).
Drain Ø 50 mm.

PROSHOWER BASE BASIC is a water collecting duct system in polypropylene for floor showers, available in several lengths and grids.



PROSHOWER BASE BASIC

GREY POLYPROPYLENE



GREY POLYPROPYLENE DUCT BODY

Article	Description	Pc/Pack.	€/Pc
PSHWBB 60	PROSHOWER BASE BASIC - 60 x 8 cm PP	1	201,76
PSHWBB 70	PROSHOWER BASE BASIC - 70 x 8 cm PP	1	215,22
PSHWBB 80	PROSHOWER BASE BASIC - 80 x 8 cm PP	1	228,66
PSHWBB 90	PROSHOWER BASE BASIC - 90 x 8 cm PP	1	242,11

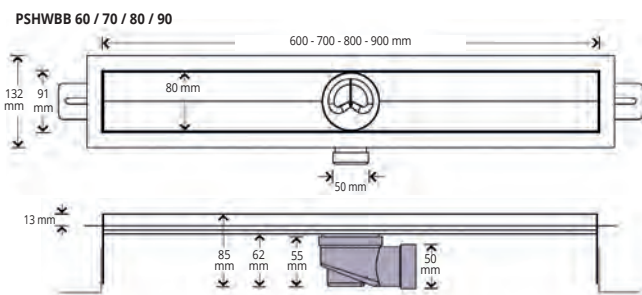

UPON REQUEST


PROSHOWER BASE BASIC with vertical siphon complete of installed Profoil membrane (code ref. PSHWBBVS...).
Drain Ø 50 mm.

PROFOIL SECTION

HDPE E PP GUAINA

PROFOIL SECTION AND DOUBLE SIDED TAPE 3 lm

Article	L	Pc/Pack.	€/Pc
PSHANT 30	30 cm	1	20,18
PSHANT 60	60 cm	1	22,88
PSHANT 70	70 cm	1	25,56
PSHANT 80	80 cm	1	30,93
PSHANT 90	90 cm	1	36,32
PSHANT 100	100 cm	1	41,70
PSHANT 120	120 cm	1	48,42

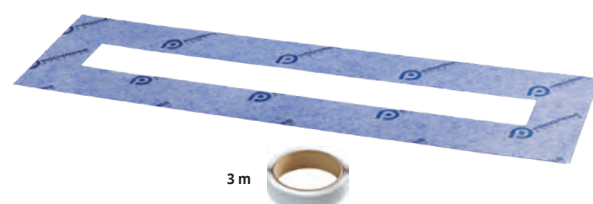

3 m

PROFOIL SECTION AND DOUBLE SIDED TAPE

PROSHOWER TOP

SUPER-POLISHED STAINLESS STEEL AISI 304 / 1.4301 - V2A

PROSHOWER TILE - tileable

PSHWT 30/60/70/80/90/100/120



PROSHOWER LINE

PSHWL 60/70/80/90/100/120




PROSHOWER DESIGN

PSHWD 30/60/70/80/90/100/120



PROSHOWER STRIPS

PSHWST 60/70/80/90/100/120

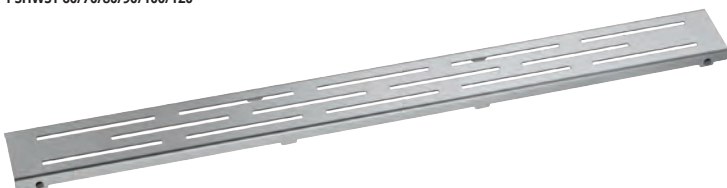

PROSHOWER GRILL

PSHWGR 60/70/80/90/100/120



PROSHOWER SQUARE

PSHWSQ 60/70/80/90/100/120



PROSHOWER TILE - SUPER-POLISHED STAINLESS STEEL AISI 304 / 1.4301 - V2A - Pack. 1 Pc

Article	Lenght cm	Width cm	€/Pc
PSHWT 30*	30	8	141,23
PSHWT 60**	60	8	161,41
PSHWT 70	70	8	168,13
PSHWT 80	80	8	174,86
PSHWT 90	90	8	181,60
PSHWT 100*	100	8	201,76
PSHWT 120*	120	8	221,93

*PSHWT 30,100,120 Provided only combined with Proshower Base L.

**PSHWT 60 Provided only combined with Proshower Base Basic.

PROSHOWER LINE - SUPER-POLISHED STAINLESS STEEL AISI 304 / 1.4301 - V2A - Pack. 1 Pc

Article	Lenght cm	Width cm	€/Pc
PSHWL 60**	60	8	161,41
PSHWL 70	70	8	168,13
PSHWL 80	80	8	174,86
PSHWL 90	90	8	181,60
PSHWL 100*	100	8	201,76
PSHWL 120*	120	8	221,93

*PSHWL 100,120 Provided only combined with Proshower Base L.

**PSHWL 60 Provided only combined with Proshower Base Basic.

PROSHOWER DESIGN - SUPER-POLISHED STAINLESS STEEL AISI 304 / 1.4301 - V2A - Pack. 1 Pc

Article	Lenght cm	Width cm	€/Pc
PSHWD 30*	30	8	141,23
PSHWD 60**	60	8	161,41
PSHWD 70	70	8	168,13
PSHWD 80	80	8	174,86
PSHWD 90	90	8	181,60
PSHWD 100*	100	8	201,76
PSHWD 120*	120	8	221,93

*PSHWD 30,100,120 Provided only combined with Proshower Base L.

**PSHWD 60 Provided only combined with Proshower Base Basic.

PROSHOWER STRIPS - SUPER-POLISHED STAINLESS STEEL AISI 304 / 1.4301 - V2A - Pack. 1 Pc

Article	Lenght cm	Width cm	€/Pc
PSHWST 60**	60	8	161,41
PSHWST 70	70	8	168,13
PSHWST 80	80	8	174,86
PSHWST 90	90	8	181,60
PSHWST 100*	100	8	201,76
PSHWST 120*	120	8	221,93

*PSHWST 100,120 Provided only combined with Proshower Base L.

**PSHWST 60 Provided only combined with Proshower Base Basic.

PROSHOWER GRILL - SUPER-POLISHED STAINLESS STEEL AISI 304 / 1.4301 - V2A - Pack. 1 Pc

Article	Lenght cm	Width cm	€/Pc
PSHWGR 60**	60	8	161,41
PSHWGR 70	70	8	168,13
PSHWGR 80	80	8	174,86
PSHWGR 90	90	8	181,60
PSHWGR 100*	100	8	201,76
PSHWGR 120*	120	8	221,93

*PSHWGR 100,120 Provided only combined with Proshower Base L.

**PSHWGR 60 Provided only combined with Proshower Base Basic.

PROSHOWER SQUARE - SUPER-POLISHED STAINLESS STEEL AISI 304 / 1.4301 - V2A - Pack. 1 Pc

Article	Lenght cm	Width cm	€/Pc
PSHWSQ 60**	60	8	161,41
PSHWSQ 70	70	8	168,13
PSHWSQ 80	80	8	174,86
PSHWSQ 90	90	8	181,60
PSHWSQ 100*	100	8	201,76
PSHWSQ 120*	120	8	221,93

*PSHWSQ 100,120 Provided only combined with Proshower Base L.

**PSHWSQ 60 Provided only combined with Proshower Base Basic.




DRAIN REDUCTION

POLYPROPYLENE

Article	Description	Pc/Pack.	€/Pc
PSHWRD 5040	50 to 40 mm polypropylene drain reduction	1	13,45



REDUCTION


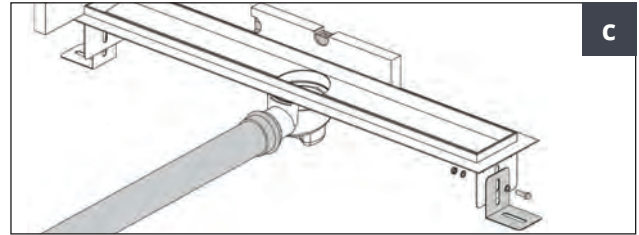
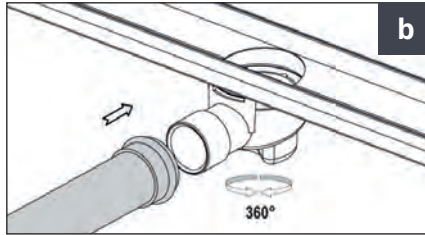



MODULAR ASSEMBLY KIT

Article	Description	Pc/Pack.	€/Pc
PSHWRD	Modular assembly kit to make drain ducts of any length	1	34,98



MODULAR ASSEMBLY KIT

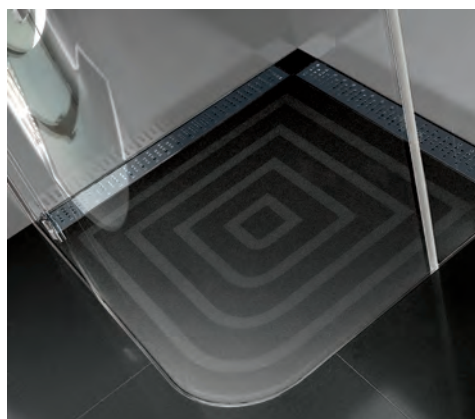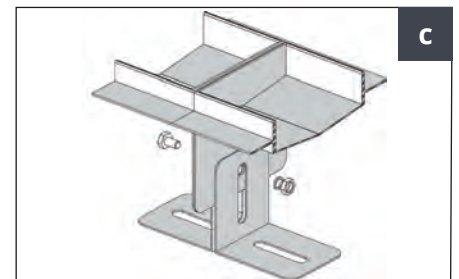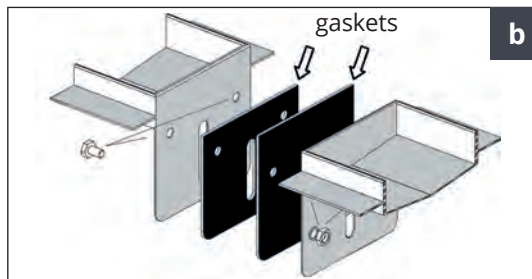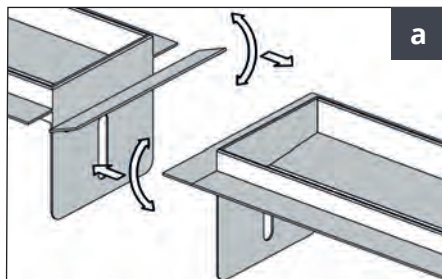



PROSHOWER BASE L PRO is a stainless steel AISI 316L / 1.4404 - V4A drain for the realisation of floor-level and for wall shower drain. This drain is available in different lengths and equipped with different grids. The reduced thickness grid has excellent chemical resistance and is equipped with a 360° adjustable siphon.

PROSHOWER BASE L PRO

SUPER-POLISHED
STAINLESS STEEL AISI 316L / 1.4404 - V4A




PROSHOWER BASE L PRO - DUCT BODY MADE OF A STAINLESS STEEL AISI 316L / 1.4404 - V4A

Article	Description	Pc/Pack.	€/Pc
PSHWP 30	PROSHOWER BASE L PRO - L 30 x 5,5 cm	1	211,15
PSHWP 60	PROSHOWER BASE L PRO - L 60 x 5,5 cm	1	242,05
PSHWP 70	PROSHOWER BASE L PRO - L 70 x 5,5 cm	1	252,35
PSHWP 80	PROSHOWER BASE L PRO - L 80 x 5,5 cm	1	262,65
PSHWP 90	PROSHOWER BASE L PRO - L 90 x 5,5 cm	1	272,95
PSHWP 100	PROSHOWER BASE L PRO - L 100 x 5,5 cm	1	283,25

PROSHOWER BASE L PRO - DUCT BODY MADE OF A STAINLESS STEEL AISI 316L / 1.4404 - V4A - WITH PROFOIL DOWEL INSTALLED


Article	Description	Pc/Pack.	€/Pc
PSHWP 30 TST	PROSHOWER BASE L PRO - L 30 x 5,5 cm	1	246,15
PSHWP 60 TST	PROSHOWER BASE L PRO - L 60 x 5,5 cm	1	277,05
PSHWP 70 TST	PROSHOWER BASE L PRO - L 70 x 5,5 cm	1	287,35
PSHWP 80 TST	PROSHOWER BASE L PRO - L 80 x 5,5 cm	1	297,65
PSHWP 90 TST	PROSHOWER BASE L PRO - L 90 x 5,5 cm	1	307,95
PSHWP 100 TST	PROSHOWER BASE L PRO - L 100 x 5,5 cm	1	318,25

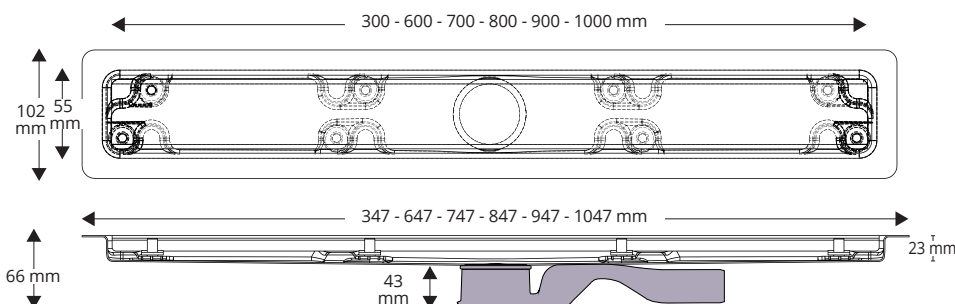

PROSHOWER BASE L PRO 40 is a stainless steel AISI 316L / 14404 - V4A drain molded for the realization of floor and wall shower, available in different lengths and equipped with different grids. The drain, has excellent chemical resistance and is equipped with a siphon from 40 mm adjustable to 360 ths.

PROSHOWER BASE L PRO 40

SUPER-POLISHED
STAINLESS STEEL AISI 316L / 1.4404 - V4A

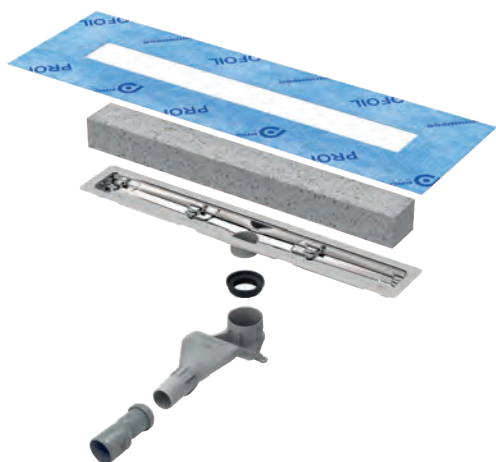


PROSHOWER BASE L PRO 40 - DUCT BODY MADE OF A STAINLESS STEEL AISI 316L / 1.4404 - V4A

Article	Description	Pc/Pack.	€/Pc
PSHWP 304	PROSHOWER BASE L PRO 40 - L 30 x 5,5 cm	1	211,15
PSHWP 604	PROSHOWER BASE L PRO 40 - L 60 x 5,5 cm	1	242,05
PSHWP 704	PROSHOWER BASE L PRO 40 - L 70 x 5,5 cm	1	252,35
PSHWP 804	PROSHOWER BASE L PRO 40 - L 80 x 5,5 cm	1	262,65
PSHWP 904	PROSHOWER BASE L PRO 40 - L 90 x 5,5 cm	1	272,95
PSHWP 1004	PROSHOWER BASE L PRO 40 - L 100 x 5,5 cm	1	283,25

PROSHOWER BASE L PRO 40 - DUCT BODY MADE OF A STAINLESS STEEL AISI 316L / 1.4404 - V4A - WITH PROFOIL DOWEL INSTALLED

Article	Description	Pc/Pack.	€/Pc
PSHWP 304 TST	PROSHOWER BASE L PRO 40 - L 30 x 5,5 cm	1	246,15
PSHWP 604 TST	PROSHOWER BASE L PRO 40 - L 60 x 5,5 cm	1	277,05
PSHWP 704 TST	PROSHOWER BASE L PRO 40 - L 70 x 5,5 cm	1	287,35
PSHWP 804 TST	PROSHOWER BASE L PRO 40 - L 80 x 5,5 cm	1	297,65
PSHWP 904 TST	PROSHOWER BASE L PRO 40 - L 90 x 5,5 cm	1	307,95
PSHWP 1004 TST	PROSHOWER BASE L PRO 40 - L 100 x 5,5 cm	1	318,25

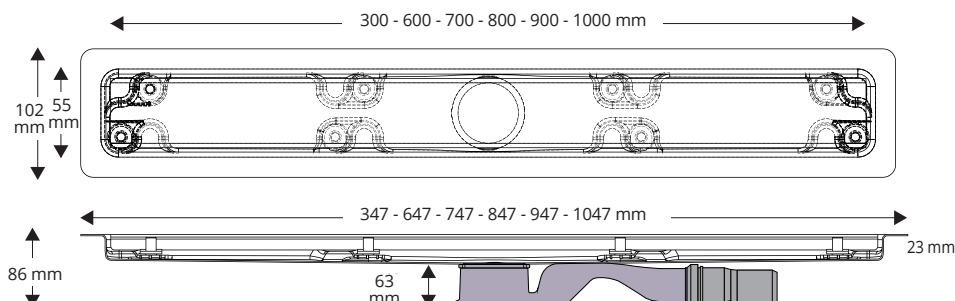


PROSHOWER TOP PRO

STAINLESS STEEL AISI 316L / 1.4404 - V4A, COATED

PROSHOWER TILE/LINE PRO

PSHWPLT 30/60/70/80/90/100

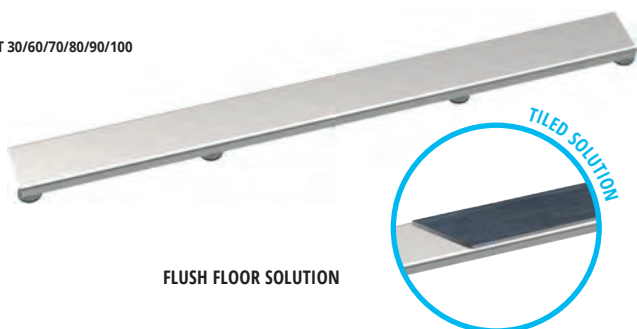

PROSHOWER TILE/LINE PRO - SUPER-POLISHED STAINLESS STEEL AISI 316L/1.4404-V4A - Pack. 1 Pc

Article	Lenght cm	Width cm	€/Pc
PSHWPLT 30	30	5,5	46,35
PSHWPLT 60	60	5,5	66,95
PSHWPLT 70	70	5,5	74,68
PSHWPLT 80	80	5,5	82,40
PSHWPLT 90	90	5,5	90,13
PSHWPLT 100	100	5,5	97,85

Sold only in combination with Proshower Base L PRO


PROSHOWER TILE/LINE PRO - BRUSHED STAINLESS STEEL AISI 316L/1.4404-V4A - Pack. 1 Pc

Article	Lenght cm	Width cm	€/Pc
PSHWPLTS 30	30	5,5	46,35
PSHWPLTS 60	60	5,5	66,95
PSHWPLTS 70	70	5,5	74,68
PSHWPLTS 80	80	5,5	82,40
PSHWPLTS 90	90	5,5	90,13
PSHWPLTS 100	100	5,5	97,85

Sold only in combination with Proshower Base L PRO

PROSHOWER DESIGN PRO

PSHWPD 30/60/70/80/90/100

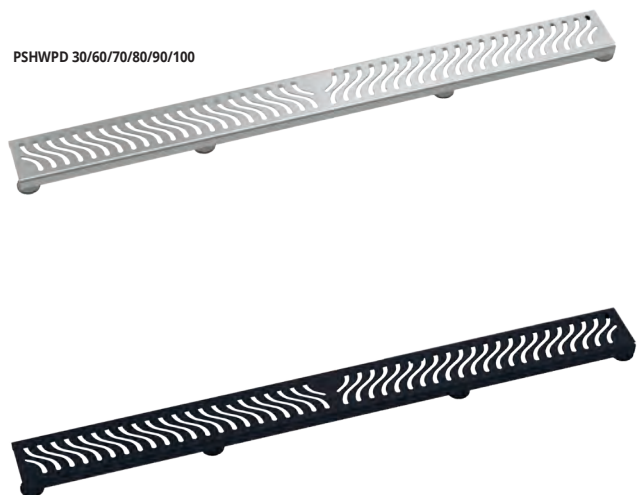

PROSHOWER DESIGN PRO - SUPER-POLISHED STAINLESS STEEL AISI 316L/1.4404-V4A - Pack. 1 Pc

Article	Lenght cm	Width cm	€/Pc
PSHWPD 30	30	5,5	49,44
PSHWPD 60	60	5,5	75,19
PSHWPD 70	70	5,5	81,37
PSHWPD 80	80	5,5	92,70
PSHWPD 90	90	5,5	101,97
PSHWPD 100	100	5,5	108,15

Sold only in combination with Proshower Base L PRO

PROSHOWER DESIGN PRO
STAINLESS STEEL AISI 316L/1,4404-V4A - EASY LINE - Pack. 1 Pc

Article	Lenght cm	Width cm	€/Pc
PSHWPD 30-EYP11	30	5,5	62,83
PSHWPD 60-EYP11	60	5,5	87,55
PSHWPD 70-EYP11	70	5,5	93,73
PSHWPD 80-EYP11	80	5,5	99,91
PSHWPD 90-EYP11	90	5,5	106,09
PSHWPD 100-EYP11	100	5,5	112,27

Sold only in combination with Proshower Base L PRO



WALL DRAIN KIT allows to create wall-mounted shower drains. The kit is composed of a tank, a drain and a tileable grid in stainless steel AISI 316L / 14404 - V4A, a connection to the waterproofing system, a polystyrene template, a 360° adjustable siphon (d: 32/40 mm), a hair retainer insert and 4 screws for fixing the grill to the tub.

WALL DRAIN KIT



WALL DRAIN KIT 32 - STAINLESS STEEL AISI 316L/1.4404-V4A

Article	Shower Channel (cm)	Ø (mm)	€/Kit
KBPSHWPAC 30K	30 x 5,5	32	530,45
KBPSHWPAC 60K	60 x 5,5	32	607,70
KBPSHWPAC 70K	70 x 5,5	32	633,45
KBPSHWPAC 80K	80 x 5,5	32	654,05
KBPSHWPAC 90K	90 x 5,5	32	741,60
KBPSHWPAC 100K	100 x 5,5	32	767,35

WALL DRAIN KIT 40 - STAINLESS STEEL AISI 316L/1.4404-V4A

Article	Shower Channel (cm)	Ø (mm)	€/Kit
KBPSHWPAC 304K	30 x 5,5	40	530,45
KBPSHWPAC 604K	60 x 5,5	40	607,70
KBPSHWPAC 704K	70 x 5,5	40	633,45
KBPSHWPAC 804K	80 x 5,5	40	654,05
KBPSHWPAC 904K	90 x 5,5	40	741,60
KBPSHWPAC 1004K	100 x 5,5	40	767,35




PROSHOWER PROFILE GLASS



SATINED STAINLESS STEEL AISI 304 / 1.4301 - V2A

PROSHOWER PROFILE GLASS Suitable profile for fixing glass slabs in case of floor level showers with a slope of 2%. Due to its particular shape and finish in satin-finish stainless steel AISI 304 / 1.4301 - V2A, it covers and decorates the visible side of the screed.

PSHWPAGACS...SX



PSHWPAGACS...DX

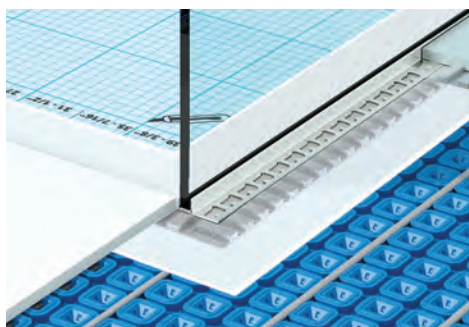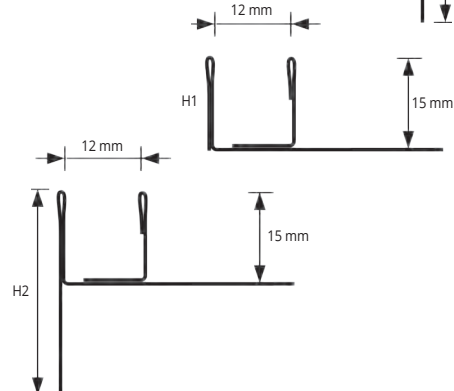


SATINED STAINLESS STEEL AISI 304/1.4301-V2A - LEFT
degreased and passivated - thermo packed - Pack. 1 Pc


Article	H1 mm	H2 mm	L cm	€/Pc
PSHWPAGACS 100SX	15	33	100	122,34
PSHWPAGACS 150SX	15	43	150	170,75
PSHWPAGACS 200SX	15	53	200	221,87

SATINED STAINLESS STEEL AISI 304/1.4301-V2A - RIGHT
degreased and passivated - thermo packed - Pack. 1 Pc

Article	H1 mm	H2 mm	L cm	€/Pc
PSHWPAGACS 100DX	15	33	100 cm	122,34
PSHWPAGACS 150DX	15	43	150 cm	170,75
PSHWPAGACS 200DX	15	53	200 cm	221,87



EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

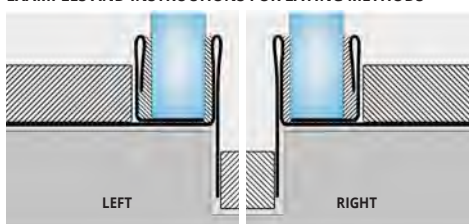

1. Choose "PROSHOWER PROFILE GLASS" according to the desired length.
2. Cut "PROSHOWER PROFILE GLASS" to the desired length and apply the adhesive on the support where the profile will be laid.
3. Press the anchoring flange of "PROJOLLY SQUARE" into the adhesive.
4. Lay the tiles, aligning them with the profile leaving a 2 mm joint. Remove immediately all remains of adhesive from the surface of the profile.
5. Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile.
6. Insert the sheet of glass and seal.

PROSHOWER PROFILE




SATINED STAINLESS STEEL AISI 304 / 1.4301 - V2A

PROSHOWER PROFILE is a profile for floor level showers in stainless steel for the protection of the floor edges and as decoration of the screed visible side. The profile has a 2% slope. Its specific shape makes it an easy to lay profile to be used with all kind of floor.


PSHWPACS... SX



PSHWPACS... DX

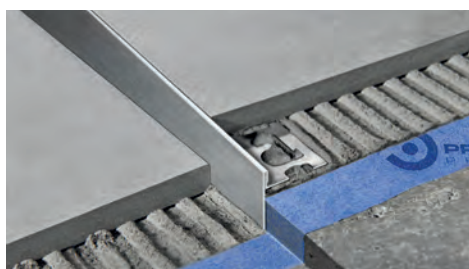

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

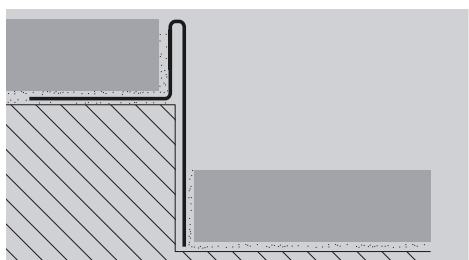

1. Choose "PROSHOWER PROFILE" according to the desired length.
2. Cut "PROSHOWER PROFILE" to the desired length and apply the adhesive on the support where the profile will be laid.
3. Press the anchoring flange of "PROJOLLY SQUARE" into the adhesive.
4. Lay the tiles, aligning them with the profile leaving a 2 mm joint. Remove immediately all remains of adhesive from the surface of the profile.
5. Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile.
6. Insert the sheet of glass and seal.

SATINED STAINLESS STEEL AISI 304/1.4301-V2A - RIGHT
degreased and passivated - thermo packed - Pack. 1 Pc

Article	H mm	H1 mm	H2 mm	L cm	€/Pc
PSHWPACS 1010DX	10	11	28	100	54,59
PSHWPACS 1015DX	10	11	38	150	66,95
PSHWPACS 1020DX	10	11	48	200	94,76
PSHWPACS 12510DX	12,5	13,5	30	100	56,14
PSHWPACS 12515DX	12,5	13,5	40	150	69,01
PSHWPACS 12520DX	12,5	13,5	50	200	96,82

SATINED STAINLESS STEEL AISI 304/1.4301-V2A - LEFT
degreased and passivated - thermo packed - Pack. 1 Pc

Article	H mm	H1 mm	H2 mm	L cm	€/Pc
PSHWPACS 1010SX	10	11	28	100	54,59
PSHWPACS 1015SX	10	11	38	150	66,95
PSHWPACS 1020SX	10	11	48	200	94,76
PSHWPACS 12510SX	12,5	13,5	30	100	56,14
PSHWPACS 12515SX	12,5	13,5	40	150	69,01
PSHWPACS 12520SX	12,5	13,5	50	200	96,82



PROSHOWER PROFILE FRONT is a satin-finish stainless steel AISI 304/1.4301-V2A profile. It is suitable to cover and decorate the visible part of wall in front of the shower tray in case of floor level showers with slope.

PROSHOWER PROFILE FRONT

SATINED STAINLESS STEEL AISI 304 / 1.4301 - V2A

SATINED STAINLESS STEEL AISI 304/1.4301-V2A
degreased and passivated - thermo packed - Pack. 1 Pc

Article	H mm	H1 mm	L cm	€/Pc
PSHWPFACS 101028	10	28	100	61,81
PSHWPFACS 101038	10	38	100	63,15
PSHWPFACS 101048	10	48	100	67,20
PSHWPFACS 101528	10	28	150	80,64
PSHWPFACS 101538	10	38	150	81,99
PSHWPFACS 101548	10	48	150	87,37
PSHWPFACS 1251028	12,5	28	100	61,81
PSHWPFACS 1251038	12,5	38	100	63,15
PSHWPFACS 1251048	12,5	48	100	67,20
PSHWPFACS 1251528	12,5	28	150	80,64
PSHWPFACS 1251538	12,5	38	150	81,99
PSHWPFACS 1251548	12,5	48	150	87,37

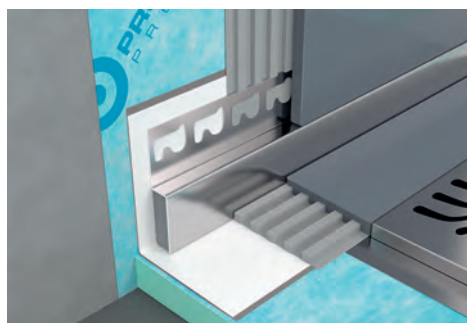

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS




1. Choose "PROSHOWER PROFILE FRONT" according to the desired length. 2. Cut "PROSHOWER PROFILE FRONT" to the desired length and apply the adhesive on the support where the profile will be laid. 3. Press the anchoring flange of "PROJOLLY SQUARE" into the adhesive. 4. Lay the tiles, aligning them with the profile leaving a 2 mm joint. Remove immediately all remains of adhesive from the surface of the profile. 5. Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile. 6. Insert the sheet of glass and seal.


PSHWPFACS 101028
PSHWPFACS 101528



PSHWPFACS 1251028
PSHWPFACS 1251528




PSHWPFACS 101038
PSHWPFACS 101538




PSHWPFACS 1251038
PSHWPFACS 1251538



PSHWPFACS 101048
PSHWPFACS 101548



PSHWPFACS 1251048
PSHWPFACS 1251548



PROSHOWER PROFILE WALL Profile in satin-finish stainless steel AISI 304 / 1.4301 - V2A. It is suitable to cover and decorate the visible part of wall beside the shower tray in case of floor level showers with a slope of 2%.

PROSHOWER PROFILE WALL


SATINED STAINLESS STEEL AISI 304 / 1.4301 - V2A

SATINED STAINLESS STEEL AISI 304/1.4301-V2A - RIGHT
degreased and passivated - thermo packed - Pack. 1 Pc

Article	H mm	H1 mm	H2 mm	L cm	€/Pc
PSHWPLACS 1010DX	10	10	28	100	61,81
PSHWPLACS 1015DX	10	10	38	150	80,64
PSHWPLACS 1020DX	10	10	48	200	100,82
PSHWPLACS 12510DX	12,5	10	28	100	62,48
PSHWPLACS 12515DX	12,5	10	38	150	81,31
PSHWPLACS 12520DX	12,5	10	48	200	102,16

SATINED STAINLESS STEEL AISI 304/1.4301-V2A - LEFT
degreased and passivated - thermo packed - Pack. 1 Pc

Article	H mm	H1 mm	H2 mm	L cm	€/Pc
PSHWPLACS 1010SX	10	10	28	100	61,81
PSHWPLACS 1015SX	10	10	38	150	80,64
PSHWPLACS 1020SX	10	10	48	200	100,82
PSHWPLACS 12510SX	12,5	10	28	100	62,48
PSHWPLACS 12515SX	12,5	10	38	150	81,31
PSHWPLACS 12520SX	12,5	10	48	200	102,16


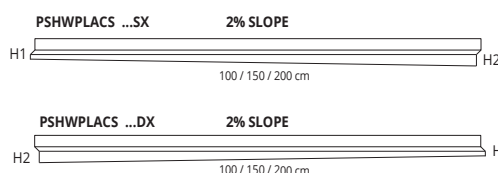


EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS





1. Choose "PROSHOWER PROFILE WALL" according to the desired length. 2. Cut "PROSHOWER PROFILE WALL" to the desired length and apply the adhesive on the support where the profile will be laid. 3. Press the anchoring flange of "PROJOLLY SQUARE" into the adhesive. 4. Lay the tiles, aligning them with the profile leaving a 2 mm joint. Remove immediately all remains of adhesive from the surface of the profile. 5. Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile. 6. Insert the sheet of glass and seal.

PSHWPLACS ...SX




PSHWPLACS ...DX




PROSHOWER PROFILE GLASS

VARNISHED ALUMINIUM

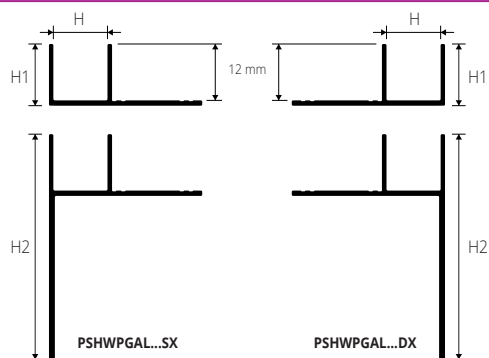


EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

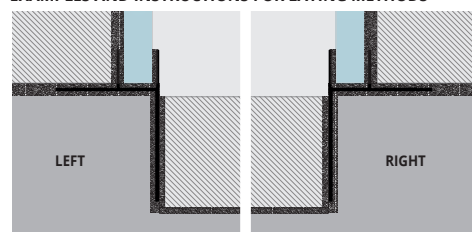

1. Choose "PROSHOWER PROFILE GLASS" according to the desired length. 2. Cut "PROSHOWER PROFILE GLASS" to the desired length and apply the adhesive on the support where the profile will be laid. 3. Press the anchoring flange of "PROJOLLY SQUARE" into the adhesive. 4. Lay the tiles, aligning them with the profile leaving a 2 mm joint. Remove immediately all remains of adhesive from the surface of the profile. 5. Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile. 6. Insert the sheet of glass and seal.

PROSHOWER PROFILE GLASS Suitable profile for fixing glass slabs in case of floor level showers with a slope of 2%. Due to its particular shape and finish in anodized and varnished aluminium, it covers and decorates the visible side of the screed.

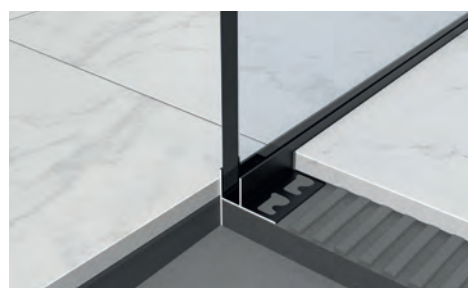

VARNISHED ALUMINIUM EASY LINE thermo packed - Pack. 1 Pc

Article	H mm	H1 mm	H2 mm	L cm	€/Pc
PSHWPGAL 100DX-EYP11	12,5	13,7	30	100	85,64
PSHWPGAL 150DX-EYP11	12,5	13,7	40	150	119,53
PSHWPGAL 200DX-EYP11	12,5	13,7	50	200	155,31
PSHWPGAL 100SX-EYP11	12,5	13,7	30	100	85,64
PSHWPGAL 150SX-EYP11	12,5	13,7	40	150	119,53
PSHWPGAL 200SX-EYP11	12,5	13,7	50	200	155,31



VARNISHED ALUMINIUM STONE LINE thermo packed - Pack. 1 Pc

Article	H mm	H1 mm	H2 mm	L cm	€/Pc
PSHWPGAL 100DX-SL..	12,5	13,7	30	100	85,64
PSHWPGAL 150DX-SL..	12,5	13,7	40	150	119,53
PSHWPGAL 200DX-SL..	12,5	13,7	50	200	155,31
PSHWPGAL 100SX-SL..	12,5	13,7	30	100	85,64
PSHWPGAL 150SX-SL..	12,5	13,7	40	150	119,53
PSHWPGAL 200SX-SL..	12,5	13,7	50	200	155,31




KALEIDOS

STONE LINE						EASY LINE
SL01 - Stone white	SL02 - Stone cream	SL03 - Stone greyvory	SL04 - Stone sand	SL05 - Stone gray	SL06 - Stone cristal gray	EYP11 - MATT black varnished
SL13 - Stone oyster grey	SL08 - Stone antrdark					

PROSHOWER PROFILE

VARNISHED ALUMINIUM

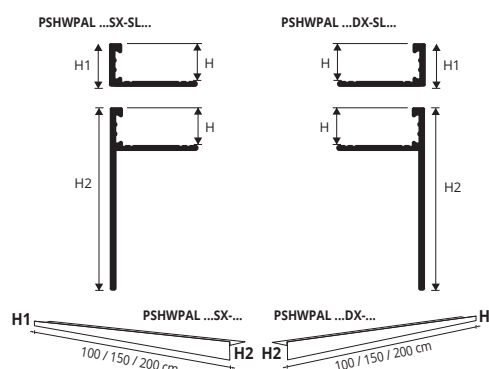


EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS



1. Choose "PROSHOWER PROFILE" according to the desired length. 2. Cut "PROSHOWER PROFILE" to the desired length and apply the adhesive on the support where the profile will be laid. 3. Press the anchoring flange of "PROJOLLY SQUARE" into the adhesive. 4. Lay the tiles, aligning them with the profile leaving a 2 mm joint. Remove immediately all remains of adhesive from the surface of the profile. 5. Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile. 6. Insert the sheet of glass and seal.

PROSHOWER PROFILE is a profile for floor level showers in aluminium for the protection of the floor edges and as decoration of the screed visible side. The profile has a 2% slope. Its specific shape makes it an easy to lay profile to be used with all kind of floor.

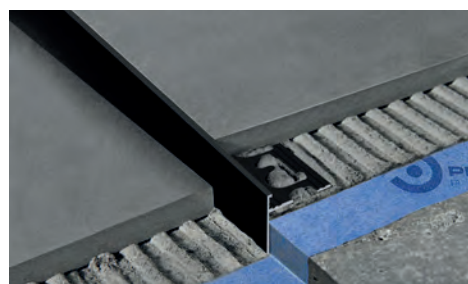

VARNISHED ALUMINIUM EASY LINE thermo packed - Pack. 1 Pc

Article	H mm	H1 mm	H2 mm	L cm	€/Pc
PSHWPAL 1010DX-EYP11	10	11	28	100	45,32
PSHWPAL 1015DX-EYP11	10	11	38	150	55,62
PSHWPAL 1020DX-EYP11	10	11	48	200	66,95
PSHWPAL 1010SX-EYP11	10	11	28	100	45,32
PSHWPAL 1015SX-EYP11	10	11	38	150	55,62
PSHWPAL 1020SX-EYP11	10	11	48	200	66,95

KALEIDOS

STONE LINE						EASY LINE
SL01 - Stone white	SL02 - Stone cream	SL03 - Stone greyvory	SL04 - Stone sand	SL05 - Stone gray	SL06 - Stone cristal gray	EYP11 - MATT black varnished
SL13 - Stone oyster grey	SL08 - Stone antrdark					

NEWS
KALEIDOS

PROSHOWER PROFILE FRONT is an aluminium profile. It is suitable to cover and decorate the visible part of wall in front of the shower tray in case of floor level showers with slope.

PROSHOWER PROFILE FRONT

VARNISHED ALUMINIUM





VARNISHED ALUMINIUM EASY LINE
thermo packed - Pack: 1 Pc

Article	H mm	H1 mm	L cm	€/Pc
PSHWPFAL 101028-EYP11	10	28	100	49,45
PSHWPFAL 101038-EYP11	10	38	100	50,52
PSHWPFAL 101048-EYP11	10	48	100	53,76
PSHWPFAL 101528-EYP11	10	28	150	64,51
PSHWPFAL 101538-EYP11	10	38	150	65,59
PSHWPFAL 101548-EYP11	10	48	150	69,90




VARNISHED ALUMINIUM STONE LINE
thermo packed - Pack: 1 Pc

Article	H mm	H1 mm	L cm	€/Pc
PSHWPFAL 101028-SL..	10	28	100	49,45
PSHWPFAL 101038-SL..	10	38	100	50,52
PSHWPFAL 101048-SL..	10	48	100	53,76
PSHWPFAL 101528-SL..	10	28	150	64,51
PSHWPFAL 101538-SL..	10	38	150	65,59
PSHWPFAL 101548-SL..	10	48	150	69,90



EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

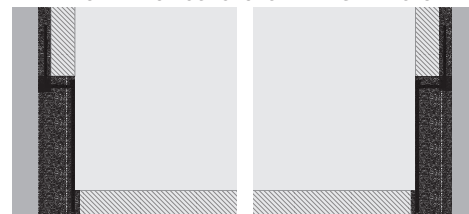

1. Choose "PROSHOWER PROFILE FRONT" according to the desired length. 2. Cut "PROSHOWER PROFILE FRONT" to the desired length and apply the adhesive on the support where the profile will be laid. 3. Press the anchoring flange of "PROJOLLY SQUARE" into the adhesive. 4. Lay the tiles, aligning them with the profile leaving a 2 mm joint. Remove immediately all remains of adhesive from the surface of the profile. 5. Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile. 6. Insert the sheet of glass and seal.

KALEIDOS

STONE LINE

SL01 - Stone white	SL02 - Stone cream	SL03 - Stone greyvory	SL04 - Stone sand	SL05 - Stone gray	SL06 - Stone cristal gray
SL13 - Stone oyster grey	SL08 - Stone antrdark				

EASY LINE


EYP11 - MATT black varnished

NEWS
KALEIDOS

PROSHOWER PROFILE WALL Profile in aluminium. It is suitable to cover and decorate the visible part of wall beside the shower tray in case of floor level showers with a slope of 2%.


PROSHOWER PROFILE WALL

VARNISHED ALUMINIUM

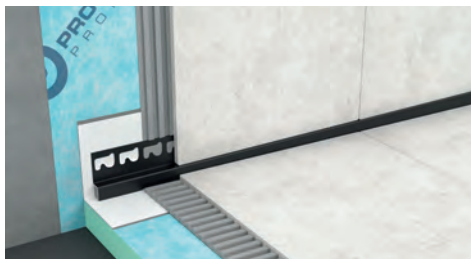



VARNISHED ALUMINIUM EASY LINE
thermo packed - Pack: 1 Pc

Article	H mm	H1 mm	H2 mm	L cm	€/Pc
PSHWPLAL 1010DX-EYP11	10	10	28	100	49,45
PSHWPLAL 1015DX-EYP11	10	10	38	150	64,51
PSHWPLAL 1020DX-EYP11	10	10	48	200	66,95
PSHWPLAL 1010SX-EYP11	10	10	28	100	80,65
PSHWPLAL 1015SX-EYP11	10	10	38	150	64,51
PSHWPLAL 1020SX-EYP11	10	10	48	200	80,65

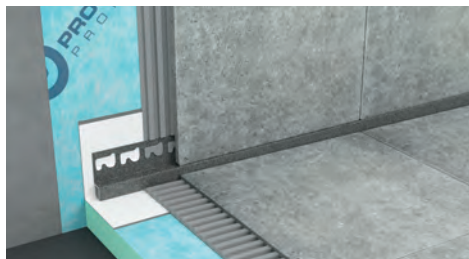


VARNISHED ALUMINIUM STONE LINE
thermo packed - Pack: 1 Pc

Article	H mm	H1 mm	H2 mm	L cm	€/Pc
PSHWPLAL 1010DX-SL..	10	10	28	100	49,45
PSHWPLAL 1015DX-SL..	10	10	38	150	64,51
PSHWPLAL 1020DX-SL..	10	10	48	200	80,65
PSHWPLAL 1010SX-SL..	10	10	28	100	49,45
PSHWPLAL 1015SX-SL..	10	10	38	150	64,51
PSHWPLAL 1020SX-SL..	10	10	48	200	80,65

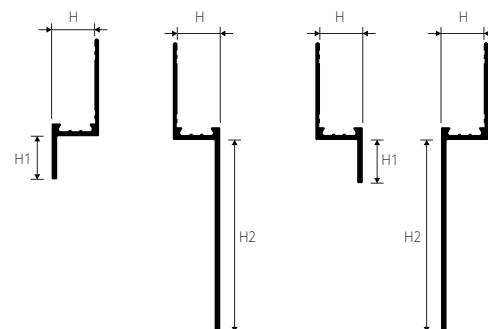

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

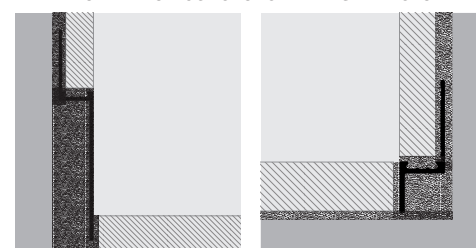

1. Choose "PROSHOWER PROFILE WALL" according to the desired length. 2. Cut "PROSHOWER PROFILE WALL" to the desired length and apply the adhesive on the support where the profile will be laid. 3. Press the anchoring flange of "PROJOLLY SQUARE" into the adhesive. 4. Lay the tiles, aligning them with the profile leaving a 2 mm joint. Remove immediately all remains of adhesive from the surface of the profile. 5. Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile. 6. Insert the sheet of glass and seal.

KALEIDOS

STONE LINE

SL01 - Stone white	SL02 - Stone cream	SL03 - Stone greyvory	SL04 - Stone sand	SL05 - Stone gray	SL06 - Stone cristal gray
SL13 - Stone oyster grey	SL08 - Stone antrdark				

EASY LINE

EYP11 - MATT black varnished


SHOWER
SYSTEMS

PROLISTEL CHANNEL


STAINLESS STEEL AISI 304/1.4301-V2A

PROLISTEL CHANNEL is a F-shaped strip in satin-finish stainless steel AISI 304/1.4301-V2A suitable to decorate the wall coverings in ceramic tiles and natural stones. Its section allows the realization of a decorative joint which can also be used as a guide for the fixing of sheets of glass on floors and walls. Its particular section and the availability in two different finishes make **PROLISTEL CHANNEL** a much sought-after profile that allows an easy workmanlike application.

PLTCH... 08 - 10 - 11 - 12,5
scale 1:1



EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

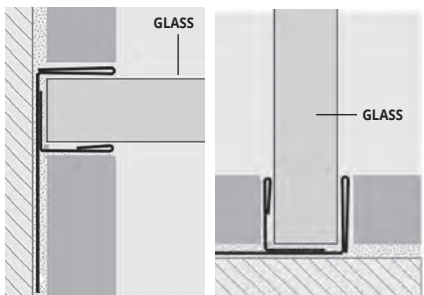

1. Choose "PROLISTEL CHANNEL" according to the visible surface and desired finish. 2. Cut "PROLISTEL CHANNEL" to the desired length and apply the adhesive on the surface where the profile will be laid. 3. Press "PROLISTEL CHANNEL" into the adhesive, aligning it with the tiles leaving a 2 mm. joint. Remove immediately all remains of adhesive from the surface of the profile. 4. Fill the joint between the profile and tiles with grout in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile.



SATIN-FINISH STAINLESS STEEL AISI 304/1.4301-V2A

bar length 2,7 lm - pack. 1 Pc

Article	H mm	L mm	€/ml	€/Pc
PLTCHACS 0812	8	12	48,50	130,95
PLTCHACS 1012	10	12	51,00	137,70
PLTCHACS 1112	11	12	53,48	144,40
PLTCHACS 12512	12,5	12	55,97	151,12

SATIN-FINISH STAINLESS STEEL AISI 304/1.4301-V2A

bar length 2,7 lm - pack. 1 Pc

Article	H mm	L mm	€/ml	€/Pc
PLTCHACS 0810	8	10	48,50	130,95
PLTCHACS 1010	10	10	51,00	137,70
PLTCHACS 1110	11	10	53,48	144,40
PLTCHACS 12510	12,5	10	55,97	151,12



SATIN-FINISH STAINLESS STEEL AISI 304/1.4301-V2A

bar length 2,7 lm - pack. 1 Pc

Article	H mm	L mm	€/ml	€/Pc
PLTCHACS 0808	8	08	48,50	130,95
PLTCHACS 1008	10	08	51,00	137,70
PLTCHACS 1108	11	08	53,48	144,40
PLTCHACS 12508	12,5	08	55,97	151,12

COLOURS



ACS - Satin finish stainless steel
AISI 304/1.4301-V2A

© 2020 All rights reserved by Progress Profiles. Printed in Italy




PROLISTEL CHANNEL is a F-shaped strip in anodized and polished aluminum suitable to decorate the wall coverings in ceramic tiles and natural stones. Its section allows the realization of a decorative joint which can also be used as a guide for the fixing of sheets of glass on floors and walls. Its particular section and the availability in two different finishes make **PROLISTEL CHANNEL** a much sought-after profile that allows an easy workmanlike application.

PROLISTEL CHANNEL

ANODIZED AND POLISHED ALUMINIUM



PLTCH... 08 - 10 - 11 -12,5
scale 1:1



ANODIZED ALUMINIUM

bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	H mm	€/lm	€/Pc
PLTCHAA 10	10	9,12	24,62
PLTCHAA 11	11	9,27	25,03
PLTCHAA 125	12,5	9,48	25,60
PLTCHAB 10	10	16,48	44,50
PLTCHAB 125	12,5	17,77	47,98
PLTCHAT 10	10	16,48	44,50
PLTCHAT 125	12,5	17,77	47,98

POLISHED CHROME ALUMINIUM

bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	H mm	€/lm	€/Pc
PLTCHBC 10	10	19,51	52,68
PLTCHBC 11	11	20,52	55,40
PLTCHBC 125	12,5	21,52	58,10

ANODIZED BLACK ALUMINIUM

bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	H mm	€/lm	€/Pc
PLTCHNEO 10	10	17,51	47,28
PLTCHNEO 11	11	18,39	49,65
PLTCHNEO 125	12,5	19,06	51,46

COLOURS

ANODIZED		POLISHED

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS



1. Choose "PROLISTEL CHANNEL" according to the visible surface and desired finish.
2. Cut "PROLISTEL CHANNEL" to the desired length and apply the adhesive on the surface where the profile will be laid.
3. Press "PROLISTEL CHANNEL" into the adhesive, aligning it with the tiles leaving a 2 mm. joint. Remove immediately all remains of adhesive from the surface of the profile.
4. Fill the joint between the profile and tiles with grout in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile.

NEWS
KALEIDOS

PROLISTEL CHANNEL is a F-shaped strip in stone line varnished aluminum suitable to decorate the wall coverings in ceramic tiles and natural stones. Its section allows the realization of a decorative joint which can also be used as a guide for the fixing of sheets of glass on floors and walls. Its particular section and the availability in 16 different finishes make **PROLISTEL CHANNEL** a much sought-after profile that allows an easy workmanlike application.

PROLISTEL CHANNEL

STONE LINE VARNISHED ALUMINIUM




STONE LINE VARNISHED ALUMINIUM

bar length 2,7 lm - pack. 40 Pcs - 108 lm


Article	H mm	€/ml	€/Pc
PLTCHA 10-SL..	10	22,56	60,91
PLTCHA 125-SL..	12,5	25,24	68,15

PLTCH... 08 - 10 - 11 -12,5
scale 1:1



EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

1. Choose "PROLISTEL CHANNEL" according to the visible surface and desired finish.
2. Cut "PROLISTEL CHANNEL" to the desired length and apply the adhesive on the surface where the profile will be laid.
3. Press "PROLISTEL CHANNEL" into the adhesive, aligning it with the tiles leaving a 2 mm. joint. Remove immediately all remains of adhesive from the surface of the profile.
4. Fill the joint between the profile and tiles with grout in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile.

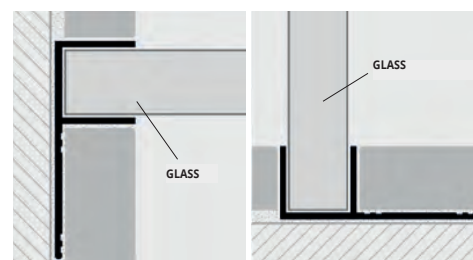


KALEIDOS

STONE LINE					
SL01 - Stone white	SL02 - Stone cream	SL03 - Stone greyvory	SL04 - Stone sand	SL07 - Stone antragraf	SL12 - Stone black

PROSHOWER PANEL

120X120 - LINEAR DRAIN



PROSHOWER PANEL 120x120 LINEAR DRAIN is an extruded polystyrene tileable shower tray covered on top with a steam- and waterproof membrane. The panel has a slope of 2% and allows the installation of any linear channel.



NEWS

PROSHOWER PANEL 120 X 120 LINEAR DRAIN

Hight density polystyrene panel (XPS)


Article	dimensions	Pc/Pack.	€/Pc
PSHPAN1212L	120 x 120 cm	1	234,41

EACH PANEL COMES WITH 2 PRE-FORMED CORNERS AND PROBAND 150.



PROSHOWER PANEL

120x120 - CENTRAL DRAIN



PROSHOWER PANEL 120x120 CENTRAL DRAIN is an extruded polystyrene tileable shower tray covered on top with a steam- and waterproof membrane. The panel has a slope of > 3% and allows the installation of PROSHOWER DRAIN CENTRAL PRO.



NEWS

PROSHOWER PANEL 120 X 120 CENTRAL DRAIN

Hight density polystyrene panel (XPS)


Article	dimensions	Pc/Pack.	€/Pc
PSHPAN1212C	120 x 120 cm	1	223,38

EACH PANEL COMES WITH 2 PRE-FORMED CORNERS AND PROBAND 150.



PROSHOWER PANEL

91,5X152,5 - OFF-CENTER CENTRAL DRAIN

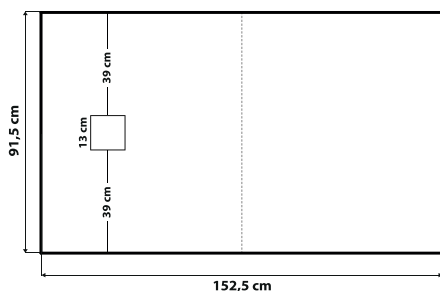

PROSHOWER PANEL 91,5X152,5 OFF-CENTER CENTRAL DRAIN is an extruded polystyrene tileable shower tray covered on top with a steam and waterproof membrane. The panel has a slope of 2% and allows the installation of the PROSHOWER DRAIN CENTRAL PRO central drain.



NEWS

PROSHOWER PANEL 91,5 X 152,5 OFF-CENTER DRAIN

Hight density polystyrene panel (XPS)


Article	dimensions	Pc/Pack.	€/Pc
PSHPAN09150C	91.5 x 152.5 cm	1	335,00

EACH PANEL COMES WITH 2 PRE-FORMED CORNERS AND PROBAND 150.



PROSHOWER PANEL

120X180 - LINEAR DRAIN

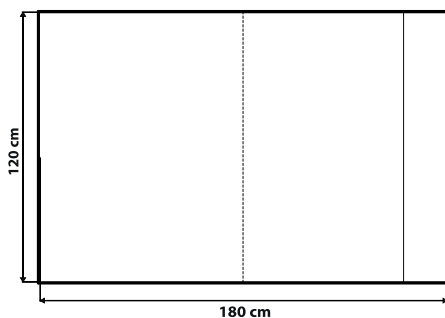

PROSHOWER PANEL 120x180 LINEAR DRAIN is an extruded polystyrene tileable shower tray covered on top with a steam and waterproof membrane. The panel has a slope of 1.25% and allows the installation of any linear channel.


NEWS

PROSHOWER PANEL 120 X 180 LINEAR DRAIN

Hight density polystyrene panel (XPS)

Article	dimensions	Pc/Pack.	€/Pc
PSHPAN1812L	120 x 180 cm	1	343,10

EACH PANEL COMES WITH 2 PRE-FORMED CORNERS AND PROBAND 150.



PROSHOWER LATERAL DRAIN KIT are 2 central drain systems with lateral outflow equipped with a siphon, grate support, stainless steel grate, butyl double-sided ring for the fixing of the waterproof section, waterproof section and a protection cap with template function too that allows the correct positioning of the butyl ring and the waterproof section. LATERAL AND VERTICAL DRAIN KIT ensure a correct flow of rainwater.


PROSHOWER DRAIN KIT

LATERAL AND VERTICAL DRAINS

Article	Description	Pc/Pack.	€/Pc
PSHLDK	PROSHOWER DRAIN LATERAL KIT	1	163,24

AREA OF USE

- **Use** - PROSHOWER BASE L PRO it can be used in any indoor and outdoor environment.
- **Don't use** - In environments where very aggressive substances are used and a high concentrated load is expected.

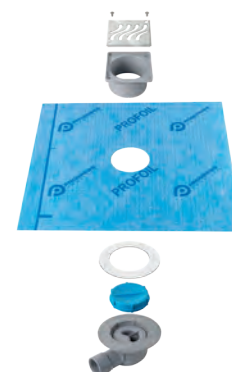

PROSHOWER DRAIN CENTRAL PRO is a 10x10 cm stainless steel AISI 316L / 1.4404 - V4A drain for the realisation of floor-level shower. This low thickness drain is equipped with a grid that can also be tiled for floor-level drains. PROSHOWER DRAIN CENTRAL PRO has excellent chemical resistance and is equipped with a 360° adjustable siphon.

PROSHOWER DRAIN CENTRAL PRO

LATERAL DRAIN

PROSHOWER DRAIN CENTRAL PRO - GRATE + POLYSTYRENE CHANNEL PROTECTION + PROFOIL SECTION + DUCT BODY + SIPHON


Article	Description	Pc/Pack.	€/Pc
PSHWCP	PROSHOWER DRAIN CENTRAL PRO	1	182,31
PSHWCP 40	PROSHOWER DRAIN CENTRAL PRO 40	1	212,31

AREA OF USE

- **Use** - Balconies, terraces, outdoor surfaces of any size, kitchens and showers.
- **Don't use** - In environments subject to heavy traffic and where washing with acidic and strong alkaline substances is foreseen.

WARNINGS

After the drain installation, apply the protective cap. Before applying the butyl double-sided adhesive ring on the flange of the drain, thoroughly clean the flange of any dirt residue that may compromise its adhesion. Apply the butyl double-sided adhesive ring and the waterproofing section during the application of the waterproofing system.

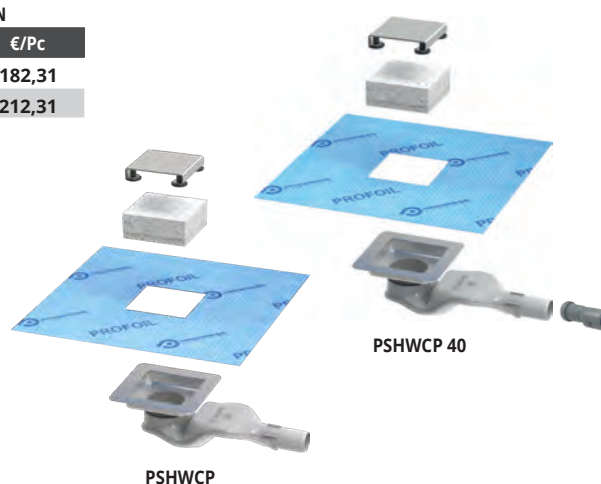

PSHWCP

PSHWCP 40

PROSHOWER TAPE & CORNER

PROSHOWER TAPE - Waterproof tape provided in the last 2 cm of butyl adhesive for the connection between shower tray/ tub and wall. The butyl-free strip portion can be glued with normal cement adhesive.

Article	size	Pc/Pack.	€/Pc
PRBPSH	300 x 8 cm	1	40,17

PROSHOWER CORNER - Waterproof corner provided in the last 2 cm of butyl adhesive for the connection between shower tray/ tub and wall. The butyl-free strip portion can be glued with normal cement adhesive.


Article	H (mm)	L (mm)	Pc/Pack.	€/Pc
PRBPSHC	80	120 x 120	1	14,42



PRBPSH




PRBPSHC

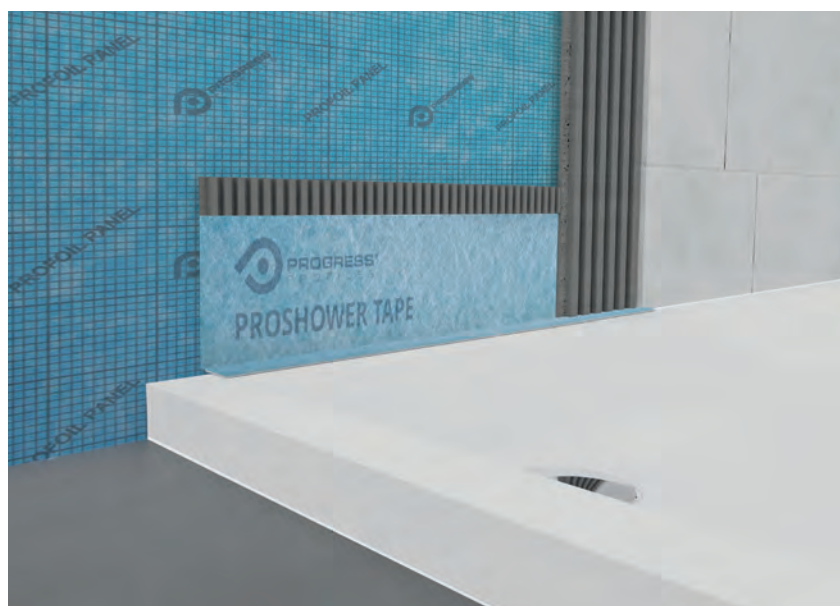

PROFOIL PANEL

HIGH DENSITY EXTRUDED
POLYSTYRENE PANEL

PROFOIL PANEL are high density extruded polystyrene panels covered on both sides with a steam- and waterproofing membrane. The membrane is waterproofing and the adhesive to fix them reinforces the panels for a quick and inexpensive laying.

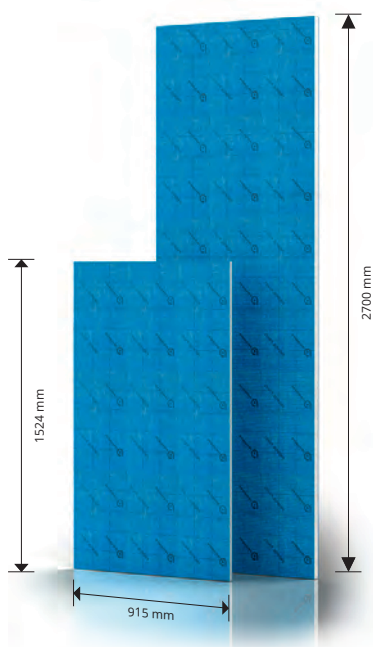

WEBSITE




PROFOIL PANEL 2700 mm - high density extruded polystyrene
915 mm x 2700 mm = 2,470 m²

Article	H mm	Pcs/pallet	Mq/pallet	€/Mq	€/Pc	€/Pallet	
PFLPAN927	9,50	80	197,60	47,82	118,12	9.449,60	*
PFLPAN1327	12,70	60	148,20	49,48	122,22	7.333,20	
PFLPAN1627	15,9	50	123,50	53,20	131,41	6.570,50	*
PFLPAN2527	25,00	30	74,10	59,48	146,92	4.407,60	
PFLPAN3827	38,10	20	49,40	65,58	161,97	3.239,40	*
PFLPAN5027	50,80	10	24,70	83,28	205,69	2.056,90	

PROFOIL PANEL 1524 mm - high density extruded polystyrene
915 mm x 1524 mm = 1,394 m²

Article	H mm	Pcs/pallet	Mq/pallet	€/Mq	€/Pc	€/Pallet
PFLPAN6	6,35	85	118,49	38,93	54,27	4.612,95

PROFOIL PANEL THICKNESS

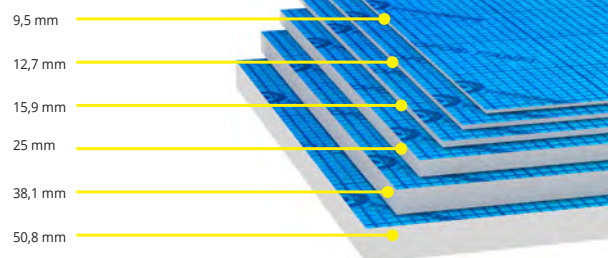

PROFOIL PANEL 2600 mm - high density extruded polystyrene
600 mm x 2600 mm = 1,56 m²

Article	H mm	Pcs/pallet	Mq/pallet	€/Mq	€/Pc	€/Pallet
PFLPAN7626	7	160	249,60	42,95	67,00	10.720,00
PFLPAN10626	10	112	174,72	43,59	68,00	7.616,00
PFLPAN13626	12,5	60	93,60	46,15	72,00	4.320,00
PFLPAN20626	20	56	87,36	56,41	88,00	4.928,00
PFLPAN25626	25	30	46,80	60,45	94,00	2.820,00
PFLPAN30626	30	24	37,44	60,26	96,00	2.304,00
PFLPAN48626	48	14	21,84	85,26	133,00	1.862,00

PROFOIL PANEL 1300 mm - high density extruded polystyrene
600 mm x 1300 mm = 0,78 m²

Article	H mm	Pcs/pallet	Mq/pallet	€/Mq	€/Pc	€/Pallet
PFLPAN7613	7	160	124,80	43,59	34,00	5.440,00
PFLPAN10613	10	112	87,36	44,87	35,00	3.920,00
PFLPAN13613	12,5	60	46,80	47,36	37,00	2.220,00
PFLPAN20613	20	56	43,68	58,97	46,00	2.576,00
PFLPAN25613	25	30	23,40	61,44	48,00	1.440,00
PFLPAN30613	30	24	18,72	64,1	50,00	1.200,00
PFLPAN48613	48	14	10,92	89,74	70,00	980,00



© 2020 All rights reserved by Progress Profiles. Printed in Italy

PROFOIL AND PROBAND DOWELS, WASHERS, SCREWS

STAINLESS STEEL/ZINC-COATED METAL/GLASS FIBER NET



PROFOIL DOWELS - ZINC-COATED METAL - pack 250 Pc

Article	L mm	€/Pc	€/Pack.
TZPFP 110	100	1,75	437,50
TZPFP 140	140	1,95	487,50
TZPFP 170	170	2,15	537,50
TZPFP 200	200	2,35	587,50



PROFOIL DOWELS - STAINLESS STEEL 250 Pc

Article	L mm	€/Pc	€/Pack.
TIPFP 110	110	3,38	845,00
TIPFP 140	140	3,64	910,00
TIPFP 170	170	3,90	975,00
TIPFP 200	200	4,16	1.040,00
TIPFP 250	250	4,84	1.210,00



PROFOIL PANEL SCREWS (ZINC-COATED METAL)

Article	Pcs/Pack.	L mm	€/Pc	€/Pack.
VACFPF 35	1000	35	0,04	40
VACFPF 55	1000	45	0,05	50
VACFPF 80	1000	80	0,10	100



PROFOIL PANEL WASHERS (ZINC-COATED METAL) - pack 100 Pc

Article	Pcs/Pack.	ø mm	€/Pc	€/Pack.
RFPPF 36	100	35	0,33	33



PROFOIL PANEL NICHE are prefabricated built-in elements of PROFOIL PANEL to make indoor wall niches and support surfaces. The niches can be linked to the waterproofing systems PROFOIL and PROFOIL PANEL. The fixing of the shelf inside the niche is optional. The shelf, part of the, can be fixed at the needed height. It is available in 4 sizes. The insert is adjustable or removable.

PROFOIL PANEL NICHE

HIGH DENSITY EXTRUDED POLYSTYRENE

PROFOIL PANEL NICHE - WATERPROOFING NICHE

Article	Description	Pcs/Pack.	€/Pc
PFLPANICH 88	WATERPROOFING NICHE MADE OF PROFOIL PANEL of 12,5mm, Inside size of the niche 203,2 x 203,2 mm	1	71,76
PFLPANICH 1212	WATERPROOFING NICHE MADE OF PROFOIL PANEL of 12,5mm, Inside size of the niche 304,8 x 304,8 mm	1	83,44
PFLPANICH 821	WATERPROOFING NICHE MADE OF PROFOIL PANEL of 12,5mm, Inside size of the niche 203,2 x 533,4 mm	1	110,34
PFLPANICH 1221	WATERPROOFING NICHE MADE OF PROFOIL PANEL of 12,5mm, Inside size of the niche 304,8 x 533,4 mm	1	123,94

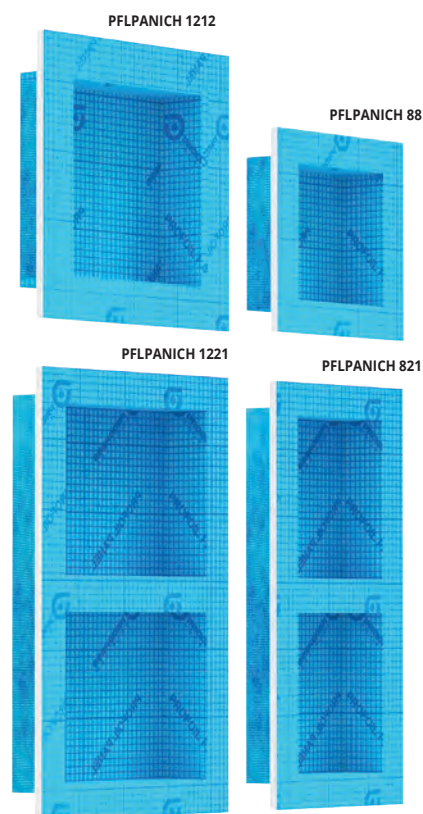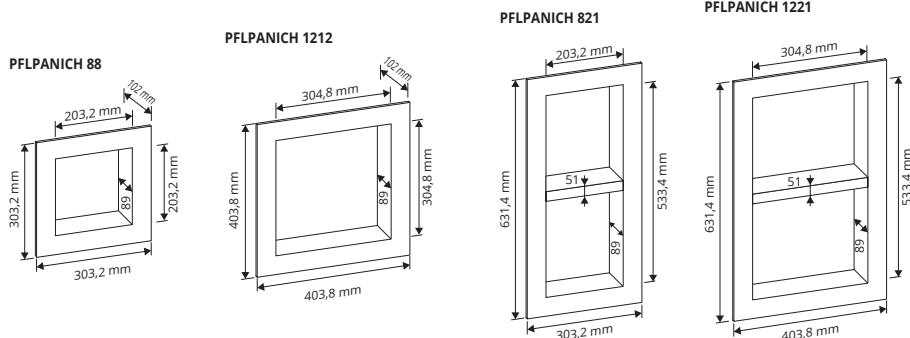

PROFOIL PROFOIL PRO

ROLLS IN HDPE AND PP

PROFOIL is a waterproofing polyethylene membrabe with nonwoven polypropylene fabric on both side that guarantees high adhesion to the support.

PROFOIL PRO is a waterproofing elastic polyethylene membrane with nonwoven polypropylene fabric on both side that guarantees high adhesion to the support.

PROFOIL PRO - ELASTIC ROLLS IN HDPE AND PP - Thickness 0,42 mm PP

Article	Width roll H x L lm	total m²	Rolls/pallet	€/m²	€/Roll	€/pallet
PFLOPR 0430	1 x 30	30	40	16,77	503,10	20.124,00

PROFOIL - ROLLS IN HDPE AND PP - Thickness 0,42 mm ROLLS IN HDPE AND PP - Thickness 0,42 mm


Article	Width roll H x L lm	total m²	Rolls/pallet	€/m²	€/Roll	€/pallet
PFLO 0430	1 x 30	30	40	14,28	428,40	17.136,00
PFLO 0405	1 x 5	5	154	19,87	99,35	15.299,90

AREAS OF USE

• **Use.** Waterproofing of substrates and vertical structures before the laying of ceramic in areas subject to occasional contact with water like bathrooms and kitchens, saunas and Turkish baths. **PROFOIL PRO** can also be used in environments with permanent contact with water like swimming pools and tanks. • **Don't use.** On bituminous coverings, over insulating panels and lightweight screed.

WARNINGS

Store in a cool and dry place avoiding direct sunlight and sources of heat. Read the data sheet before applying; in case of special applications please call the technical department.

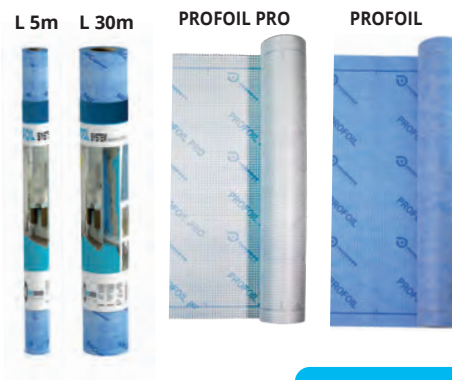

WEBSITE



© 2020 All rights reserved by Progress Profiles. Printed in Italy

PROBAND 150/250

ELASTIC ROLLS IN HDPE AND PP



ROLLS IN HDPE AND PP - Thickness 0,42 mm

Article	Roll width H mm x L lm	Rolls/ Pack.	€/lm	€/Roll	€/Pack.
PRBPE 1507	150 x 7,5	16	5,87	44,03	704,48
PRBPE 1530	150 x 30	6	4,31	129,30	775,80
PRBPE 2530	250 x 30	3	7,91	237,30	711,90

CORNERS and PIPE COLLAR

HDPE E PP



PRBE

PRBI

PRBT

PREFORMED ELASTIC CORNERS AND PIPE COLLAR IN HDPE AND PP
Thickness 0,42 mm

Article	H x L mm	€/Pc	€/Pack.
PRBI	60 x 120	8,48	84,80
PRBE	60 x 120	8,48	84,80
PRBT	125 x 125	7,51	75,10

PROBAND FIX

MOISTURE-CURE SEALANT



MOISTURE-CURE SEALANT

pack. of 12 cartridges - B (white) - G (grey)



Article	Cartridge lm	€/Pc	€/Pack.
PRBFXB	290	18,17	218,05
PRBFXG	290	18,17	218,05



PROSHELF INS ACC

SATIN STAINLESS STEEL AISI 316/1.4404-V4A

PROSHELF INS ACC stainless steel shelves AISI 316/1.4404-V4A for wall installation even after tile installation. Thanks to special fixing flanges can be installed both during the installation of the ceramic tiles and at a later stage by inserting the flanges in the joint between the tiles. Available in 112x300 format in the Design and Line versions. The shelves are suitable for installation in bathrooms and kitchens.

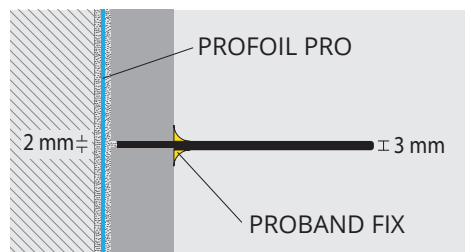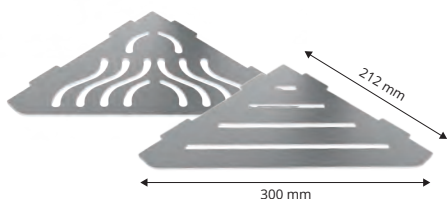

PROSHELF INS ACC - DESIGN

SATIN Stainless Steel AISI 316/1.4404-V4A

Article	Size	€/Pc
PRSHLFID 30ACMS	212 x 300 mm	84,46



PROSHELF INS ACC - LINE

SATIN Stainless Steel AISI 316/1.4404-V4A

Article	Size	€/Pc
PRSHLFIL 30ACMS	212 x 300 mm	81,37



EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS



1. Place PROSHELF INS in the desired position and mark the points on the cover where the shelf will be recessed. 2. Create a cavity equal to the width of the supports, 2 mm high and 6 mm deep. 3. Apply the PROBAND FIX sealant inside the cavities. 4. Place PROSHELF INS in place and seal the upper and lower edges of the shelf with PROBAND FIX. 5. Wait for the sealant to be dry before placing objects on it.

PROSHELF INS ALL

VARNISHED ALUMINIUM

PROSHELF INS ALL painted aluminum shelves, for wall installation even after laying the tiles. Thanks to special fixing flanges can be installed both during the installation of the ceramic tiles and at a later stage by inserting the flanges in the joint between the tiles. Available in 112x300 format in the Design and Line versions and in many colors of the Stone Line range. The shelves are suitable for installation in bathrooms and kitchens.

NEWS
KALEIDOS

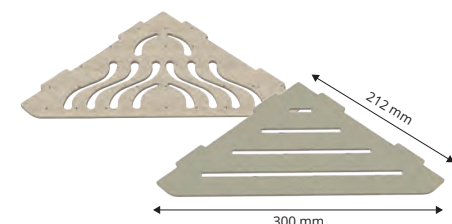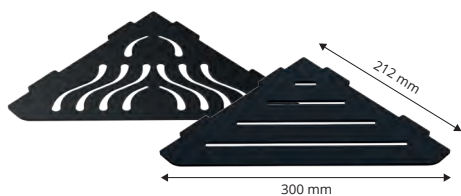

PROSHELF INS ALL - DESIGN

Varnished Aluminium - Easy Line

Article	Size	€/Pc
PRSHLFID 30-EYP11	212 x 300 mm	63,86




PROSHELF INS ALL - LINE

Varnished Aluminium - Easy Line

Article	Size	€/Pc
PRSHLFIL 30-EYP11	212 x 300 mm	60,77

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

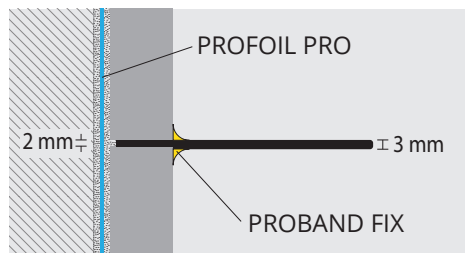

1. Place PROSHELF INS in the desired position and mark the points on the cover where the shelf will be recessed. 2. Create a cavity equal to the width of the supports, 2 mm high and 6 mm deep. 3. Apply the PROBAND FIX sealant inside the cavities. 4. Place PROSHELF INS in place and seal the upper and lower edges of the shelf with PROBAND FIX. 5. Wait for the sealant to be dry before placing objects on it.



PROSHELF INS ALL - DESIGN

Varnished Aluminium - Stone Line

Article	Size	€/Pc
PRSHLFID 30-SL...	212 x 300 mm	60,77



PROSHELF INS ALL - LINE

Varnished Aluminium - Stone Line

Article	Size	€/Pc
PRSHLFIL 30-SL...	212 x 300 mm	57,68

KALEIDOS

STONE LINE						
SL01 - Stone white	SL02 - Stone cream	SL03 - Stone greywory	SL04 - Stone sand	SL05 - Stone gray	SL06 - Stone cristal gray	SL07 - Stone antragray
SL08 - Stone antrdark	SL09 - Stone bronze	SL10 - Stone corten	SL12 - Stone black	SL13 - Stone oyster grey	SL14 - Stone taupe grey	SL15 - Stone grey smoke
SL16 - Stone grey gun	SL17 - Stone tobacco	SL18 - Stone white cement				

EASY LINE

EYP11 - MATT black varnished

PROSHELF are tileable shelves in stainless steel AISI 316/1.4404-V4A for the underile installation. Thanks of their perforated fixing flaps, they are easily installed on the wall during the laying of the ceramic coating. They are available in 2 shapes, triangular for the corner installation and rectangular. These shelves are suitable for the installation in Bathroom and kitchens.

PROSHELF

STAINLESS STEEL AISI 316/1.4404-V4A


PROSHELF - STAINLESS STEEL AISI 316/1.4404-V4A TRIANGULAR TILEABLE SHELF

Article	size	Pc/Pack.	€/Pc
PRSHLFTP24	170 mm x 240 mm	1	85,53
PRSHLFTP30	212 mm x 300 mm	1	97,94



PROSHELF - STAINLESS STEEL AISI 316/1.4404-V4A RECTANGULAR TILEABLE SHELF

Article	size	Pc/Pack.	€/Pc
PRSHLFRP40	150 mm x 400 mm	1	150,17
PRSHLFRP30	115 mm x 300 mm	1	137,12

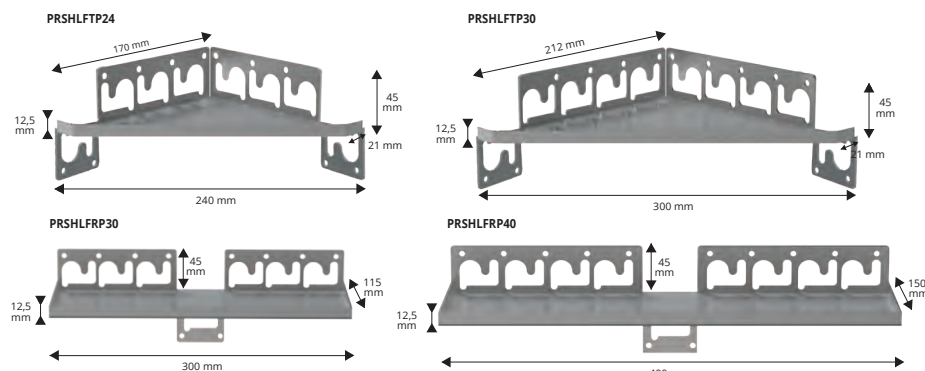

EXAMPLES OF LAYING



1. Choose "PROSHELF" according to the desired shape and size.
2. apply the adhesive on the support where the shelf will be installed.
3. Press the anchoring flap into the adhesive;
4. Lay the tiles taking care to align them with the shelf. Immediately remove adhesive residues from the surface of the shelf.
5. Carefully seal the joints between the shelf and tiles with PROBAND FIX to avoid water stagnation. Remove any grout residue from the shelf surface.

PROSHELF - STAINLESS STEEL AISI 316/1.4404-V4A TRIANGULAR SHELF

Article	size	Pc/Pack.	€/Pc
PRSHLFTD24	170 mm x 240 mm	1	130,59
PRSHLFTD30	212 mm x 300 mm	1	143,65





PROSHELF - STAINLESS STEEL AISI 316/1.4404-V4A RECTANGULAR SHELF

Article	size	Pc/Pack.	€/Pc
PRSHLFRD40	150 mm x 400 mm	1	195,90
PRSHLFRD30	115 mm x 300 mm	1	176,29



PROSHELF - STAINLESS STEEL AISI 316/1.4404-V4A TRIANGULAR SHELF Black line coated (matt black)

Article	size	Pc/Pack.	€/Pc
PRSHLFTD 30-EYP11	212 mm x 300 mm	1	193,64

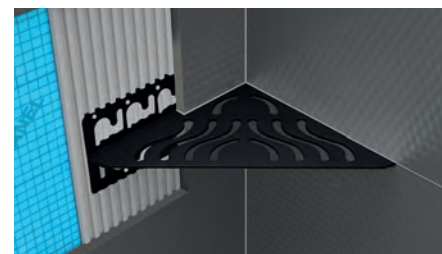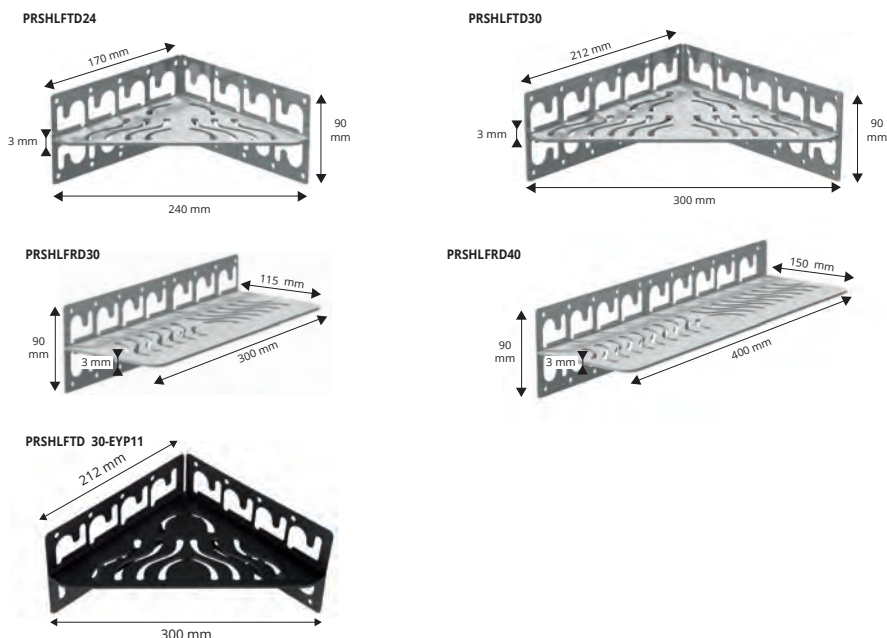

* = Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed

Prices are referred to whole packs.



PRONICHE FLEX

A space that enhances every detail



© 2020 All rights reserved by Progress Profiles. Printed in Italy

PRONICHE FLEX transforms the bathroom wall into a functional and perfectly integrated space, thanks to a prefabricated and waterproof solution that guarantees precision of installation, resistance and reliability over time. An essential architectural detail that enhances the bathroom environment with a clean aesthetic, offering a practical, stable and easy-to-maintain storage compartment, designed for everyday use.

Finishes designed to last,
designed **to stand out**.

- **Premium range** of aesthetic and technical finishes.
- **Advanced technology** for high-quality surface finishes.
- **High resistance to salt spray** and aggressive environments.
- **Three-dimensional texture** for increased abrasion resistance.



CORROSION RESISTANCE AND TO OUTDOOR EXPOSURE

Test Humidistat DIN 50017
Test Kesternich EN ISO 3231
Test Salt fog EN ISO 9227
NSS neutral salt spray test: performed according to ASTM B 117-97



MECHANICAL PROPERTIES

Erichsen drawing EN ISO 1520 8 mm
Fold with spindle EN ISO 1519 Ø 3 mm
ASTM D2794 impact test >2.5 nm
Bucholz durometer EN ISO 2815 90-110
Adherence Test EN ISO 2409 Gt0



PRONICHE FLEX are prefabricated waterproof built-in elements made of painted aluminum for the creation of niches and shelves a wall. The niches are adjustable according to the thickness of the covering and can be connected with the PROFOIL and PROFOIL PANEL waterproofing systems. Available in three sizes and different colours.

PRONICHE FLEX

STONE LINE VARNISHED ALUMINIUM

PRONICHE FLEX 1212 - WATERPROOFING NICHE


Article	Inside size	depth	Pcs/Pack.	€/Pc
PRNICAL 1212-SL01	295x295 mm	85 mm	1	310,00
PRNICAL 1212-SL04	295x295 mm	85 mm	1	310,00
PRNICAL 1212-EYP11	295x295 mm	85 mm	1	310,00

Article	Kit components	Pcs/Pack.
PRNICAL 1212-SL...	PRONICHE FLEX - 295x295 mm	1
PRNICTP 1212	PROFOIL SECTION - 295x295 MM	1
CTAA 40420C	COMPENSATORS - 40x4x20 mm	2
PRBFXB	PROBAND FIX	1
PRSPD 10	PVC TOWEL - 10x10 cm	1

KALEIDOS

STONE LINE	EASY LINE
SL01 - Stone white SL04 - Stone sand	EYP11 - MATT black varnished

PRNICAL 1212

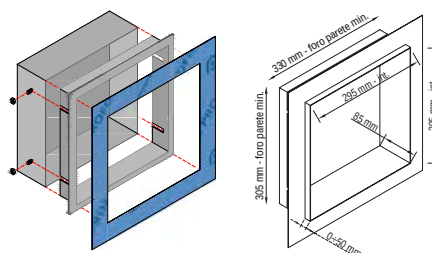

PRONICHE FLEX 1212 - WATERPROOFING NICHE


Article	Inside size	depth	Pcs/Pack.	€/Pc
PRNICAL 1224-SL01	295x595 mm	85 mm	1	390,00
PRNICAL 1224-SL04	295x595 mm	85 mm	1	390,00
PRNICAL 1224-EYP11	295x595 mm	85 mm	1	390,00

Article	Kit components	Pcs/Pack.
PRNICAL 1224-SL...	PRONICHE FLEX - 295x595 mm	1
PRNICTP 1224	PROFOIL SECTION - 295x595 MM	1
CTAA 40420C	COMPENSATORS - 295x595 mm	2
PRBFXB	PROBAND FIX	1
PRSPD 10	PVC TOWEL - 10x10 cm	1

KALEIDOS

STONE LINE	EASY LINE
SL01 - Stone white SL04 - Stone sand	EYP11 - MATT black varnished

PRNICAL 1224

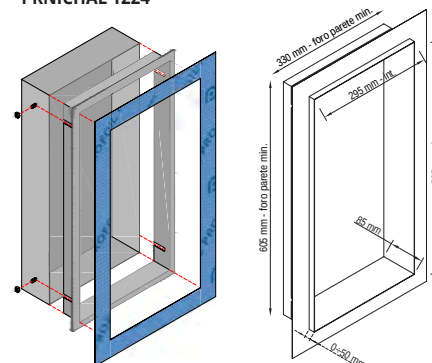

PRONICHE FLEX 1248 - WATERPROOFING NICHE

Article	Inside size	depth	Pcs/Pack.	€/Pc
PRNICAL 1248-SL01	295x1195 mm	85 mm	1	480,00
PRNICAL 1248-SL04	295x1195 mm	85 mm	1	480,00
PRNICAL 1248-EYP11	295x1195 mm	85 mm	1	480,00

Article	Kit components	Pcs/Pack.
PRNICAL 1248-SL...	PRONICHE FLEX - 295x1195 mm	1
PRNICTP 1248	PROFOIL SECTION - 295x1195 MM	1
CTAA 40420C	COMPENSATORS - 40x4x20 mm	2
PRBFXB	PROBAND FIX	1
PRSPD 10	PVC TOWEL - 10x10 cm	1

KALEIDOS

STONE LINE	EASY LINE
SL01 - Stone white SL04 - Stone sand	EYP11 - MATT black varnished

PRNICAL 1248

