




An interpretation of:
Bosjes Chapel, Steyn Studio, CAPE TOWN (South Africa), 2016

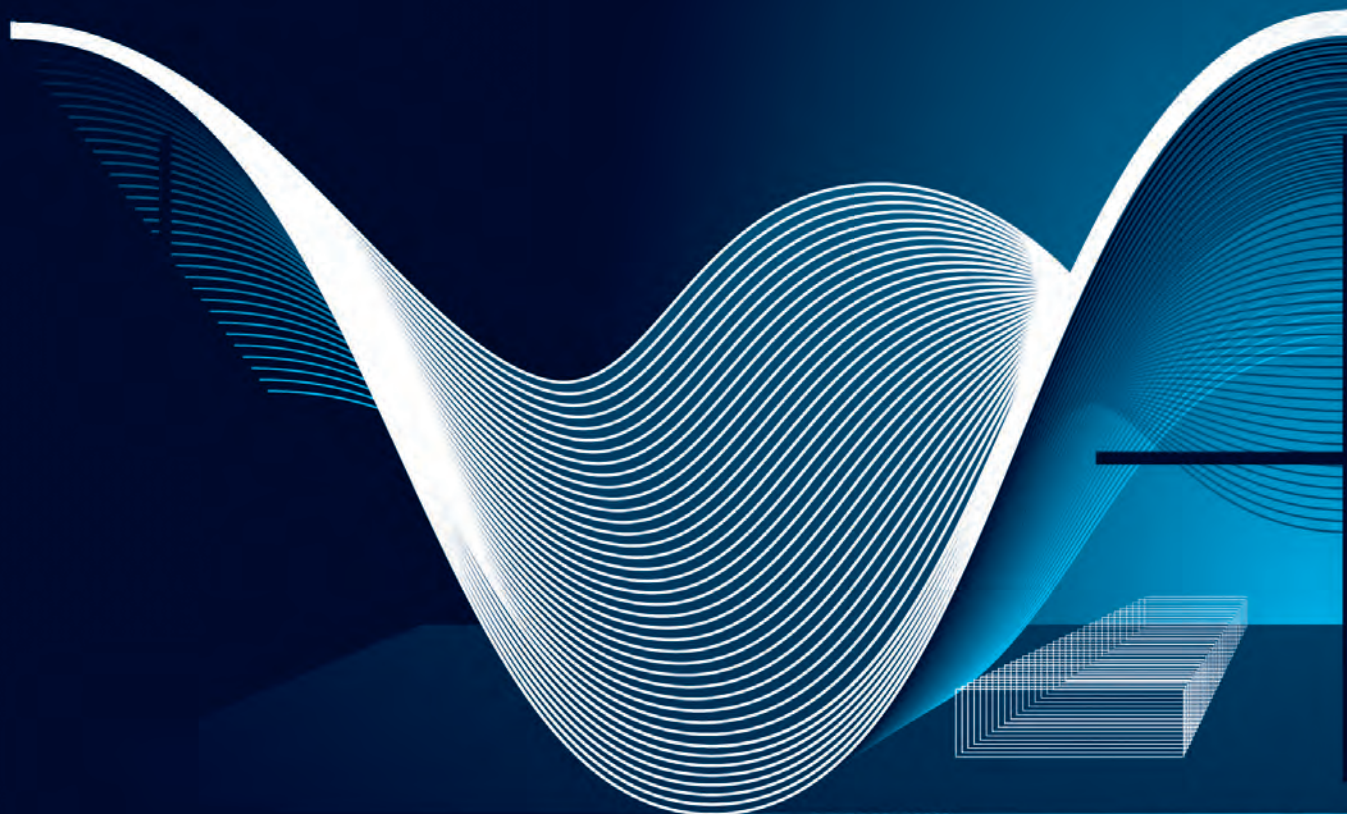

PROFILES FOR LAMINATE, PARQUET
AND CARPETED FLOORS

WOODEN/LVT

COLOURS
STANDARD AND ON DEMAND

For a precise assessment of colours request the wooden finishes sample range.
For sample finishes, contact the sales office for minimum quantities, timing and costs.

WOOD COLOURS

	Promultifix	Sol 40 P	Zero Curve	Terminal Pin	Terminal	Style Stair	Style Stair L	LVT	Sol 30	Profixer Line System
04W	•	•	•					•		•
05W	•	•	•	•	•	•	•	•	•	•
13W								•		
18W		•	•	•		•		•		•
21W	•					•		•		
29W	•	•	•			•		•	•	•
30W	•	•	•	•		•		•		•
31W	•	•	•	•		•		•		•
33W		•	•	•		•		•		•
34W	•	•	•	•	•	•	•	•		•
35W								•		
36W						•		•		
37W	•			•	•	•	•	•		
41W	•							•		
42W	•	•	•					•		•
44W	•						•	•		
48W	•			•				•		
49W	•							•		
53W	•							•		
54W	•				•			•		
62W	•							•		
65W	•									
66W	•									
71W	•							•		
74W	•									
75W	•	•	•					•		•
85W	•							•		
AA	•									
B	•									
N	•									



© 2020 All rights reserved by Progress Profiles, Printed in Italy

WOOD COLOURS







04W	05W	13W	18W	21W	29W	30W	31W	33W
34W	35W	36W	37W	41W	42W	44W	48W	49W
53W	54W	62W	65W	66W	71W	75W	85W	

WOODEN/LVT

COLOURS
STANDARD AND ON DEMAND




For a precise assessment of colours request the wooden finishes sample range.
For sample finishes, contact the sales office for minimum quantities, timing and costs.

EXTRUDED EXPANDED PVC COLOURS

			
B - White	GC - Light grey	GS - Dark grey	N - Black
			
04W - Dark beech	05W - Light Oak	06W - Dark Oak	07W - Light cherry
			
08W - Dark cherry	09W - Red Walnut	10W - Wengè	M - Mahogany

Extruded Expanded PVC	Proseal wood	Proangle wood	Skirting	Skirting 6014-8014	Angle bar
B (White)	●	●	●	●	●
GC (Light Grey)	●	●	●	●	●
GS (Dark Grey)	●	●	●	●	●
N (Black)	●	●	●	●	●
04W (Dark Beech)	X	X	●	X	●
05W (Light Oak)	●	●	●	X	●
06W (Dark Oak)	X	X	●	X	●
07W (Light cherry)	X	X	●	X	●
08W (Dark cherry)	X	X	●	X	●
09W (Red Walnut)	X	X	●	X	●
10W (Wengè)	●	●	●	X	●
M (Mahogany)	X	X	●	X	●

ANODIZED COLOURS

			
AO - Anod. gold aluminium	AA - Anod. silver aluminium	AB - Anod. bronze aluminium	AT - Anod. titanium aluminium
			
CH - Anod. champagne alum.	SB - Anod. sand aluminium		

Anodized Aluminium Colours	Promultifix	SOL 40P Zero Curve Terminal Pin	Terminal	Style Stair	Style Stair L	LVT	Prowalk	Prostep ins	SOL 30	Profixer line	Proscrow
AO (anod. gold)	●	●	●	●	●	●	●	X	●	●	*
AA (anod. silver)	●	●	●	●	●	●	●	●	*	●	●
AB (anod. bronze)	●	●	●	●	●	●	●	X	*	●	*
AT (anod. titanium)	*	*	*	*	*	●	*	X	*	*	*
CH (anod. champagne)	*	*	*	*	*	●	*	X	*	*	*
SB (anod. sand)	*	*	*	*	*	●	*	X	*	*	*

● = Available finishes X = Not available finishes

* = minimum order 200 pcs. Production delay 4/5 weeks. Price to be agreed.

Prices are referred to whole packs, 10% increase for minimum orders of 10 pcs, 20% increase for orders of less than 10 pcs.

PROMULTIFIX SYSTEM®

INSTRUCTIONS FOR LAYING

PATENTED

PROGRESS PROFILES® has filed an innovative patent PROMULTIFIX SYSTEM® in respect of a wide range of aluminum profiles covered with very strong films in wooden finishes, plus anodized finishes.


The PROMULTIFIX SYSTEM® system is a multipurpose profile for finishing laminate, melamine-coated, parquet and wood floating floors.

FIXING: it can be fixed with adhesive, nylon anchors, glue, flatten down base and screws.


STANDARD Wooden FINISHES: Light oak (strip), Light cherry (strip), Red walnut (merbau-apple-walnut), Light zerbano, Oak powder, White oak, Grey oak, Victoria oak, Pink oak, Havana oak, Edinburgh oak, Carvi oak, Ice oak, Grace oak, Honey oak, Black decapè, Cork oak, Sand oak, Tripoli, Bangkok, Liotard, New white.

STANDARD ALUMINUM FINISHES: anodized Silver, Gold and Bronze.

ANODIZED COLOURS



* ANODIZED COLOURS ON DEMAND



WOODEN COLOURS


(For a precise assessment of colours request the wooden finishes sample range)



PROMULTIFIX SYSTEM

PROMULTIFIX SYSTEM is composed of an aluminium profile with adhesive, with a lengthwise groove in form of dovetail, where nylon anchors can be inserted, or a punched aluminium flatten down base for an easy and invisible fixing.

NYLON SCREW ANCHORS

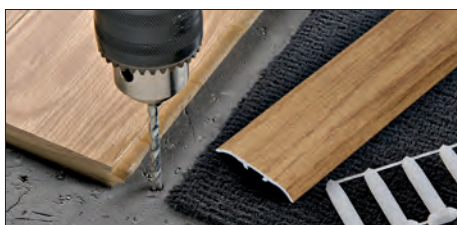

PERIMETRIC SUPPORTS





FLATTEN DOWN BASE



It is a system composed of a special TOP with adhesive, with a visible surface of 44.7 mm, anodized aluminium or covered with wooden film. The aluminium TOP can be fixed to the floor in different ways: with adhesive, with nylon anchors, support with removable spacers, flatten down base.

PROMULTIFIX SYSTEM

ALUMINIUM PROFILES
FIXING KIT

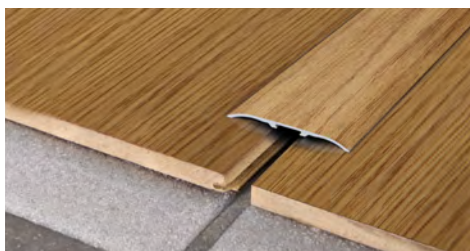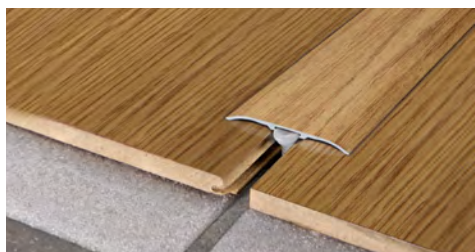

TOP IN ANOD. ALUMINIUM with adhesive (6 finishes of which 3 on demand) n.3 KIT (15 screws, 12 perimeter pins, 6 joints) thermo packed - bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	L mm	€/lm	€/Pc
PMPFX... 42A	44,7	9,07	24,49

TOP IN ANOD. ALUMINIUM with adhesive (6 finishes of which 3 on demand) + n.1 KIT (5 screws, 4 perimeter pins, 2 joints) thermo packed 0,90 lm 15 Pcs

Article	L mm	€/Pc
PMPFX... 42090AS	44,7	9,53

TOP IN ALUM. COVERED with adhesive (22 wooden finishes) + n.3 KIT (15 screws, 12 perimeter pins, 6 joints) thermo packed - bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	L mm	€/lm	€/Pc
PMPFX... 42A	44,7	12,99	35,07

TOP IN ALUM. COVERED with adhesive (22 wooden finishes) + n.1 KIT (5 screws, 4 perimeter pins, 2 joints) thermo packed - bar length 0,90 lm - 15 Pcs


Article	L mm	€/Pc
PMPFX... 42090AS	44,7	13,65

Available in the colours: AO - AA - AB (AT, CH and SB on demand with a minimum quantity order of 200 pcs) and in the wooden finishes: 04W - 05W - 21W - 29W - 30W - 31W - 34W - 37W - 41W - 42W - 44W - 48W - 49W - 53W - 54W - 62W - 65W - 66W - 71W - 74W - 75W - 85W. The code of the selected colour must be added to the article code. E.g.: PMPFX... 42A (chosen finish anod. gold) PMPFXAO 42A.


EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

1. Choose the profile of the required finish, if necessary cut the TOP in the required length.
2. Clean, remove the grease and dry the substrate: the temperature should be at least of 15° C.
- Fixing with biadhesive tape:**
3. Remove the paper protection from the adhesive and lay the TOP with a vertical pressure without moving the profile.
- Fixing with screw anchors:**
3. Drill the substrate with a 6 mm bit, 5 holes per linear meter. 4. Remove the paper protection from the adhesive. 5. Insert the screw anchors in the profile dovetail groove. 6. Beat with a rubber/pvc hammer to insert the screw anchors into the holes.
- Fixing of the aluminium flatten down base:**
3. Cut the flatten down base to the requested length. 4. Remove the paper protection from the adhesive. 5. Insert the base into the profile groove dovetail, then fix or glue the base to the floor. 6. Make a uniform pressure on the profile with the hands or a rubber hammer.
- Perimetric laying:**
3. Remove the paper protection from the adhesive. 4. Cut the perimetric pins according to the thickness of the floor. 5. Insert the perimetric pins into the profile groove dovetail using 4 supports per linear meter. 6. Fix the profil making a uniform pressure on the profile with the hands, but do not move the profile.


One fixing kit is composed of: 5 screws, 4 perimetric pins, 2 joints





PMPFX... 42090AS / 42A
scale 1:1

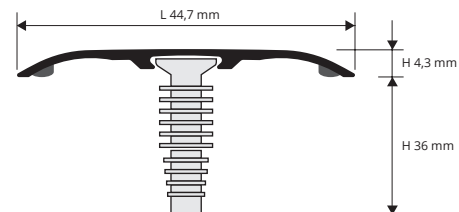

PMPFX... 42090AS / 42A
scale 1:1




PMPFX... 42090AS / 42A + PMFIXBSAN 23
scale 1:1

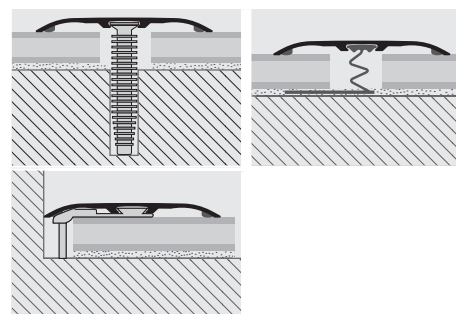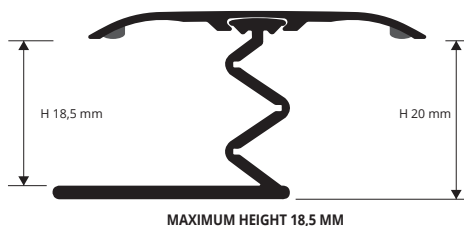

SCREWS AND SCREW ANCHORS, TAP-DOWN BASE


NICKEL - PLATED FLATHEAD SCREWS + SCREW ANCHORS
pack. 1.000 Pcs

Article	Ø mm	L mm	€/Pack.
VINIPT 325	3	25	94,28



PROFIXER TAP-DOWN BASE - ALUM. PUNCHED/PERFORED
2,7 lm 20 Pcs 54 lm

Article	H mm	€/lm	€/Pc
PMFIXBSAN 23	23	6,94	18,74

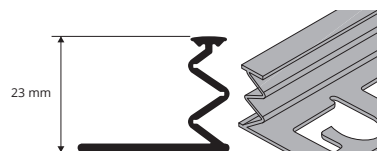



PROINSERT SYSTEM®


INSTRUCTIONS FOR LAYING

PROGRESS® PROFILES has filed an innovative patent PROINSERT SYSTEM in respect of a wide range of aluminum profiles covered with very strong films in 77 wooden finishes are available, plus 6 anodized finishes.

The **PROINSERT SYSTEM** system comprises a complete set of profiles for finishing laminate, melamine-coated, parquet and wood floating floors.

INTERCHANGEABLE INSERTS in 7 heights: (H 07, 09, 11, 13, 15, 17 and 19 mm). **PROFILES COVERED** with film: resistant to wear and UV rays (classe AC1). **TWO VERSATILE VERSIONS OF BASES**: available for fixing with glue or screws.


INSTRUCTIONS FOR LAYING:

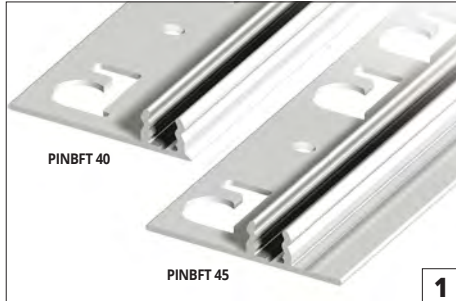


1) Choose between the two types of aluminum base.



2) Fix and/or glue the base to the floor.

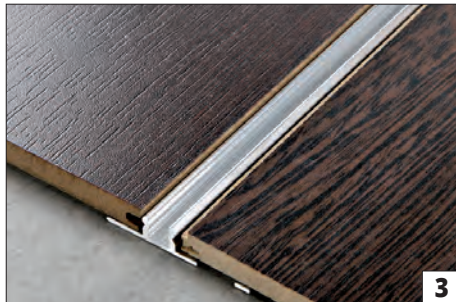

3) Lay the floor correctly leaving between 3 and 10 mm gap for the natural expansion of the wood.

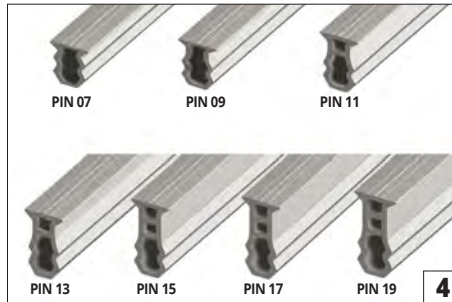

4) Choose the vinyl resin insert according to the clear height and thickness of the floor.



5) Keep the profile with the groove for insertion facing upwards and slot in the insert from the top downwards (if it does not slide easily, lubricate with water, silicone spray or vegetable oil).



6) Place the profile over the "U" shaped channel.



7) With the help of a wooden tapping block, apply pressure evenly over the whole length of the profile using a hammer. If tapping is done correctly, a "click" will be heard when the profile slots into place.

THESE PROFILES ARE APPLIED TO CREATE:

- Threshold covers and expansion joints (SOL 30, SOL 40P and SOL 50)
- Transition joints for differences in level and floors in differing materials and thickness (ZERO CURVE)
- Perimeter joints or terminal expansion pieces (TERMINAL PIN)
- Corner joints and step nosings (serie STYLE STAIR)

SOL 30, SOL 40P AND SOL 50



ZERO CURVE



TERMINAL PIN



STYLE STAIR / STYLE STAIR L



PROFIXER LINE SYSTEM

The **PROFIXER LINE SYSTEM** comprises an assortment of profiles in aluminum with a longitudinal dovetail groove/channel into which the anchors or the tap-down punched/perforated aluminum profile may be inserted for easy and invisible fixing.

NYLON SCREW ANCHORS



TAP-DOWN BASE



SOL 40P range comprises a large assortment of universal jointing profiles in aluminium covered with film that is highly resistant to pedestrian traffic, wear, UV rays and commonly used floor cleaning products. Thanks to the insert in rigid PVC (non-conducting) between the base and the top, the new **SOL 40P** stops and eliminates electrostatic charges and magnetic fields and whatever else may be transmitted between two floors (e.g.: heated floors). available in wooden finishes, plus anodized finishes. Any insert of height H 7, 9, 11, 13, 15, 17 and 19 mm may be used with either the punched/perforated base for screwing or for gluing. Covering width 40 mm.

SOL 40P

TOP IN WOODEN OR ANODIZED FINISHES
+ PIN INSERT + ALUMINIUM BASE



ALUM. TOP + PIN INSERT + ALUM. BASE 45 PUNCHED/PERFORED
(6 anod. alum. finishes of which 3 on demand) thermo packed
bar length 2,7 lm - pack. 20 Pcs - 54 lm (PIN 17, 19 - 40,5 lm)

Article	H mm	€/lm	€/Pc
PISPC... 407 (PIN 07)	7 / 10	15,59	42,09
PISPC... 409 (PIN 09)	9 / 12	15,74	42,50
PISPC... 4011 (PIN 11)	11 / 14	15,87	42,85
PISPC... 4013 (PIN 13)	13 / 16	16,03	43,28
PISPC... 4015 (PIN 15)	15 / 18	16,18	43,69
PISPC... 4017 (PIN 17)	17 / 20	16,44	44,39
PISPC... 4019 (PIN 19)	19 / 22	16,64	44,93

COMPLETE

ALUM. TOP + PIN INSERT + ALUM. BASE 45 PUNCHED/PERFORED
(6 anod. alum. finishes of which 3 on demand) thermo packed
length 0,90 lm - 15 Pcs (PIN 13, 15, 17, 19 - 10 Pcs)

Article	H mm	€/Pc
PISPC... 4079S (PIN 07)	7 / 10	15,94
PISPC... 4099S (PIN 09)	9 / 12	16,17
PISPC... 40119S (PIN 11)	11 / 14	16,43
PISPC... 40139S (PIN 13)	13 / 16	16,72
PISPC... 40159S (PIN 15)	15 / 18	17,01
PISPC... 40179S (PIN 17)	17 / 20	17,45
PISPC... 40199S (PIN 19)	19 / 22	17,89



ALUM. TOP COVERED + PIN INSERT + ALUM. BASE 45 PUNCHED/PERFORED
(10 wooden finishes) thermo packed
bar length 2,7 lm - pack. 20 Pcs - 54 lm (PIN 17, 19 - 40,5 lm)

Article	H mm	€/lm	€/Pc
PISPC... 407 (PIN 07)	7 / 10	21,67	58,51
PISPC... 409 (PIN 09)	9 / 12	21,84	58,97
PISPC... 4011 (PIN 11)	11 / 14	21,98	59,35
PISPC... 4013 (PIN 13)	13 / 16	22,10	59,67
PISPC... 4015 (PIN 15)	15 / 18	22,28	60,16
PISPC... 4017 (PIN 17)	17 / 20	22,58	60,97
PISPC... 4019 (PIN 19)	19 / 22	22,93	61,91

COMPLETE

ALUM. TOP COVERED + PIN INSERT + ALUM. BASE 45 PUNCHED/PERFORED
(10 wooden finishes) thermo packed
length 0,90 lm - 15 Pcs (PIN 13, 15, 17, 19 - 10 Pcs)


Article	H mm	€/Pc
PISPC... 4079S (PIN 07)	7 / 10	21,50
PISPC... 4099S (PIN 09)	9 / 12	21,79
PISPC... 40119S (PIN 11)	11 / 14	22,06
PISPC... 40139S (PIN 13)	13 / 16	22,36
PISPC... 40159S (PIN 15)	15 / 18	22,66
PISPC... 40179S (PIN 17)	17 / 20	23,11
PISPC... 40199S (PIN 19)	19 / 22	23,57




Available in the finishes: AO - AA - AB (AT, CH and SB available on demand with a minimum quantity order of 200 pcs) and in the wooden finishes: 04W - 05W - 18W - 29W - 30W - 31W - 33W - 34W - 42W - 75W.

The code of the selected colour must be added to the article code. E.g.: PISPC... 4079S (chosen finish anod. gold) PISPCAO 4079S.


ANODIZED COLOURS



* ANODIZED COLOURS ON DEMAND



WOODEN COLOURS

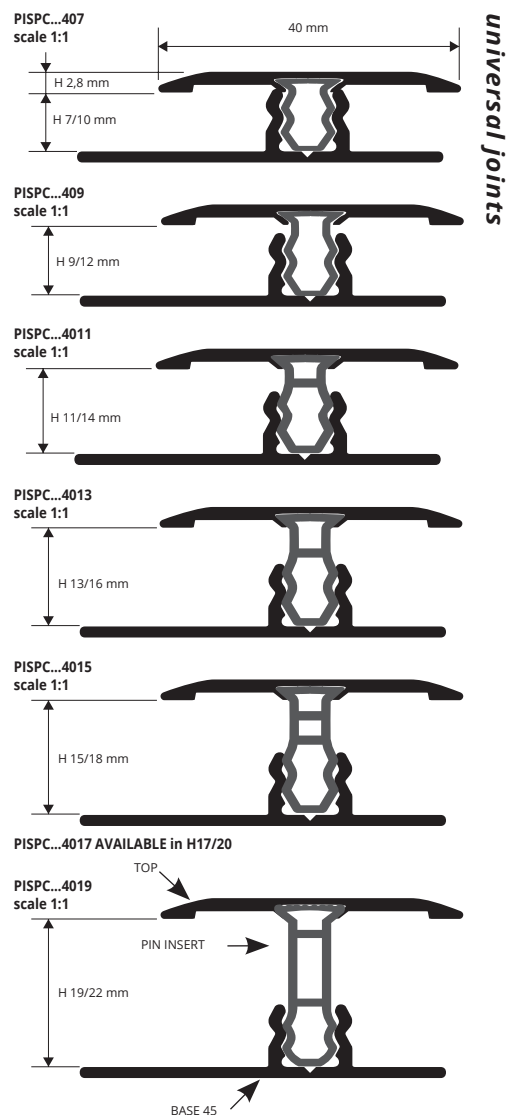

universal joints

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS



1. Fix and/or glue the base to the floor. 2. Lay the floor leaving from 3 to 10 mm between the floor and the insert. 3. Choose the desired profile, if necessary cut TOP, PIN and BASE at the needed length and then insert the PIN in the TOP in the specific "dovetail" seat. The position the profile above the U-shaped snap-in seat of the base. 4. With the aid of a board, hammer the TOP to the desired fitting level.


* = Production on demand with minimum quantity of 200 pcs. Production delay 4/5 weeks. Price to be agreed

Prices are referred to whole packs, 10% increase for minimum orders of 10 pcs, 20% increase for orders of less than 10 pcs.

ZERO CURVE

TOP IN WOODEN FINISHES
AND ANODIZED FINISHES
+ PIN INSERT + ALUMINIUM BASE

The **ZERO CURVE** range comprises a large assortment of terminal transition profiles for joining floors at different levels and with different thickness varying from 7 to 20 mm. wooden finishes are available, plus anodized finishes. There is a profile (top) and an insert (pin) for each height, while the base (punched or perforated) allows fixing by screwing or gluing.

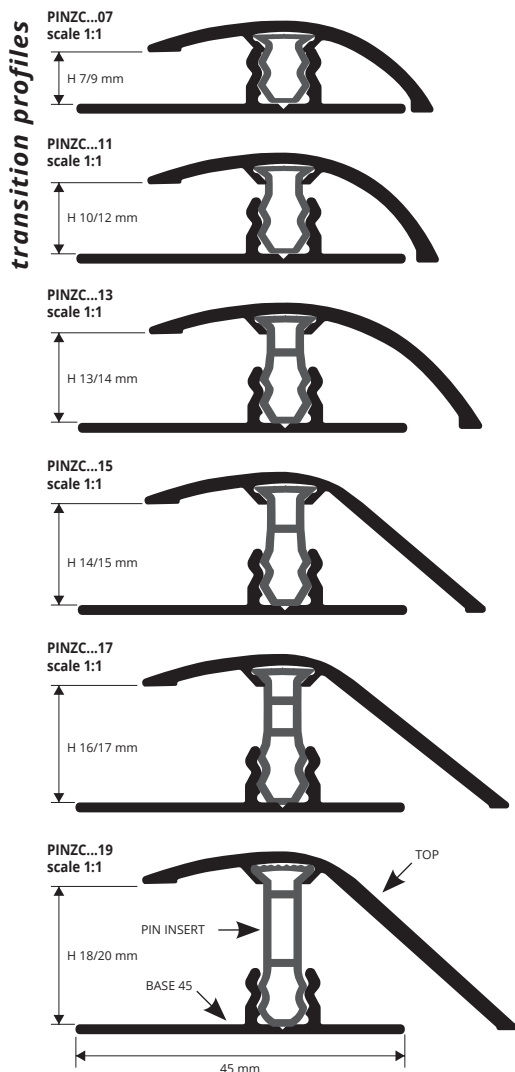

ALUM. TOP + PIN INSERT + ALUM. BASE 45 PUNCHED/PERFORED
(6 anod. alum. finishes of which 3 on demand) thermo packed
bar length 2,7 lm - pack. 20 Pcs - 54 lm - (PIN 15, 17 - 40,5 lm) (PIN 19 - 27 lm)

Article	H mm	€/lm	€/Pc
PINZC... 07 (top PINZ... 07 + PIN 07)	7 / 9	15,07	40,69
PINZC... 11 (top PINZ... 07 + PIN 11)	10 / 12	15,79	42,63
PINZC... 13 (top PINZ... 09 + PIN 13)	13 / 14	16,01	43,23
PINZC... 15 (top PINZ... 13 + PIN 15)	14 / 15	16,22	43,79
PINZC... 17 (top PINZ... 13 + PIN 17)	16 / 17	16,66	44,98
PINZC... 19 (top PINZ... 15 + PIN 19)	18 / 20	17,21	46,47

COMPLETE

ALUM. TOP + PIN INSERT + ALUM. BASE 45 PUNCHED/PERFORATED
(6 anod. alum. finishes of which 3 on demand) thermo packed
L. 0,90 lm - 15 Pcs (PIN 13, 15, 17, 19 - 10 Pcs)

Article	H mm	€/Pc
PINZC... 07S (top PINZ... 07 + PIN 07)	7 / 9	14,75
PINZC... 11S (top PINZ... 07 + PIN 11)	10 / 12	15,76
PINZC... 13S (top PINZ... 09 + PIN 13)	13 / 14	16,00
PINZC... 15S (top PINZ... 13 + PIN 15)	14 / 15	16,22
PINZC... 17S (top PINZ... 13 + PIN 17)	16 / 17	16,63
PINZC... 19S (top PINZ... 15 + PIN 19)	18 / 20	17,06



ALUM. TOP COVERED + PIN INSERT + ALUM. BASE 45 PUNCHED/PERFORED
(10 wooden finishes) thermo packed
bar length 2,7 lm - pack. 20 Pcs - 54 lm - (PIN 15, 17 - 40,5 lm) (PIN 19 - 27 lm)

Article	H mm	€/lm	€/Pc
PINZC... 07 (top PINZ... 07 + PIN 07)	7 / 9	21,78	58,81
PINZC... 11 (top PINZ... 07 + PIN 11)	10 / 12	22,38	60,43
PINZC... 13 (top PINZ... 09 + PIN 13)	13 / 14	22,66	61,18
PINZC... 15 (top PINZ... 13 + PIN 15)	14 / 15	22,96	61,99
PINZC... 17 (top PINZ... 13 + PIN 17)	16 / 17	23,24	62,75
PINZC... 19 (top PINZ... 15 + PIN 19)	18 / 20	23,76	64,15

COMPLETE

ALUM. TOP COVERED + PIN INSERT + ALUM. BASE 45 PUNCHED/PERFORED
(10 wooden finishes) thermo packed
L. 0,90 lm - 15 Pcs (PIN 13, 15, 17, 19 - 10 Pcs)

Article	H mm	€/Pc
PINZC... 07S (top PINZ... 07 + PIN 07)	7 / 9	21,44
PINZC... 11S (top PINZ... 07 + PIN 11)	10 / 12	22,35
PINZC... 13S (top PINZ... 09 + PIN 13)	13 / 14	22,66
PINZC... 15S (top PINZ... 13 + PIN 15)	14 / 15	22,93
PINZC... 17S (top PINZ... 13 + PIN 17)	16 / 17	23,23
PINZC... 19S (top PINZ... 15 + PIN 19)	18 / 20	23,62



ANODIZED COLOURS

AO - Anod. gold aluminium	AA - Anod. silver aluminium	AB - Anod. bronze aluminium


* ANODIZED COLOURS ON DEMAND

AT - Anod. titanium aluminium	CH - Anod. champagne alum.	SB - Anod. sand aluminium

WOODEN COLOURS

04W - Dark beech	05W - Light oak (strip)	18W - Light zerbano	29W - White oak	30W - Grey oak	31W - Victoria oak	33W - Sawed oak	34W - Havana oak	42W - Grace oak	75W - Liotard

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

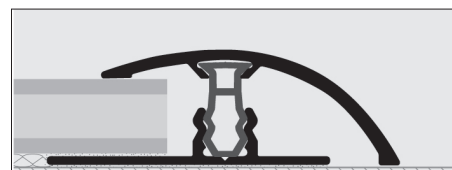


1. Fix and/or glue the base to the floor. 2. Lay the floor leaving from 3 to 10 mm between the floor and the insert. 3. Choose the desired profile, if necessary cut TOP, PIN and BASE at the needed length and then insert the PIN in the TOP in the specific "dovetail" seat. The position the profile above the U-shaped snap-in seat of the base. 4. With the aid of a board, hammer the TOP to the desired fitting level.



TERMINAL PIN

TOP IN WOODEN FINISHES
AND ANODIZED FINISHES
+ PIN INSERT + ALUMINIUM BASE

The **TERMINAL PIN** series consists in a wide range of terminal/ outer joint squares ideal to realize the connection and junction with floors in laminate or melamine and/or wood/parquet rolled floor. The **TERMINAL PIN** allows the floor underneath to expand for more than 5 / 10 mm. It prevents from the use of the skirting -board and covers perfectly any kind of floor with a minimum thickness of 7 mm and a maximum of 22 mm. It delimitates the floor in proximity of walls, coverings, windows, doors, sliding doors, doormats buss etc.

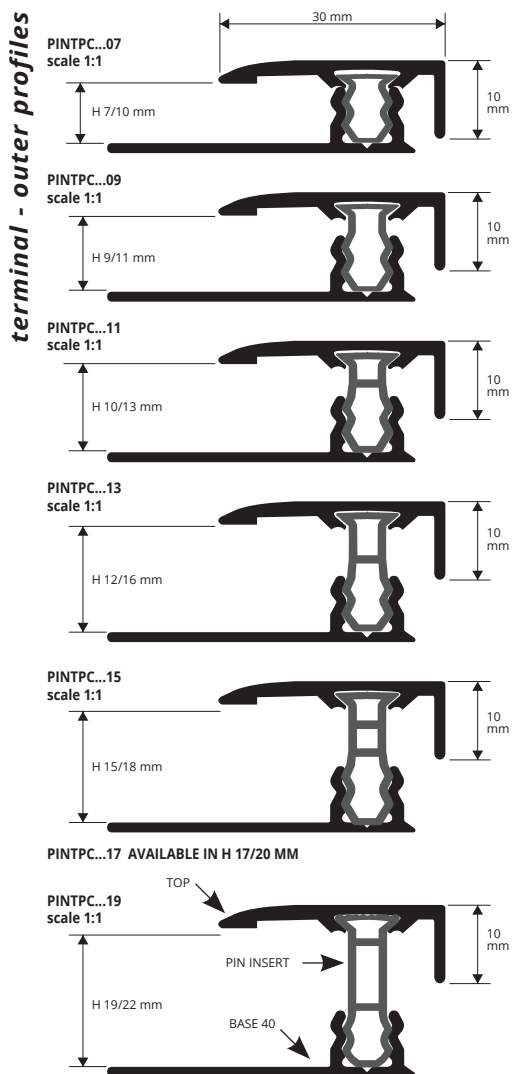

ALUM. TOP + PIN INSERT + ALUM. BASE 40 PUNCHED/PERFORATED
(6 anod. alum. finishes of which 3 on demand) thermo packed
bar length 2,7 lm - pack: 20 Pcs - 54 lm (PIN 11, 15, 17 - 40,5 lm) (PIN 19 - 27 lm)

Article	H mm	€/lm	€/Pc
PINTPC... 07 (PIN 07)	7 / 10	13,86	37,42
PINTPC... 09 (PIN 09)	9 / 11	14,29	38,58
PINTPC... 11 (PIN 11)	10 / 13	14,73	39,77
PINTPC... 13 (PIN 13)	12 / 16	15,26	41,20
PINTPC... 15 (PIN 15)	15 / 18	16,00	43,20
PINTPC... 17 (PIN 17)	17 / 20	16,88	45,58
PINTPC... 19 (PIN 19)	19 / 22	17,76	47,95

COMPLETE

ALUM. TOP + PIN INSERT + ALUM. BASE 40 PUNCHED/PERFORATED
(6 anod. alum. finishes of which 3 on demand) thermo packed
L. 0,90 lm - 15 Pcs (PIN 13, 15, 17, 19 - 10 Pcs)

Article	H mm	€/Pc
PINTPC... 07S (PIN 07)	7 / 10	14,98
PINTPC... 09S (PIN 09)	9 / 11	15,50
PINTPC... 11S (PIN 11)	10 / 13	16,04
PINTPC... 13S (PIN 13)	12 / 16	16,55
PINTPC... 15S (PIN 15)	15 / 18	17,06
PINTPC... 17S (PIN 17)	17 / 20	16,63
PINTPC... 19S (PIN 19)	19 / 22	18,62



ALUM. TOP COVERED + PIN INSERT + ALUM. BASE 40 PUNCHED/PERFORATED
(8 wooden finishes) thermo packed
bar length 2,7 lm - pack: 20 Pcs - 54 lm (PIN 11, 15, 17 - 40,5 lm) (PIN 19 - 27 lm)

Article	H mm	€/lm	€/Pc
PINTPC... 07 (PIN 07)	7 / 10	19,49	52,62
PINTPC... 09 (PIN 09)	9 / 11	20,09	54,24
PINTPC... 11 (PIN 11)	10 / 13	20,70	55,89
PINTPC... 13 (PIN 13)	12 / 16	21,54	58,16
PINTPC... 15 (PIN 15)	15 / 18	22,38	60,43
PINTPC... 17 (PIN 17)	17 / 20	23,57	63,64
PINTPC... 19 (PIN 19)	19 / 22	24,66	66,58

COMPLETE

ALUM. TOP COVERED + PIN INSERT + ALUM. BASE 40 PUNCHED/PERFORATED
(8 wooden finishes) thermo packed
L. 0,90 lm - 15 Pcs (PIN 13, 15, 17, 19 - 10 Pcs)

Article	H mm	€/Pc
PINTPC... 07S (PIN 07)	7 / 10	20,61
PINTPC... 09S (PIN 09)	9 / 11	21,25
PINTPC... 11S (PIN 11)	10 / 13	21,58
PINTPC... 13S (PIN 13)	12 / 16	22,28
PINTPC... 15S (PIN 15)	15 / 18	22,84
PINTPC... 17S (PIN 17)	17 / 20	23,23
PINTPC... 19S (PIN 19)	19 / 22	24,06



ANODIZED COLOURS

AO - Anod. gold aluminium	AA - Anod. silver aluminium	AB - Anod. bronze aluminium


*ANODIZED COLOURS ON DEMAND

AT - Anod. titanium aluminium	CH - Anod. champagne alum.	SB - Anod. sand aluminium

WOODEN COLOURS

05W - Light oak (strip)	18W - Light zerbano	30W - Grey oak	31W - Victoria oak	33W - Sawed oak	34W - Havana oak	37W - Carvi oak	48W - Cork oak

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

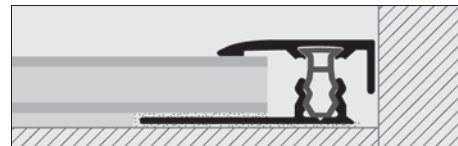

1. Fix PINBFTL 40 base at the outer edge/wall.
2. Align the laminate/melamine/wood floor, ensuring that approx. 3/10mm gap is left on each side to accommodate the natural expansion between the floor and the base.
3. Choose the desired profile, if necessary cut TOP, PIN and BASE at the needed length and then insert the PIN in the TOP in the specific "dovetail" seat. The position the profile above the U-shaped snap-in seat of the base.
4. With the aid of a board, hammer the TOP to the desired fitting level.

* = Article on demand minimum order 200 pcs. Production delay 4/5 weeks. Price to be agreed.

Prices are referred to whole packs, 10% increase for minimum orders of 10 pcs, 20% increase for orders of less than 10 pcs.

The **TERMINAL** range comprises a large assortment of perimeter joint or edging profiles in aluminium covered in wooden finishes are available, plus anodized finishes. They are used in various laying situations. Ideal as an edging profile for wood parquet, laminate and melamine-coated floors. They finish the floor where it joins to abutting surfaces, windows, glazed areas, doors, terraces and may also be used for joining two floors: wood/tiles, wood/carpeting.

TERMINAL

ALUMINIUM COVERED WOODEN FINISHES
AND ANODIZED FINISHES



ANODIZED ALUMINIUM (6 anod. alum. finishes of which 3 on demand)
thermo packed - bar length 2,7 lm - pack. 40 Pcs - 108 lm
(H 11 - H 13 - H 15 mm - 80 lm)

Article	H mm	€/lm	€/Pc
PINT... 07	7	6,78	18,31
PINT... 09	9	6,94	18,74
PINT... 11	11	7,09	19,14
PINT... 13	13	7,34	19,82
PINT... 15	15	7,64	20,63

Available in the finishes: AO - AA - AB (AT, CH and SB available on demand with a minimum quantity order of 100 pcs) and in the wooden finishes: 05W-34W-37W-54W.

The code of the selected colour must be added to the article code. E.g.: PINT... 07 (chosen finish anod. gold) PINTAO 07.

ANODIZED ALUM. (6 anod. alum. finishes of which 3 on demand)
thermo packed

bar length 0,90 lm - 20 Pcs - BLISTER PACKS



Article	H mm	€/Pc
PINT... 07S	7 / 8	7,61
PINT... 09S	9 / 10	7,76
PINT... 11S	11 / 12	7,91
PINT... 15S	15 / 16	8,52

Available in the finishes: AO - AA - AB (AT, CH and SB available on demand with a minimum quantity order of 100 pcs) and in the wooden finishes: 05W-34W-37W-54W.

The code of the selected colour must be added to the article code. E.g.: PINT... 07S (chosen finish anod. gold) PINTAO 07S.



ALUMINIUM COVERED (4 wooden finishes)
thermo packed - bar length 2,7 lm - pack. 20 Pcs - 54 lm
(H 11 - H 15 mm - 80 lm)

Article	H mm	€/lm	€/Pc
PINT... 09	9	10,89	29,40
PINT... 11	11	11,20	30,24
PINT... 15	15	12,97	35,02




ALUMINIUM COVERED (4 wooden finishes)

thermo packed

bar length 0,90 lm - 20 Pcs - BLISTER PACKS



Article	H mm	€/Pc
PINT... 09S	9 / 10	13,94
PINT... 11S	11 / 12	14,02
PINT... 15S	15 / 16	14,61

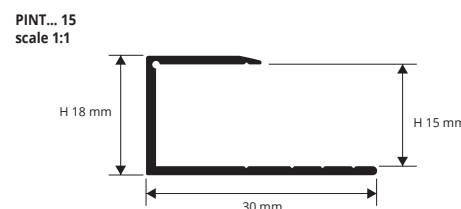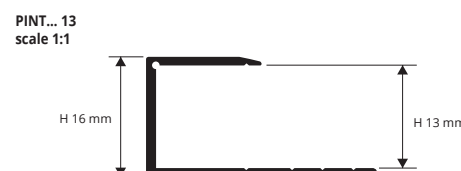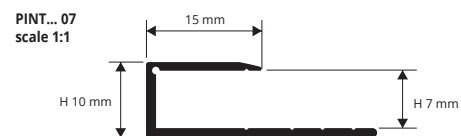

terminal - outer profiles

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS



1. Choose the **TERMINAL** according to the required height and finish and fix with screws and screw anchors or with glue/silicone; the profile must be placed next to the abutting surface e.g. wall, glazing, etc. 2. Align the laminate/melamine/wood floor, ensuring that a large enough gap is left to accommodate the natural expansion between the floor and the profile (approx. 3/10mm on one side).

ANODIZED COLOURS

AO - Anod. gold aluminium	AA - Anod. silver aluminium	AB - Anod. bronze aluminium

* ANODIZED COLOURS ON DEMAND

AT - Anod. titanium aluminium	CH - Anod. champagne alum.	SB - Anod. sand aluminium

WOODEN COLOURS

05W - Light oak (strip)	34W - Havana oak	37W - Carvi oak	54W


* = Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed

Prices are referred to whole packs, 10% increase for minimum orders of 10 pcs, 20% increase for orders of less than 10 pcs.

STYLE STAIR

TOP IN WOODEN FINISHES
and ANODIZED FINISHES
+ PIN INSERT + ALUMINIUM BASE

The **STYLE STAIR** range comprises a large assortment of aluminium step nosing profiles for the edges of steps in wood, parquet, laminate or melamine with thickness varying from 7 to 20 mm. wooden finishes are available , plus anodized finishes. Select the most suitable profile for the thickness of the floor. There is a profile (top) and an insert (pin) for each height, while the base (punched or perforated) allows fixing by screwing or gluing.

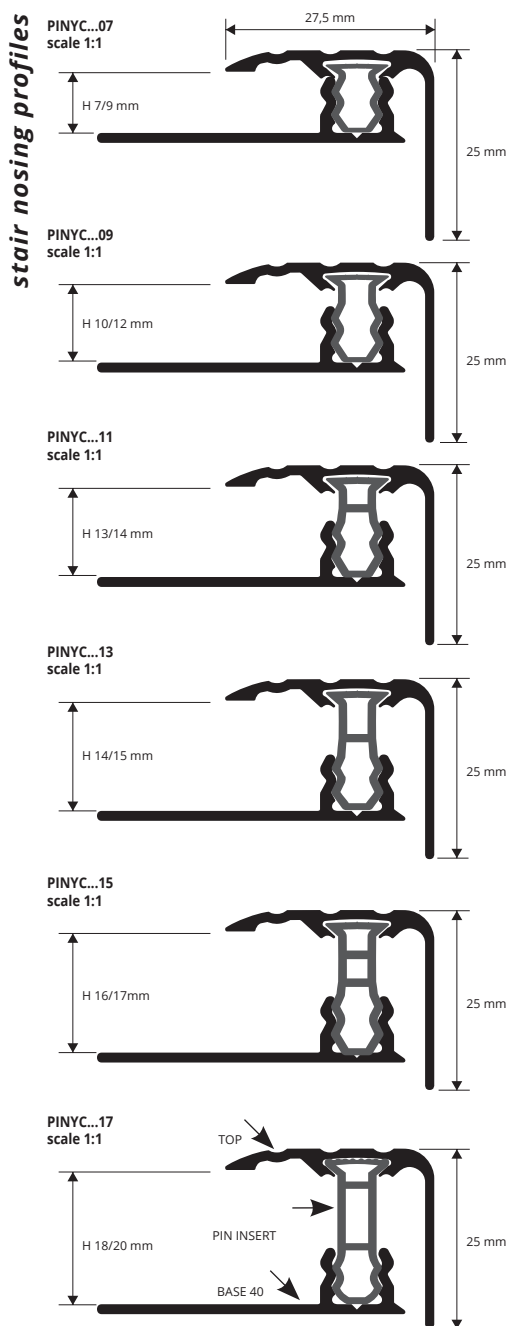

ALUM. TOP + PIN INSERT + ALUM. BASE 40 PUNCHED/PERFORATED (6 anod. alum. finishes of which 3 on demand) thermo packed bar length 2,7 lm - pack. 20 Pcs - 54 lm (H 14 - H 16 - H 18 mm - 40,5 lm)

Article	H mm	€/lm	€/Pc
PINYC... 07 (PIN 07)	7 / 9	14,27	38,53
PINYC... 09 (PIN 09)	10 / 12	14,67	39,61
PINYC... 11 (PIN 11)	13 / 14	15,07	40,69
PINYC... 13 (PIN 13)	14 / 15	15,48	41,80
PINYC... 15 (PIN 15)	16 / 17	15,86	42,82
PINYC... 17 (PIN 17)	18 / 20	16,27	43,93

COMPLETE


Available in the finishes: AO - AA - AB (AT, CH and SB available on demand with a minimum quantity order of 200 pcs) and in the wooden finishes: 05W - 18W - 21W - 29W - 30W - 31W - 33W - 34W - 36W - 37W. The code of the selected colour must be added to the article code. E.g.: PINYC... 07 (chosen finish anod. gold) PINYCAO 07.

ALUM. TOP COVERED + PIN INSERT + ALUM. BASE 40 PUNCHED/PERFORATED (10 wooden finishes) thermo packed bar length 2,7 lm - pack. 20 Pcs - 54 lm (H 14 - H 16 - H 18 mm - 40,5 lm)

Article	H mm	€/lm	€/Pc
PINYC... 07 (PIN 07)	7 / 9	20,62	55,67
PINYC... 09 (PIN 09)	10 / 12	20,98	56,65
PINYC... 11 (PIN 11)	13 / 14	21,39	57,75
PINYC... 13 (PIN 13)	14 / 15	21,79	58,83
PINYC... 15 (PIN 15)	16 / 17	22,21	59,97
PINYC... 17 (PIN 17)	18 / 20	22,58	60,97

COMPLETE

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS



TOP IN ANODIZED FINISHES



TOP IN WOODEN FINISHES

1. Fix the base exactly over the stair riser.
2. Align the laminate/melamine/wood floor, ensuring that approx. 3/10mm gap is left on one side to accommodate the natural expansion between the floor and the base.
3. Choose the desired profile, if necessary cut TOP, PIN and BASE at the needed length and then insert the PIN in the TOP in the specific "dovetail" seat. The position the profile above the U-shaped snap-in seat of the base.
4. With the aid of a board, hammer the TOP to the desired fitting level.

ANODIZED COLOURS

AO - Anod. gold aluminium	AA - Anod. silver aluminium	AB - Anod. bronze aluminium

* ANODIZED COLOURS ON DEMAND

AT - Anod. titanium aluminium	CH - Anod. champagne alum.	SB - Anod. sand aluminium

WOODEN COLOURS

05W - Light oak (strip)	18W - Light zerbano	21W - Oak powder	29W - White oak	30W - Grey oak	31W - Victoria oak	33W - Sawed oak	34W - Havana oak	36W - American oak	37W - Carvi oak

On request it is possible to realize other finishes of the color range: minimum order 200 pcs. Production delay 4/5 weeks. Price to be agreed. For sample finishes, contact the sales office for minimum quantities, timing and costs.

* = Article on demand minimum order 200 pcs. Production delay 4/5 weeks. Price to be agreed.

Prices are referred to whole packs, 10% increase for minimum orders of 10 pcs, 20% increase for orders of less than 10 pcs.

STYLE STAIR L comprises a large range of aluminium stair nosing protecting profiles for step in timber, parquet, laminate or melamine material with thickness varying from 7 to 20 mm. wooden finishes are available, plus anodized finishes. The profiles is made with 3 pcs. A natural aluminium base to screw or glue to the pavement, a PIN in non-toxic rigid to insert in the TOP, then a TOP should be selected most suitable for the floor.

STYLE STAIR L

TOP IN WOODEN FINISHES
AND ANODIZED FINISHES
+ PIN INSERT + ALUMINIUM BASE




ALUM. TOP + PIN INSERT + ALUM. BASE 40 PUNCHED/PERFORATED
(6 anod. alum. finishes of which 3 on demand) thermo packed
bar length 2,7 lm - pack. 20 Pcs - 54 lm (H 14 - H 16 - H 18 mm - 40,5 lm)

Article	H mm	€/lm	€/Pc
PINYLC... 07 (PIN 07)	7 / 9	14,67	39,61
PINYLC... 09 (PIN 09)	10 / 12	15,07	40,69
PINYLC... 11 (PIN 11)	13 / 14	15,48	41,80
PINYLC... 13 (PIN 13)	14 / 15	15,86	42,82
PINYLC... 15 (PIN 15)	16 / 17	16,27	43,93
PINYLC... 17 (PIN 17)	18 / 20	16,68	45,04


COMPLETE

Available in the finishes: AO - AA - AB (AT, CH and SB available on demand with a minimum quantity order of 200 pcs) and in the wooden finishes: 05W - 34W - 37W - 44W. The code of the selected colour must be added to the article code. E.g.: PINYLC... 07 (chosen finish anod. gold) PINYLCAO 07.

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS




TOP IN ANODIZED FINISHES




TOP IN WOODEN FINISHES

1. Fix the base exactly over the stair riser. 2. Align the laminate/melamine/wood floor, ensuring that approx. 3/10mm gap is left on one side to accommodate the natural expansion between the floor and the base. 3. Choose the desired profile, if necessary cut TOP, PIN and BASE at the needed length and then insert the PIN in the TOP in the specific "dovetail" seat. The position the profile above the U-shaped snap-in seat of the base. 4. With the aid of a board, hammer the TOP to the desired fitting level.








ANODIZED COLOURS



* ANODIZED COLOURS ON DEMAND



WOODEN COLOURS

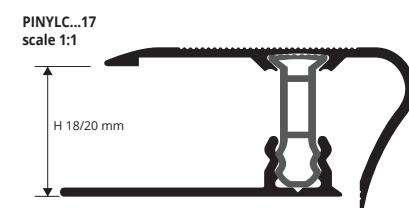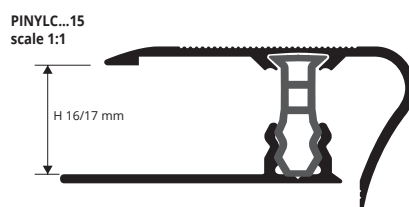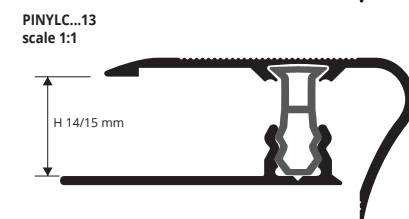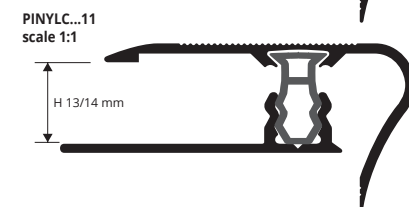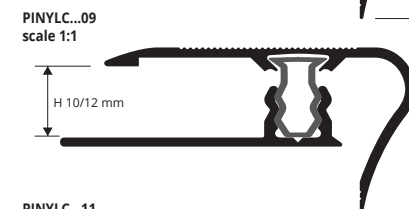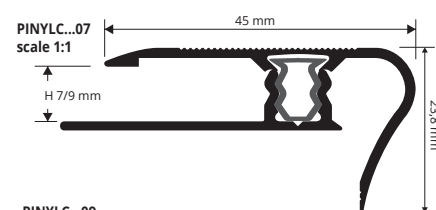

transition profiles

WOODEN/LVT

On request it is possible to realize other finishes of the color range: minimum order 200 pcs. Production delay 4/5 weeks. Price to be agreed. For sample finishes, contact the sales office for minimum quantities, timing and costs.

* = Production on demand with minimum quantity of 200 pcs. Production delay 4/5 weeks. Price to be agreed

Prices are referred to whole packs, 10% increase for minimum orders of 10 pcs, 20% increase for orders of less than 10 pcs.



LVT PROFILES

UNIVERSAL, CONNECTION AND PERIMETER JOINTS



SOL 30P



ZERO CURVE



TERMINAL PIN

CONNECTION JOINTS



**PROINTER KL
ACC / ALL**



**PROSHELL D
ALL**



**PROSHELL R
ALL**



PROLEVALL 305



PROLINOLEUM



PROFLOOR 24



**PROSLIDER KL
ALL**



**PROCOVER
1045 ALL**

STAIR NOSINGS PROFILES



PROSTYLE KL 10



PROSTAIR KL 20