




An interpretation of:
One World Trade Center, David Childs , NEW YORK CITY (USA), 2014



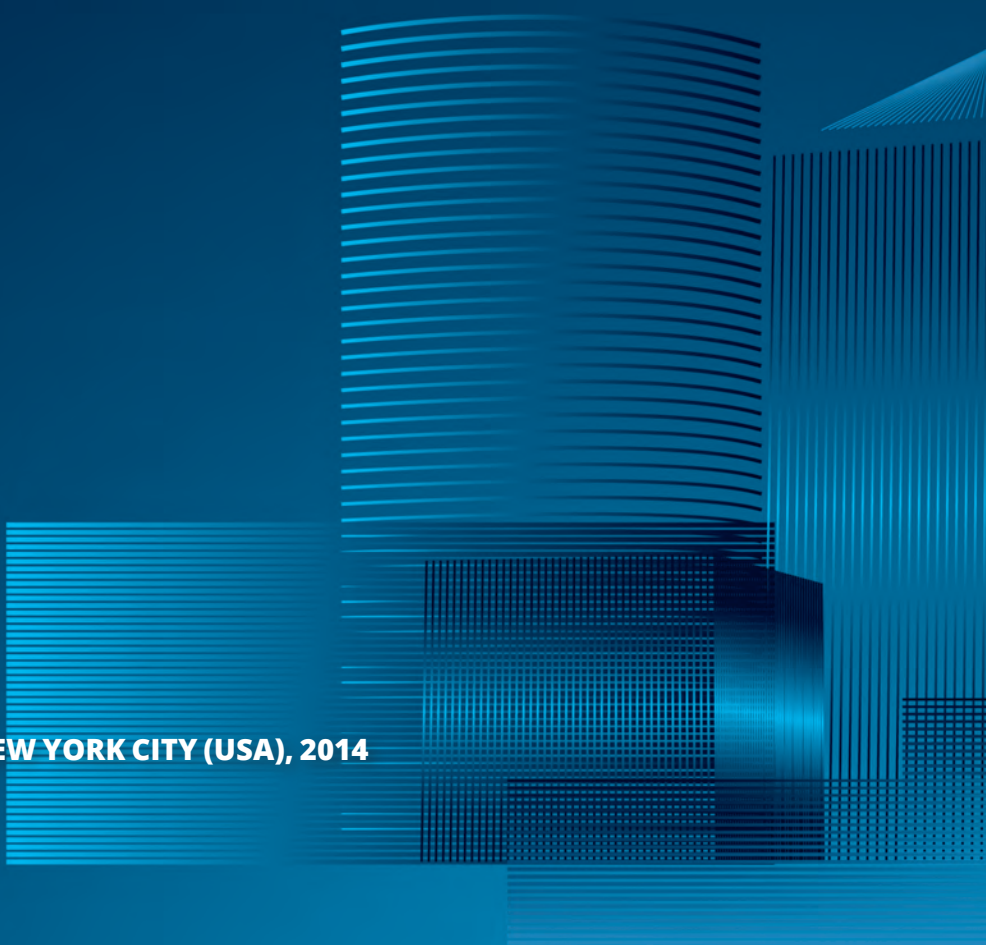

PRODUCTS FOR LAYING

TRANSPARENCY FOR A PERFECT LAYING.

LAYING
INSTRUCTIONS



PATENTED

Completely visible joint

$H \geq 50 \text{ mm}$

$H \geq 50 \text{ mm}$

The only one with 2 elements

Save 3 pieces on intersections

PATENTED

1407796
1424326
2,790,556
EP 2573296 B1
EP 2952652 B1
EP 3511484 B1
US 8,635,815 B2
US 9,328,522 B2
US 10,760,284
2019000015848
20201800000069410
Patents Pending



Kicking the clip in the direction of the joint.

ADVANTAGES

- 1 Simple and quick to lay with **only 2 elements: leveler & cap**. No need for expensive hand tools.
- 2 The only worldwide leveling system with multiple size levelers (2,3 and 5 mm). Built in spacers are available to accommodate "+" intersections as well as "T" joints **with a single leveler saving up to 3 pieces per joint**.
- 3 The only System with only two elements (**leveler & cap**) capable of leveling 3 to 20 mm floors and wall coverings with 1/2/3/5 mm available joints, and from 20 to 40 mm with 8 mm joint. Simply flip the cap over to work with various thicknesses.
- 4 It guarantees a minimum joint of 1 mm, maximum 5 mm.
- 5 Vertical compression reduces movement and widening of joints.
- 6 The thin base of the leveler allows for easy placement without mortar accumulation.
- 7 The shaped hole in the middle of the cross and T-shaped levelers allow a perfect control of the tiles lining up. Moreover the holes on their base enable a perfect anchoring between adhesive and tile.

Proleveling System

DESCRIPTION

Proleveling System is a revolutionary and innovative leveling system when laying medium and large materials with a thickness between 3 and 40 mm. The patented system is made of 2 elements:

- A leveling base (1-2-3-5 mm size) with spaced notches that allow spacing/separating/ joining floors of any type and material in a way that is: linear, cross and half cross with joints to be chosen between 1mm, 2 mm, 3 mm and 5 mm.
- The threaded stem is attached perpendicularly to the base in a way that allows for easy adjustment with turns of the cap during installation. Removal of the cap and Stem after the materials are set is made easy with strategically placed breakage points that release with either increased pressure by turning the cap or by kicking the cap in the direction of the joint.

One cap fits all threaded stems and can be reused an infinite amount of times for big cost savings.

The new PPLS (patented) system assists in the reduction or elimination of ledging and lippage in the installation of various types of materials that are applied to floors or walls with mortar including: Large Format Tile, Natural Stone, Thin Profile Tile and many others.

LAYING SYSTEM

- Choose the desired type of Leveler (spacers) based on the requested joints and joining:
 - 1 mm Linear, Cross and Half Cross Version
 - 2 mm Linear, Cross and Half Cross Version
 - 3 mm Linear, Cross and Half Cross Version
 - 5 mm Linear, Cross and Half Cross Version
- Apply the thinset or mortar on a level base with the proper notched trowel as called out in the setting materials manufacturer's installation instructions.
- During the application of the tile or other materials, position the base of the chosen Leveler under the edge of the tile at the appropriate joint location and continue laying in sequence.
- Attach the cap to the threaded stem by rotating it clockwise. Level the joint by rotating the cap using the minimum amount of pressure needed.
- Once the setting materials have become solid and the floor or wall is ready for grout: kick the cap in the direction of the joint to detach connection points between base and stem.

Remover: Fixed on a drill allows to remove levelers from caps.



By turning the cap it is possible to level a thickness of up to 40 mm with an 8 mm joint.





T-shaped leveler installation.



Linear leveler installation.



Proleveling System

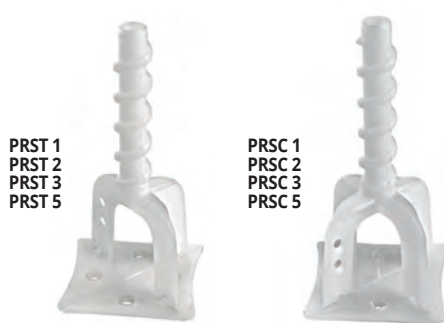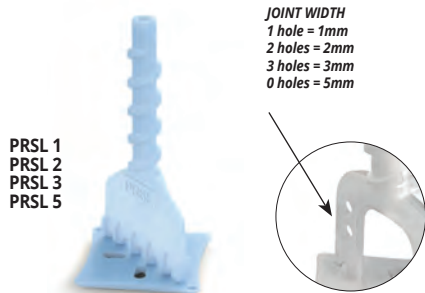

LINEAR LEVELER PROLEVELING SYSTEM

Article	thick mm	Pcs/Pack.	€/Pc	€/Pack.	Pcs/box
PRSL 1	1	100	0,15	15,00	4000
PRSL 2	2	100	0,15	15,00	4000
PRSL 3	3	100	0,15	15,00	4000
PRSL 5	5	100	0,16	16,00	4000

"T" LEVELER PROLEVELING SYSTEM

Article	thick mm	Pcs/Pack.	€/Pc	€/Pack.	Pcs/box
PRST 1	1	100	0,16	16,00	3000
PRST 2	2	100	0,16	16,00	3000
PRST 3	3	100	0,16	16,00	3000
PRST 5	5	100	0,17	17,00	3000

ROTATING POMMEL CAP FOR LEVELER PROLEVELING SYSTEM

Article	Pcs/Pack.	€/Pc	€/Pack.	Pcs/box
PRSTT	50	0,90	45,00	1000
PRST	50	0,90	45,00	1000

PROTECTION CAP FOR PROLEVELING SYSTEM


Article	Pcs/Pack.	€/Pc	€/Pack.	Pcs/box
PRSPC	50	0,99	49,50	3000



It protects the marble and natural stones surface from scratches that could be provoked by the cap during the floor levelling.

PROLEVELING SYSTEM REMOVER FOR LEVELER

Article	Pcs/Pack.	€/Pc	€/Pack.	Pcs/box
PRSSV	50	0,99	49,50	1300

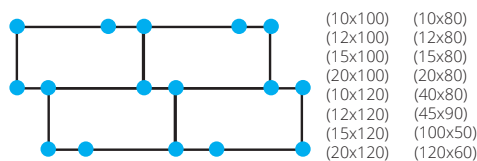


Tile cm x cm	10 X 100	12 X 100	15 X 100	20 X 100	10 X 120	12 X 120	15 X 120	20 X 120	10 X 80	12 X 80	15 X 80	20 X 80	40 x 80	45 x 90	100 x 50	120 x 60
U. / MQ (Type of leveler)*	20 (only T)	17 (only T)	14 (only T)	10 (only T)	17 (only T)	14 (only T)	11 (only T)	9 (only T)	25 (only T)	21 (only T)	17 (only T)	13 (only T)	6 (only T)	5 (only T)	4 (only T)	4 (only T)

* + = cross leveler, L = linear leveler, T = "T" shape leveler

Tiles cm x cm	30 X 30	40 X 40	45 X 45	50 X 50	60 X 60	80 X 80	90 X 90	120 X 120
U. / MQ (Type of leveler)*	11 (only +)	6 (only +)	5 (only +)	4 (only +)	3 (only +)	5 (2+, 3L)	5 (2+, 3L)	3 (1+, 2L)

* + = cross leveler, L = linear leveler, T = "T" shape leveler

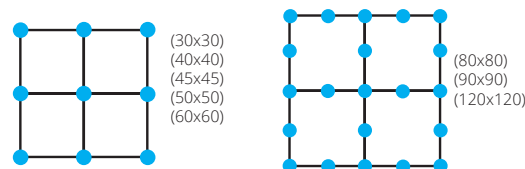

Tiles cm x cm	30 X 60	40 X 80	45 X 90	120 X 30	100 X 50	120 X 60
U. / MQ (Type of leveler)*	6 (only +)	6 (3+, 3L)	6 (3+, 3L)	6 (3+, 3L)	4 (2+, 2L)	4 (2+, 2L)

* + = cross leveler, L = linear leveler, T = "T" shape leveler



PROLEVELING WEDGE PRO - Tile levelling system kit with spacers for levelling tiles, provided in a practical PVC bucket, for a coplanar and equidistant pose.
The kit consists of 4 elements: linear levellers, "T" levellers, tie rods for leveller and unscrew for tie rod.

PROLEVELING WEDGE PRO

PROLEVELING WEDGE PRO

Article	€/Pack
PRSK LT02	90,00

ON REQUEST OTHER PACKS MINIMUM ORDER 100 PCS. PRICES AND TIME TO BE AGREED


Package contents		
Article	Description	Pcs/Pack.
PRSTT	Tie rods for leveller	50
PRSL 2	Linear levellers	100
PRST 2	"T" levellers	100
PRSSV	Unscrew for tie rod	1



PROLEVELING WEDGE SYSTEM

Leveling system for tiles composed of 3 elements: wedge, leveler and plier.
The levelers are available for grout lines of 1/1.5/2 and 3 mm and are suitable for tiles with thickness from 3 to 12 mm and from 12 to 20 mm. The wedge, with a length of 90 mm and a width of 22 mm, is inserted during the laying inside the leveler and thanks to the plier we get a complete flatness between adjacent tiles. When the adhesive is hardened, kick the wedges and the protruding part of the levelers along the grout line.

Levelers H 3-12 mm

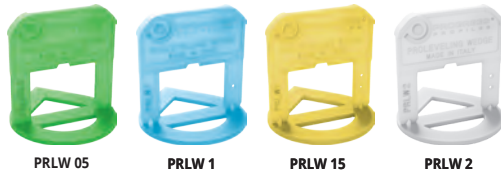

Levelers H 12-20 mm



Wedge - PRLW



LEVELING WEDGE

Article	Pcs/pack	Pcs/box	€/Pc	€/Pack.
PRLW	100	2400	0,140	14,00

TRACTION PLIER for PROLEVELING WEDGE SYSTEM

Article	Pcs/pack	€/Pc
PRLWP	1	26,00

PROLEVELING WEDGE SYSTEM - LINEAR LEVELERS


Article	h. mm	Thick. mm	Pcs/pack	Pcs/Box	€/Pc	€/Pack.
PRLW 05	3-12	0,5	200	3000	0,130	26,00
PRLW 1	3-12	1	200	3000	0,130	26,00
PRLW 15	3-12	1,5	200	3000	0,130	26,00
PRLW 2	3-12	2	200	3000	0,130	26,00
PRLW 3	3-12	3	200	3000	0,130	26,00
PRLW 120	12-20	1,5	100	2500	0,160	16,00
PRLW 220	12-20	2	100	2500	0,160	16,00

* NEWS 2024: PRLW 05 AVAILABLE FROM SEPTEMBER 2024

INDICATIVE CONSUMPTIONS FOR A SURFACE OF 10 M²

X cm	10	20	30	40	50	60	80	90	100	120	150	160	180	Y cm
10	1984													
20	976	480												
30	971	475	420											
40	720	352	307	224										
50	595	291	256	187	156									
60	501	245	215	157	131	110								
80	468	228	183	132	111	93	72							
90	437	213	173	125	105	88	69	66						
100	499	243	193	139	117	98	75	72	78					
120	405	197	152	109	92	77	57	55	59	44				
150	405	197	152	109	92	77	57	55	59	44	44			
160	404	196	141	100	85	71	48	47	49	35	35	24		
180	373	181	131	93	79	66	45	44	46	33	33	23	22	
200	373	181	131	93	79	66	45	44	46	33	33	23	22	
240	280	136	101	72	61	51	36	35	37	27	27	20	19	
260	311	151	111	79	67	56	39	38	40	29	29	21	20	
300	311	151	111	79	67	56	39	38	40	29	29	21	20	
320	248	120	80	56	48	40	24	24	24	16	16	8	8	
400	248	120	80	56	48	40	24	24	24	16	16	8	8	

Ex: 120 x 60 cm = 77 Pz x 10 m²

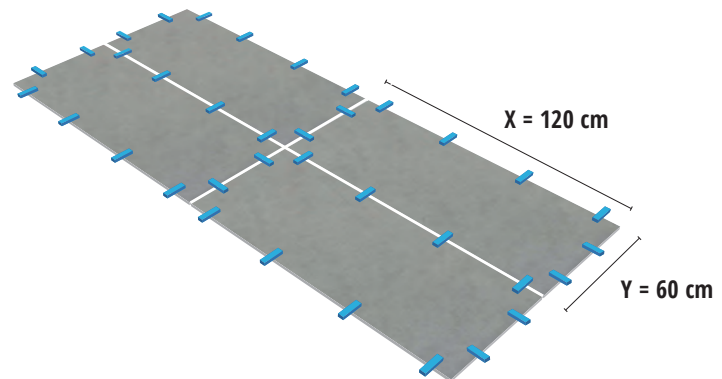

© 2023 All rights reserved by Progress Profiles. Printed in Italy

PROLEVELING WEDGE KIT

PROLEVELING WEDGE KIT - Tile levelling system kit with spacers for levelling tiles, provided in a practical PVC bucket, for a coplanar and equidistant pose.
The kit consists of 3 elements: levelling wedge, linear leveller and clamp.


PROLEVELING WEDGE KIT

Article	€/Pack
PRLWK 02	80,00



Kit components

Article	Description	Pcs/Pack.
PRLW	Leveling wedge	100
PRLW 2	Linear levelers	200
PRLWP	Traction plier	1

ON REQUEST OTHER KITS MINIMUM ORDER 100 PCS. PRICES AND TIME TO BE AGREED

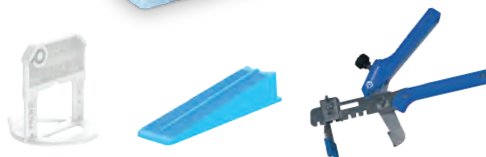

PROLEVELING WEDGE SYSTEM

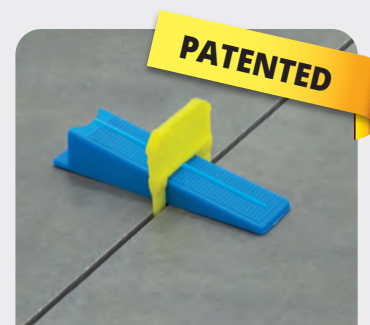

ADVANTAGES




Complies with the legislation:
Thanks to the join of the stems directly on the base, after the removal there are no components between the joints;



Ergonomic wedge:
The concave part of the wedge allows greater ease in insertion;



Easier to insert:
Improved base with the new eye shape that ensures better and more effective insertion under the tile;

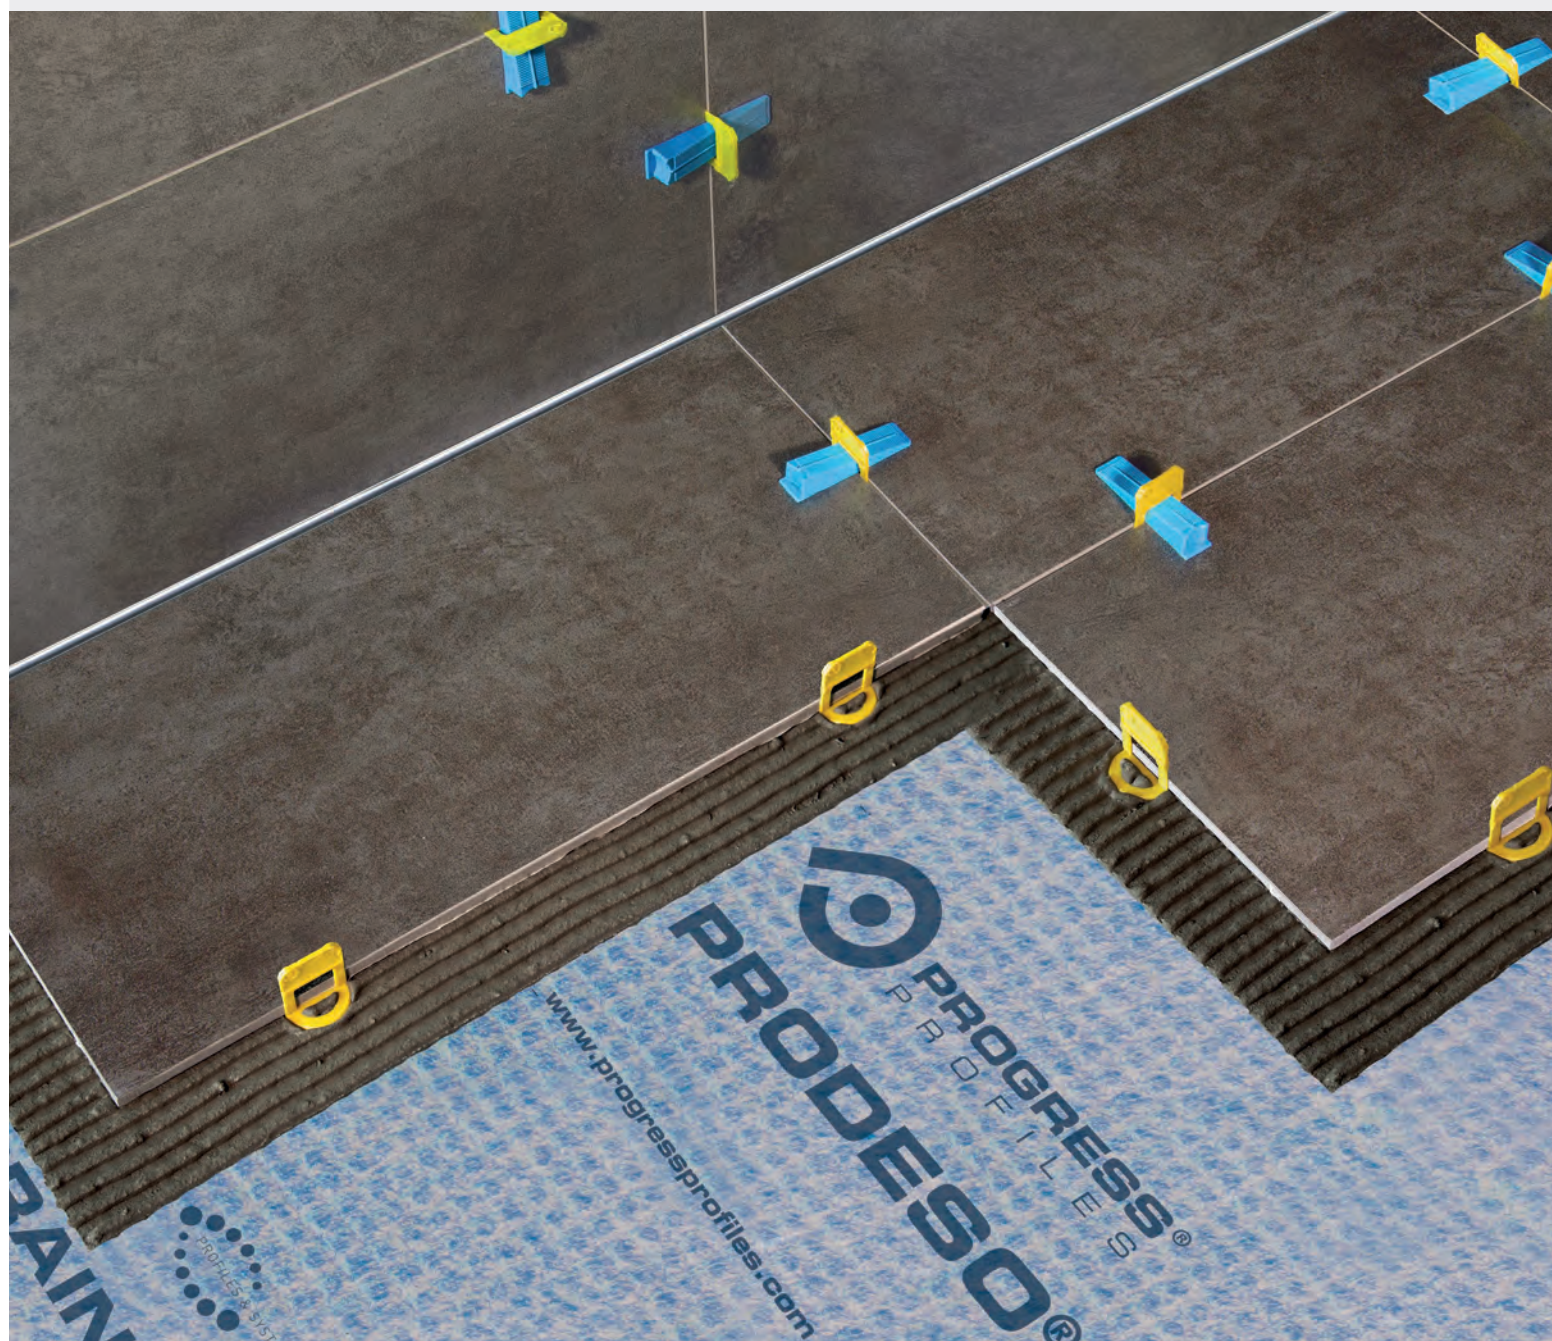

MULTISPACER

MULTISPACER Removable and reusable spacer for joints of tiled floors and walls. Its little tabs and open shape allows various uses with a perfect joint and view of the junctions among tiles during the laying.



MSP 1



MSP 2






MSP 3



MSP 5

MULTISPACER

Article	Thick. mm	Pcs/pack	Pcs/Box	€/Pc	€/Pack.
MSP 1	1	100	2500	0,31	31,00
MSP 2	2	100	2500	0,31	31,00
MSP 3	3	100	2500	0,31	31,00
MSP 5	5	100	2500	0,36	36,00

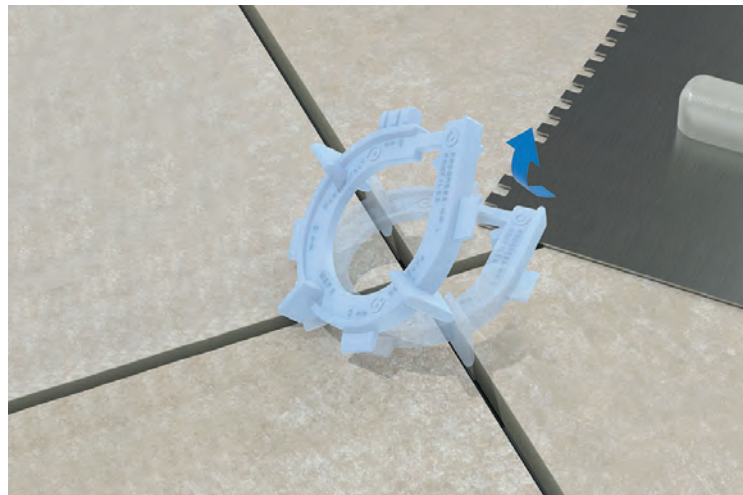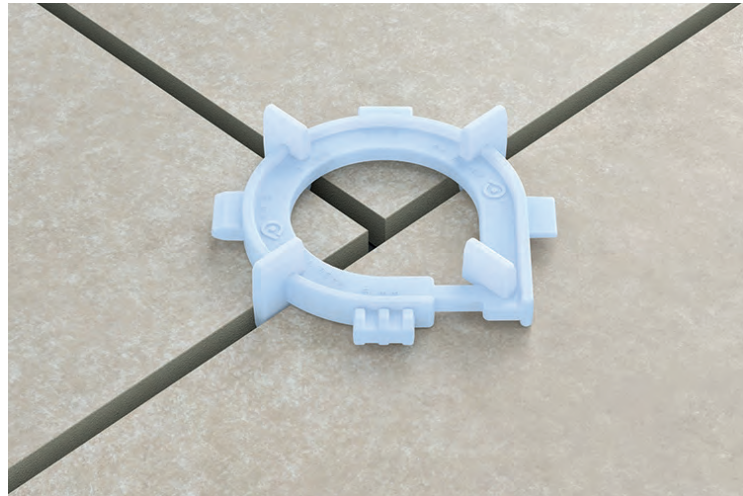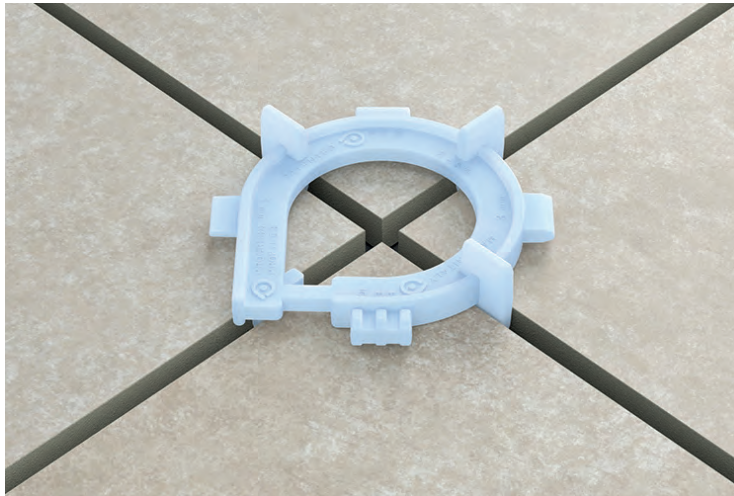


The **CROSS-SHAPED** and **T-SHAPED SPACERS** are perforated, weatherproof and made in top quality material with choice of colour. They are used to provide regular gaps in floors and coverings and thanks to the anti-floating perforations remain in the correct laying position. Available in every required thickness 1 - 2 - 3 - 4 - 5 - 7 - 10 mm. Levelling wedges are also available for compensating differences in level that emerge during laying. The **Y-SHAPED SPACERS** have to be used to separate hexagonal tiles in floors and walls. Available in thickness 2 and 3 mm.

SPACERS LEVELLING WEDGES

PERFORATED SPACERS CROSS-SHAPED boxes with bags of 250 Pcs each

Article	Thick. mm	Pcs/Box	€/Bag	€/Pc
RC 1	1	20.000	2,50	0,011
RC 2	2	15.000	2,50	0,011
RC 3	3	15.000	2,50	0,011
RC 4	4	15.000	2,50	0,011
RC 5	5	15.000	2,50	0,011
RC 7	7	10.000	2,50	0,012
RC 10	10	5.000	5,00	0,024

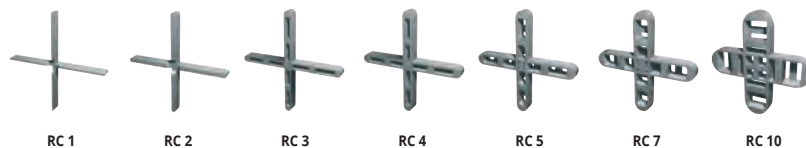

PERFORATED SPACERS T-SHAPED boxes with bags of 250 Pcs each

Article	Thick. mm	Pcs/Box	€/Bag	€/Pc
RT 1	1	20.000	2,50	0,011
RT 2	2	15.000	2,50	0,011
RT 3	3	15.000	2,50	0,011
RT 4	4	15.000	2,50	0,011
RT 5	5	15.000	2,50	0,011
RT 7	7	10.000	2,50	0,017
RT 10	10	5.000	5,00	0,024




Y-SHAPED SPACERS FOR HEXAGONAL TILES boxes with bags of 250 Pcs each


Article	Thick. mm	Pcs/Box	€/Bag	€/Pc
RY 2	2	10.000	5,00	0,021
RY 3	3	10.000	5,00	0,021



RY 2




RY 3



LEVELLING WEDGES boxes with bags of 500 Pcs

Article	Thick. mm	Pcs/Box	€/Bag	€/Pc
PCU 5	0 - 5	10.000	5,00	0,011



SPACERS / SQ.M

TILE FORMAT cm x cm	60 x 60	60 x 30	40 x 40	40 x 30	40 x 20	33 x 33	30 x 30	30 x 20	25 x 25	20 x 20	15 x 15	13 x 26	13 x 13	10 x 20	10 x 10
CROSS-SHAPED SPACERS No. / Sq.m	3	6	7	9	12	9	11	17	16	25	44	30	60	50	100
T-SHAPED SPACERS No. / Sq.m	6	12	14	18	24	18	22	34	32	50	88	60	120	100	200

Y-SHAPED SPACERS

2 spacers for each tile multiplied by the amount of tiles per square meter

PROSUPPORT SLIM

**PROSUPPORT
Profile "N"**



**PROSUPPORT
SYSTEM**

**PROSUPPORT
Profile "T"**

PROSUPPORT TUBE

PRORAIL

PROSUPPORT TUBE SYSTEM

ADJUSTABLE AND MODULAR SUPPORTS SYSTEM
FOR OUTDOOR FLOATING FLOORS

PROSUPPORT TUBE SYSTEM is an adjustable and modular supports system for outdoor floating floors from the height of 29 mm to 1000 mm. The system is composed of 1 base, 2 screws, 1 flange, 2 heads and several pvc pipes to obtain the requested height. Both heads, according to the screw, can be fix or self-levelling.

PATENTED

PROSUPPORT TUBE SYSTEM KIT HEIGHTS

FULL KIT - Pack. 40 Pcs. - Items not for sale individually. Minimum order one pack.

A: SUPPORT'S HEIGHT WITH SELF-LEVELING INSTALLATION
B: SUPPORT'S HEIGHT WITH FIX SIDE INSTALLATION
T: THICKNESS OF THE SPACER FLAP



FULL KIT CODE		FULL KIT CODE		FULL KIT CODE		FULL KIT CODE	
PST3454/4 T = 4 mm	PST3454/2 T = 2 mm	PST5474/4 T = 4 mm	PST5474/2 T = 2 mm	PST7494/4 T = 4 mm	PST7494/2 T = 2 mm	PST94114/4 T = 4 mm	PST94114/2 T = 2 mm
€/Pc. 4,56		€/Pc. 4,88		€/Pc. 6,93		€/Pc. 7,45	
€/Pack. 182,52		€/Pack. 195,29		€/Pack. 277,28		€/Pack. 297,88	

FULL KIT CODE		FULL KIT CODE		FULL KIT CODE		FULL KIT CODE	
PST114134/4 T = 4 mm	PST114134/2 T = 2 mm	PST134154/4 T = 4 mm	PST134154/2 T = 2 mm	PST154174/4 T = 4 mm	PST154174/2 T = 2 mm	PST174194/4 T = 4 mm	PST174194/2 T = 2 mm
€/Pc. 7,86		€/Pc. 8,27		€/Pc. 9,82		€/Pc. 10,07	
€/Pack. 314,36		€/Pack. 330,84		€/Pack. 392,64		€/Pack. 402,94	

FULL KIT CODE		FULL KIT CODE	
PST194214/4 T = 4 mm	PST194214/2 T = 2 mm	PST194214/4 T = 4 mm	PST194214/2 T = 2 mm
€/Pc. 10,28		€/Pc. 10,28	
€/Pack. 411,18		€/Pack. 411,18	

© 2023 All rights reserved by Progress Profiles. Printed in Italy

HEIGHTS GREATER THAN 209 mm

H (mm) SELF-LEVELING HEAD (A)	H (mm) FIX HEAD (B)	Choose the kit according to the desired tile joint (T)		PIPE	FLANGE	€/PC.
		PST3454/4 T = 4 mm	PST3454/2 T = 2 mm		PSTGH 02	
214/234	209/229			+ PSTT 175		11,15
234/254	229/249			+ PSTT 195		11,85
254/274	249/269			+ PSTT 215		12,25
274/294	269/289			+ PSTT 235		12,75
294/314	289/309			+ PSTT 255		13,35
314/334	309/329			+ PSTT 275		14,05
334/354	329/349			+ PSTT 295		14,50
354/374	349/369			+ PSTT 315		14,95
374/394	369/389			+ PSTT 335		15,40
394/414	389/409			+ PSTT 355		15,85
414/434	409/429			+ PSTT 375		16,20
434/454	429/449			+ PSTT 395		17,10
454/474	449/469			+ PSTT 415		17,65
474/494	469/489			+ PSTT 435		17,95
494/514	489/509			+ PSTT 455		19,80




PSTGH 02

PST3454/...


SELF-LEVELING HEAD MODE

Self-levelling head mode
Max height 1000 mm with max slope of 5%.

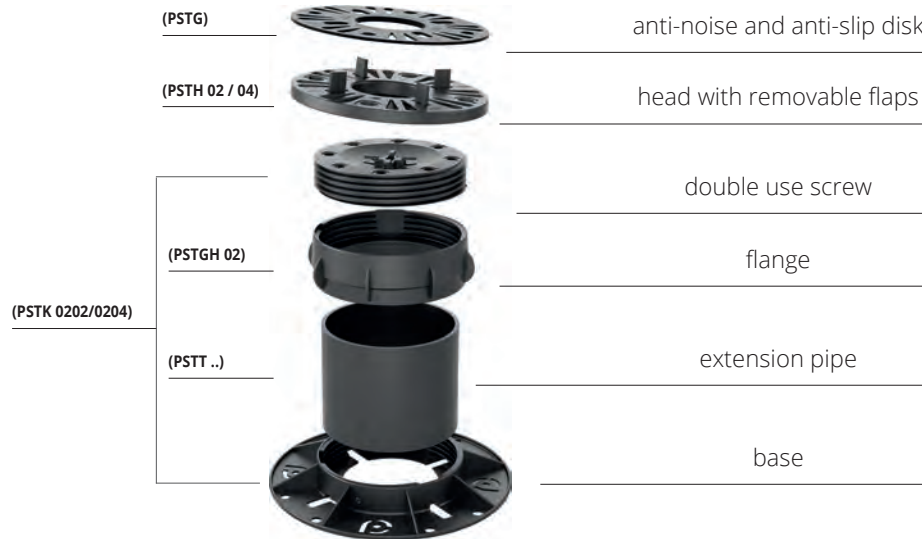

FIXED HEAD MODE

Fixed head mode
Max height 1000 mm



PROSUPPORT TUBE SYSTEM COMPONENTS

BASE +SCREW 20/40 mm
polypropylene - pack. 40 Pc. (PSTK 0202) - pack. 20 Pc. (PSTK 0204)

Article	Thickness (mm)	kit / pack.	€/Pc	€/pack.
PSTK 0202	20	40	3,40	135,96
PSTK 0204	40	20	3,72	74,37

Items not for sale individually. Minimum order one pack.



PSTK 0202



PSTK 0204


HEAD with removable flaps 2/4 mm
polypropylene - pack. 40 Pc.

Article	flap Thk (mm)	kit/pack.	€/Pc	€/pack.
PSTH 02	2	40	1,16	46,56
PSTH 04	4	40	1,16	46,56


Items not for sale individually. Minimum order one pack.



PSTH 02 / PSTH 04



FLAP THICKNESS 2 mm - PSTH 02



FLAP THICKNESS 4 mm - PSTH 04

FLANGE 40 mm
polypropylene - pack. 40 pcs

Article	H (mm)	Pc/pack.	€/Pc	€/Pack.
PSTGH 02	40	40	1,85	74,16

Connection nut with a lower side of 110 mm inner diameter, where the pipe of different heights should be inserted, and one side with thread where the regulation screws should be inserted.
Items not for sale individually. Minimum order one pack.



PSTGH 02

ANTI-NOISE AND ANTI-SLIP DISK
rubber - H 1,5 mm - Ø 150 - pack. 120 pcs

Article	H / Ø mm	Pc/pack.	€/Pc	€/Pack.
PSTG	H 1,5 - Ø150	120	1,13	135,96

The non-slip rubber disk to be used with the heads of PROSUPPORT TUBE SYSTEM reduces noises till 25 dB.

Items not for sale individually. Minimum order one pack.



PSTG

PRE-CUT EXTENSION PIPE - outer diameter Ø110 mm Thickness 4 mm - polyethylene polypropylene - pack. 40 Pc.

Article	H (mm)	Pc/pack.	€/Pc	€/pack.
PSTT 35	35	40	0,52	20,60
PSTT 55	55	40	1,03	41,20
PSTT 75	75	40	1,44	57,68
PSTT 95	95	40	1,85	74,16
PSTT 115	115	40	3,40	135,96
PSTT 135	135	40	3,66	146,26
PSTT 155	155	40	3,86	154,50

Items not for sale individually. Minimum order one pack.



PSTT...

FULL LENGHT EXTENSION PIPE - outer diameter Ø110 mm Thickness 4 mm - polyethylene or polypropylene - pallet 43 Pc.

Article	H (ml)	ml/pallet.	€/ml	€/Pc	€/pallet
PSTT 2700	2,7	116	24,80	66,96	2.879,28

Items not for sale individually. Minimum order one pallet.

UPON REQUEST IT IS POSSIBLE TO HAVE HEIGHTS TILL 1000 MM USING PIPES FROM 155 TILL 955. For information and installation instructions ask for the technical data sheet. Price to be agreed. Production delay 4/5 weeks.




PSTT 2700

270 cm

PERIMETER SPACER

Perimeter spacer of stainless steel AISI 316L / 1.4404 - V4A for laying outdoor floating floors. The profile makes a 5 mm wide perimeter gap, for the outflow of rainwater; moreover, thanks to the rounded flin with which is provided, it does not damage the waterproofing sheath. The slit width of 0.5 cm and the length of 18 cm ensure a perfect anchorage of the spacer with the heads of the Prosupport System.

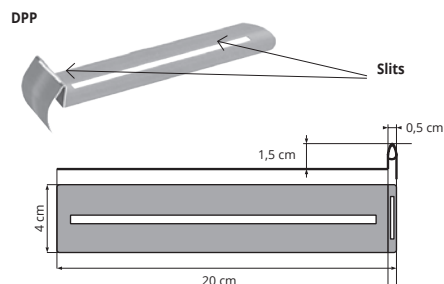

PERIMETER SPACER PROSUPPORT SYSTEM
Stainless steel AISI 316L / 1.4404 - V4A - pack. 40 Pcs



Article	€/Pc	€/Pack.
DPP	3,66	146,40

PROSUPPORT TUBE SYSTEM OPTIONAL

ADJUSTING KEY (only for head PSTH 04)

Article	€/Pc
PSTAK	32,45



ADJUSTABLE SPACER TABS 4 mm
polypropylene - Pack 80 pcs

Article	L x H mm	Pcs/pack	€/Pc	€/Pack.
PSTJ	80 x 20	80	0,88	70,04

Spacer tabs 80 mm long to be fixed on the self-levelling head, which allow the fixing of wooden, WPC and aluminium joists of max width 80 mm.



Items not for sale individually. Minimum order one pack.

FIXING CLIP FOR TILES - WIND-PROOF
Pack 40 pairs

Article	L x H mm	Pcs/pack	€/Pc	€/Pack.
PSTWP	20 x 60	40	6,28	251,32

Fastening clip to fix the tiles and block the floor in case of strong wind. The clips must be inserted inside the cross joint or along the perimeter of the floor.



Items not for sale individually. Minimum order one pack.

RUBBER DISK for laying on bituminous roof membrane
H 2 mm - Pack. 100 Pcs (box 100 pcs)

Article	H (mm)	€/Pc	€/Pack.
LVGG 0204	4	2,00	200

Rubber disc, 2 mm thick, to be applied under the support (SQG 15) to protect the bituminous membrane.




LVGG 0204

SPACER FOR APPLICATION ON GRAVEL
Pack: 100 Pcs (box 100 pcs)

Article	€/Pc	€/Pack.
DILV	0,93	92,70

Transparent plastic. 4 mm cross spacer for laying on gravel or irregular surfaces.



PROSUPPORT SUB-BASE

Article	Pc/Pack	€/Pc	€/Pack
PSTPG 2020	160	1,02	163,20

Recycled rubber plate, 20 x 20 cm 3 mm thick, to protect the bituminous sheath for laying Prosupport.



HANDLE FOR LIFTING AND LAYING PLATES

NEWS

Handle for lifting and laying plates, adjustable from 390 to 620 mm, ergonomic handle, resealable after use.

HANDLE FOR LIFTING AND LAYING PLATES

Article	Pcs/Pack.	€/Pc
PSTMSP 3962	1	180,25



HAND LIFTING HOOK

NEWS

Hand lifting hook plates, for 4mm wide joints.

HAND LIFTING HOOK

Article	Pcs/Pack.	€/Pc
PSTGNC 04	1	15,45



The kits contain all the necessary components: Base, Screw, Head 4 mm and anti-noise and anti-slip rubber. A first kit of variable height from 34 mm to 54 mm and a second kit of variable height from 54 mm to 74 mm. The kits are compatible with all accessories of the PROSUPPORT TUBE line.

KIT PROSUPPORT TUBE



KIT PROSUPPORT TUBE

Article	H (mm)	Pc/Pack	€/Pack
PSTK 3454/4	29 - 54	20	113,40
PSTK 5474/4	49 - 74	20	119,40

Kit components

Article	Description	Pz./Conf.
PSTK 0202/0204	BASE + SCREW 20/40 mm	20
PSTH 04	HEAD 4 mm	20
PSTG	ANTI-NOISE AND ANTI-SLIP RUBBER	20

NEWS

Complete kits made of polypropilene with V0 self-extinguishing degree, ideal for installation in environments where maximum fire resistance is required.

KIT PROSUPPORT TUBE VO



V0 material
by Progress Profiles
FIRE RESISTANT

Special **self-extinguishing** and **fire-resistant** thermoplastic material within 10 seconds of contact with the free flame.

KIT PROSUPPORT TUBE V0

Article	H (mm)	Pc/Pack	€/Kit
PSTKV0 3454/4	29 - 54	20	340,00
PSTKV0 5474/4	49 - 74	20	350,20

ATTENZIONE! IL KIT PROSUPPORT TUBE VO NON È COMPATIBILE CON GLI ACCESSORI STANDARD.

NEWS

ADJUSTABLE EXTENSION for Prosupport Tube system. It can be used by inserting into the prosupport Tube base or above the ring. The extension extends the possibility of adjusting the system by reducing the total number of elements on site.

PROSUPPORT TUBE EXTENSION



20 mm
excursion

EXTENSION

Article	Pz/pack.	€/pack.
PSTPR 02	20	45,40



(PSTK 3454/4)

74 / 114 mm
(40 mm excursion)

€/Pc. 7,70

Components:
PSTK 3454/4 + PSTP 02



114 / 174 mm
(60 mm excursion)

€/Pc. 9,75

Components:
PSTK 3454/4 + 2 X PSTP 02



174 / 254 mm
(80 mm excursion)

€/Pc. 11,80

Components:
PSTK 3454/4 + 3 X PSTP 02



Extension compatible with the
complete system.

PROSUPPORT SIDEWALK

VARNISHED ALUMINIUM


PROSUPPORT SIDEWALK, is a perimeter profile for the protection and finishing of the outer edge of raised floor with ceramic tiles, wood and composite floors. It is equipped with a horizontal flat base to be placed above the flat head of the PROSUPPORT TUBE system and with a vertical visible part of a total height of 60-80-100 mm.

NEWS



VARNISHED ALUMINIUM
bar length 2,7 ml - pack 5 pc / 13,5 ml

Article	H mm	€/ml	€/Pc
PSSDWK 60AL..	60	32,96	88,99
PSSDWK 80AL..	80	37,08	100,12
PSSDWK 100AL..	100	41,20	111,24

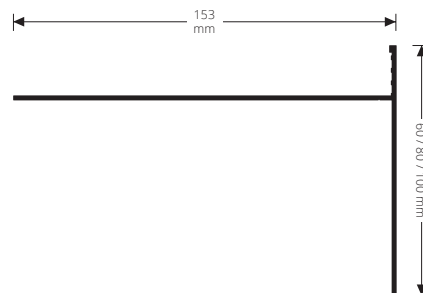

OVERLAPPING EXTERNAL ANGLES

Varnished Aluminium

Article	H mm	€/Pc	€/pack.
AEPSSDWK 60AL..	60	38,10	381,00
AEPSSDWK 80AL..	80	40,15	401,50
AEPSSDWK 100AL..	100	43,25	432,50

OVERLAPPING JOINTS

Varnished Aluminium

Article	H mm	€/Pc	€/pack.
GINPSSDWK 60AL...	60	14,42	144,20
GINPSSDWK 80AL...	80	16,48	164,80
GINPSSDWK 100AL...	100	18,54	185,40


STANDARD COLOURS (EMBOSSSED)

EF - Beige (1019)	GF - Grey (7038)	A - Anthracite grey (no RAL)

* ON DEMAND (EMBOSSSED)

BF - White (9010)	TF - Dark brown (8019)	C - Corten

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

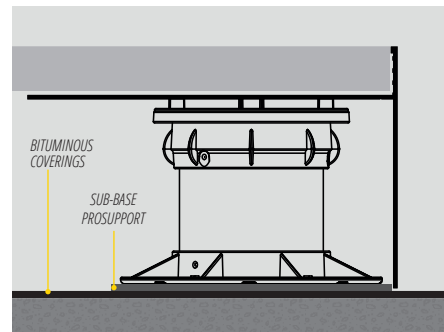

1. Choose the desired PROSUPPORT SIDEWALK model 2. Cut to size PROSUPPORT SIDEWALK and place it on the supports by aligning it 3. Lay on the floor by adjusting the height of the supports until complete levelling.



© 2023 All rights reserved by Progress Profiles. Printed in Italy

PROSUPPORT PROFILE T & N is a profile for the protection and finishing of the external edge of raised floors in ceramic, wood and composite materials. The vertical section of the profiles features a specially designed fins that create a dovetail cladding system. This dovetail cladding system allows for the adhesive used to fix the covering to also mechanically bond to the profiles. The profile is also available with a decorative edge of 2 cm height (PROSUPPORT PROFILE T).

PROSUPPORT PROFILE T & N

VARNISHED ALUMINIUM
NATURAL ALUMINIUM

PATENTED



PROSUPPORT PROFILE T - VARNISHED ALUMINIUM
bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	L x H mm	h mm	€/lm	€/Pc
PSRPTE 20AL...	180,7x81,5	59,5	32,04	86,51

STANDARD COLOURS (EMBOSSSED)

GF - Grey (7038)	A - Anthracite grey - (no RAL)	EF - Beige
------------------	--------------------------------	------------

* ON DEMAND (EMBOSSSED)

BF - White (9010)	TF - Dark brown (8019)	C - Corten
-------------------	------------------------	------------



PROSUPPORT PROFILE N - NATURAL ALUMINIUM
bar length 2,7 lm - pack. 20 Pcs - 54 lm




Article	H mm	L	€/lm	€/Pc
PSRP 15560AL	60	156,5	21,51	58,08

COLOURS

AN - Natural aluminium

LAYING INSTRUCTIONS

1. Choose "PROSUPPORT PROFILE" desired model. 2. Cut "PROSUPPORT PROFILE" to the desired lenght and put on the supports and aligning. 3. Lay the floor by adjusting the height of the supports until completely leveling. 4. Cut the tiles of the correct size to close the perimeters of the floating floor. 5. Fix on the vertical surface of the profile the tiles using a suitable adhesive.

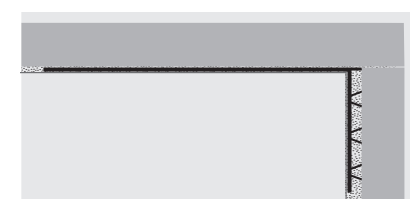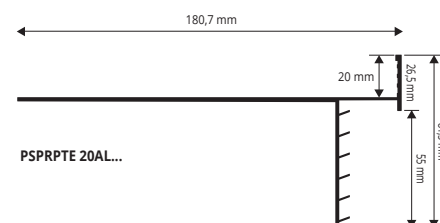

PROSUPPORT SYSTEM A&B Perimeter profile to protect and finish the outer edge of raised floors of different types, ceramic, wood, stone etc. The **PROSUPPORT PROFILE A** consists in an "L"-shaped horizontal flat base to insert and anchor above the **PROSUPPORT** Self-levelling head and a vertical visible part to insert in the vertical "L"-shaped element (as indicated in the drawing).

Use: Perimeter profile to protect and finish the outer edge of raised floors of different types, ceramic, wood, marble etc. The **PROSUPPORT PROFILE** consists in an "L"-shaped horizontal flat base to insert and anchor above the **PROSUPPORT** Self-levelling head and a vertical visible part to insert in the vertical "L"-shaped element (as indicated in the drawing)

PROSUPPORT PROFILE A & B

VARNISHED ALUMINIUM,
NATURAL ALUMINIUM




PUNCHED AND PERFORATED PROSUPPORT A
NATURAL ALUMINIUM - length 2,7 lm - pack. 20 Pcs

Article	L x H	€/lm	€/Pc
BPPSAN 15020	150 X 20	29,38	79,33

COLOURS

AN - Natural aluminium



TOP PROFILE PROSUPPORT B - VARNISHED ALUMINIUM
length 2,7 lm Pack 10 Pcs (PFPSAL...1060 Pack 20 Pcs)


Article	H1	€/lm	€/Pc
PFPSAL... 1060	60	20,60	55,62
PFPSAL... 1080	80	24,03	64,88
PFPSAL... 10100	100	27,09	73,14

COLOURS (EMBOSSSED)


GF - Grey (7038)	A - Anthracite grey - (no RAL)
------------------	--------------------------------

* ON DEMAND (EMBOSSSED)


ON DEMAND (EMBOSSED)

		
BF - White (9010)	TF - Dark brown (8019)	C - Corten
		
EF - Beige		

PROSUPPORT A

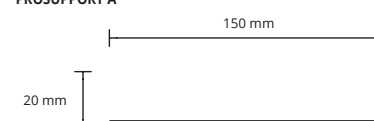

PROSUPPORT B

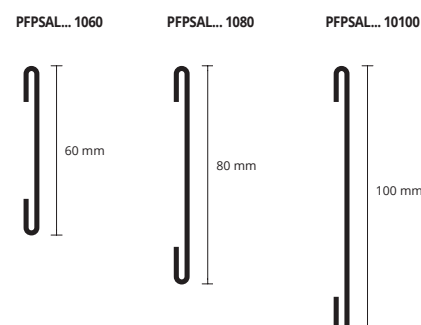


ITEM AVAILABLE WHILE STOCKS LAST

PRORAIL SYSTEM

PRORAIL SYSTEM is a modular system composed of aluminium joists to lay floating floors of any size, to create steady and modular substructures together with PROSUPPORT TUBE and PROSUPPORT SLIM. The system consists of two aluminium joists, PRORAIL and PRORAIL RET, one fastening ring PRORAIL RING, two cross spacers with removable flaps PRORAIL SPACER and one anti-noise and anti-slip rubber PRORAIL RUBBER

**PRORAIL
PSTRAN 53**

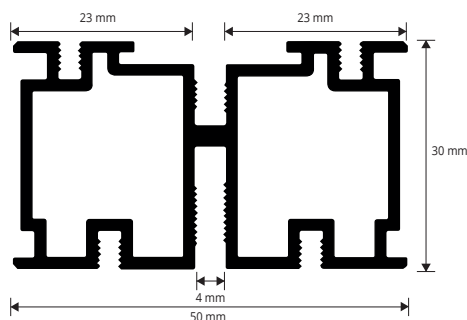


PRORAIL - SHAPED JOIST
aluminium - Pack 10 Pcs - Bar lenght 2,7 Lm

Article	L x H (mm)	Pc/Pack	€/lm	€/Pc
PSTRAN 53	50 X 30	10	16,97	45,82

PRORAIL RUBBER
Roll lenght 110 Lm

Article	L roll ml	€/lm	€/roll
PSTRI	110	1,96	215,27

**PRORAIL RET
PSTRAN 5030**

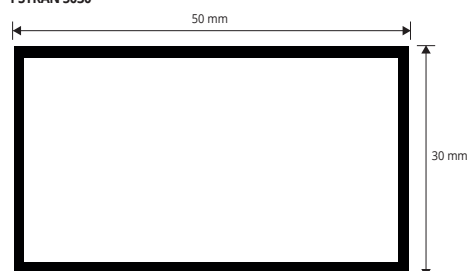

PRORAIL RET - SMOOTH JOIST
aluminium - Pack 10 Pcs - Bar lenght 2,7 ML

Article	L x H (mm)	Pc/Pack	€/lm	€/Pc
PSTRAN 5030	50 X 30	10	11,33	30,59

PRORAIL RING - JOIST FASTENING RING
polypropylene - Pack 40 Pcs



Article	Ø mm	Pc/Pack	€/Pc	€/Pack
PSTRR	135	40	0,93	37,08

PRORAIL SYSTEM LAYING PATTERN

Material required for 1 qm of the below pattern:
-3 pcs **PROSUPPORT TUBE/PROSUPPORT TUBE SLIM**
-3 pcs fastening rings **PRORAIL RING**
-2,7 lm **PRORAIL** joist
-4 lm **PRORAIL RUBBER**

TECHINICAL LAYING INSTRUCTIONS

1. Choose the support **PROSUPPORT TUBE** or **PROSUPPORT SLIM** of the required height;
 2. Set the fastening ring **PRORAIL RING** on the supports;
 3. Set the joist **PRORAIL (*)** or the joist **PRORAIL RET** on the ring;
 4. Insert the rubber **PRORAIL RUBBER** inside the grooves of the joist **PRORAIL**;
 5. Set the cross spacers **PRORAIL SPACER** following the laying pattern;
- (*) It is possible to fix the joist PRORAIL on the supports fixing it into the spacer flaps, see picture hereunder.

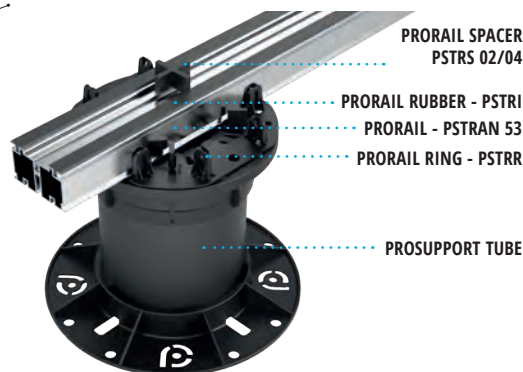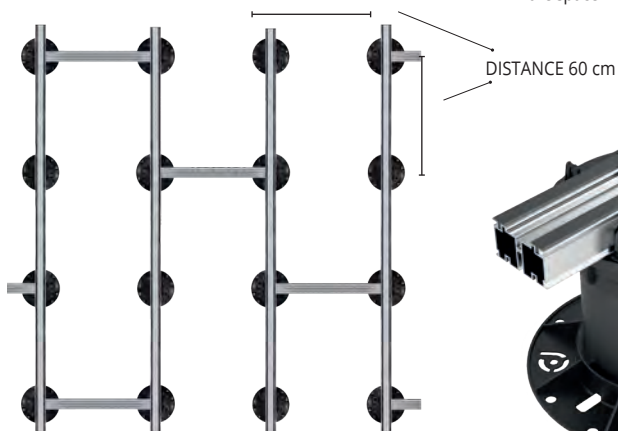

**PRORAIL SPACER
PSTRS 02**



**PRORAIL SPACER
PSTRS 04**

PRORAIL SPACER - CROSS SPACER with removable flaps
polypropylene - Pack 100 Pcs

Article	thickness (mm)	Pc/Pack	€/Pc	€/Pack
PSTRS 02	2	100	0,82	82,00
PSTRS 04	4	100	0,93	93,00



ANTI-ROTATION CLIP - Pack 40 Pcs

Article	Pc/Pack	€/Pc	€/Pack
PSTCAR	40	1,08	43,20

FIXING WITH PRORAIL JOIST:

Prosupport tube/slim + Prorail + Prorail spacer + Prorail rubber



FIXING WITH RING AND PRORAIL JOIST:

Prosupport tube/slim + Prorail ring + Prorail + Prorail spacer + Prorail rubber



FIXING WITH RING AND PRORAIL RET SMOOTH JOIST :

Prosupport tube/slim + Prorail ring + Prorail ret



PATENTED

© 2023 All rights reserved by Progress Profiles. Printed in Italy



PROSUPPORT SLIM SYSTEM

PROSUPPORT SLIM is a modular system to make outdoor floating floors from 10 to 40 mm height, it is composed of two bases of 10 mm height, levellers of 10 mm thickness and anti-noise and anti-slip disks. Thanks its modularity the system allows to make, from a height of 10 mm, all heights with 2 mm interval using the levellers.



BASE WITH FLAPS
PSTSB 02 - 2 mm



BASE WITH FLAPS
PSTSB 04 - 4 mm



LEVELER
PSTSL 02 - 2 mm



ANTI-NOISE AND ANTI-SLIP DISK
PSTSG

BASE with flaps 2/4 mm
polypropylene - Pack 120 Pc.



Article	Thickness (mm)	Pcs/pack	€/Pc	€/Pack
PSTSB 02	2	120	1,19	142,14
PSTSB 04	4	120	1,19	142,14

LEVELLER
Polystyrene - Pack 120 Pc.


Article	Thickness (mm)	Pcs/pack	€/Pc	€/Pack
PSTSL 02	2	120	0,98	117,42

ANTI-NOISE AND ANTI-SLIP DISK
rubber - pack 120 pcs

Article	H/Ø mm	Pcs/pack	€/Pc	€/Pack
PSTSG	H 1,5 - Ø 150	120	0,98	117,42

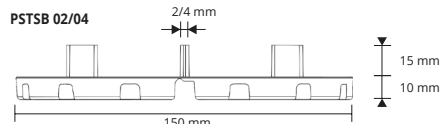

ACHIEVABLE HEIGHTS WITH PROSUPPORT SLIM SYSTEM



Requested items:
PSTSB 02/04



Requested items:
PSTSB 02/04
PSTSL 02



Requested items:
PSTSB 02/04
2 x PSTSL 02



Requested items:
PSTSB 02/04
3 x PSTSL 02



Requested items:
PSTSB 02/04
4 x PSTSL 02



Requested items:
2 x PSTSB 02/04




Requested items:
2 x PSTSB 02/04
PSTSL 02



Requested items:
2 x PSTSB 02/04
2 x PSTSL 02



Requested items:
2 x PSTSB 02/04
3 x PSTSL 02



Requested items:
2 x PSTSB 02/04
4 x PSTSL 02



Requested items:
3 x PSTSB 02/04

TO OBTAIN MORE THAN 30 mm HEIGHTS USE THE PROSUPPORT TUBE SYSTEM WITH WHICH IT'S POSSIBLE TO OBTAIN HEIGHTS FROM 29 mm UP TO A MAXIMUM OF 1000 mm.

SUPPORT AND LEVELLER

POLYETHYLENE

SUPPORT and **LEVELLER** are suitable for the realization of outdoor floating floors. The support, in polyethylene, has a height of 15 mm. The rubber leveler, with a thickness of 3 mm, can be applied on the supports up to a maximum of 2. **SUPPORT** and **LEVELLER** are suitable for outdoor areas, terraces, pool edges and pedestrian crossings.

SQUARES SUPPORT
boxes of 350 Pcs

Article	Thick. mm	€/Pc	€/Pack.
SQG 15	15	0,37	129,50

ITEMS NOT FOR SALE INDIVIDUALLY.

SQUARES LEVELLER
boxes of 100 Pcs

Article	Thick. mm	€/Pc	€/Pack.
LQG 03	3	0,28	28,00

ITEMS NOT FOR SALE INDIVIDUALLY.



SUPPORT




LEVELER



SQG 15




LQG 03



LAYING INSTRUCTIONS

1. Lay the supports on the waterproofing membrane. 2. To reach the desired height or compensate different heights, if necessary, place 1 or 2 rubber levlers on the support. 3. Lay the floating flooring.

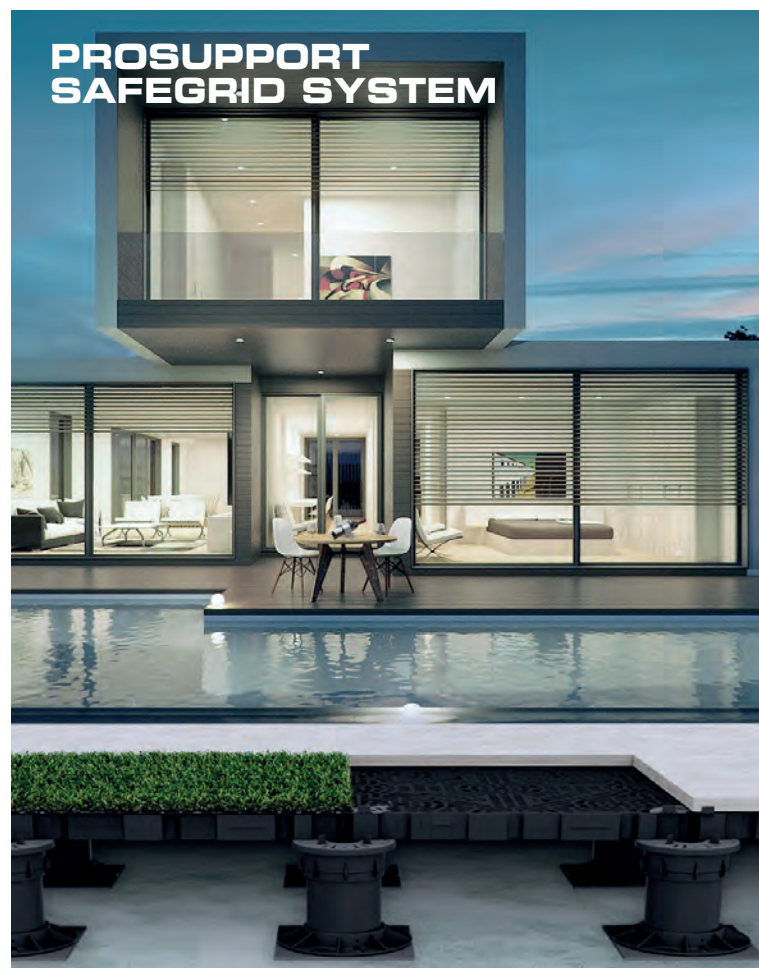

NEWS

PROSUPPORT SAFEGRID SYSTEM is a system composed of modular grilles in FIBRATED POLYPROPYLENE for the installation of raised floors of any size in stoneware, concrete, marble and synthetic grass, which makes it possible to create stable and safety substructures in combination with PROSUPPORT TUBE and PROSUPPORT SLIM. The system consists of a PROSUPPORT SAFEGRID polypropylene grid, 50x50 cm, modular and perforated for perfect evacuation of rainwater, and by a rubber anti-noise and anti-slip disk with spacers to achieve a 2 and 4mm joint.

PROSUPPORT SAFEGRID SYSTEM



POLYPROPYLENE

PROSUPPORT SAFEGRID Polypropylene

Article	LxL cm	H mm	Pcs/pack	€/Pc
PSTSFG 5050	50 X 50	40	1	29,50


RUBBER SPACER Rubber - Pack 100 Pcs

Article	Spacer thick. mm	Pcs/pack	€/Pc
LVGG 0202	2	100	2,00
LVGG 0204	4	100	2,00

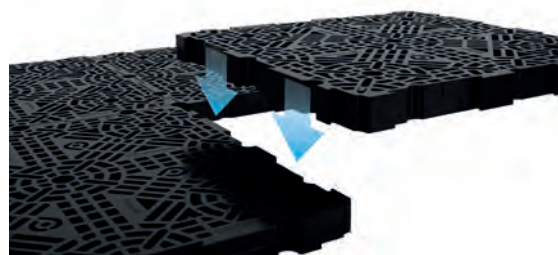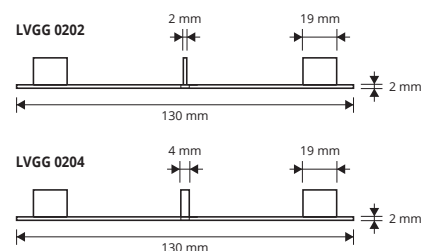

* Compressive strength 6.07kN, 619Kg, 1,364LB average values double those of similar products on the market

MAGNET KIT



MAGNET KIT - 4 magnets and 4 plates
for ceramic inspection panel - packs of **10 kits** - price for **1 Kit**

Article	€/KIT
KMD	14,42

SCISSORS FOR PVC PROFILES



SCISSORS
for cutting PVC profiles

Article	€/Pc
FTPP	95,79

PROECOFON

EXPANDED POLYETHYLENE CLOSED - CELL
WITH ADHESIVE

PROECOFON is a roll of closed-cell polyethylene used as edging between the wall and screed or where there are expansion joints. It should be used in all floor-laying work to ensure long life of the floor.




CLOSED-CELL EXPANDED POLYETHYLENE

Article	Thick. x H mm	lm/roll	€/lm	€/Roll
PEF 550A	5 X 50	25	-	56,25
PEFPU 510A	5 X 10	2,7	-	8,12
PEF 5100A	5 X 100	100	-	91,00

For perimeter areas and joints.
PEFPU 510A for Prot Terrace Drain Drip
PEF 550A - sold exclusively in packs of **2 pcs**

EXEMPLE OF LAYING



PROBAND FIX

MONOCOMPONENT WATERPROOF
SEALANT



SEALANT MONOCOMPONENT WATERPROOF

Pack of **12** cartridges

Article	Cartridge lm	€/Pc	€/Pack.
PRBFXB	290	18,17	218,04
PRBFXG	290	18,17	218,04

SEALANT MONOCOMPONENT WATERPROOF CARTRIDGE

Pack of **12** cartridges

Article	Cartridge lm	€/Pc	€/Pack.
PRBFXUB	600	35,65	427,80
PRBFXUG	600	35,65	427,80

COLOURS

B - White	G - Grey

Technical data:

Appearance:	white or gray thixotropic paste
Temperature range for application:	+ 5 °C / + 40 °C
Temperature range:	- 40 °C / + 90 °C
Curing:	≈ 2 mm / 24 h
Commissioning:	≈ 7 days

SUGGESTIONS FOR THE INSTALLATION:

In general cementitious support must be free from dust, oil and grease, dry and free from any visible moisture, free of loose or imperfectly anchored parts such as residual traces of cement, lime and paint, which must be totally removed. In case of contact with eyes, rinse immediately with water and seek medical advice. Avoid contact with skin and keep out of reach of children.

- **Use**
Balconies, terraces, bathrooms, kitchens, saunas, swimming pools and exterior surfaces of any size.
- **Don't use**
On bitumen membranes.
To seal proband with PRODESO®.

PROPOLISH

WHITE CREAM - BASED SURFACTANTS
SUITABLE FOR CLEANING

White cream - based surfactants, amines and inert powder, suitable for cleaning, degreasing and polishing of stainless steel surfaces and opaque/matt brass. The product, ready to use, does not contain acids and alkalis and do not leave marks after use. It does not emit harmful substances



Article	Pack. g.	Pcs/Pack	€/Pc	€/Pack.
PRLISH	250	6	21,63	129,78

PROCARE CLEAN

CLEANING SPRAY

Cleaning spray ready to use suitable for cleaning of stainless steel, brass and aluminum profiles, from residual surface oxide and limestone. The product deposit a protective film that prevents the deposit of limestone and soap residues. Its periodic use allows to obtain bright and cleaner surfaces for long period. Suitable also for glasses, mirrors and bathroom fittings.



Article	Pack. lm	Pcs/Pack.	€/Pc	€/Pack.
PRCLEAN	750	6	20,60	123,60

TROWEL in steel foil, support in polished aluminium with electro welded fixing. Rubber grip fixed with an anti-rotation system.

TROWEL

STAINLESS STEEL

TROWEL STAINLESS STEEL

Box 6 Pcs

Article	Tooth	Dimensions mm	Pcs/Box	€/Pack.	€/Pc
PFTT33	3X3	280X120	6	17,51	105,06

TROWEL STAINLESS STEEL


Box 6 Pcs

Article	Tooth	Dimensions mm	Pcs/Box	€/Pack.	€/Pc
PFTT57	5X7	280X121	6	17,51	105,06

TROWEL STAINLESS STEEL

Box 6 Pcs

Article	Tooth	Dimensions mm	Pcs/Box	€/Pack.	€/Pc
PFTT1010	10X10	280X122	6	17,51	105,06

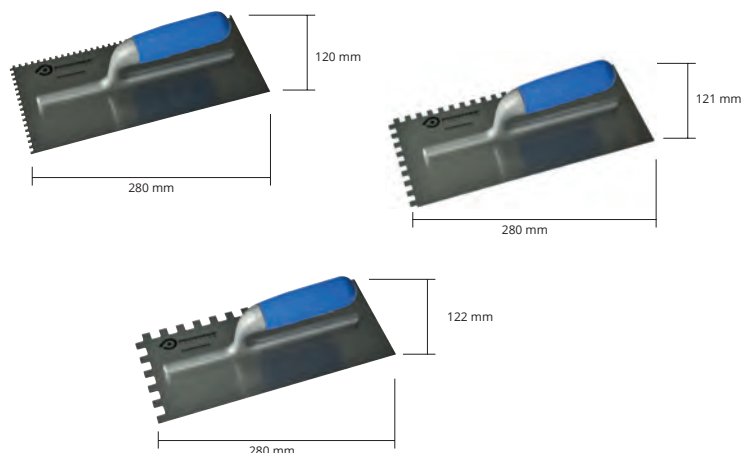


TROWEL in PVC size 10x10 cm, resistant to solvents, with a triangular teeth of interaxle spacing of 5 mm, 4 mm and 3 mm. To be used for the application of adhesives PROBAND FIX.

TROWEL

PVC

TROWEL

Article	Dimensions mm	€/Pc
PRSPD 10	100x100	4,12



TROWEL PROBAND KOLL - Stainless steel AISI 304 / 14301 - V2A trowel for the application of PROBAND KOLL family adhesives along the joints between adjacent rolls of membranes of the PRODESO® family for the sealing of PROBAND 150/250.

**TROWEL
PROBAND KOLL**

STAINLESS STEEL

TROWEL PROBAND KOLL

Article	Tooth	Dimensions mm	Pcs/Box	€/Pc
PFTTKL	2X10	130X205	1	36,05



ROLLER in nylon, 40 cm long, fixed to a stainless steel 304 frame, suitable for pressing the PRODESO®, PRODESO® HEAT & PRODESO® HEAT GRIP and PROFOIL. The roller is equipped with an extendable grip, length-adjustable and with an L base that allows to load 1 bag of adhesive to obtain the correct and homogenous pressing of the membranes.

ROLLER

STAINLESS STEEL

ROLLER IN STAINLESS STEEL

L 40 cm

Article	L mm	Finish	€/Pc
PSMAC	400	steel	494,40

