


PROSTAIR ACC


BRUSHED STAINLESS STEEL AISI 304/1.4301-V2A

PROSTAIR ACC is steps protecting technical profile, designed and conceived to make the step scales made of ceramic, porcelain stoneware and others nonskid and non-slip ones ; it's to be applied before the step laying process. Manufactured in aisi 304/1.4301-V2A glazed stainless steel, with the superior side level crimped in order to increase its adhesion. It replaces special ceramic elements in refined, resistant and economic way. It is compulsory in public places for the accident prevention. It is recommended for elegant, refined industrial, commercial and private environments: available in H 4,5-6-8-10-12,5-15 mm versions. Combining with the entire series of steel profiles recommended.

STEPS

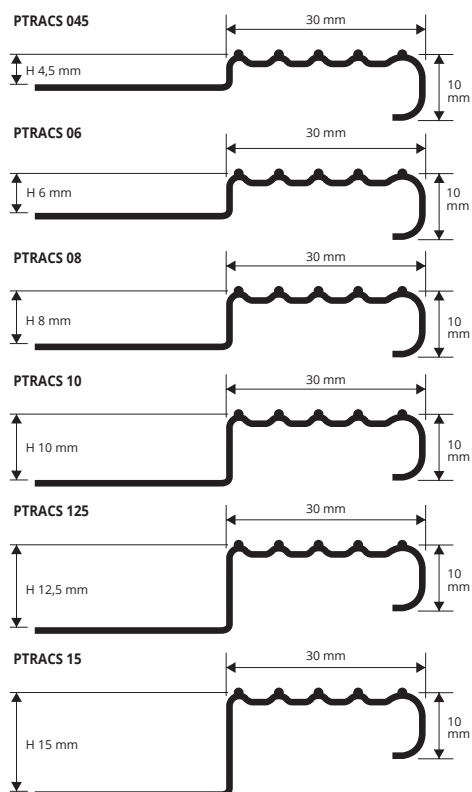

EXAMPLES OF LAYING

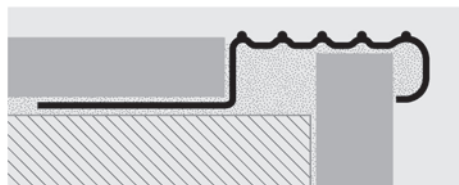

BRUSHED STAINLESS ST. AISI 304/1.4301-V2A with protective film
bar length 2,7 lm - pack. 15 Pcs - 40,5 lm - 10/10 mm

Article	H mm	€/lm	€/Pc
PTRACS 06	6	17,60	47,52
PTRACS 08	8	18,01	48,63
PTRACS 10	10	18,55	50,09
PTRACS 125	12,5	19,21	51,87
PTRACS 15	15	20,13	54,35



LAYING INSTRUCTIONS

1. Choose the PROSTAR ACC of the desired height and material on the basis of the tile (steps) thickness. 2. Fix the first rising part laying it down at its appropriate and definitive level. 3. Fill completely the empty spaces under the profile with the tile adhesive. 4. Spread out the adhesive on the tread, lay down the profile with its cut base immersed completely in adhesive and align it so that the profile covers the riser tile edge. 5. Lay down the tread tiles and align them with the superior grazing part of the profile by drawing its back close and filling the inner space with the adhesive.



END CAP IN VARNISHED PLASTIC BRUSHED STAINLESS STEEL EFFECT
pack. 2 Pcs (1 right and 1 left)

Article	H mm	€/Pack.
TPTRACS/1	4,5 ÷ 15	3,38



COLOURS

