

PROINTER AC

POLISHED AND BRUSHED
STAINLESS STEEL AISI 316/1.4401-V4A

PROINTER AC 316 is a cove-shaped profile in polished, super polished and brushed stainless steel AISI 316 / 1.404 - V4A. It is particularly suitable to ensure cleanliness and hygiene in every kind of environment where high resistance to mechanical and chemical stresses are required. Its particular section and the availability in three finishes and special pieces, such as internal and external corners, make **PROINTER AC 316** a much sought after profile. The profile is easy to match with the wall covering and allows a workmanlike application even in environments subject to high mechanical stresses.

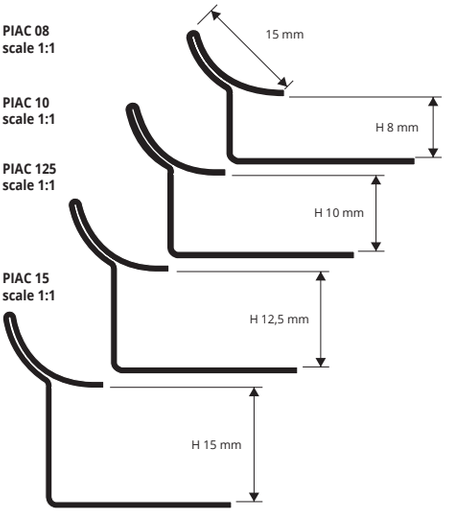

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

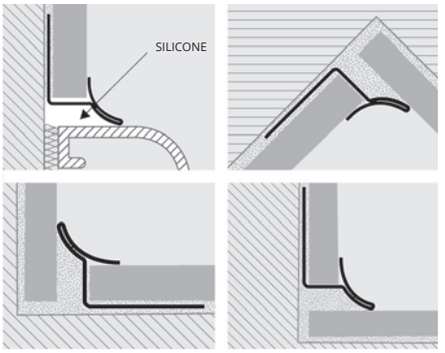


1. Choose "PROINTER AC 316" according to the tile thickness and desired finish. **2.** Cut "PROINTER AC 316" to the desired length and apply the adhesive on the support where the profile will be laid. **3.** Press the anchoring flange of "PROINTER AC 316" into the adhesive. **4.** Lay the tiles, aligning them with the profile leaving a 2 mm joint. Remove immediately all remains of adhesive from the surface of the profile. **5.** Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile.



POLISHED STAINLESS STEEL AISI 316/1.4404-V4A
bar length **2,7 lm** - pack. **20 Pcs - 54 lm - 10/10 mm**

Article	H mm	€/lm	€/Pc
PIACM 08	8	19,50	52,65
PIACM 10	10	20,62	55,67
PIACM 125	12,5	26,29	70,98

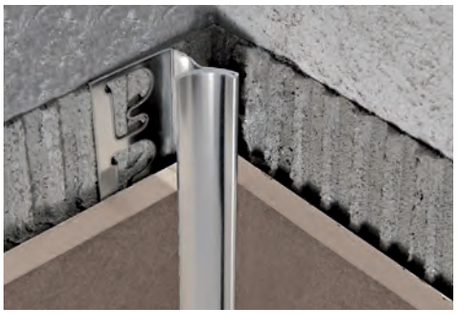

BRUSHED STAINLESS STEEL AISI 316/1.4404-V4A
bar length **2,7 lm** - pack. **20 Pcs - 54 lm - 10/10 mm**

Article	H mm	€/lm	€/Pc
PIACMS 08	8	24,45	66,02
PIACMS 10	10	28,03	75,68
PIACMS 125	12,5	29,07	78,49

COLOURS



ACM - Polished stainless steel AISI 316/1.4404-V4A
ACMS - Brushed stainless steel AISI 316/1.4404-V4A

JOINTS CAN ALSO BE USED FOR PROINTER KL ACC



PROINTER JUNCTIONS
Polished stainless steel AISI 316/1.4404-V4A

Article	€/Pc
RIPISACM/1	7,73
RITPISACM/1	7,73
REPISACM/1	7,73
GPISACM/1	4,64
TPISACM/1	6,70


PROINTER JUNCTIONS
Brushed stainless steel AISI 316/1.4404-V4A

Article	€/Pc
RIPISACMS/1	8,24
RITPISACMS/1	8,24
REPISACMS/1	8,24
GPISACMS/1	5,15
TPISACMS/1	7,21


PROINTER KL ACC

STAINLESS STEEL AISI 316/1.4401-V4A

PROINTER KL ACC 316 is a cove-shaped profile in stainless steel AISI 316/1.4404-V4A. The profile allows to connect the floor and wall coverings in ceramic and mosaic also with low thickness. It is particularly suitable to ensure cleanliness and hygiene in every kind of environment where good resistance to mechanical and chemical stresses are required. Its particular section makes **PROSHELL KL ALL 316** a much sought after profile.




EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

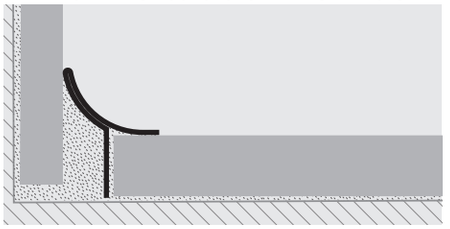


1. Choose "PROINTER KL ACC 316" according to the desired finish. **2.** Cut "PROINTER KL ACC 316" to the desired length. **3.** Apply the silicone along the floor-wall connection. **4.** Press the arrowhead of "PROINTER KL ACC 316" into the silicone evenly untili t is completely adherent to the floor and wall.

SUITABLE FOR USE IN CONTACT WITH FOODSTUFFS

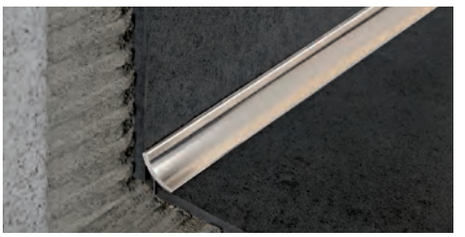

POLISHED STAINLESS STEEL AISI 316/1.4404-V4A
bar length **2,7 lm** - pack. **20 Pcs - 54 lm - 10/10 mm**

Article	H mm	€/lm	€/Pc
PIKLACM 15	15	16,89	45,6

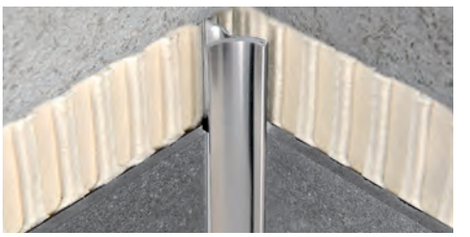

BRUSHED STAINLESS STEEL AISI 316/1.4404-V4A
bar length **2,7 lm** - pack. **20 Pcs - 54 lm - 10/10 mm**

Article	H mm	€/lm	€/Pc
PIKLACMS 15	15	21,34	57,62

COLOURS



ACM - Polished stainless steel AISI 316/1.4404-V4A
ACMS - Brushed stainless steel AISI 316/1.4404-V4A

IT IS POSSIBLE TO USE THE JOINTS OF PROINTER AC

© 2026 All rights reserved by Progress Profiles. Printed in Italy

Prices are referred to whole packs, 10% increase for minimum orders of 10 Pcs, 20% increase for orders of less than 10 Pcs.