



Genesis

For the Perfect Finish

2022



For the Perfect Finish...

Established in 1989 in the ceramic accessories market, Genesis quickly became a leading brand in the UK and around the world. Exporting since 1990 and now available in over 70 countries.

Since then we have diversified the range into the contract flooring, resin, landscaping and entrance matting sectors.


WELCOME TO GENESIS....



Genesis

For the Perfect Finish



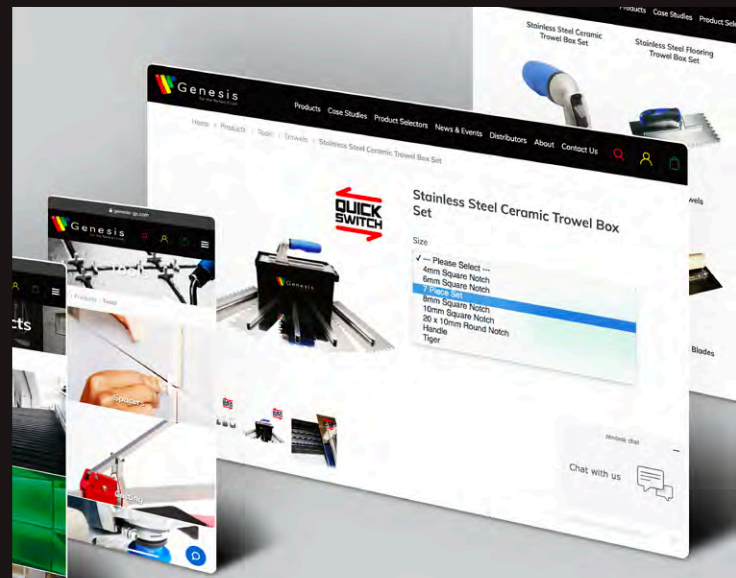

Metal Trim

Page 5



Luxe

Page 23




P.V.C. Trim

Page 143




Commercial Nosing

Page 39

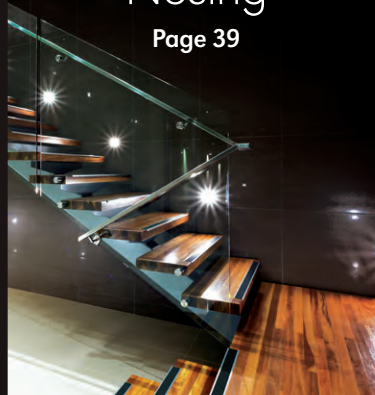

vision

Page 109

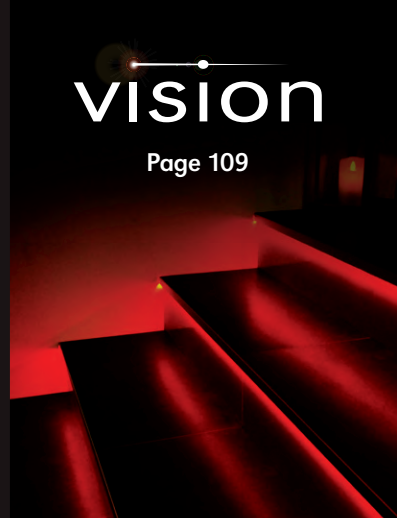

Tools & PPE

Page 59



Transitions

Page 161




BIHUI
PROFESSIONAL TILING TOOLS

Page 85




Step Edges

Page 137

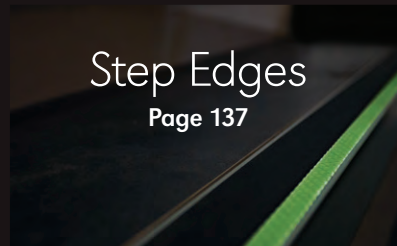


LVT Profiles

Page 26

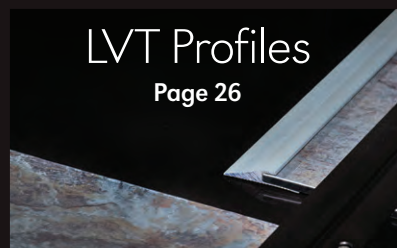


Metal Skirting

Page 36

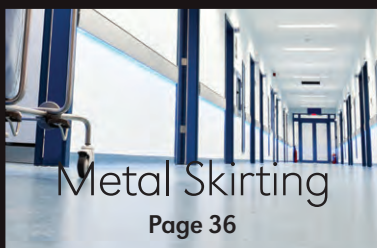

Anti-Slip, Matting & Access

Page 151

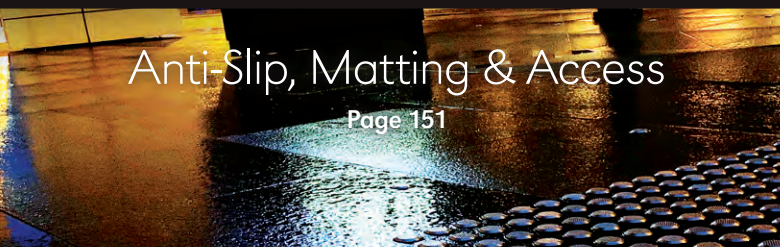


Movements & Structural Joints

Page 125




K & B

Page 105

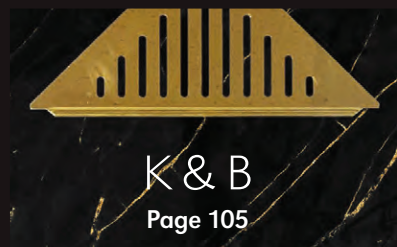

Edge Protection

Page 34

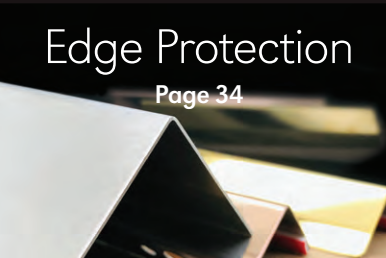

Panel Profiles

Page 31



Marketing

Page 171




Metal Trim

The Genesis range of metal profiles is without doubt one of the most comprehensive available, covering round, straight, square and even triangular profiles.




Aluminium Straight Edge & Formable Trim

**PROTECTIVE
FILM**
EXCL.*



ESA060 onwards



ESA030,040,050



A comprehensive range of profiles designed to protect corners avoiding the unsightly and fragile 45° cut. The defined square edge clearly outlines coverings such as rectified porcelain stoneware. Available in different materials, colors and finishes, these profiles offer a practical and aesthetic solution, ideal for walls and floors.

Anodised finishes are supplied with a transparent protective film offering protection during transport, storage, simply peel off after installation.

01*
White



02*
Matt White



16
Black



17
Matt Black



18
Brushed Black



34*
Soft Grey



80
Mill Aluminium



81
Matt Silver



85
Pewter



86
Bright Brass



88
Nickel



89
Bronze



90
Brushed Brass



91
Bright Silver



92
Matt Nickel



94
Brushed Effect



95
Bright Copper



96
Brushed Copper



98
Antique Rose



99
Bright Rose



101
Chrome Plated



411*
Granite



414*
Bath Stone



425*
Sand Stone



435*
Dark Granite



*POWDER COATED FINISHES



Code	D (mm)	Length (m)	Finish	Box Qty
ESA030	2.25	2.7	80 NEW LENGTH	20
ESA040	3.25	2.7	80 NEW LENGTH	20
ESA050	4.25	2.7	80 NEW LENGTH	20
ESA060	6	2.7	80 NEW LENGTH	20
ESA060	6	2.5	01,81,91	20
ESA080	8	2.7	80 NEW LENGTH	20
ESA080	8	2.5	01,02,16,17,18,34,80,81,85,86,88,91,94, 95,96,98,99,411,414,425,435	20
ESA100	10	2.7	80 NEW LENGTH	20
ESA100	10	2.5	01,02,16,17,18,34,80,81,85,86,88,89,90,91 92,94,95,96,98,99,101,411,414,425,435	20
ESA120	12	2.7	80 NEW LENGTH	20
ESA120	12	2.5	01,02,16,17,18,34,80,81,85,86,88,89,90, 91,92,94,95,96,98,99,101,411,414,425,435	20
ESA150	15	2.7	80 NEW LENGTH	20
ESA150	15	2.5	01,17,81,91,94	20
ESA180	18	2.7	80 NEW LENGTH	20
ESA180	18	2.5	81,91	20
ESA225	22.5	2.7	80 NEW LENGTH	20
ESA225	22.5	2.5	17,91,94,411,414,425,435	20

Formable

Code	D (mm)	Length (m)	Finish	Box Qty
EFA040	4	2.7	80 NEW LENGTH	20
EFA050	5	2.7	80 NEW LENGTH	20
EFA060	6	2.7	80 NEW LENGTH	20
EFA080	8	2.7	80 NEW LENGTH	20
EFA100	10	2.7	80 NEW LENGTH	20
EFA120	12	2.7	80 NEW LENGTH	20
EFA150	15	2.7	80 NEW LENGTH	20
EFA180	18	2.7	80 NEW LENGTH	20

Universal Corner Pieces - ESC

Produced from Machined Aluminium to ensure a perfect finish to compliment the profile.




Code	D (mm)	Finish	Pack Qty
ESC082	8	81,91,94	2
ESC102	10	81,90,91,94,411,414,425,435	2
ESC122	12	81,90,91,94,411,414,425,435	2



Metal Trim Straight / Square



Aluminium Medium Duty Trim

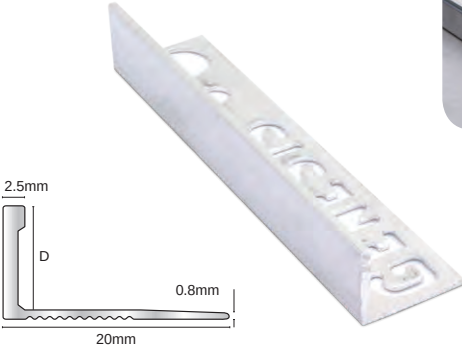

80
Mill Aluminium

Code	D (mm)	Length (m)	Finish	Box Qty
EMA080	8	2.5	80	50
EMA100	10	2.5	80	50
EMA120	12	2.5	80	50



Aluminium Slim Trim - Square

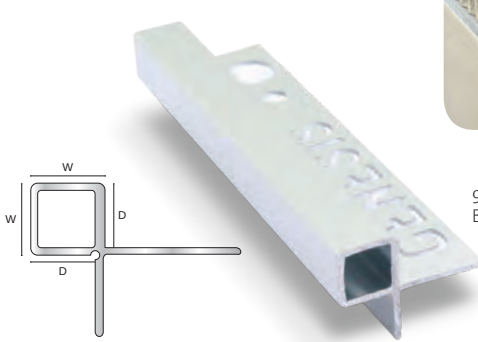

91
Bright Silver

Code	W x D (mm)	Length (m)	Finish	Box Qty
EAM100	11 x 10	2.5	91	20

Aluminium Contour Trim & Corners



81
Matt Silver



91
Bright Silver

Code	W x D (mm)	Length (m)	Finish	Box Qty
TDG084	8 x 8	2.5	81,91	20
TDG104	10 x 10	2.5	81,91	20
TDG124	12 x 12	2.5	81,91	20

Corner Pieces

Code	D (mm)	Finish	Pack Qty
ECG082	8	81,91	2
ECG102	10	81,91	2
ECG122	12	81,91	2

Corner Pieces


Produced from Machined Aluminium to ensure a perfect finish to compliment the profile.





Aluminium Square Trim & Corners

**PROTECTIVE
FILM
EXCL.***

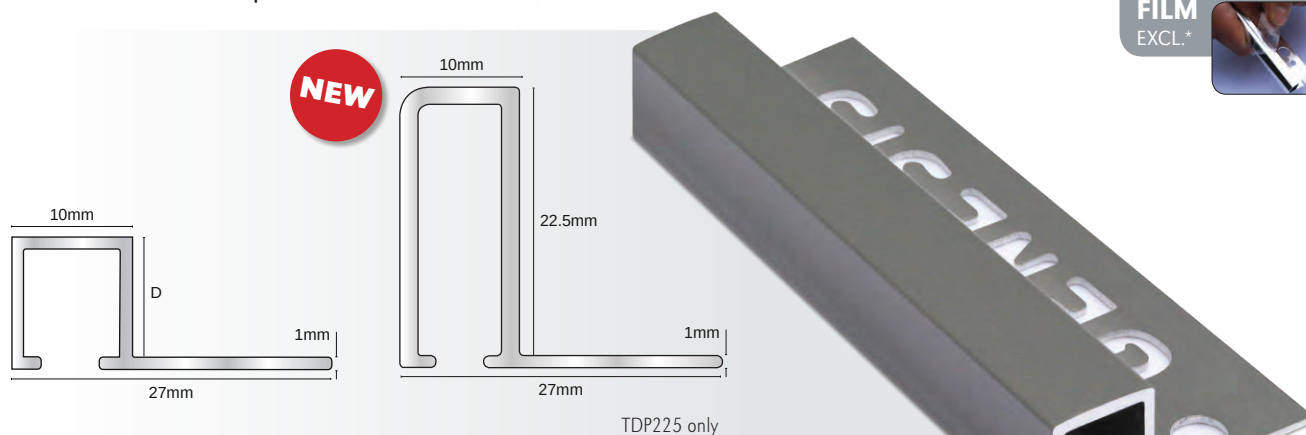

An alternative to an ordinary straight edge profile, the TDP offers a more luxurious finish. It can be used as an edge trim on the vertical with wall tiles or on the horizontal with Floor tiles or even as a feature strip in wall or floor applications. The extruded Aluminium profile gives a square appearance when installed and is also available with internal and external corner pieces (EDP) to obviate sharp edges when mitring is necessary.

Anodised finishes are supplied with a transparent protective film offering protection during transport, storage, simply peel off after installation.



*POWDER COATED FINISHES



Code	W x D (mm)	Length (m)	Finish	Box Qty
TDP080	10 x 8	2.5	81,91,94, 98,99 ,411,414,425,435	20
TDP100	10 x 10	2.5	01,02,16,17,18,81,82,86,90,91,94, 95,96, 98,99 ,411,414,425,435	20
TDP100	10 x 10	2.5	101	10
TDP120	10 x 12	2.5	01,02,16,17,18,81,82,86,90,91,94, 95,96, 98,99 ,411,414,425,435	20
TDP120	10 x 12	2.5	101	10
TDP150	10 x 15	2.5	91	20
TDP225	10 x 22.5	2.5 NEW	17,81,411,414,425,435	20

Universal Corner Pieces - EDP


Produced from Machined Aluminium to ensure a perfect finish to compliment the profile.

Code	D (mm)	Finish	Pack Qty
EDP082	8	81,82,91,94,95,96	2
EDP102	10	01,16,17,18,81,82,90,91,94,95 96,101,411,414,425,435	2
EDP122	12	01,16,17,18,81,82,90,91,94,95 96,101,411,414,425,435	2
EDP152	15	81,91,94	2



Metal Trim Square / Round

Aluminium Internal Square

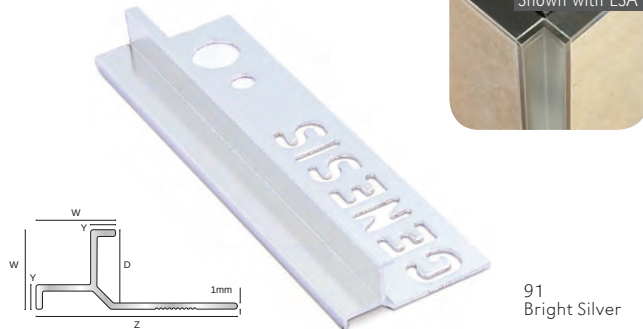

91
Bright Silver

Code	W x D (mm)	Y (mm)	Z (mm)	Length (m)	Finish	Box Qty
EIK100	11 x 10	3	31	2.5	91	20
EIK120	13 x 12	4	33	2.5	91	20
End Caps						
Code	D (mm)	Finish	Pack Qty			
ECK102	10	91	2			
ECK122	12	91	2			


Aluminium Pro Trim & Corners



Code	W x D (mm)	Length (m)	Finish	Box Qty
ETA060	8 x 6	2.5	81,91	20
ETA080	8 x 8	2.5	81,91,94	20
ETA100	10 x 10	2.5	81,91,94	20
ETA120	12 x 12	2.5	81,91,94	20


Corner Pieces - see EAC / EIQ opposite

Aluminium Angle Trim - Slim

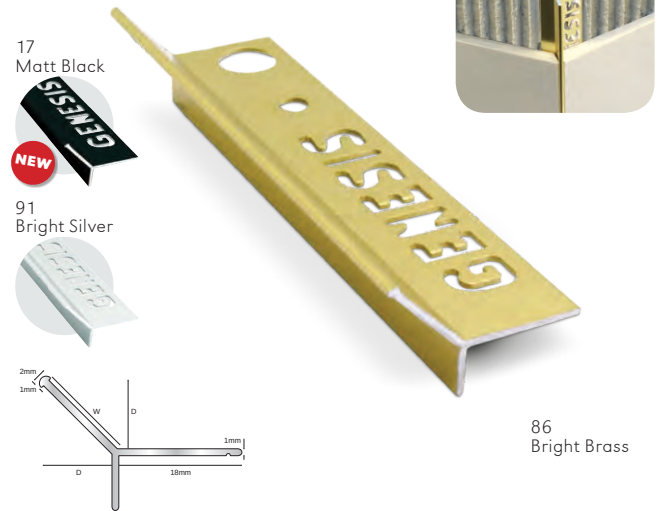


Code	W x D (mm)	Length (m)	Finish	Box Qty
EAD080	12 x 8	2.5	86,91	20
EAD100	15 x 10	2.5	17,86,91	20
EAD120	18 x 12	2.5	86,91	20

Aluminium Round Edge

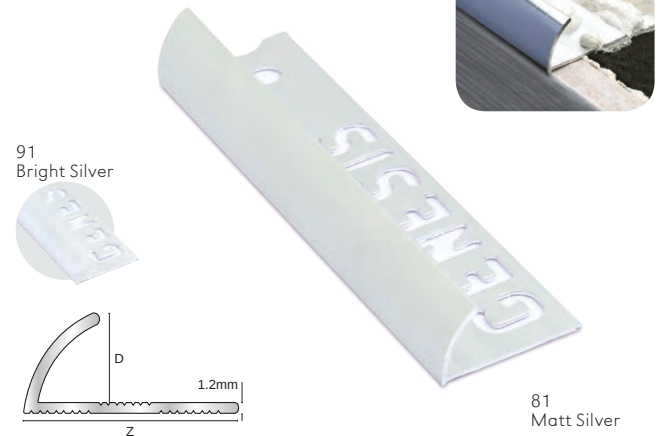

Code	D (mm)	Z (mm)	Length (m)	Finish	Box Qty
ERA100	10	22	2.5	91	20
ERA120	12	24	2.5	81,91	20

Aluminium Quadrant Trim & Corners



**PROTECTIVE
FILM**
EXCL. 80



An extruded aluminium profile with a fully rounded quadrant face designed to protect the edges of ceramic tiles or similar hard finishes fitted in wall or floor installations. Available in a wide range of heights and finishes with corresponding Internal and External Aluminium corners avoiding the unsightly and exposed 45° cuts.

Code	W/D (mm)	Length (m)	Finish	Box Qty
EAQ060	6	2.5	01	20
EAQ080	8	2.5	01,81,91,94	20
EAQ100	10	2.5	01,16,80,81,85,86,91,94,95,96	20
EAQ120	12	2.5	01,16,81,86,91,94,95,96	20

Solid Brass available upon request - lead times and MOQ's apply.



Corner Pieces

Produced from Machined Aluminium to ensure a perfect finish to compliment the profile.

External Corners


Code	D (mm)	Finish	Pack Qty
EAC062	6	91	2
EAC082	8	01,80,81,91,94	2
EAC102	10	01,16,80,81,86,91,94,95,96	2
EAC122	12	01,16,80,81,91,94,95,96	2

Internal Corners

Code	D (mm)	Finish	Pack Qty
EQ082	8	81,91,94	2
EQ102	10	81,86,91,94	2
EQ122	12	81,91,94	2




Don't cut corners...
...there's a piece for that!

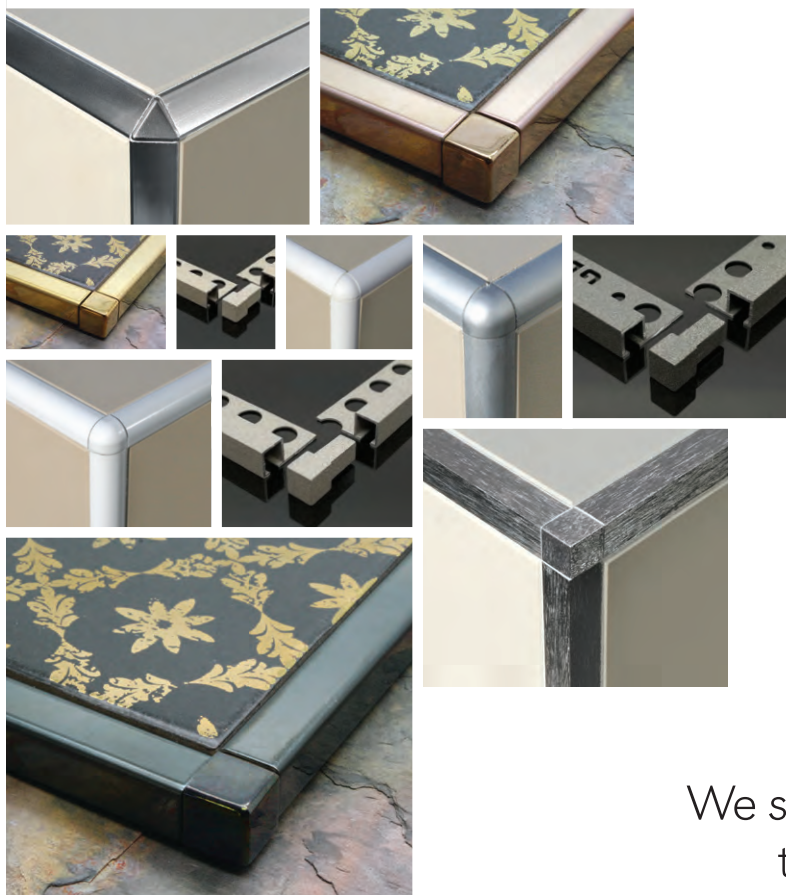

We sell a range of corner pieces
to provide the Perfect Finish

Aluminium Triangular Trim & Corners



These unique profiles offer an attractive professional finish to ceramic tiles; the specially engineered triangular shape of these trims provide outstanding strength and protection for tiled edges and corners.

All are supplied with a transparent protective film offering protection during transport, storage, simply peel off after installation.

Code	D x W (mm)	Length (m)	Finish	Box Qty
EAT100	11 x 10	2.7	81,91,94	20
EAT120	13 x 12	2.7	81,91,94	20



Corner Pieces

Produced from Machined Aluminium to ensure a perfect finish to compliment the profile.

External Corners

Code	D (mm)	Finish	Pack Qty
EET102	10	91,94	2
EET122	12	91,94	2

Internal Corners

Code	D (mm)	Finish	Pack Qty
EIT102	10	91,94	2
EIT122	12	91,94	2

81
Matt Silver




91
Bright Silver




94
Brushed Effect



**PROTECTIVE
FILM**



Aluminium Self Adhesive Internal Trim, Corners & Caps



Aluminium Internal Trim applied retrospectively and secured into position with the pre-bonded adhesive tape, simply remove the backing and apply to the prepared area.

Ideal for floor and worktop applications, a range of complimentary accessories complete the perfect finish.

Code	D (mm)	Length (m)	Finish	Box Qty
EWA150	11.5	2.5	81,91	20

Corner Pieces & End Caps

The fabricated aluminium corners and caps with integral guide arms that help locate and guide into the profile, producing a perfect match to the EWA profile offering a neat and professional finish.


81
Matt Silver




91
Bright Silver



Code	D (mm)	Type	Finish	Pack Qty
EWI150	11.5	Internal Corner	81,91	2
EWE150	11.5	External Corner	81,91	2
EWK150	11.5	End Caps	81,91	2



Stainless Steel Square Edge Trim & Corners



For stainless steel cutting disc see Page 80

This Stainless Steel profile should be chosen where high levels of hygiene are sought, such as food processing industries, breweries, dairies and hospitals.

These profiles offer superb resistance to principal chemical and atmospheric agents and are particularly recommended to protect steps in zones such as food processing industries, breweries, dairies, hospitals and external applications.

Its' smooth and non-porous surface makes it especially difficult for the adhesion and survival of bacteria and/or other micro-organisms.

84
Stainless Steel



102
Brushed Stainless Steel



PROTECTIVE FILM
EXCL. 102



161
Tinted Black



187
Gold



195
Copper



Stainless Steel Square Edge Trim - Grade 304

Code	W x D (mm)	Length (m)	Finish	Box Qty
EQQ080	8 x 8	2.5	84,102,161,187,195	10
EQQ100	10 x 10	2.5	84,102,161,187,195	10
EQQ120	12 x 12	2.5	84,102,161,187,195	10
EQQ150	15 x 15	2.5	NEW 84	10

Stainless Steel Square Edge Trim - Grade 316

Code	W x D (mm)	Length (m)	Finish	Box Qty
EQQ308	8 x 8	2.5	84,102	10
EQQ310	10 x 10	2.5	84,102	10
EQQ312	12 x 12	2.5	84,102	10



Corner Pieces - Grade 304

Corner pieces to compliment the EQQ stainless steel square edge trims.



Code	D (mm)	Finish	Pack Qty
EDQ082	8	84,102,161,187,195	2
EDQ102	10	84,102,161,187,195	2
EDQ122	12	84,102,161,187,195	2

Stainless Steel Quadrant Trim & Corners



For stainless steel cutting disc see Page 80

This Stainless Steel profile should be chosen where high levels of hygiene are sought, such as food processing industries, breweries, dairies and hospitals.

These profiles offer superb resistance to principal chemical and atmospheric agents and are particularly recommended to protect steps in zones such as food processing industries, breweries, dairies, hospitals and external applications.

Its smooth and non-porous surface makes it especially difficult for the adhesion and survival of bacteria and/or other micro-organisms.

84 Stainless Steel 102 Brushed Stainless Steel



PROTECTIVE FILM
EXCL. 102



Stainless Steel Quadrant Trim - Grade 304

Code	W/D (mm)	Length (m)	Finish	Box Qty
ESQ080	8	2.5	84,102	10
ESQ100	10	2.5	84,102	10
ESQ120	12	2.5	84,102	10

Stainless Steel Quadrant Trim - Grade 316

Code	W/D (mm)	Length (m)	Finish	Box Qty
ESQ308	8	2.5	84,102	10
ESQ310	10	2.5	84,102	10
ESQ312	12	2.5	84,102	10



Corner Pieces - Grade 304

Corner pieces to compliment the ESQ stainless steel square edge trims.



Code	D (mm)	Finish	Pack Qty
ECQ082	8	84,102	2
ECQ102	10	84,102	2
ECQ122	12	84,102	2

Stainless Steel Straight Edge (304 & 316) & Formable Trim



For
stainless
steel cutting
disc see
Page 80

This Stainless Steel profile should be chosen where high levels of hygiene are sought, such as food processing industries, breweries, dairies and hospitals.

These profiles offer superb resistance to principal chemical and atmospheric agents and are particularly recommended to protect steps in zones such as food processing industries, breweries, dairies, hospitals and external applications.

It's smooth and non-porous surface makes it especially difficult for the adhesion and survival of bacteria and/or other micro-organisms.

84
Stainless Steel



102
Brushed



**PROTECTIVE
FILM**
EXCL. 102



161
Tinted Black



187
Gold



195
Copper



Stainless Steel - Grade 304

Code	D (mm)	Length (m)	Finish	Box Qty
ESS045	4.5	2.5	84,102	10
ESS060	6	2.5	84,102	10
ESS080	8	2.5	84,102,161,187,195	10
ESS100	10	2.5	84,102,161,187,195	10
ESS120	12	2.5	84,102,161,187,195	10
ESS150	15	2.5	84,102	10
ESS180	18	2.5	84,102	10
ESS225	22.5	2.5	84,102	10

Stainless Steel - Grade 316

Code	D (mm)	Length (m)	Finish	Box Qty
ESS310	10	2.5	84,102	10
ESS312	12	2.5	84,102	10

Formable

Code	D (mm)	Length (m)	Finish	Box Qty
ESF100	10	2.5	84,102	10
ESF120	12	2.5	84,102	10

Metal Trim Stainless Steel / Listello

Stainless Steel Angle Edge



Code	D (mm)	Length (m)	Finish	Box Qty
ETS100	10	2.5	84	10

Stainless Steel Birdsbeak




Code	D (mm)	Length (m)	Finish	Box Qty
ETS060	6	2.5	102	10

Aluminium Listello





Code	W x D (mm)	Length (m)	Finish	Box Qty
LPA100	10 x 7	2.5	91	20

Glass Panel / Shadow Gap

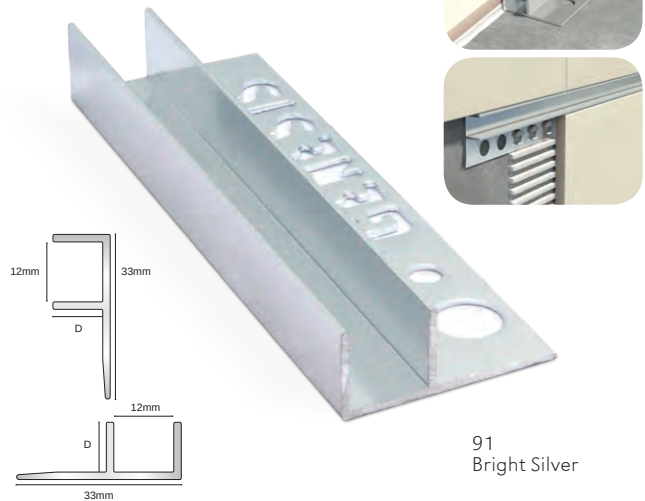

Code	D (mm)	Length (m)	Finish	Box Qty
LGA100	10	2.5	91	10
LGA125	12.5	2.5	91	10

Flat Line Listello

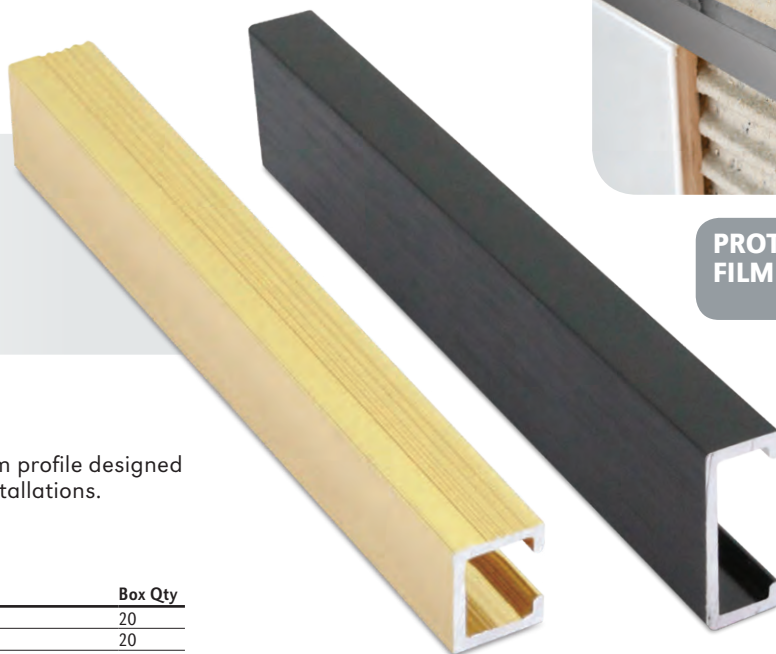



**PROTECTIVE
FILM**




Genesis LFA is a flat decorative Aluminium profile designed to create a feature in ceramic wall tile installations.

Code	W x D (mm)	Length (m)	Finish	Box Qty
LFA100	10 x 8	2.5	81,86,91,94	20
LFA200	20 x 8	2.5	16,17,18,90,91,94	20



2cm Options for Outdoor Tiles

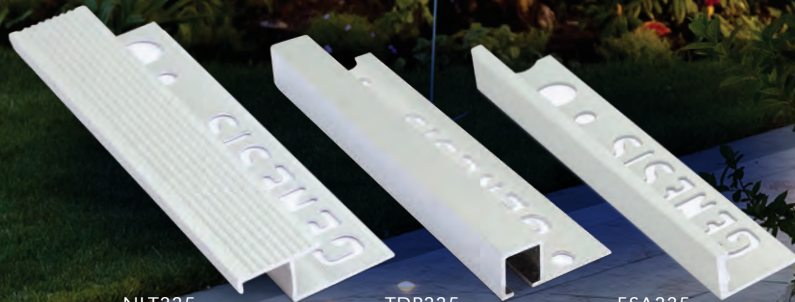

NLT225
Page 142

TDP225
Page 10


ESA225
Page 6




Levelling Systems for 2cm tiles available
- see the options on pages 70 & 71

Luxe

A range of luxurious tiling profiles to add glitz, glamour and a premium finish to your installation.

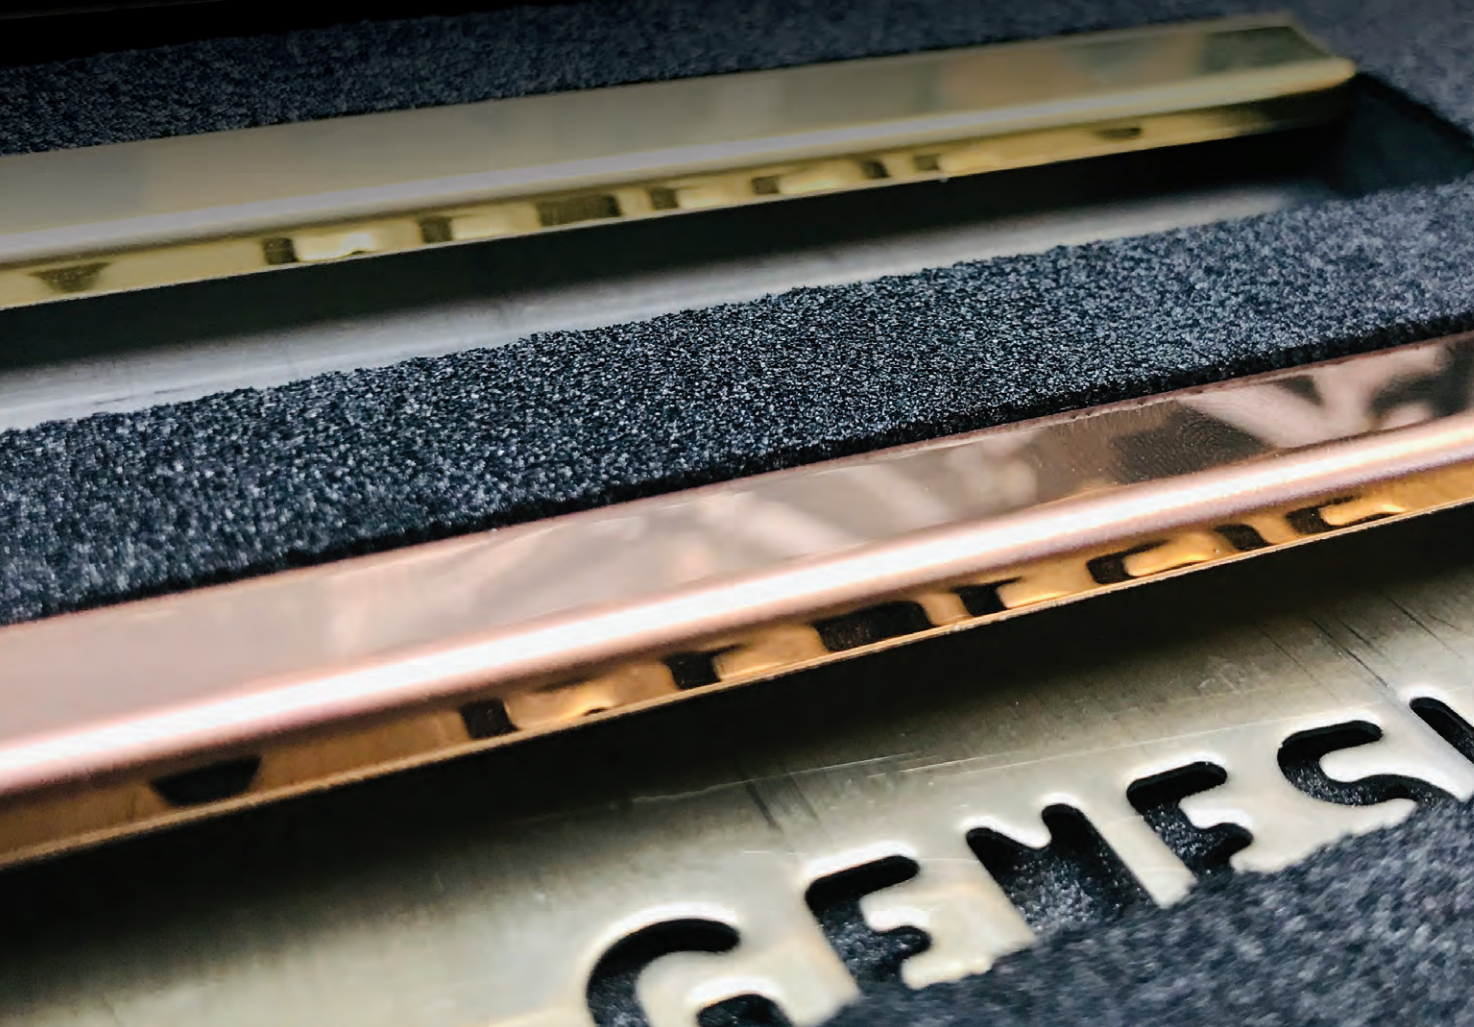

Plated Stainless Steel

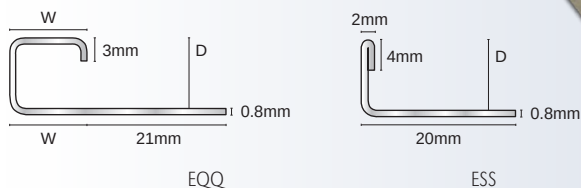

Make a statement with these luxurious stainless steel profiles. Available in three breathtaking finishes, stainless steel has never looked so good!

161
Tinted Black



187
Gold



195
Copper



Square Edge

Code	W x D (mm)	Length (m)	Finish	Box Qty
EQQ080	8 x 8		161,187,195	10
EQQ100	10 x 10		161,187,195	10
EQQ120	12 x 12		161,187,195	10

Straight Edge


Code	D (mm)	Length (m)	Finish	Box Qty
ESS080	8mm		161,187,195	10
ESS100	10mm		161,187,195	10
ESS120	12mm		161,187,195	10

Corner Pieces

Code	D (mm)	Finish	Box Qty
EDQ082	8mm	161,187,195	10
EDQ102	10mm	161,187,195	10
EDQ122	12mm	161,187,195	10



Solid Brass

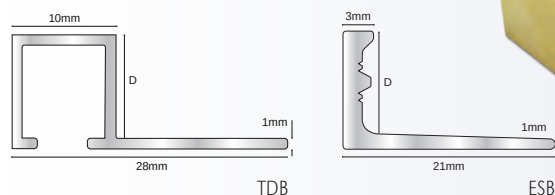


Our range of solid brass profiles are suitable for both domestic and commercial areas. Solid brass is extremely hard wearing and provides a truly unique finish.



Code	D (mm)	Length (m)	Finish	Box Qty
ESB107	10	2.7	86,87,90	10
ESB127	12	2.7	86,87,90	10
TDB107	10	2.7	87,90	5
TDB127	12	2.7	87,90	5

Glitter Listello



Add glitz and glamour to your room with our new Glitter Listellos. As a vertical or horizontal feature strip this can be used on wall tile installations.

Code	W x D (mm)	Length (m)	Finish	Box Qty
LAG100	10 x 10	2.5	216,286,291	10

216
Black

286
Gold


291
Silver

LVT Profiles

Luxury Vinyl Tiles are distinctly slim and highly water-repellent and durable floor coverings, now complimented by an equally enduring, versatile and functional range of profiles.




Aluminium Internal Corner




Code	W x D (mm)	Length (m)	Finish	Box Qty
TVI037	25 x 25	2.7	81,89,91	10

81
Matt Silver




89
Bronze



91
Bright Silver



Aluminium External Corner

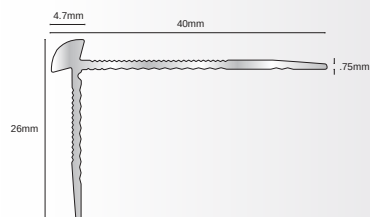


NEW




Code	W x D (mm)	Length (m)	Finish	Box Qty
TVC037	4.7 x 26	2.7	81,89,91,94	10

81
Matt Silver




89
Bronze




91
Bright Silver



94
Brushed Effect



Aluminium Vinyl Nosing




NEW



Code	D (mm)	Length (m)	Finish	Box Qty
TVB037	3	2.7	81,89,91,94	10
TVB037	3	2.7	81,89,91,94	10

81
Matt Silver



89
Bronze





91
Bright Silver



94
Brushed Effect



Vinyl Transition

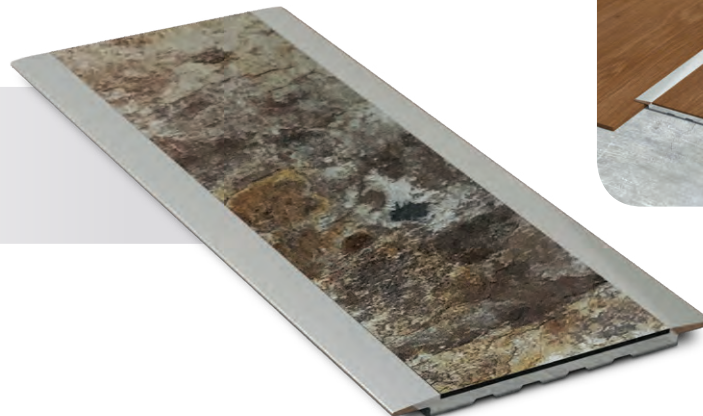


Code	W x D (mm)	Length (m)	Finish	Box Qty
TSL547	70 x 4	2.7	80	10

Inserts available NITR50 & NISL50. See pages 41

80
Mill Aluminium
(Vinyl not included)

Aluminium Step Edge

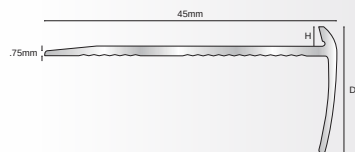


Code	D (mm)	H (mm)	Length (m)	Finish	Box Qty
TVN037	19.5	3	2.7	81,89,91,94	10
TVN057	21.5	5	2.7	81,89,91,94	10

81
Matt Silver



89
Bronze

91
Bright Silver

94
Brushed Effect



Aluminium End Profile




Code	W x D (mm)	H (mm)	Length (m)	Finish	Box Qty
TVE037	6 x 5.6	3	2.7	81,89,91,94	10
TVE057	8.5 x 7.6	5	2.7	81,89,91,94	10

81
Matt Silver




89
Bronze

91
Bright Silver

94
Brushed Effect



Aluminium Reducer

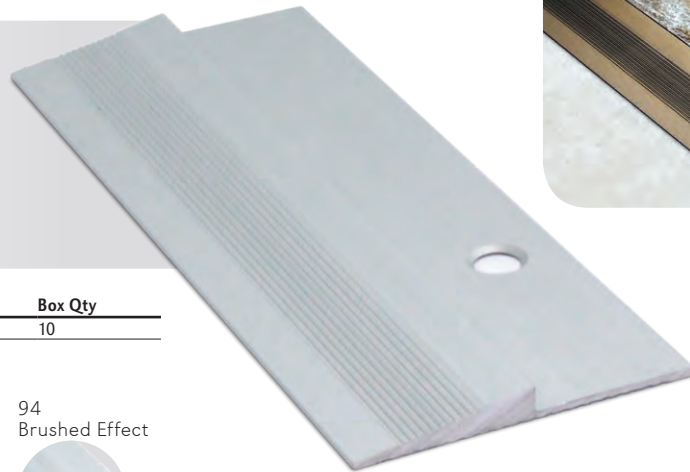


Code	W x D (mm)	Length (m)	Finish	Box Qty
TVR037	38 x 3	2.7	81,89,91,94	10

81
Matt Silver



89
Bronze





91
Bright Silver



94
Brushed Effect




Aluminium Reducer



Code	W x D (mm)	Length (m)	Finish	Box Qty
TVR057	39 x 5	2.7	81,89,91,94	10

81
Matt Silver



89
Bronze



91
Bright Silver



94
Brushed Effect



Panel Profiles


Shower Panels are a cost effective alternative to tiles and a growing part of the UK bathroom scene.

Naturally we offer the profiles to compliment these in a small, concise range



Panel Profiles


End - U

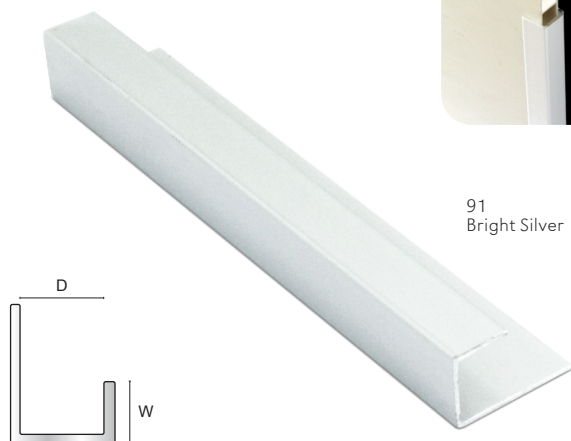

91
Bright Silver

Code	W x D(mm)	Length (m)	Finish	Box Qty
PUA118	6 x 11.5	2.4	91	50
PUA118	6 x 11.5	2.4	NEW 01,17,81	50


H - Joint

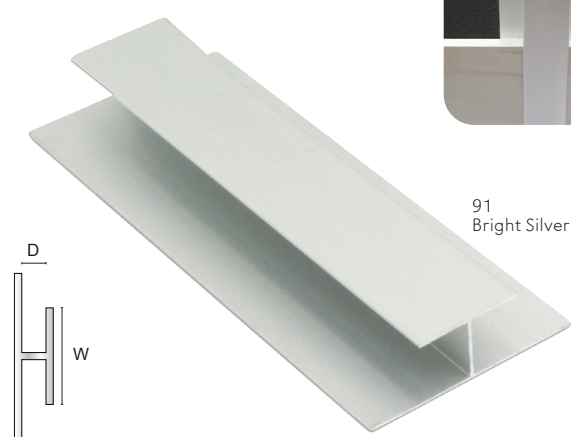

91
Bright Silver

Code	W x D (mm)	Length (m)	Finish	Box Qty
PHA118	11 x 11.5	2.4	91	50
PHA118	11 x 11.5	2.4	NEW 01,17,81	50


External

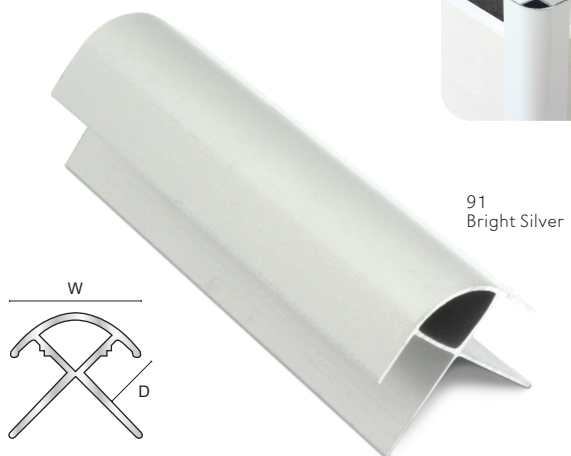

91
Bright Silver

Code	W x D (mm)	Length (m)	Finish	Box Qty
PXA118	30 x 11.5	2.4	91	25
PXA118	30 x 11.5	2.4	NEW 01,17,81	25

Internal

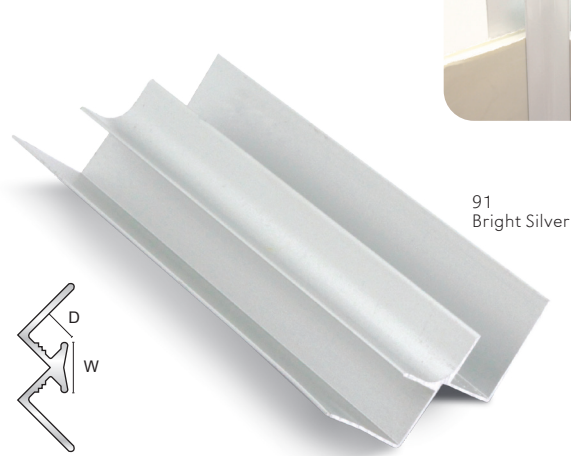

91
Bright Silver

Code	W x D (mm)	Length (m)	Finish	Box Qty
PIA118	15 x 11.5	2.4	81,91	25
PIA118	15 x 11.5	2.4	NEW 01,17	25

Finish Options


01
White



17
Matt Black




81
Matt Silver




91
Bright Silver



Scotia Retro Fit



91
Bright Silver



Code	W x D (mm)	Length (m)	Finish	Box Qty
PSA308	27 x 19	2.4	91	50



Colour match to any RAL



We can now colour match most of our aluminium profiles to any RAL, please contact us for more information.

Edge Protection



A simple yet effective range of corner guards to protect the finished surface of any installation. Made from aluminium and stainless steel these corner guards are robust for domestic and commercial installations.



Aluminium Retro-Fit Protector

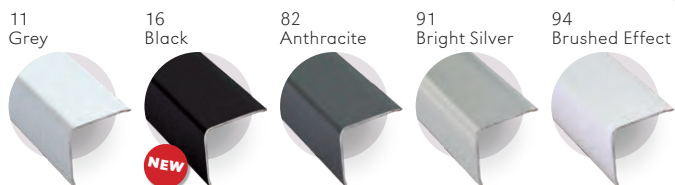


Code	W x D (mm)	Length (m)	Self-Adhesive	Finish	Box Qty
EAA100	10 x 10	2.5	Yes	81,91	20
EAA206	20 x 20	2.5	No	11,16,81,82,91,94	20
EAA254	25 x 25	2.5	No	81	20


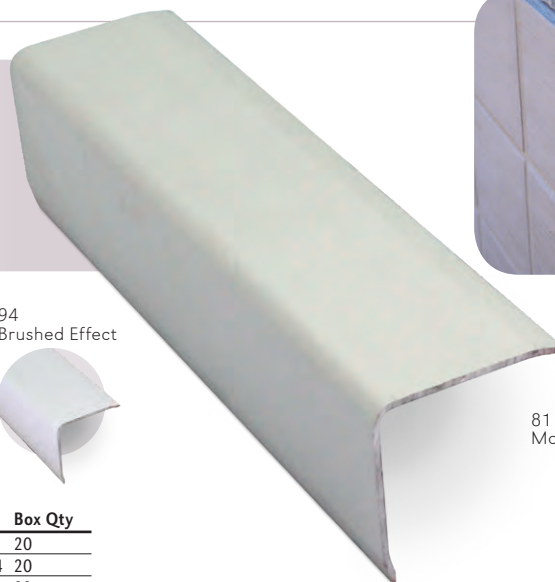


81
Matt Silver

Stainless Steel Retro-Fit Protector - Self Adhesive



Code	W x D (mm)	Length (m)	Finish	Box Qty
EAS154	15 x 15	2.5	84,102	10
EAS304	30 x 30	2.5	84,102,117,187,195	10
EAS504	50 x 50	2.5	84,102,117,187,195	10
EAS515	50 x 50	1.5	84	10

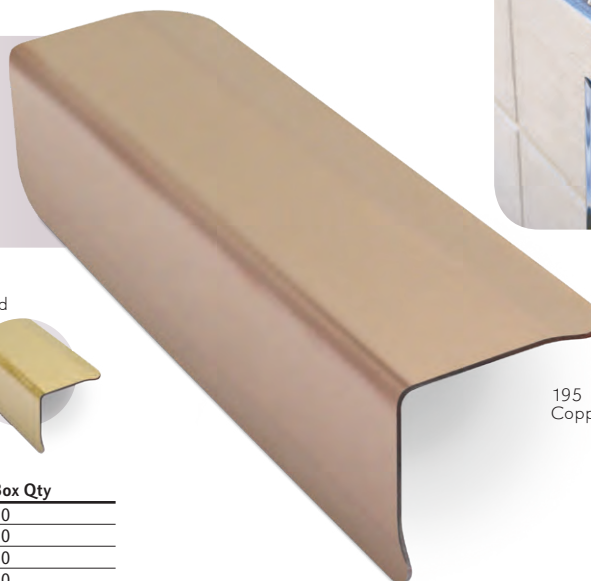



195
Copper

Metal Skirting

Sleek and elegant skirting solutions
perfect for commercial installations



Aluminium Skirting, Corners & End Caps



81
Matt Silver

Genesis KAA is an anodised Aluminium Skirting. It is ideal for use where a modern, hi-tech finish is required. It can be used with most types of floor covering including carpets, resilient flooring, stone, wood, wood laminate and ceramic tiles.

The profile is designed to sit on top of the floor covering in order to provide a neat finish.

Available in Matt Silver, and with matching finishing trims for neat installation: End caps, junctions and internal/external corners.

Powder coating and anodising options available, please contact us for details.


Code	D (mm)	Length (m)	Finish	Box Qty
KAA607	60	2.7	81	10
KAA807	80	2.7	81	10
KAA107	100	2.7	81	10

P.V.C. Corners & End Caps

Code	Description	Finish	Box Qty
KPE600	External Corner for KAA607	11	20
KPI600	Internal Corner for KAA607	11	20
KPC600	Pair End Caps (L/R) for KAA607	11	20
KPE800	External Corner for KAA807	11	20
KPI800	Internal Corner for KAA807	11	20
KPC800	Pair End Caps (L/R) for KAA807	11	20
KPE100	External Corner for KAA107	11	20
KPI100	Internal Corner for KAA107	11	20
KPC100	Pair End Caps (L/R) for KAA107	11	20


KPC

KPI

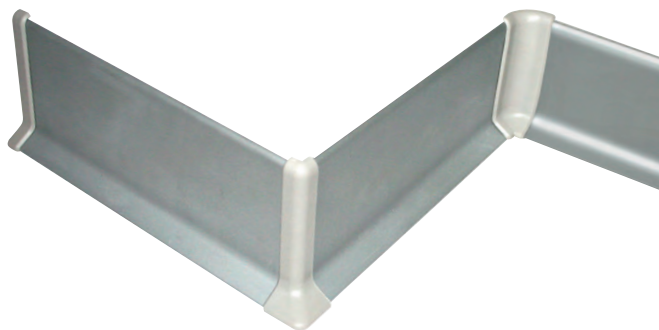

KPE

Aluminium Clip On Skirting, Corners & End Caps



81
Matt Silver



This profile is anodised Aluminium skirting which is easy to install and allows you to cover and protect low running cables around the perimeter, providing an attractive finish to low wall corners. The internal interlocking clip is fixed to the wall with screws, which are supplied, to provide a solid foundation. The top section simply clips into place.

Powder coating and anodising options available, please contact us for details.

Code	W x D (mm)	Length (m)	Finish	Box Qty
KAC710	10 x 70	2.5	81	10

External Corners

Code	W x D x L (mm)	Description	Finish	Pack Qty
KEC710	10 x 70 x 80	Pre-formed external corner	81	1
KIC710	10 x 70 x 80	Pre-formed internal corner	81	1


End Caps

Code	W x D (mm)	Description	Finish	Pack Qty
KLC710	10 x 70	Left end cap	81	1
KRC710	10 x 70	Right end cap	81	1



Commercial Nosing

We offer you a combination of profiles to suit all types of stairs and installation requirements. Carpet, laminate, tile or vinyl solutions can be found.

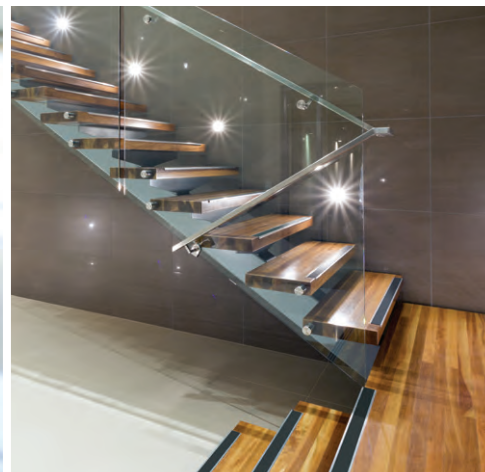

LRV's – Clarification

Reflectance is the proportion of light that a surface reflects compared to the amount or volume of light that falls on the said surface. An LRV is a value given to a surface to identify the amount of light reflected. People with impaired vision can perceive light and dark, therefore LRV's are a suitable method to measure contrast between 2 different surfaces.

Note that dark, matt or textured surfaces absorb a large amount of light, therefore have low reflectance values, however a combination of one or all light, shiny or smooth surfaces reflect the majority of light and therefore have higher reflectance values.


In order to achieve a suitable contrast between different surfaces, ADM 2004 recommend at least a 30 point difference in the LRV's of the two contrasting surfaces.

Please note the RAL numbers in the table is a guide only and cannot guarantee an exact match as there are a number of variables within the manufacturing process.

^aSpecial colour matching RAL E3 Effects

^{*}Awaiting final test results

Genesis Finish	LRV	RAL
01 White	79.9	9003
16 Black	4.5	9004
20 Brown	9.1	8014
25 Beige	41.1	1001
27 Canvas	53.2	1013
30 Red	10.6	3031
43 Dolphin Grey	27.6	7042
44 Ice Grey	42.1	7001
46 Midnight Grey	12.8	7024
47 Yellow	55.7	1018
48 Cobalt Blue	9.2	5000
54 Saffron	46.3	1017
58 Cloud	58*	7047
68 Haze	66*	860-2 ^a
78 Sand	77*	1013
80 Mill Aluminium	78.9	
113 Tangerine	32.8	2000
601 White	82.7	9003
616 Black	4.8	9004
643 Dolphin Grey	18.3	7000
647 Yellow	46.1	1012

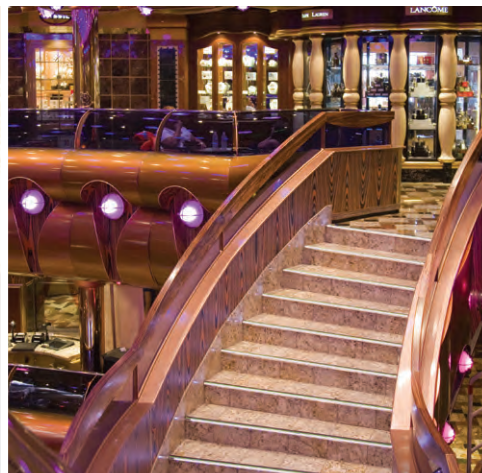

Nosing Insert Slip Resistance

Slip-resistance tests have been independently undertaken by Lucideon Ltd using the pendulum and inclined platform test.

Inclined Platform Test DIN 51130:2010

The critical angle at which a test person reaches the limit of safe walking on an inclined plane is used as a measure of slip resistance.

Pendulum Test BS 7976-2:2002

The energy absorbed by contact with the pre-set distance is read from a physical scale by a pointer that follows the overswing of the pendulum arm. 12 results are averaged to give the final pendulum number which is used to categorise the tile surface.

Results

Insert	Inclined Platform Test DIN 51130:2010*	Category	Pendulum Test BS 7976-2:2002 [†]	
			Dry	Wet
Standard	22.9°	R11	66	54
Tredsafe®	24.7°	R11	57	47

*Average of Six Shod Results (Corrected)



[†]PTV Average Value

The UK slip resistance group recommends the following guidelines;

PTV	Slip Potential
0-24	High
25-35	Moderate
36+	Low

Drilling Guide

Length	No. of Holes
600 - 699	2
700 - 1049	3
1050 - 1399	4
1400 - 1749	5
1750 - 2099	6
2100 - 2449	7
2450 - 2799	8
2800 - 3220	9

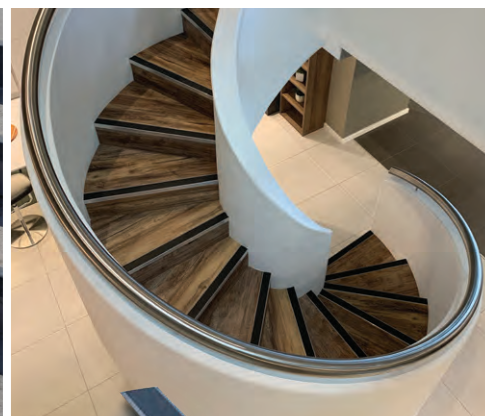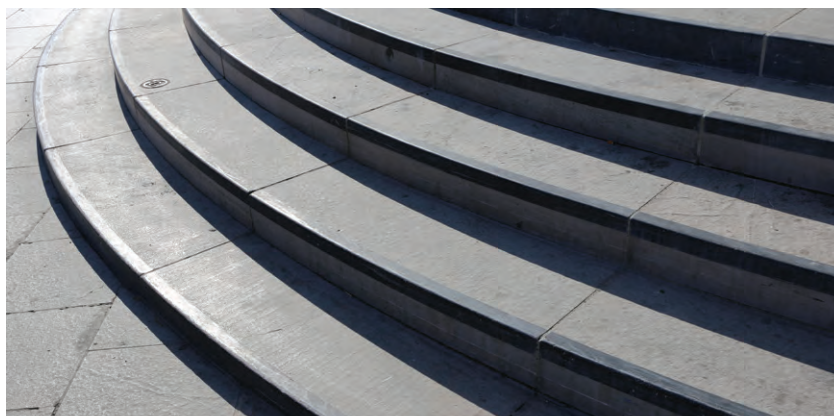

Templates/Curves

Stair casings can be made to fit most irregular shapes and curves. However each curved step must be treated individually and a separate template made for each using card, felt or paper. Follow these three simple steps as an easy guide to the perfect edge.

For assistance with any aspect of measuring or making templates please speak to Technical Services.


Not available for NXF/S, NTC, ATC or Vision



Step 1

Place the card or felt on top of the curve that requires a template and draw a line underneath with a felt pen or marker (see Figure 1) following the edge of the curve to create a smooth line.


Figure 1

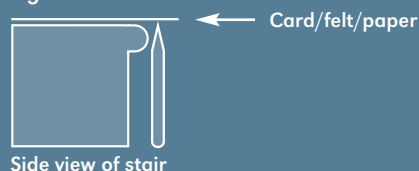

Step 2

Cut the shape along the felt pen mark (Figure 2) and clearly indicate the top and front edge of the template.


Figure 2

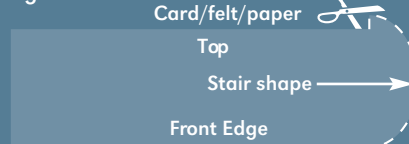

Step 3

Clearly mark on the template, the customer name and reference, the profile required, the colour insert required and finally whether your curve is required drilled or undrilled (Figure 3).

Figure 3

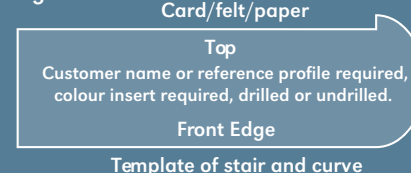

Installation - Mechanical Fix

If fixing inserts separate follow steps 1 – 6, remove release paper from channel and position insert ends flush applying pressure towards the centre finishing with hand roller to ensure adhesion.



1
Prepare surface, it must be clean, smooth and free of debris.



2
Position the profile, check the fit and mark the drill holes.



3
Drill and Plug to suit the screw size.



4
Apply adhesive as per manufacturer's instructions.



5
Position onto step.



6
Mechanically fix.



7
Insert plug.




8
Remove protective film when applicable.

Installation - Adhesive

Installer must follow individual manufacturers guidelines.




1
Prepare surface, it must be clean, smooth and free of debris.



2
Apply 5mm bead to the underside of the profile, 2 lines for Single and 3 for double channel.



3
Position, press and slide to ensure full bond.



4
Allow min. 1 hour after fixing. It is the contractor's responsibility to ensure the bond is secure before opening the area.

Insert quick reference guide

Insert	LRV	NSL		ASL		NHD		AHD		NTC/S	ATC/S	NXF/S	LNR	P.V.C
		SINGLE	DOUBLE	SINGLE	DOUBLE	SINGLE	DOUBLE	SINGLE	DOUBLE					
Standard														
01 White	79.9	□	□	□	□	□	□	□	□	□	□		□	□
16 Black	4.5	■	■	■	■	■	■	■	■	■	■	■	■	■
20 Brown	9.1	■	■	■	■	■	■	■	■	■	■		■	■
25 Beige	41.1	■	■	■	■	■	■	■	■	■	■		■	■
27 Canvas	53.2	□	□	□	□	□	□	□	□	□	□		□	□
30 Red	10.6	■	■	■	■	■	■	■	■	■	■		■	■
43 Dolphin Grey	27.6	□	□	□	□	□	□	□	□	□	□		□	□
44 Ice Grey	42.1	□	□	□	□	□	□	□	□	□	□	□	□	□
46 Midnight Grey	12.8	■	■	■	■	■	■	■	■	■	■		■	■
47 Yellow	55.7	■	■	■	■	■	■	■	■	■	■	■	■	■
48 Cobalt Blue	9.2	■	■	■	■	■	■	■	■	■	■		■	■
54 Saffron	46.3	■												■
58 Cloud NEW	58*	□	□	□	□	□	□	□	□	□	□		□	□
68 Haze NEW	66*	□	□	□	□	□	□	□	□	□	□		□	□
78 Sand NEW	77*	□	□	□	□	□	□	□	□	□	□		□	□
113 Tangerine	32.6	■												■
120H Hazard						■	■	■	■					■
Tredsafe®														
601 White	82.7	□	□	□	□	□	□	□	□	□	□		□	□
616 Black	4.8	■	■	■	■	■	■	■	■	■	■		■	■
643 Dolphin Grey	18.2	■	■	■	■	■	■	■	■	■	■		■	■
647 Yellow	46.1	■	■	■	■	■	■	■	■	■	■		■	■
NIA50														
80 Mill Aluminium	78.9					□				□			□	
P.V.C Channel														
16 Black														■
Anodising														
16 Black	4.7	■	■	■	■	■	■	■	■			■	■	
86 Bright Brass	64.3	■	■	■	■	■	■	■	■			■		

*Awaiting final test results




Standard - NISL38



Standard - NISL50




Standard - NIHD38



Standard - NIHD50




Tredsafe® - NITR38



Tredsafe® - NITR50



Castellated - NIA50



Insert	Fits	External
NISL38	NSL Twin Channel	No
NISL38	NSL Single Channel	No
NISL50	NSL Single Channel	No
NIHD38	NHD Twin Channel	No
NIHD50	NHD Single Channel	No
NITR38	NSL, NHD Twin Channel	Yes
NITR50	NSL, NHD Single Channel	Yes
NIA50	NHD Single Channel	No



Frontier NXF/S

Available in 2.77m
Standard Lengths.

The Frontier range offers a unique mechanism to secure the insert in position while offering heightened exposure to the leading edge.


This increased foot contact to the slip-resistant insert reduces the risk of slips, trips and falls on stairs designed to meet the guidance in Approved Document M and BS8300-2:2018.

The profile is supplied Mill finish as standard, other anodised and powder coated options can be made available on request.

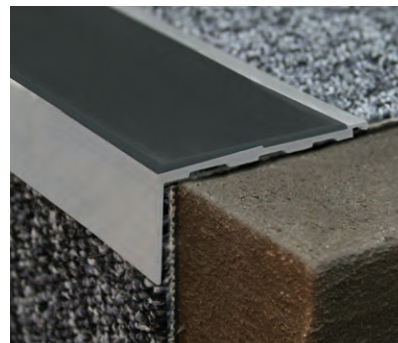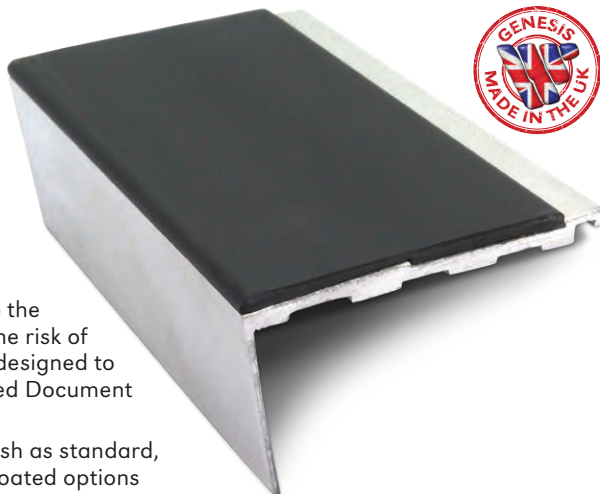


Insert	LRV	NXF	N	XFS
Standard				
16 Black	4.5			
44 Ice Grey	42.1			
47 Yellow	55.7			
Anodising				
16 Black	4.7			
86 Bright Brass	64.3			


NXF/S Rigid & Flexible




NXF05



NXFS01




NXF06




NXFS02

Channel

80
Mill Aluminium



*16
Black



*86
Bright Brass




*Anodising - Maximum length 2.4m. Other finishes available on demand.

Please note; limited anodising stock available - lead times may apply

Standard Insert

16
Black



44
Ice Grey



47
Yellow





Slimline Aluminium Nosings

Available in 2.46m, 2.77m, 3.22m Standard Lengths.


The NSL Profile comprises of an aluminium channel with a choice of insert material designed to meet the guidance in Approved Document M and BS8300:2009+A1:2010. It is a straight edge, single channel profile and is ideal for use with resilient flooring.

The profile is supplied Mill finish as standard, other anodised and powder coated options can be made available.


Designed to meet the guidelines in BS8300:2009+A1:2010.

External grade Tredsafe® Insert.

Tredsafe® insert is manufactured from a special blend of P.V.C., silica quartz and polymeric plasticiser giving an homogeneous hard wearing anti-slip flooring for wet and dry conditions. The three dimensional pyramid pattern which provides excellent slip resistance in both wet and dry conditions.

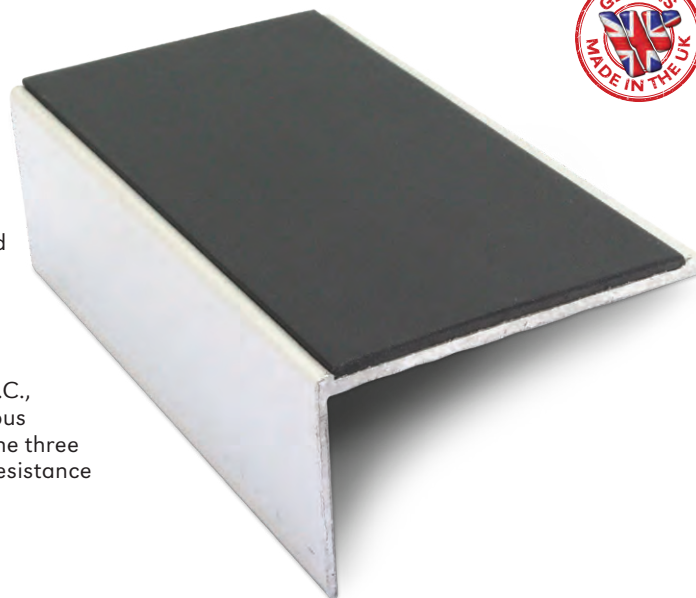

Channel

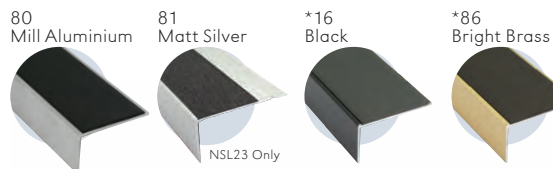




*Anodising - Maximum length 2.4m. Other finishes available on demand.
Please note; limited anodising stock available - lead times may apply

Standard Insert



Tredsafe® Insert

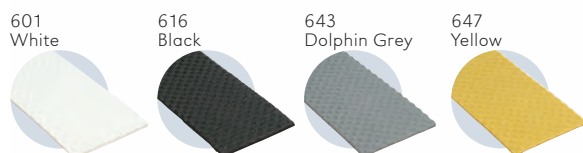

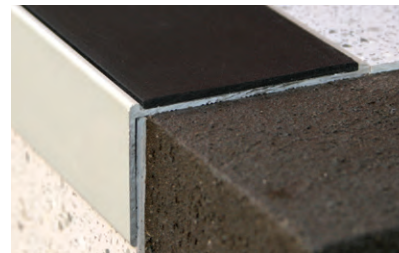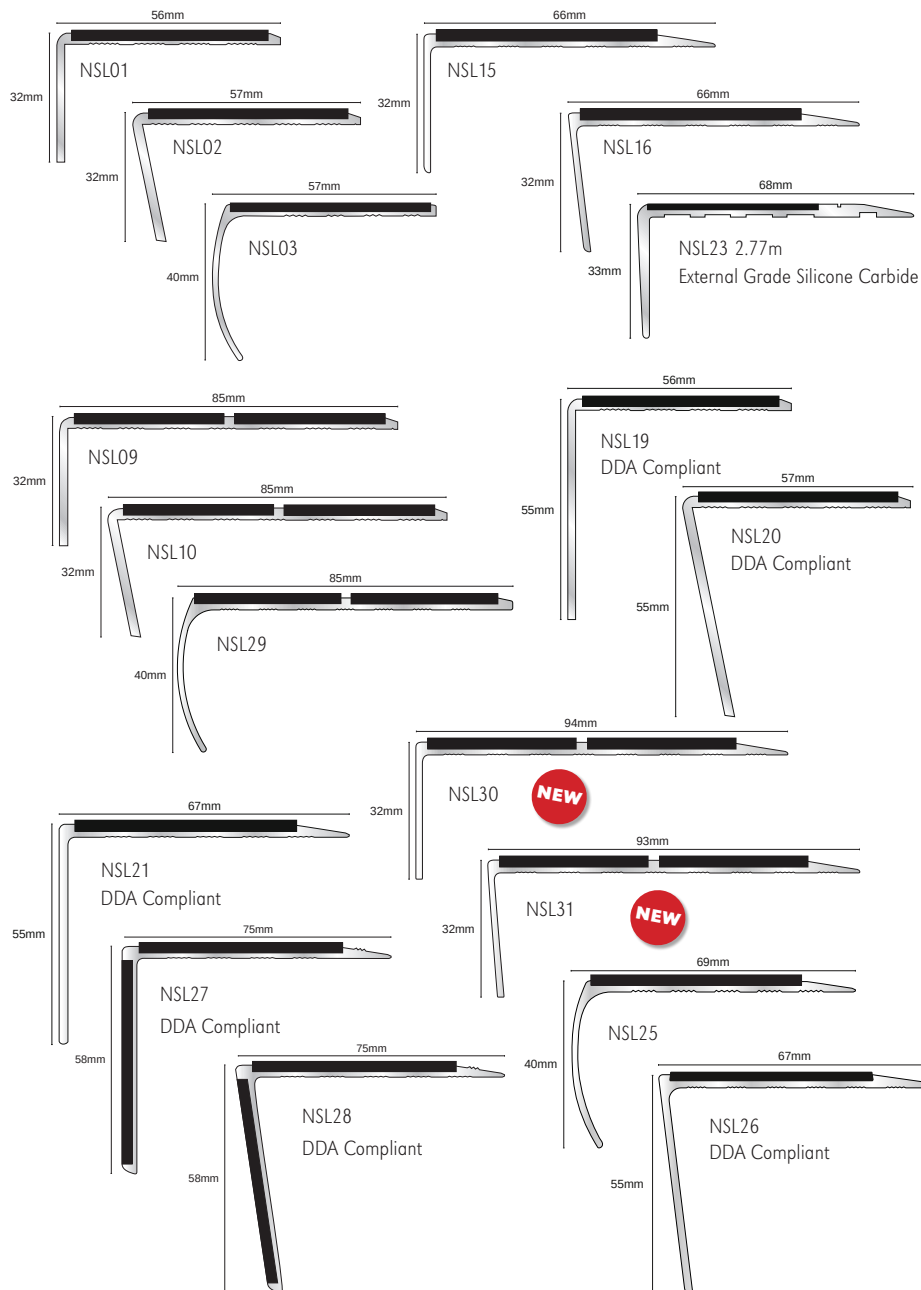

Insert	LRV	SINGLE	DOUBLE
Standard			
01 White	79.9		
16 Black	4.5		
20 Brown	9.1		
25 Beige	41.1		
27 Canvas	53.2		
30 Red	10.6		
43 Dolphin Grey	27.6		
44 Ice Grey	42.1		
46 Midnight Grey	12.8		
47 Yellow	55.7		
48 Cobalt Blue	9.2		
54 Saffron	46.3		
58 Cloud	58*		
68 Haze	66*		
78 Sand	77*		
113 Tangerine	32.8		

Tredsafe®			
601 White	82.7		
616 Black	4.8		
643 Dolphin Grey	18.2		
647 Yellow	46.1		

Silicone Carbide (NSL23 Only)			
16 Black	4.5		
47 Yellow	55.7		

Anodising			
16 Black	4.7		
86 Bright Brass	64.3		

*See page 44

Standard		
Tredsafe®		



Aluminator® Slimline Aluminium Nosings


Available in 2.46m, 2.77m, 3.22m Standard Lengths.

In addition to the function of step edge protection the **Aluminator®** range offers an easy, energy efficient solution to illuminate steps. Should a local or emergency power failure occur on stairways, increasing the risk of hazard for evacuees, the **Aluminator®** system allows the evacuee to orientate, locate stair edges and risers, and to assist in the safe evacuation of the premises. The system requires no electrical connection, is simple to install and requires no special maintenance other than that which you would normally carry out on any similar product. Only normal illumination, daylight, fluorescent or standard tungsten filaments are required to activate its performance. The highly durable and slip resistant silicone carbide is suitable for external use, ideal for both commercial and domestic applications where public safety is paramount. The diverse range can be used on a wide variety of substrates such as concrete, timber, tiles, vinyl, steel and checker plate with inserts available in a wide array of colours promoting the visibility while complimenting the aesthetics.



Channel

80
Mill Aluminium



*16
Black



*86
Bright Brass




*Anodising - Maximum length 2.4m. Other finishes available on demand.
Please note; limited anodising stock available - lead times may apply

Standard Insert

01
White



16
Black



20
Brown



25
Beige



27
Canvas



30
Red



43
Dolphin Grey



44
Ice Grey



46
Midnight Grey



47
Yellow



48
Cobalt Blue



54
Saffron



58
Cloud



68
Haze



78
Sand



113
Tangerine




Tredsafe® Insert


601
White




616
Black





643
Dolphin Grey



647
Yellow



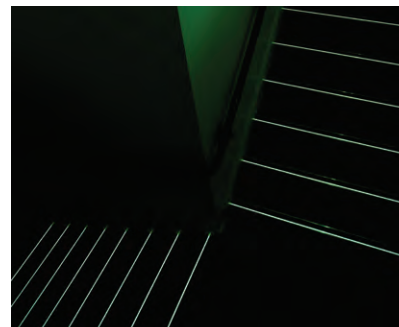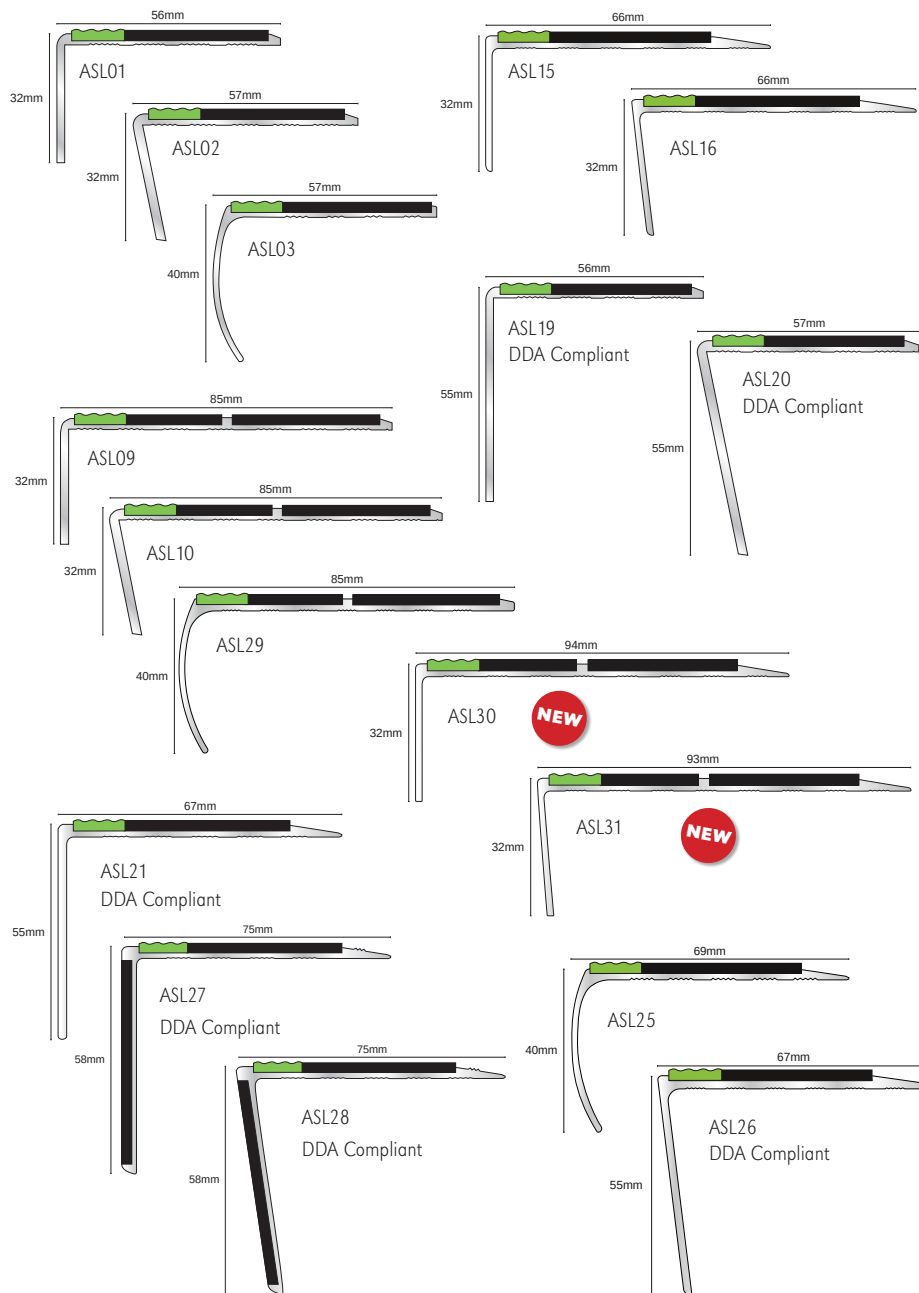


Insert	LRV	SINGLE	DOUBLE
Standard			
01 White	79.9		
16 Black	4.5		
20 Brown	9.1		
25 Beige	41.1		
27 Canvas	53.2		
30 Red	10.6		
43 Dolphin Grey	27.6		
44 Ice Grey	42.1		
46 Midnight Grey	12.8		
47 Yellow	55.7		
48 Cobalt Blue	9.2		
54 Saffron	46.3		
58 Cloud	58*		
68 Haze	66*		
78 Sand	77*		
113 Tangerine	32.8		

Tredsafe®			
601 White	82.7		
616 Black	4.8		
643 Dolphin Grey	18.2		
647 Yellow	46.1		

Anodising			
16 Black	4.7		
86 Bright Brass	64.3		

*See page 44

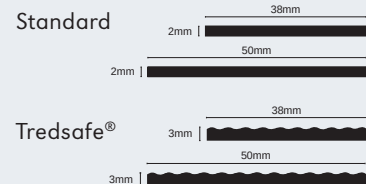

Heavy Duty Aluminium Nosings

Available in 2.46m, 2.77m, 3.22m Standard Lengths.

The NHD Profile is designed to be used in most commercial and industrial applications with a coloured PVC insert. It is available in a 5mm gauge allowing for fixing with carpet or similar floor covering. The profile is available in a range of designs with DDA and building regulations accounted for.

Designed to meet the guidelines in BS8300:2009+A1:2010.


External grade Tredsafe® Insert.

Tredsafe® insert is manufactured from a special blend of P.V.C., silica quartz and polymeric plasticiser giving an homogeneous hard wearing anti-slip flooring for wet and dry conditions. The three dimensional pyramid pattern which provides excellent slip resistance in both wet and dry conditions.




Channel


80
Mill Aluminium



*16
Black



*86
Bright Brass




*Anodising - Maximum length 2.4m. Other finishes available on demand.
Please note; limited anodising stock available - lead times may apply

Standard Insert

01
White



16
Black



20
Brown



25
Beige



27
Canvas



30
Red




43
Dolphin Grey



44
Ice Grey




46
Midnight Grey



47
Yellow



48
Cobalt Blue



58
Cloud



68
Haze



78
Sand



120H
Hazard




Tredsafe® Insert


601
White




616
Black



643
Dolphin Grey





647
Yellow



NIA50 Insert

80
Mill Aluminium



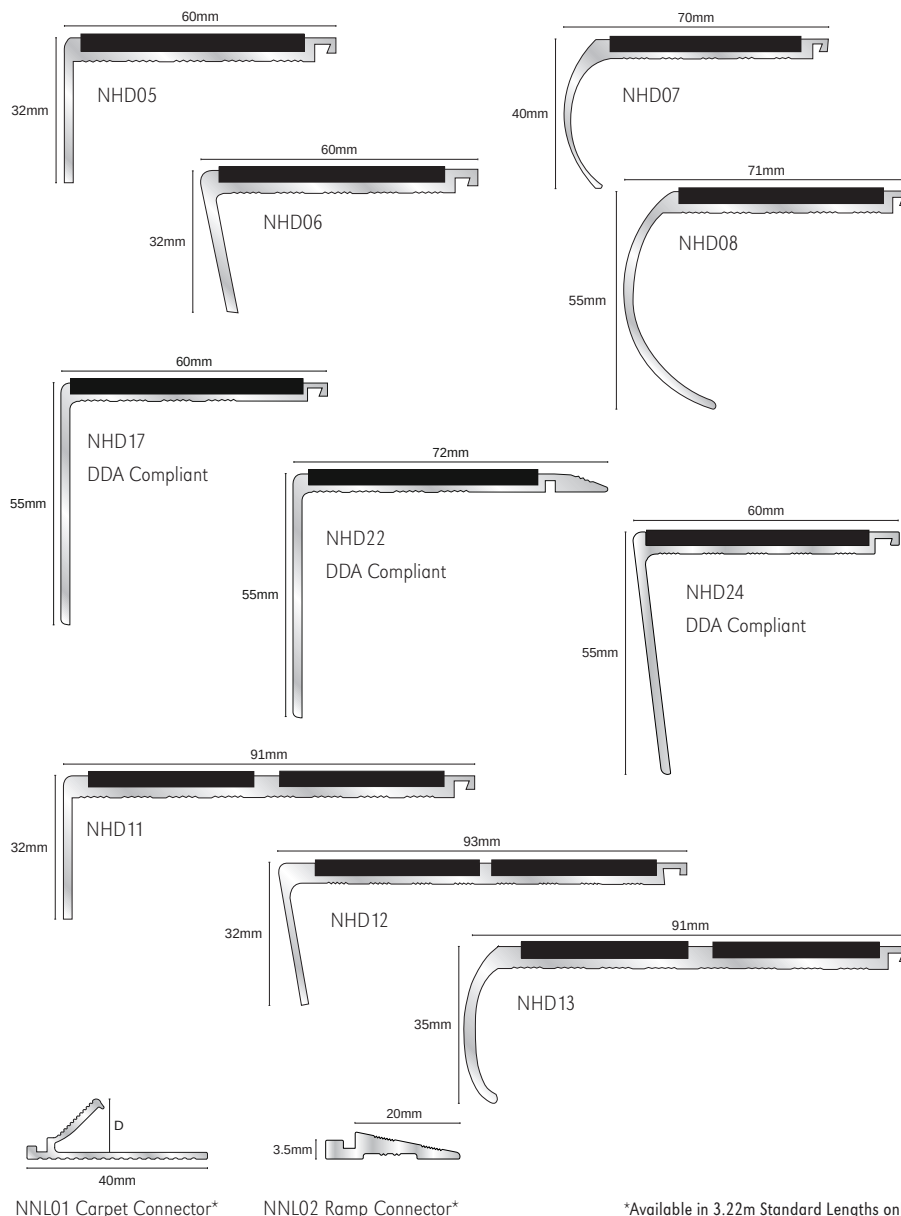

Insert	LRV	SINGLE	DOUBLE
Standard			
01 White	79.9		
16 Black	4.5		
20 Brown	9.1		
25 Beige	41.1		
27 Canvas	53.2		
30 Red	10.6		
43 Dolphin Grey	27.6		
44 Ice Grey	42.1		
46 Midnight Grey	12.8		
47 Yellow	55.7		
48 Cobalt Blue	9.2		
58 Cloud	58*		
68 Haze	66*		
78 Sand	77*		
120H Hazard	32.8		
Tredsafe®			
601 White	82.7		
616 Black	4.8		
643 Dolphin Grey	18.2		
647 Yellow	46.1		
NIA50			
80 Mill Aluminium	78.9		
Anodising			
16 Black	4.7		
86 Bright Brass	64.3		
*See page 44			
Standard			
	2mm	38mm	50mm
	2mm	38mm	50mm
Tredsafe®			
	3mm	38mm	50mm
	3mm	38mm	50mm
NIA50			
	3.5mm	38mm	50mm

*Available in 3.22m Standard Lengths only




Aluminator® Heavy Duty Aluminium Nosings

Available in 2.46m, 2.77m, 3.22m Standard Lengths.

In addition to the function of step edge protection the **Aluminator®** range offers an easy, energy efficient solution to illuminate steps. Should a local or emergency power failure occur on stairways, increasing the risk of hazard for evacuees, the **Aluminator®** system allows the evacuee to orientate, locate stair edges and risers, and to assist in the safe evacuation of the premises.

The system requires no electrical connection, is simple to install and requires no special maintenance other than that which you would normally carry out on any similar product. Only normal illumination, daylight, fluorescent or standard tungsten filaments are required to activate its performance.

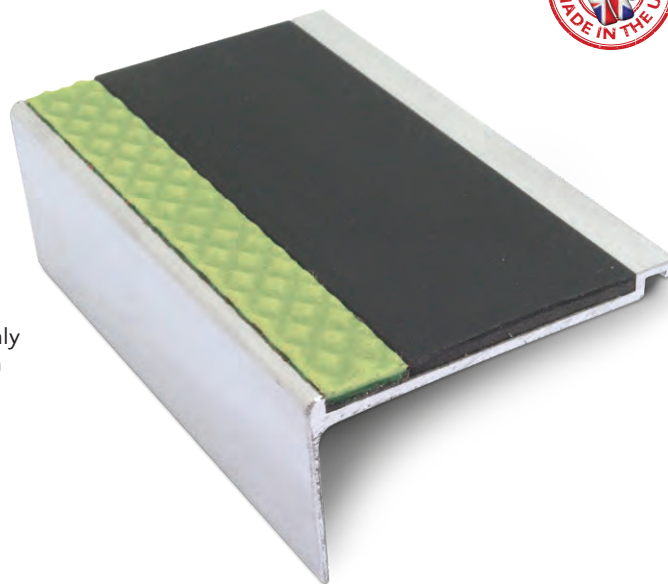

Channel


80 Mill Aluminium




81 Matt Silver



*16 Black



*86 Bright Brass



AHD23 Only

*Anodising - Maximum length 2.4m. Other finishes available on demand.
Please note; limited anodising stock available - lead times may apply

Standard Insert

01 White



16 Black



20 Brown



25 Beige



27 Canvas



30 Red



43 Dolphin Grey



44 Ice Grey



46 Midnight Grey



47 Yellow



48 Cobalt Blue



58 Cloud



68 Haze



78 Sand



Tredsafe® Insert


601 White



616 Black





643 Dolphin Grey



647 Yellow



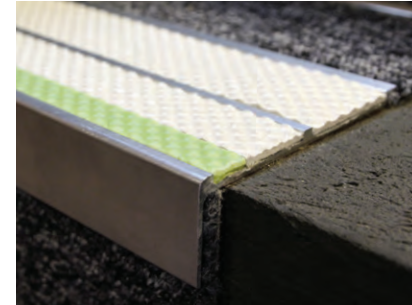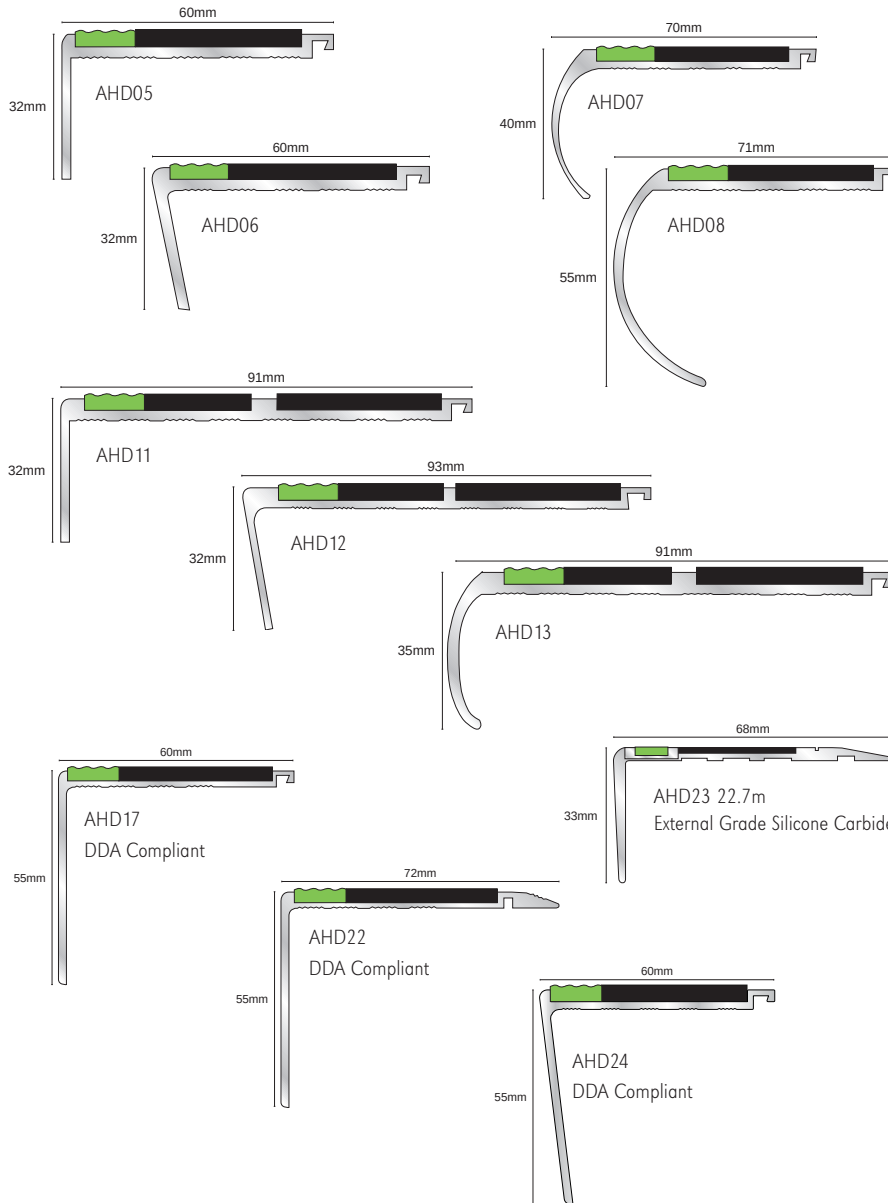

Insert	LRV	SINGLE	DOUBLE
--------	-----	--------	--------

Standard

01 White	79.9		
16 Black	4.5		
20 Brown	9.1		
25 Beige	41.1		
27 Canvas	53.2		
30 Red	10.6		
43 Dolphin Grey	27.6		
44 Ice Grey	42.1		
46 Midnight Grey	12.8		
47 Yellow	55.7		
48 Cobalt Blue	9.2		
58 Cloud	58*		
68 Haze	66*		
78 Sand	77*		

Tredsafe®

601 White	82.7		
616 Black	4.8		
643 Dolphin Grey	18.2		
647 Yellow	46.1		

Silicone Carbide (AHD23 Only)

16 Black	4.5		
47 Yellow	55.7		

Anodising


16 Black	4.7		
86 Bright Brass	64.3		

*See page 44

Standard



Tredsafe®





Heavy Duty Ceramic Tile-In Edges

Available in 3.22m Standard Lengths.

This Tile-In Nosing offers a cost effective alternative to ceramic treads. The PVC insert on the tread has been designed to provide additional slip resistance. Although mainly used with ceramic tile it can also be used with wood, laminate and stone. Meets DDA Guidelines and Building regulations.

The **Aluminator**® range of profiles are available with the innovative external grade Tredsafe® Insert.

Tredsafe® insert is manufactured from a special blend of P.V.C., silica quartz and polymeric plasticiser giving an homogeneous hard wearing anti-slip flooring for wet and dry conditions. The three dimensional pyramid pattern which provides excellent slip resistance in both wet and dry conditions.

Code	D (mm)	Length (m)	Finish	Box Qty
NTC10	10	3.22	81	10
NTC12	12.5	3.22	81	10
ATC10	10	3.22	81	10
ATC12	12.5	3.22	81	10

Channel†

81
Matt Silver



NIA50 Insert

80
Mill Aluminium




†Channels can be powdercoated on demand.

Standard Insert


01
White



16
Black



20
Brown



25
Beige



27
Canvas



30
Red



43
Dolphin Grey



44
Ice Grey



46
Midnight Grey



47
Yellow



48
Cobalt Blue



58
Cloud



68
Haze



78
Sand



120H
Hazard




Tredsafe® Insert


601
White




616
Black







643
Dolphin Grey



647
Yellow



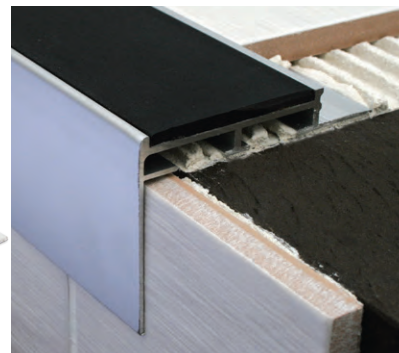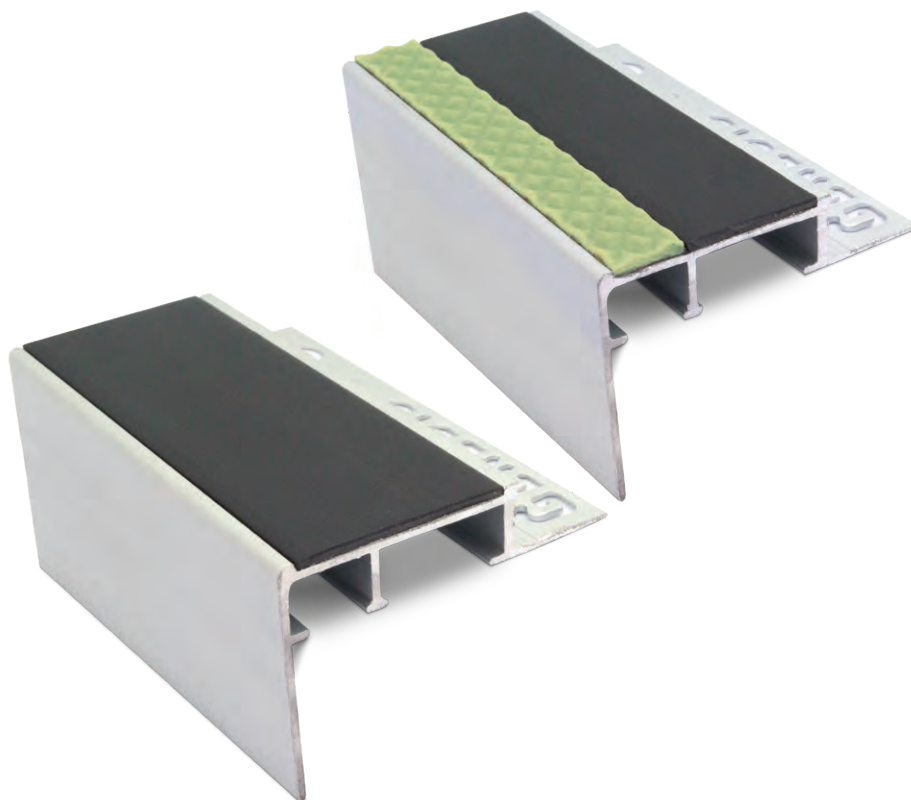

Insert	LRV	
Standard		
01 White	79.9	
16 Black	4.5	
20 Brown	9.1	
25 Beige	41.1	
27 Canvas	53.2	
30 Red	10.6	
43 Dolphin Grey	27.6	
44 Ice Grey	42.1	
46 Midnight Grey	12.8	
47 Yellow	55.7	
48 Cobalt Blue	9.2	
58 Cloud	58*	
68 Haze	66*	
78 Sand	77*	
120H Hazard [†]		

Tredsafe®		
601 White	82.7	
616 Black	4.8	
643 Dolphin Grey	18.2	
647 Yellow	46.1	

NIA50[†]		
80 Mill Aluminium	78.9	

*See page 44

[†]NTC Only



Hard Nose P.V.C

Available in 3.22m Standard Lengths.

Designed to be used in most commercial and domestic applications, the rear of the profile tapers to 3mm offering greater installation opportunities.

In addition to the function of step edge protection the **Aluminator**® offers an easy, energy efficient solution to illuminate steps. Should a local or emergency power failure occur on stairways, increasing the risk of hazard for evacuees, the **Aluminator**® system allows the evacuee to orientate, locate stair edges and risers, and so assist in the safe evacuation of the premises.



Channel

16
Black




Standard Insert


01
White



16
Black



20
Brown



25
Beige



27
Canvas



30
Red




43
Dolphin Grey



44
Ice Grey




46
Midnight Grey



47
Yellow



48
Cobalt Blue



58
Cloud



68
Haze



78
Sand



120H
Hazard




Tredsafe® Insert


601
White




616
Black



643
Dolphin Grey



647
Yellow




NIA50 Insert



80
Mill Aluminium



Heavy Duty

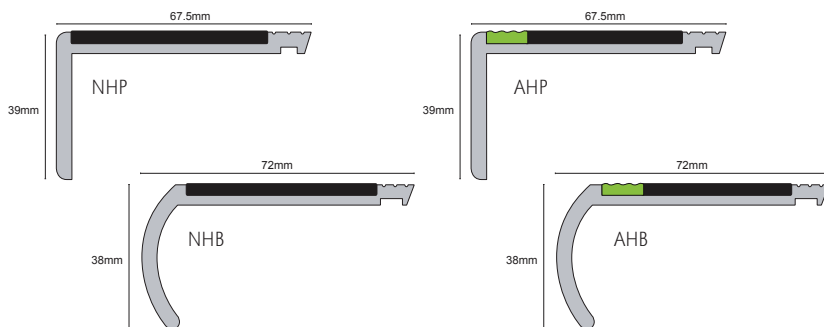

Slimline

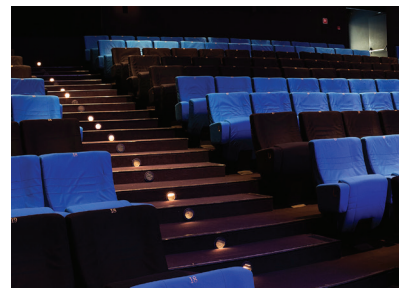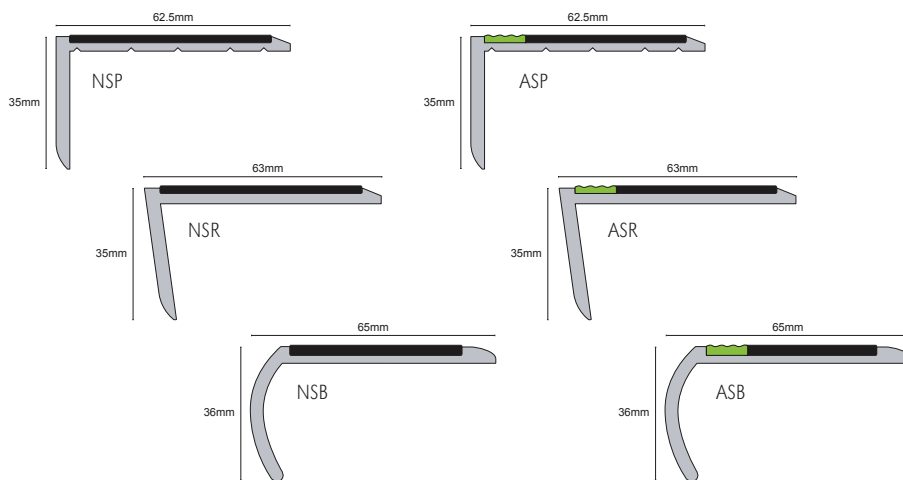

Insert	LRV	SLIM	HD
Standard			
01 White	79.9	☐	☐
16 Black	4.5	☒	☒
20 Brown	9.1	☒	☒
25 Beige	41.1	☒	☒
27 Canvas	53.2	☒	☒
30 Red	10.6	☒	☒
43 Dolphin Grey	27.6	☒	☒
44 Ice Grey	42.1	☒	☒
46 Midnight Grey	12.8	☒	☒
47 Yellow	55.7	☒	☒
48 Cobalt Blue	9.2	☒	☒
54 Saffron	46.3	☒	☒
58 Cloud	58*	☒	☒
68 Haze	66*	☒	☒
78 Sand	77*	☒	☒
113 Tangerine	32.8	☒	☒
120H Hazard		☒	☒
Tredsafe®			
601 White	82.7	☒	☒
616 Black	4.8	☒	☒
643 Dolphin Grey	18.2	☒	☒
647 Yellow	46.1	☒	☒
P.V.C Channel			
16 Black		☒	☒

*See page 44


Standard



Tredsafe®




Flexible P.V.C. Nosings

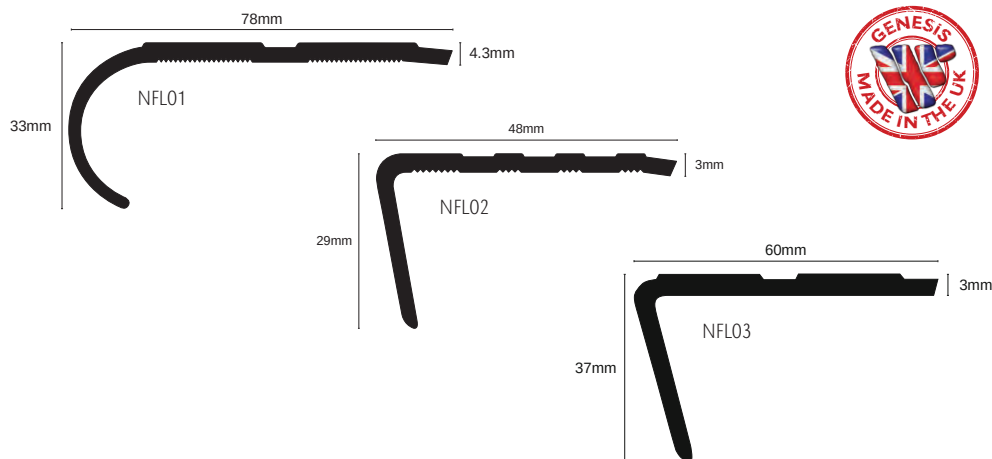


Benefits of the flexible range include their ease of installation, their ability to be easily shaped around corners and they are a cost effective alternative to traditional aluminium nosings.

Code	W x D (mm)	Length (m)	Finish	Box Qty
NFL01	78 x 33	3.22	16	10
NFL02	48 x 29	3.22	16	10
NFL03	60 x 37	3.22	16	10


Stair Edge Trim Pre-Formed / Landing Strip

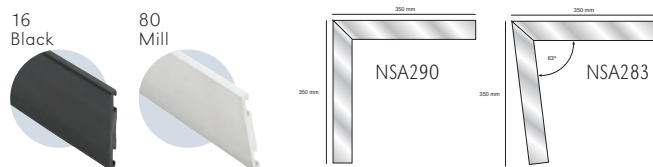

Code	D (mm)	Length (mm)	Finish	Style	Box Qty
NSA290	42	350	16,80	Straight	10
NSA283	42	350	16,80	Rakeback	10
NTL1	42	2500	16,80		10

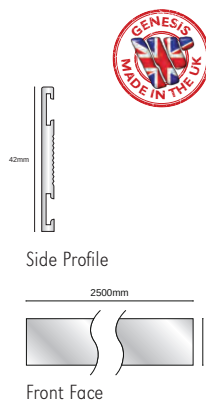

Stair Edge Trim Clips

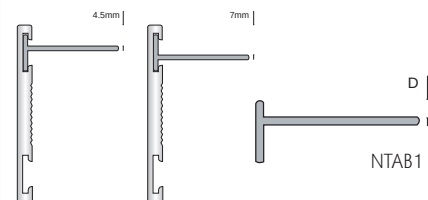





Side Profile of NSA/NTL with NTAB1

Code	D (mm)	Pack Qty
NTAB1	4.5 / 7 Dual Height	20

Tools

Our range of tools offer the customer a way to achieve the perfect finish with ease and precision.





Rotera Wedge

The Genesis Rotera Wedge is the perfect tool to increase productivity when laying tiles. The clever, yet simple design allows the installer to achieve a fully controlled level of accuracy to achieve the perfect finish. The wedges simply rotate to the exact space needed. They are the perfect choice when looking to support the bottom course when wall tiling.

Gone are the days of using cardboard to rest the tiles on or stacking up traditional wedges, the Genesis Rotera Wedges offer the perfect solution for creating space for stone, masonry, paving, bricklaying and tile installations.



Code	Description	Qty
508	Rotera Wedge 1-13mm	10



Spacers



Our spacer range has a varied format to suit most needs. From the small bag through to the large, extremely popular, bucket container.

All spacers are injection moulded for precision and the individual spacer is separated after the moulding process to allow faster use when tiling.

Code	Size	Type	Qty	Pack	Box Qty
507	0-5mm	Wedges	100	Bag	10
505	1mm	Cross	500	Bag	50
515	2mm	Cross	250	Bag	25
510	2mm	T Shape	250	Bag	25
555	2mm	Cross	500	Bag	15
625	2mm	Cross	2500	Bag	2
557	2mm	Cross	5000	Bucket	1
535	3mm	Cross	250	Bag	25
536	3mm	Cross	500	Bag	15
538	3mm	Cross	5000	Bucket	1
570	5mm	Cross	100	Bag	50





Mosaic Mesh



An innovative product which solves the problem of fixing mosaic tiles.

Makes mosaic fixing fast and simple

- A 300 x 300mm rigid plastic mesh
- Optimum design allowing maximum adhesive coverage and performance
- Self adhesive back to stick to the underside of your mosaic sheet giving complete support
- 3mm thick adds no significant thickness to your mosaics
- Cut with a knife or scissors to desired size

Also used to pack out thin mosaics when used as borders to enable them to be the same thickness as the wall tiles.

All mosaics are equally spaced and straight.

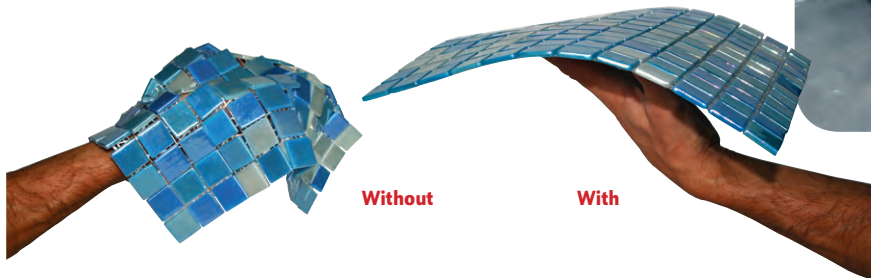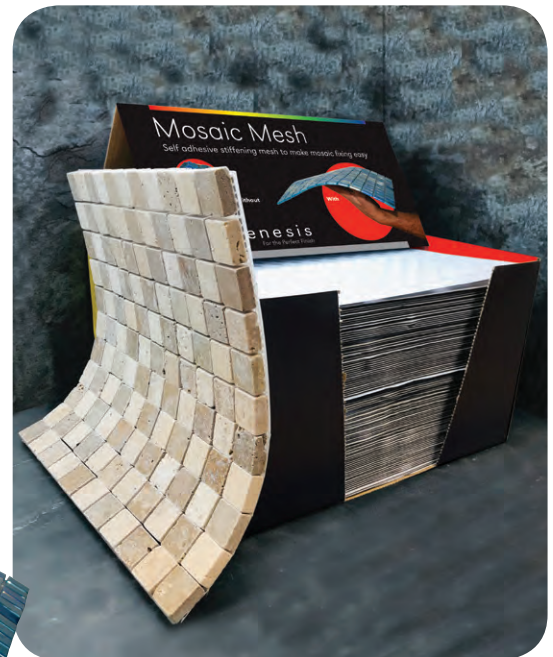

Without

With

Code	Description	Qty
660	Counter top Display Box Contents 100 sheets (1 unit = 100 sheets)	6

Diamond Hole Saws 2 per pack



Code	Description	Qty
756	2 x 6 mm Hole Saw	20
758	2 x 8 mm Hole Saw	20

Diamond Hole Saw Set

6, 8, 10, 12, 22 and 35mm diamond drill bits.
 Suitable for drilling porcelain, marble, granite and travertine.



Code	Description	Qty
750	Trade Hole Saw Set	10

Tile / Glass Drill Bits



Carbide tipped drill suitable for glass and glazed ceramic tiles.

Code	Description	Qty
836	6mm Tile/Glass Drill Bit	10
838	8mm Tile/Glass Drill Bit	10

Dry Drill Bits



Code	Description	Qty
806DD	6mm Dry Drill	10
808DD	8mm Dry Drill	10

73mm Tri Bore



For use with all standard power drills. Cuts holes in ceramic tiles up to 73mm in diameter.


Code	Description	Qty
830	73mm Tri Bore	20

RE·VOLUTION Multi Wheel

DIAMOND BLADES

Diamond cup wheels for cutting and grinding, suitable for cutting materials such as porcelain tiles, ceramic, marble, travertine etc.

Code	Description	Qty
B778005	115mm, Medium grit	5
B778000	115mm, Fine grit	5
B778015	125mm, Medium grit	5
B778025	125mm, Fine grit	5

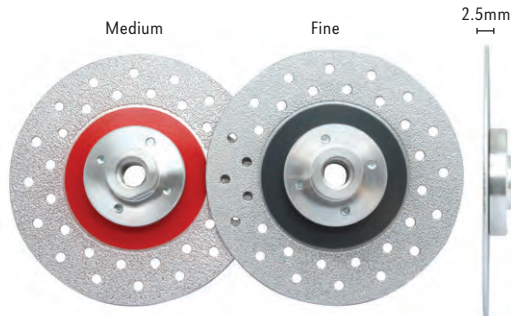

RE·VOLUTION M14 Dry Drills

DIAMOND DRILLS

Suitable for drilling porcelain, marble, granite and travertine.

Diamond brazed cutting rim with dust discharge hole.

M14 Thread fits directly onto angle grinder with 11,000rpm.


Code	Description	Qty
781	6mm	10
782	8mm	10
783	20mm	10
780	20mm Bore	1
791	25mm	10
792	28mm	10
784	35mm	10
785	50mm	5
780CA	Chuck Adaptor Hex to M14	10



REVOLUTION

DIAMOND DRILLS

Diamond Drills - Pro-Wet Flex

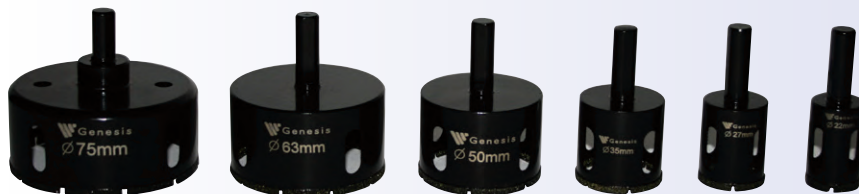

Suitable for drilling porcelain, marble, granite and travertine. Electro plated diamond cutting rim with Discharge hole for dust removal, the straight shank fits all standard drills.

Code	Description	Qty
810	Diamond Hole Saw - 6mm	10
811	Diamond Hole Saw - 8mm	10
812	Diamond Hole Saw - 10mm	20
813	Diamond Hole Saw - 12mm	10
827	Diamond Hole Saw - 18mm	10
870	Diamond Hole Saw - 20mm	10
814	Diamond Hole Saw - 22mm	10
815	Diamond Hole Saw - 27mm	10

Code	Description	Qty
816	Diamond Hole Saw - 30mm	5
826	Diamond Hole Saw - 35mm	5
871	Diamond Hole Saw - 42mm	5
872	Diamond Hole Saw - 45mm	5
817	Diamond Hole Saw - 50mm	5
818	Diamond Hole Saw - 63mm	5
819	Diamond Hole Saw - 75mm	5

REVOLUTION

DIAMOND DRILLS

NEW

M14 Diamond Hole Saw Set

Suitable for drilling porcelain, marble, granite and travertine.

Diamond brazed cutting rim with dust discharge hole.

M14 Thread fits directly onto angle grinder with 11,000rpm.

Includes: 6, 8, 20, 35, 50 & 70mm hole saws.




Code	Description	Qty
800DBS	6 pc set M14 REVOLUTION Diamond Hole Saw Aluminium Case	1





Diamond Hand Pads

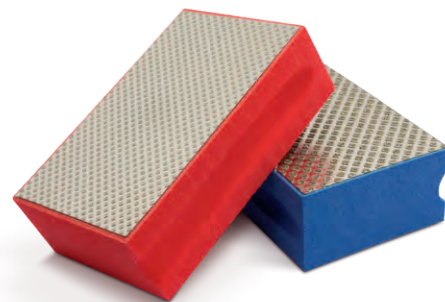

60 (medium) and 200 (fine). For smoothing the edges of any type of marble, granite, porcelain, stoneware and ceramics.

Code	Description	Qty
828F	Fine Diamond Hand Pads	1
828M	Medium Diamond Hand Pads	1



Cyclone Blades



For Wet and dry cutting of tiles. Unique segment blade design provides effective removal and fine cuts.

Max RPM 12220,

Max cutting depth 25mm.

22.2mm bore with reducers 20 & 16mm.

Blade thickness only 1.5mm with 10mm Segment.

Turbo



Diamond turbo blade for wet and dry cutting of porcelain, stone, concrete, and granite ceramics.

All Blades have a thickness of 2.5mm and Rim Width of 10mm.

Continuous Rim



High performance diamond blade for wet and dry cutting of Ceramic wall and Floor Tiles.

Code	Description	Diameter	Bore	Qty
B335115	Cyclone	115	22.2mm	10
B775115	Continuous Rim	115	22.2mm	10
B776115	Turbo	115	22.2mm	10



Drilling - Large

Collects dust and water when drilling while acting as a guide, suitable for drilling up to Ø 72mm.

Simply connect to a vacuum cleaner with the nozzle diameter of 25-35mm, the air is channelled producing a seal against the Tile.

- Flexible rubber gasket that maintains the connection with a vacuum nozzle (diameter of 25-35mm)
- Suction that seals even on uneven surfaces
- Suitable for drilling up to 14-72mm hole saws
- Supplied with adaptor for connecting to vacuum cleaner



Code	Description	Qty
B334500	Drilling - Large	1



Without Dust Extractor



With Dust Extractor

The all in one, reusable levelling system from BIHUI...
No tools, no snapping, no fuss...

BIHUI®
PROFESSIONAL TILING TOOLS



See range on page 100



GLS **WEDGE**

- Improved accuracy and installation speed
- Traction adjustable Applicator
- Perfect for all types of tiles
- Maximum working depth 12mm
- Consistent grout lines (1, 2 or 3mm)
- Ideal for Walls and Floors

Code	Description	Qty
639	1mm Levelling Base 100pcs per pack	10
640	2mm Levelling Base 100pcs per pack	10
641	3mm Levelling Base 100pcs per pack	10
641XL	3mm Levelling Base for 12 - 20mm tiles NEW 100pcs per pack	10
644	Levelling Wedge 100pcs per pack	5
646	Application Tool	6
647CD	GLS Clip Dozer	1
640BLK	WEDGE 2mm Levelling Bases - 500pk NEW	6
641BLK	WEDGE 3mm Levelling Bases - 500pk NEW	6
644BLK	WEDGE Levelling Wedges - 500pk NEW	4

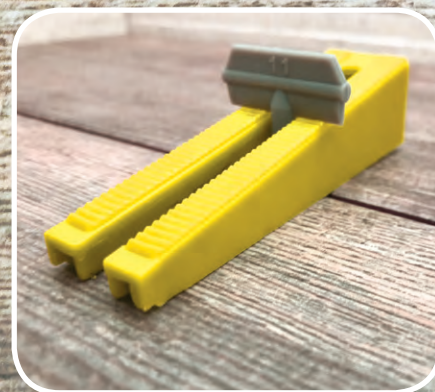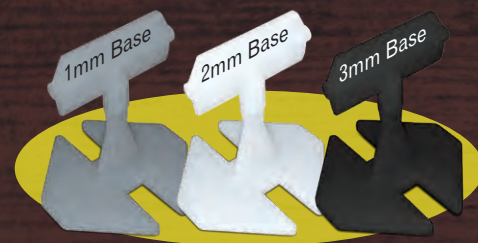




GLS Spin is an innovative tile levelling system allowing accelerated installation resulting from its auto-rotation mechanism using centripetal force.

- Flat base system
- Consistent grout line (2 or 3mm)
- Maximum working depth 25mm
- Optional anti-friction plate
- Ideal for walls and floors
- Minimal effort
- No installation tools required

Code	Description	Qty
618	Spin caps - 50 pcs	10
622	2mm flat base - 100 pcs	10
623	3mm flat base - 100 pcs	10
647CD	GLS Clip Dozer	1

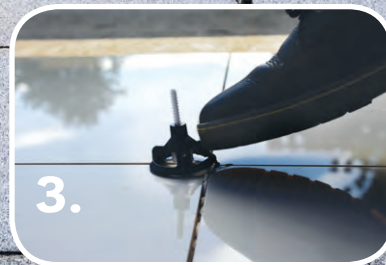





Stainless Steel Trowels

- Stainless Steel Blades
- Interchangeable Handle
- Square notch 4,6,8 & 10mm
- 10 x 20mm Round Notch
- Tiger Trowel
- V notch x 5
- Screeding Blade







965SET - Blades Included

Code	Description	Qty
965SET	6 blade set	5
965BS4	4mm Square Notch	10
965BS6	6mm Square Notch	10
965BS8	8mm Square Notch	10
965BS10	10mm Square Notch	10
965BTG	Tiger	10
965BR20	20 x 10mm Round Notch	10
965HDL	Handle	10




965FTS - Blades Included

Code	Description	Qty
965FTS	6 blade set - Flooring	5
965BSC	Screed	10
965BV104	1mm x 4mm notch	10
965BV155	1.5mm x 5mm notch	10
965BV206	2mm x 6mm notch	10
965BVA1	A1 notch	10
965BVA2	A2 notch	10
965HDL	Handle	10





Extra Large Screeding Blade

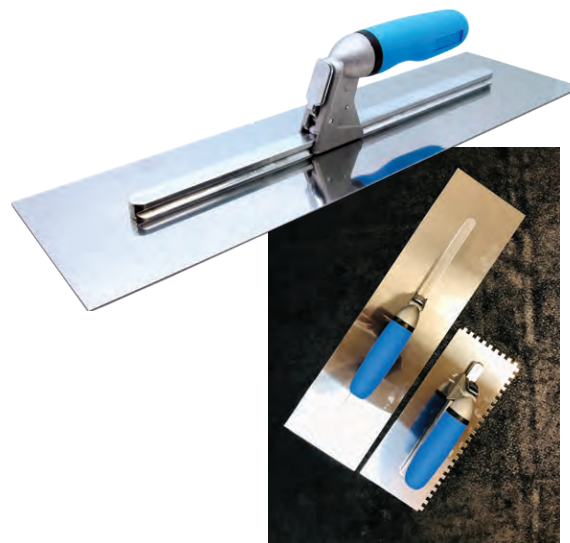

Code	Description	Qty
965BSCXL	Extra large screeding blade (not included in set)	6

Float Attachment



Code	Description	Qty
965FLT	Float attachment (not included in set)	6




Soft Grip Trowels

Extensive range of soft-comfort handle trowels with steel blade.








Code	Description	Qty
910	2mm V Notch	6
903	3.5mm Square Notch	6
904	4mm Square Notch	6
906	6mm Square Notch	6
908	8mm Square Notch	6
909	10mm Square Notch	6
907	12mm Square Notch	6
902	20 x 10mm Round Notch	6

'Softgrip' contoured handle for improved comfort and control

Handle support held to blade with 6 welded rivets

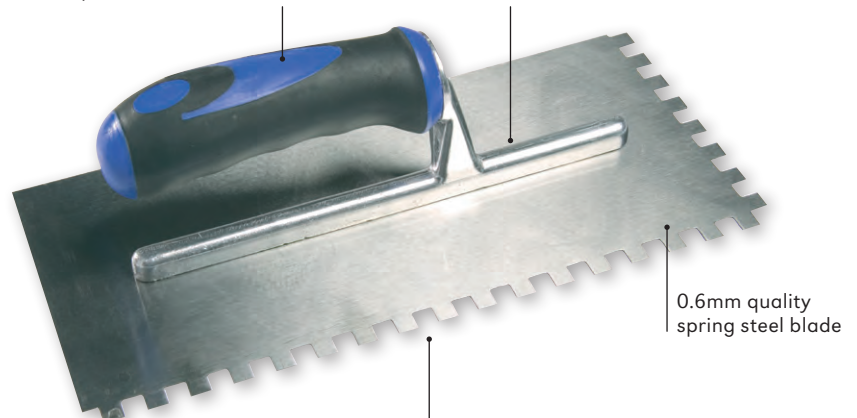


0.6mm quality spring steel blade



Range of notch sizes to suit any job

Tiger Trowel

Notch design tried and tested in Central Europe, Scandinavia and Australia.



Special Notch Design allows for easier bedding of tiles and reduce need to 'back butter' the tile



Notch design creates greater adhesive coverage

Code	Description	Qty
911TG	Notched Tiger Trowel	6




Soft Grip Gauging & Bucket Trowels

Soft-comfort handle trowels with steel blade.



Code	Description	Qty
952	Soft Grip Gauging Trowel	12
953	Soft Grip Bucket Trowel	12

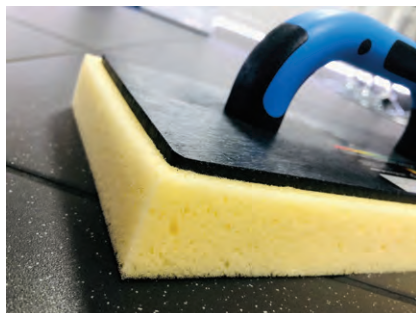

Premium Grout Float

Professional float designed for grouting wall and floor tiles. Size: 240x102mm, PVC handle, aluminium backing with white rubber face, rounded & bevelled edges for ease of spreading.

Code	Description	Qty
995	Grout Float	12



Cleaning Pad Set

Scouring pad set of 3 with new handle, white fine, brown medium, black coarse. Pads 120mm x 250mm.

Code	Description	Qty
725SET	Scouring Pad	25



Cleaning Pads

Handle with velcro fixing for coarse, medium and fine cleaning pads.

Pads measure 120 x 240mm.

Code	Description	Qty
725-H	80 x 235mm Handle	12
725-BC	Coarse Pad (Black)	100
725-GM	Medium Pad (Brown)	100
725-WF	Fine Pad (White)	100




Dual Edge Float

For grouting of floors and walls.

Ergonomic handle, anti-abrasion rubber.

The dual profile rubber (18°o 42°) allows optimal performance both with low density and high density grout, with both narrow and large joints.

The Green float is ideal for epoxy grout, the Blue float is perfect for cementitious grout.

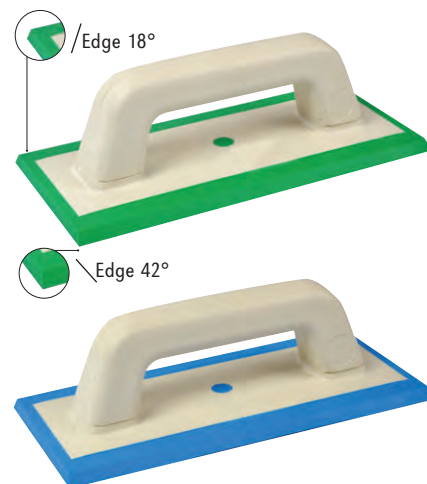

Code	Description	Qty
946BL	Blue Soft Rubber Dual Edge Float	10
946GR	Green Hard Rubber Dual Edge Float	10

Grout Float



240 x 90mm. P.V.C. Handle with aluminium plate

Code	Description	Qty
944	Grout Float - aluminium plate	12

Epoxy Cellulose Sponge Float

- 280 x 140mm
- 30mm Sponge
- Ideal for epoxy
- Block Cut



Code	Description	Qty
998EXP	Cellulose Sponge Float	24

Float with Hydro Sponge

- 280 x 140mm
- 30mm Sponge



Code	Description	Qty
998	Float with Block Cut Sponge	10
998WO	Float with Sponge - not Block Cut	10

Float with Hydro Sponge

- 280 x 140mm
- Replaceable Sponge
- Soft grip handle
- Block cut



Code	Description	Qty
998-S	Float with Block Sponge	24
998-SP	Replacement Sponge for 998S	20



Sponges

Used for grouting and cleaning up grout.




Code	Description	Qty
997	Sml Hydro Sponge (160 x 110 x 50mm)	10
996	Lrg Hydro Sponge (200 x 150 x 60mm)	20
916	Professional Sponge (160 x 110 x 62mm)	45
942	Sponge (160 x 110 x 55mm)	30

23L Washboy Set


Our popular 23L Professional cleaning Washboy set has had some improvements and is now even more user friendly.

- New slanted base
- New ergonomic handle
- New easy to read litre / fl oz measurements inside the bucket
- New spout / lowered lip for easy pouring
- Perforated twin rollers
- Plastic float with hydro sponge
- Plastic grate
- 4 x sturdy plastic wheels

Code	Description	Qty
993	23L Washboy	1
993W	4 x Wheels For 993	10
993G	Plastic Grate For 993	10
993R	Rollers For 993	10

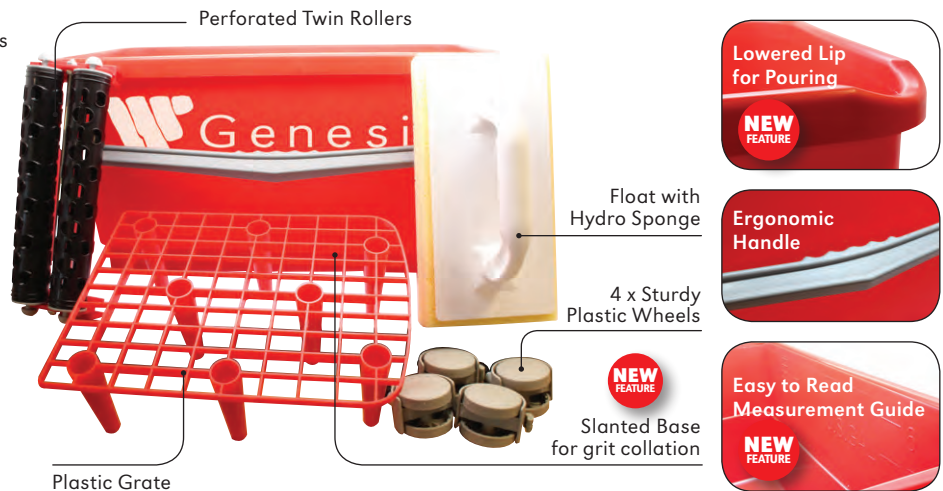

Combination Spreader

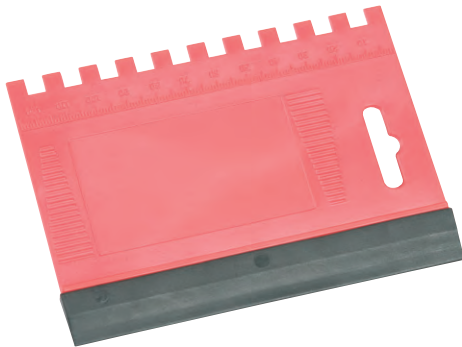

125mm / 5" Basic Plastic handled Combination Spreader with rubber fin and measuring guide.

Code	Description	Qty
954	Combination Spreader	50

Pro Floor Squeegee



Black double-weight natural rubber, steel frame, compatible with wooden and aluminium handles, locked with the locking screw.



Code	Description	Qty
708	Floor Squeegee 450mm	1
710	Wooden Shaft	1



Pro Caulking Gun

- Rodless Construction
- Ideal for narrow space application
- Ideal for use with latex and silicone caulks
- Force: 1.4kN (~140kg)
- Pitch: 9mm
- Weight: 670g


Code	Description	Qty
B801100	Pro Caulking Gun	6

Rodless Construction



Narrow Space Application

Caulking Gun

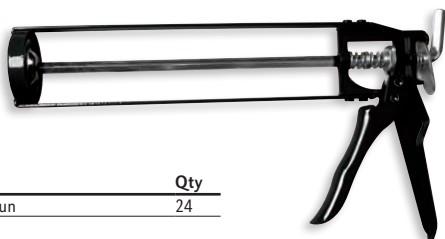

Code	Description	Qty
915	Metal Caulking Gun	24

Tile Magnets for Access Panels



Magnetic lock set for tile cover of control panels. They are packed in an attractive blister pack with four magnets in each pack.

Code	Description	Box
912	Tile Magnets	10

Mixer

Twisted mixer for mixing grout etc, hexagonal steel handle will fit standard drills - chrome plated.



Code	Description	Qty
914	400mm x 80mm Mixer	5

Grout Rake

Professional Grout remover with interchangeable carbide and saw blades.



Code	Description	Qty
925G	Grout Rake	12
925B	Spare Blades for 925G	10

Cutting Blade for Stainless Steel

Wear resistant bond system.
Max. RPM: 13,300
Width: 1mm
Bore: 22.2mm



Code	Description	Qty
B550115	Ø 115mm Cutting Blade	1

Mini Suction Cup

For easy positioning and repositioning of floor and wall tiles with varying lifting strengths to accommodate all types of installations.



Code	Description	Qty
B334210	Ø 80mm Mini Suction Cup SWL 20kgs	24

Tile Remover / Scraper



Code	Description	Qty
920TR	Tile Remover / Scraper	12

Tile Markers



Set of markers suitable for marking out tiles, glass, plastic, metal and paper.

Code	Description	Qty
704	Tile Markers	25

Spike Roller

Spiked Rollers for use with epoxy resin coatings and cementitious floor screeds to remove trapped air bubbles in the floor coating.


Ideally weighted and designed for a smooth gliding action with integral splash guard for all models.



R94241

R94242

Code	Description	Qty
R94241	250 x 11mm Spike Roller	1
R94242	500 x 11mm Spike Roller	1
R94246	250 x 31mm Spike Roller	1
R94248	500 x 31mm Spike Roller	1

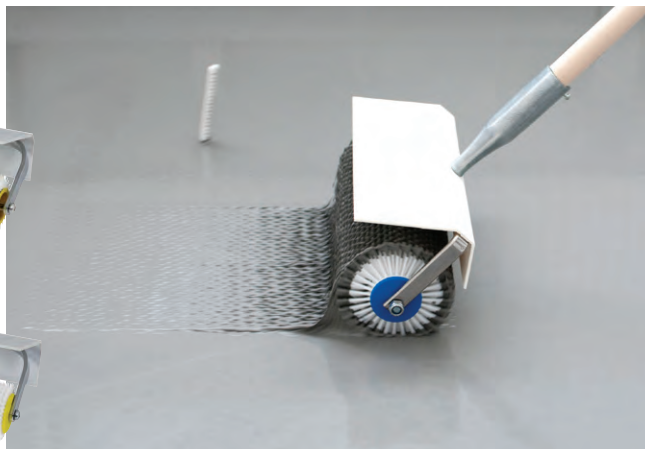

Spike Shoes



Ideal for walking on wet screeds or levelling compounds.

Code	Description	Qty
R94256	Spike Shoes - 25mm	1

Mitre Block

- Unique design
- Solid construction
- Anti-slip base
- Channel to hold profiles
- Multi compatible



Hacksaw not included

Code	Description	Qty
900MB	Versatile Mitre Block	10

Soft Grip Heavy Duty Nipper



Tungsten Carbide edge for superior hardness.



Code	Description	Qty
971HD	Heavy Duty Nipper	10

Knee Pads

- Foam core gives maximum cushioning
- Perforated neoprene lining
- One size fits all
- Heavy Duty construction
- Velcro straps & Pressure clip secure below the knee increasing stability & comfort
- Pack contains one pair



Code	Description	Qty
989A	Knee Pads	12

See
BIHUI
knee pads
on page
101

Work Wipes

- Antibacterial
- Anti-Weil's disease
- Dermatologically tested

Removes paint, oil, grease, adhesives, silicones, mastics and more from hands, tools and hard surfaces.

Code	Description	Qty
725WW	200 wipes per tub dispenser	6
725WR	Refill Pack 200	NEW



NEW



Floor / Carpet Protector

- Self adhering cover for temporary protection for floor coverings
- The adhesive back makes it quick and easy to install. Perfect for protection when painting / decorating - No tape needed
- Ideal for high traffic areas
- Made of 50 micron PE plastic



Code	Description	Qty
B869007	Floor Protector	16
B869011	Carpet Protector	16


PDQ available upon request - 16 rolls per PDQ



Zipper Door

- Reusable
- Dustproof-protection door
- Dual zippers giving access from both sides
- Prevents dust and odour spreading during decoration
- Easy to carry, store and fold
- Perfect for 1m width doors

Code	Description	Qty
880ZD	Zipper Door U Shape	10

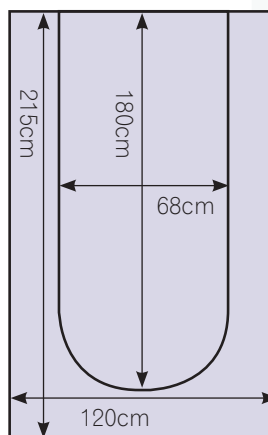

Available across the whole range

Our new finishes look amazing with marble and can contrast or compliment your tiles or fixtures.



All shower shelves can also be powder coated to any RAL on request

See range on page 106 - 107

BIHUI®

PROFESSIONAL TILING TOOLS


With the key word innovation, BIHUI is at the forefront developing quality tools for advanced handling and assembly of large format tiles. The products are manufactured using the latest technology and the focus is on function and design in every detail.



Lifting System

- Robust and stable plate lift for large-format plates
- Adjustable rail system, max capacity 3.2 x 1.6m
- Max. lifting capacity 130kgs
- Soft Grip easy access handles

Code	Description	Qty
BLFCSF	Lifting System	1

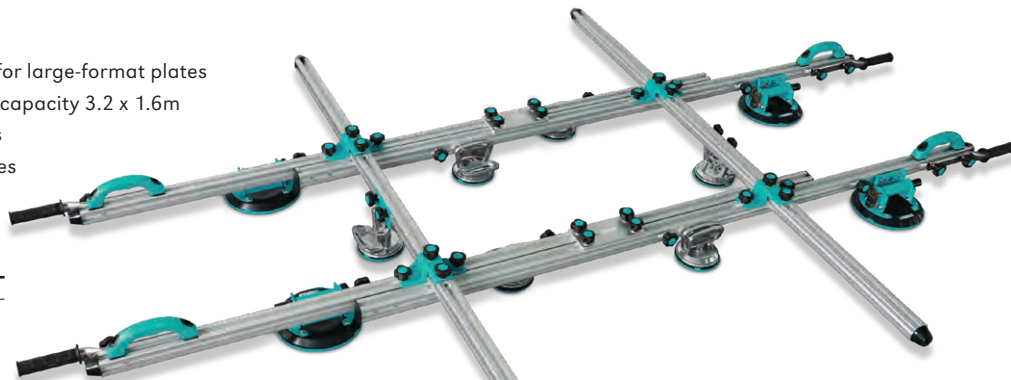

Manual Rail Cutting System

For manual cutting of large format tiles with thicknesses between 3-6mm.

Packed in plastic case and tool bag, this 3 rail system has a cutting ability of up to 3.6m.

System includes:

- 1 x Cutting Carriage
- 2 x Cutting Wheels
- 3 x Aluminium Rails with Suction Cups
- 1 x Breaking Plier
- 2 x Break Clamp Device
- 2 x F Clamp

Also available individually

Code	Description	Qty
BU-LFMC	Manual cutting carriage	1
BU-LFRS	Rails for use with the above	1
BLFMC	Manual cutting system (BU-LFMC x 1 & BU-LFRS x 1)	1



Electric Cutter



An electric dry cutter compatible with the above rail system for large format tiles.

- 1500W, 220V
- 13000rpm
- Max. cutting depth 14mm

Code	Description	Qty
BLFECM	Electric cutting carriage	1
BU-LFRS	Rails for use with the above	1



Transport Cart

The ideal solution to move large format slabs of porcelain stoneware in the warehouse, places of installation offering work area to apply the adhesive.

Thanks to the 4 soft rubber castors (Lockable) positioned on each corner superb control of movement and direction is created plus they make it extremely stable.

Height: 1500mm


Width: 1500mm

Depth: 750mm


Max. Load: 280kg

Code	Description	Qty
BLFCART	Transport cart for Large Format Tile	1



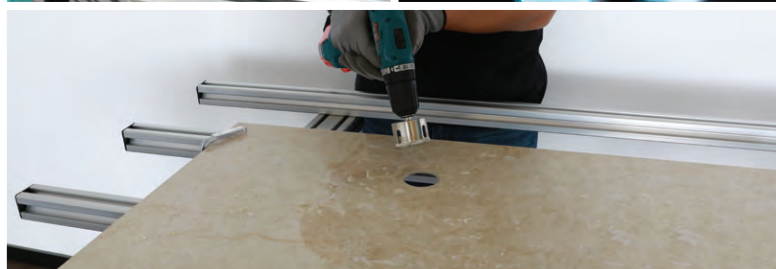

Workbench

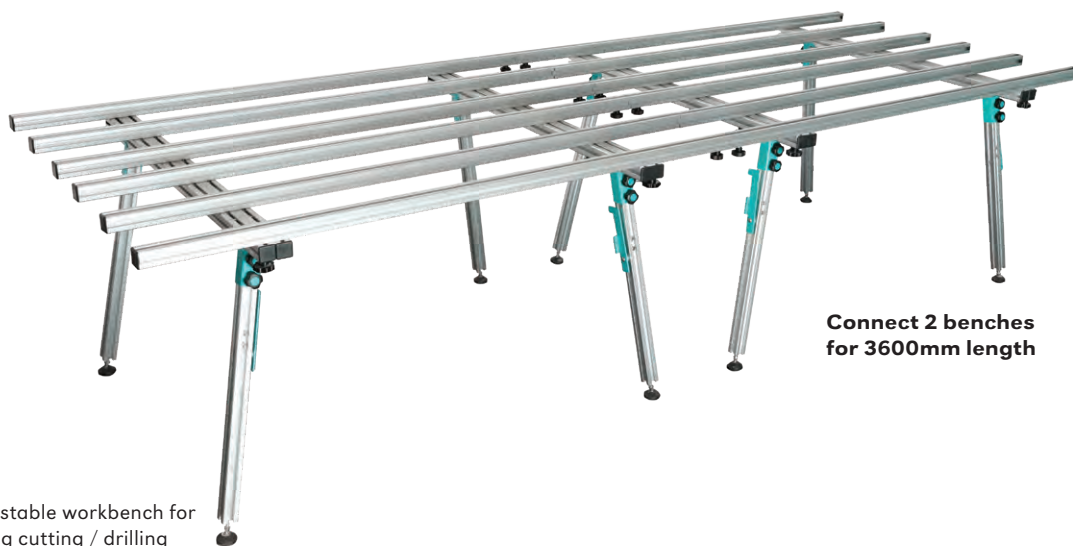

**Connect 2 benches
for 3600mm length**

Height: 800mm
Width: 1400mm
Length: 1800mm
Max. Load: 200kg

A lightweight, robust and stable workbench for large-format tiles, enabling cutting / drilling without risk of damaging the work surface.

Easily assembled for transport and storage and can be mounted together with additional tables for increased work surface, features includes foldable legs and adjustable rails.

Code	Description	Qty
BLFWBO	Workbench for Large Format Tile	1

Power Vacuum Sucker



Designed for professionals, the vacuum-assisted lifting technology transforms the traditional method of heavy lifting.

- Voltage 14.8V
- Charging Time 1 Hour
- Max. Lift 70kg
- Set Includes 2 batteries
- Battery life indicator

Code	Description	Qty
BLFEVS	Power Vacuum Sucker	1
BLFEVgas	Spare Gasket	1

Vibration Tile Beater

Compact and lightweight, the vibration beater removes residual air bubbles trapped between the tile and adhesive, to give a solid bed finish.

The intensity of the vibration is adjustable via the switch, other features include integral level and working light.

- Lithium Battery
- Voltage 16.8V
- Charging Time: 2 Hours
- Battery Life Indicator
- Max. Lift: 35kg

Code	Description	Qty
BU-LFTBV	Vibration Tile Beater V2	1
BU-LFTBVbatt	Spare Battery for BU-LFTBV	1





Tile Space Regulator

For positioning and fine-tuning of large-format and heavier materials with a smooth surface, such as stone, granite, metal and glass.

- 6 suction cups
- Span between 170 - 225mm
- Width: 350mm. Length: 655mm

Code	Description	Qty
BLFTGP	Tile Space Regulator	1

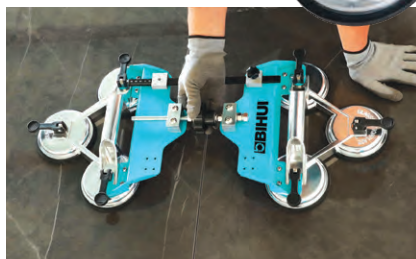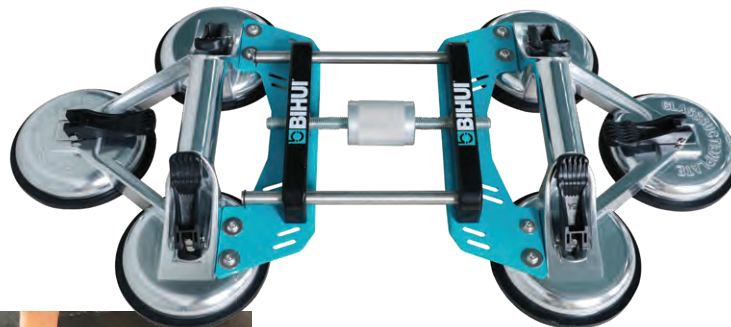


2 in 1 Multi Angle Tile Fixer & Adjuster

- With 6" vacuum suction cup
- Work for 90°& 180°& 270° alignment and tile gap adjustment
- Two buttons for adjusting tile level
- Light duty and durable structure
- Ideal for handling with porcelain or stone tiles and glass

Code	Description	Qty
BU-LFTFV6	2 in 1 Multi Angle Tile Fixer & Adjuster	1


NEW

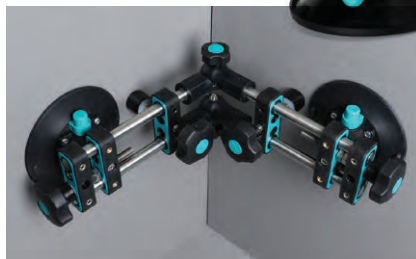

1900W Concrete Grinder

- Made of durable aluminum alloy, metal and engineering nylon
- Ergonomic design characterized with the increased balance and flatness
- Suitable for almost all 180mm diamond or resin discs
- Featured with power-off & overloading protections, and speed regulation
- Full wave electronics, soft start, and with a start-current limit function
- Removable front protective cover with magnetic, convenient for corner grinding (inner corner)
- Self-cleaning design, equipped with professional vacuum cleaner interface, can be used in vacuum bag or vacuum cleaner, dust-free operation
- Convenient installation, comfortable operation, reducing labour intensity
- Adjustable angles to meet the needs of the working scene.
- Equipped with adjustable positioner device to ensure the consistency of grinding edges and corners.
- Removing old surfaces as well as preparing a new base for secondary renovation.
- Suitable for materials like tile, concrete, etching, tile adhesive, natural stone, plaster, paint, coating, adhesive carpet etc.

Code	Description	Qty
BU-CG1900	1900W Concrete Grinder suitable for 180mm diamond or resin discs,	1
BU-CG1900W	Dual row Diamond Wheel 180mm	1
BU-DCWT7	Professional Turbo Diamond Wheel 180mm	1
BU-CGWS19	Adjustable stand for BW-CG1900 with 2.5m cable	1



BU-DCWT7



BU-CG1900W



BU-CGWS19

Diamond Cup Wheel

125mm for use with standard angle grinders.

Provides a smooth finish to concrete surfaces

Code	Description	Application Materials	Features	Qty
BU-DCWA5	6 block diamond grinding wheel #25/30 grit	Harsh surface, concrete, cement and other heavy materials	- For grinding rough surfaces - Grit is coarse and sharp arrow-shaped diamond tip, makes this ideal for first step working - Fast acting	1
BU-DCWD5	Dual row diamond grinding wheel #35/40 grit	For rough grinding surfaces of granite, concrete and masonry materials	- Ideal for bevelling, smoothing and sharpening - Grinding rough surfaces - Stable and durable	1
BU-DCWF5	Turbo diamond grinding wheel #35/40 grit	Concrete, cement and paint	- Quality surface finish - Excellent first cut prior to polishing - Long lasting - The outer perimeter blocks cut fast and the angled blocks give a more refined finish	1
BU-DCWT5	Pro turbo diamond grinding wheel #40/45 grit	Concrete, ceramic and stone materials	- Stable and durable - Fast acting - Suitable for both rough surfaces and fine finishing - Long working life	1
BU-DCWG5	Paint & epoxy diamond grinding wheel #50/60 grit	Epoxy, paint, waterproofing membrane glues and adhesives	- Flexible and light weight - Removes thin paints, coatings and rust - Provides a fast removal speed - Digs in and tears off as opposed to grinding the surface down	1



BU-DCWA5




BU-DCWD5



BU-DCWF5



BU-DCWT5



BU-DCWG5

Dust Extraction System for Grinding Wheels

- Available in Ø125mm & 180mm
- With universal connectors for angle grinders
- Quick release lock
- Fast evacuation of dust
- Rubber adapter for vacuum cleaner
- Movable guide for grinding upto walls




Code	Description	Qty
BU-DCWDE5	Dust extractor for grinding cups	1

Polishing Pads

- Size: 100mm (#50 #200 #800 #1500)
- Sharp, durable, well finish
- Great for polishing flat surfaces and beveled edges
- Light color pad design
- Ideal for white and light color ceramic tiles and other materials

Code	Description	Qty
BU-DPP405	100mm Dry Diamond Polishing pad #50 Grit	1
BU-DPP420	100mm Dry Diamond Polishing pad #200 Grit	1
BU-DPP480	100mm Dry Diamond Polishing pad #800 Grit	1
BU-DPP415	100mm Dry Diamond Polishing pad #1500 Grit	1
BU-DPV405	100mm Dry Polishing Pads w/ Brazed Diamonds #50 GRIT	1
BU-DPV410	100mm Dry Polishing Pads w/ Brazed Diamonds #100 GRIT	1
BU-DPPH4	Rubber Packing Pad, velcro back, M14 connection Black	1

NEW

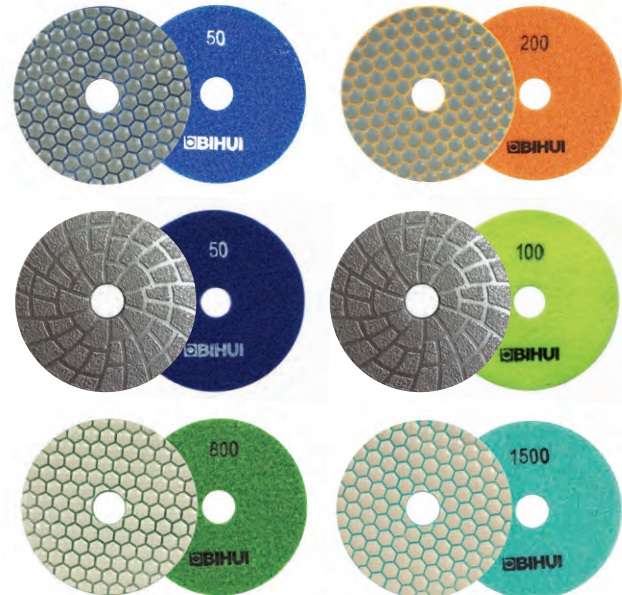

Heavy Duty Suction Cup - 110KG

Heavy duty suction cup with visual guide to let you know when full suction has been achieved.

- Lifting Capacity: 110kg
- Ø 200mm
- Pump Action
- Quick Release
- Outer Ring ideal for textured tiles
- Protective Carry Case

Code	Description	Qty
BU-SCVU8	Pump Suction cup for texture surfaces, capacity 110kg	1




Twin Suction Cup 80kgs

- Size: 125mm (5")
- Lifting capacity: 85kg (187lbs)
- Made of aluminium with rubber suction cup
- Ideal of carrying ceramic tiles, marble and glass
- Before use make sure the surface is clean and smooth

Code	Description	Qty
BU-SCDB4	Double head suction cup Size: 4" Capacity 80kgs	1



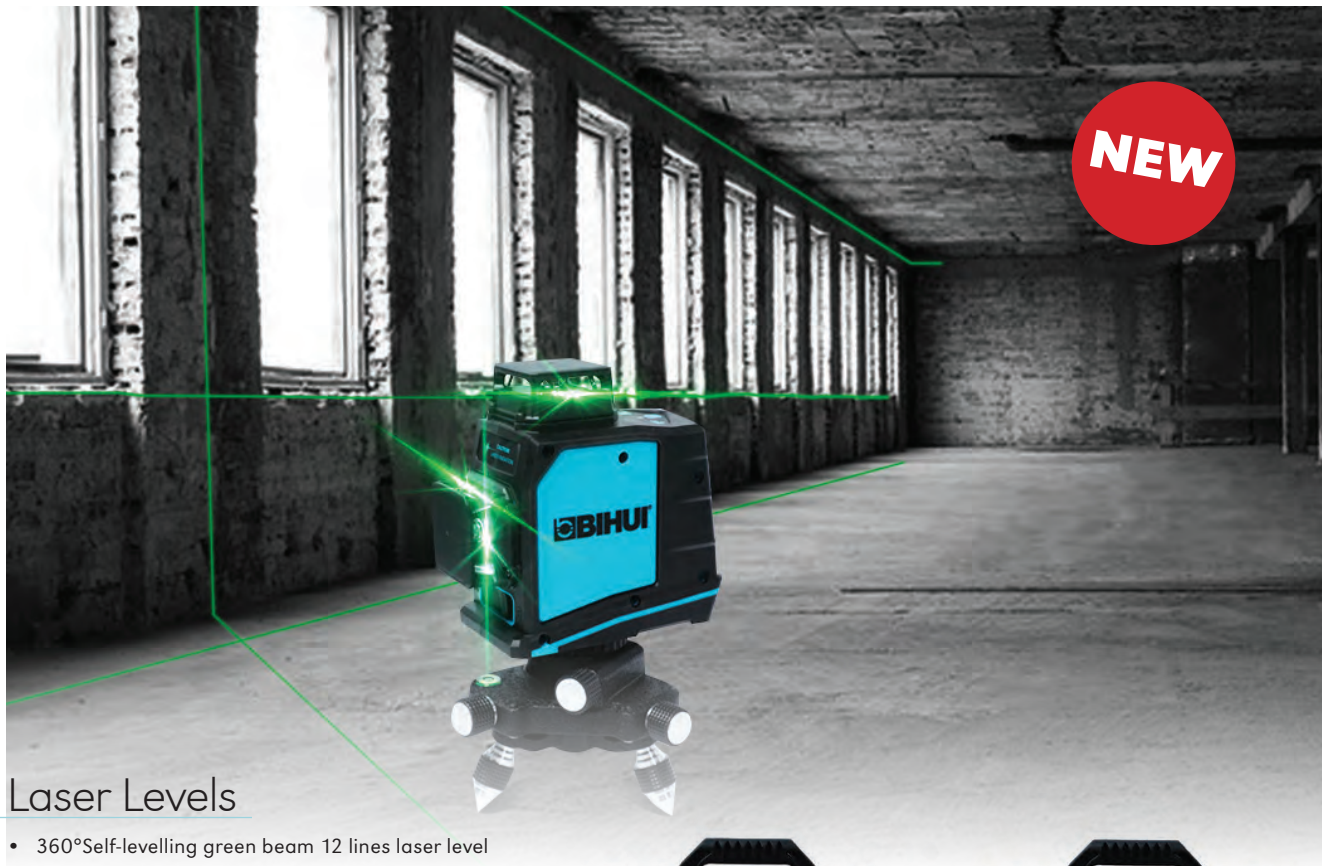

Laser Levels

- 360°Self-levelling green beam 12 lines laser level
- Auxiliary tiles fixing, wall decoration, floor tiles fixing, stair handrails, furred ceiling, floor tile, plastering etc

Accessories include:

- USB charging
- Lithium-ion Battery
- Laser target plate
- Green glasses
- Bracket with adjusting and level spirit
- Magnetic bracket PV9 & PV6+ (BU-LLG12 only)



BU-LLG12



BU-LLG05





Code	Description	Qty
BU-LLG05	Self-levelling 5 Lines Green Beams Laser Level	1
BU-LLG12	Self-levelling 12 Lines Green Beams Laser Level	1

Manual Cutters


NEW




- Double-layer aluminum alloy chassis, strong and durable
- Tungsten carbide scoring wheel with etched scale for using with different tile thickness
- Anti-rotation handle for change scoring wheels from Ø1/4" (6mm) to Ø7/8"(22mm)
- Ø7/8"(22mm) scoring wheel included
- Magnetic adsorption and fast release breaking device with 800kg breaking power for one-handed operation
- Adjustable measurement guide and side ruler for cutting tiles from different angle
- Anti-slip handle with storage function and snap-in for locking the handle
- LED light for extra vision
- 1M and 1.2M tile cutter with caster design
- Suitable for cutting all kinds of ceramic tiles, such as wall tiles, polished tiles and glazed tiles



800mm
1000mm
1200mm



560mm x 560mm
700mm x 700mm
840mm x 840mm



16mm Max
16mm Max
16mm Max

Code	Description	Qty
BU-TCB800	Cutter with light - 800mm	1
BU-TCB1000	Cutter with light - 1000mm	1
BU-TCB1200	Cutter with light - 1200mm	1

Angle Grinder

- 5" Variable Speed Angle Grinder with TPR handle.
- With constant speed soft start.
- Featured with polishing, drilling and grinding function.
- Professional quality for trade.

Specifications:

Voltage: 230 V AC

Power: 1200 W

Rotational speed: 3000-11000rpm

Weight: 2.1kg

Guaranteed sound power: 102 dB (A)

Vibrations, max.: 6.3 m/s²

Insulation class: Class II

Enclosure class: IP20

Guaranteed sound power LWA: 95 dB (A)

Measured sound pressure LPA: 84 dB (A)



NEW



Code	Description	Qty
BU-AG1200	1200W Variable Speed Angle Grinder w/ vibration handle - upto 125mm Blades	1



Blades




BU-DCBN115



BU-DCDA115



BU-DCDC115



BU-DCDM115



BU-DCDS115



BU-DCDT115



BU-DCDW115

Code	Description	Qty
BU-DCBN115	Super thin 115mm turbo diamond blade, Wet & Dry 22.23mm Bore 1.2mm Blade thickness, 9mm Diamond Tip, For cutting porcelain, ceramic, granite, stone, marble	1
BU-DCDA115	B-master diamond cutting blade, wet and dry 22.23mm Bore 55mm reinforced core, 1.2mm Blade thickness, 10mm Diamond Tip, For cutting porcelain, ceramic tiles	1
BU-DCDC115	B-mosaic diamond cutting blade, WET cutting 22.23mm Bore 1.6 Thickness, 10mm Diamond Tip, especially mosaic, glass and stone mosaic tiles WET ONLY	1
BU-DCDM115	B-speedy diamond cutting blade, wet and dry 22.23mm Bore 55mm reinforced core, 1.4mm Blade thickness, 10mm Diamond Tip, especially hard tiles, porcelain and ceramic tiles	1
BU-DCDS115	B-slim diamond cutting blade, wet and dry 22.23mm Bore 70mm 1 reinforced core, 1.0mm Blade thickness, 7mm Diamond Tip, especially slim slab, porcelain and ceramic tiles	1
BU-DCDT115	B-turbo 115mm Diamond Blade, Wet & Dry 22.23mm Bore 55mm 1 Reinforced Core, 1.6mm Blade Thickness, 7mm Diamond Tip, For cutting especially hard tiles, marble and slim slab	1
BU-DCDW115	B-magic diamond cutting blade, wet and dry 22.23mm Bore 55mm reinforced core, 1.4mm Blade thickness, 10mm Diamond Tip, especially porcelain and marble and slim slab	1

NEW




X Lock Adaptor

- For converting M14 thread into X lock
- Use for X-LOCK angle grinders

NEW



Code	Description	Qty
BU-DBAMXL	Angle grinder adaptor - M14 to X Lock	1

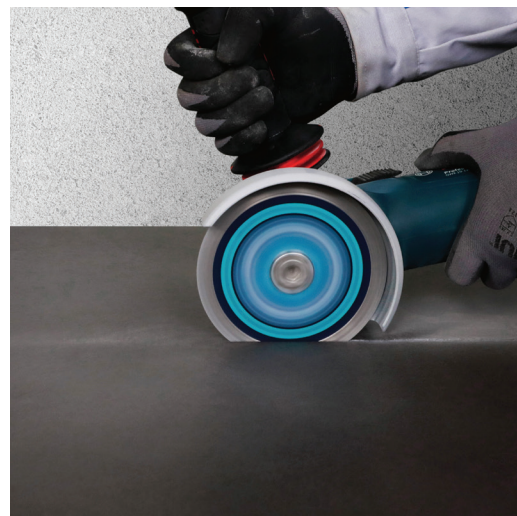



T-Spin

NEW

- Holds walls and floors tiles level & eliminates lippage
- Anti-scratching large cap for protecting your tiles and fast spin-down handle, no tools needed anymore.
- Stainless steel 1.5mm T pin and the product is fully washable and reusable, saves both time and money
- Suitable for tile clearance 1.5-6mm, for a wider joint, use classic spacers together
- Used in conjunction with other levelling systems as well
- Suitable for 2-17mm tiles



Code	Description	Qty
BU-TSL50	T spin levelling system, 50pcs per pack 1.5mm	1

Safety Gloves

- Size available in 9 / L, 10 / XL
- Provides excellent grip and movement when handling tile and stone
- Wear-resistant, stain-resistant Elastic ventilate, comfortable



NEW

Code	Description	Qty
BU-TGDL	Safety Gloves - 9/L	1
BU-TGDXL	Safety Gloves - 10/XL	1
BU-TGDXXL	Safety Gloves - 11/XXL	1

Horseshoe Shims

- High impact reusable plastic shim
- For both horizontal and vertical tile installation
- Easy to install & Easy to remove.
- For aligning marble, granite, porcelain and large format tile
- 1.5, 2 & 3mm available

NEW



Code	Description	Qty
BU-HSB400	1.5mm Horseshoe Shims - 400pcs per pack	1
BU-HSP350	2mm Horseshoe Shims - 350 per pack	1
BU-HSR300	3mm Horseshoe Shims - 300 per pack	1

Neoprene Leatherette X Large Knee Pads

Extra large, rugged and durable Knee Pads with soft premium grade Neoprene Strap.

Machine Washable.



NEW




Code	Description	Qty
BU-BLKP	Neoprene Leatherette X Large Knee Pads	1

4 Piece Silicon Application Set

- Easy to use, no need to tape or mask joints
- Designed to shape silicone sealant for a perfect neat finish
- Finishing profiles in 0R,2R,3R,4R,5R,6R,8R,10R,12R,14R,20R
- Ideal for baths, showers, basins, windows sills, aquariums & balconies etc

Code	Description	Qty
BU-STAK4	4PCS silicon application set	10

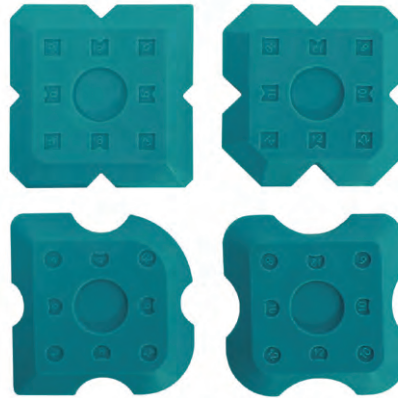

2 Piece Tile Support

- Designed to support the wall tiles at the required height and level
- Max bearing capacity: 105kg
- Adjustable height: 1-25cm

Code	Description	Qty
BU-TAS25	2PCS Tile Support for wall tiles, max loading 105kg, adjustable 1-25cm	1




Vacuum Attachment for Mixing Buckets

The device slots onto the rim of most sizes of bucket and in conjunction with a vacuum allows for dust-free indoor mixing.

- Ideal for flooring, tiling and plastering.
- Compatible with most vacuum cleaners.
- Eliminates dust from mixing mortar and grout in buckets.
- Does not allow dust to escape the top of the bucket.

Code	Description	Qty
BU-TDBM	Vacuum box for mixing bucket	1

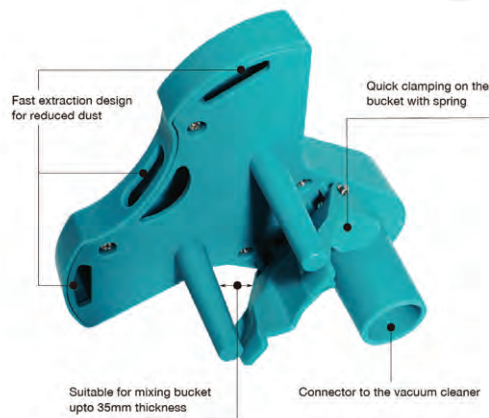


NEW



Lockable PVC Contour Gauge

- Quick and easy way to copy awkward shapes
- Low friction plastic blades
- With locking system
- Magnetic for hands-free working
- Metric and imperial scale
- Ideal for tiling, wallpaper, laying carpet, vinyl and laminate flooring
- Length: 250mm

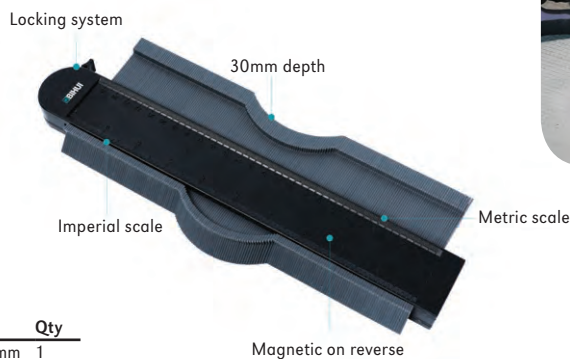

Code	Description	Qty
BU-TPL250	Lockable PVC Contour Gauge 250 x 105mm	1

NEW





Hole Locator & Cutting Guide

- Adjustable aluminium rules for mapping cuts and angles
- ABS hole locator for positioning drill locations
- Compact and light
- High quality fastenings for durability

Code	Description	Qty
BU-DBG6	Multi-Functional Adjustable Tile Hole Locator for drilling	1

Kitchen & Bathroom

Luxury shower shelves, Kitchen worktop protectors and inclined shower profiles suitable for any installation are the start of our NEW K&B range of products




Stainless Steel Tile-In Shower Shelf

Straight lines and elegant design, the shower shelf range is expanding due to popularity with this straight shelf now available in all 3 colours, giving flexibility on positioning and design of your shower installation.

Code	Description	Finish	Qty
KBSTS	Shower Shelf Straight Edge Stainless Steel	102,117,187	1




NEW

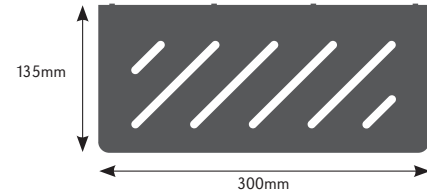

Stainless Steel Reversible Shower Shelf

- Premium model
- Grade 304 brushed finish
- 1.5mm wall thickness
- Unique reversible option
- Allows tile finish
- Integral bead to suit 9/11mm tile edge
- Tile-in

Code	Description	Finish	Qty
KBREV	Stainless Steel Shower Shelf (Reversible)	102,117,187	1

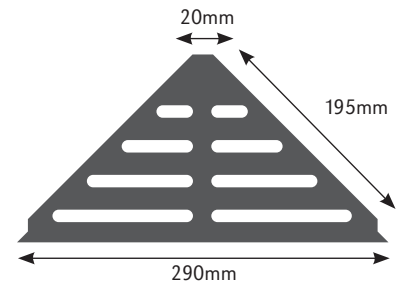


Stainless Steel Shower Shelf

Stylish shower shelf in brushed stainless steel. Fits in 90° corner. The shelf attaches in the grout joint with silicone - no drilling required!

Can be tiled in during installation or fitted retrospectively.

- 1.5mm thick
- No exposed sharp edge
- Brushed stainless steel finish
- Holes for drainage





Code	Description	Finish	Qty
KBSSS	Stainless Steel Shower Shelf	102,117,187	1

Aluminium Shower Shelf

Stylish shower shelf in aluminium. Fits in 90° corner. The shelf attaches in the grout joint with silicone - no drilling required!

Can be tiled in during installation or fitted retrospectively.

- 1.7mm thick
- No exposed sharp edge
- Aluminium finish
- Holes for drainage


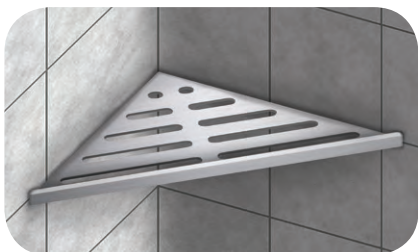


Code	Description	Finish	Qty
KBSSA	Aluminium Shower Shelf	91,117,187	1

Glass / Shower Deck Profiles

A stainless steel line profile which allows you to accurately configure tiled showers flush with the floor. Developed in order to cover the slope of 2%* it makes the shower area aesthetically perfect and at one with the modern trends of interior design.

*2% @ 0.9m, 1% @ 1.19m.

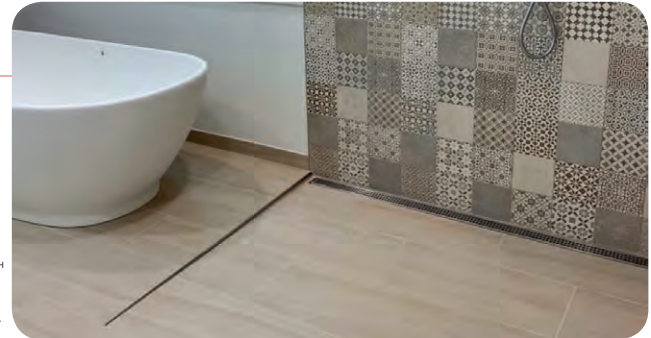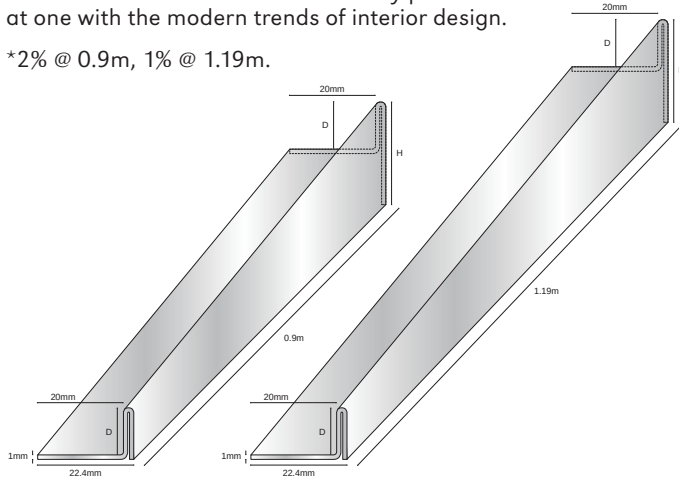

Code	D (mm)	H (mm)	Length (m)	Drop	Finish	Box Qty
ESL099	9	22	0.9	Left	84	10
ESR099	9	22	0.9	Right	84	10
ESL092	9	22	1.19	Left	84	10
ESR092	9	22	1.19	Right	84	10
ESL119	11	24	0.9	Left	84	10
ESR119	11	24	0.9	Right	84	10
ESL112	11	24	1.19	Left	84	10
ESR112	11	24	1.19	Right	84	10
ESL129	12.5	25.5	0.9	Left	84	10
ESR129	12.5	25.5	0.9	Right	84	10
ESL122	12.5	25.5	1.19	Left	84	10
ESR122	12.5	25.5	1.19	Right	84	10


Surface Protectors

Retrofit 3M self adhesive stainless steel surface protecting tactiles.

Set contains 8 stainless steel heat resistant tactiles (25mm) and template.

Code	Description	Qty
KBWPP8	25mm x 4mm Flat Top x 8 pcs	1
KBSWP28	Worktop protector 280 x 16 x 3.5mm x 4 pcs	1





VISION

Vision is comprised of both commercial
and domestic profiles with an option of
illumination – RGB or three shades of white.


VISION

Vision offers a range of premium profiles for commercial and domestic applications, designed to protect and inspire with variable mood accents.


The range is specifically designed to accept universal LED systems and RGB for Steps, Listello, Edges and Skirting offering unlimited freedom of design.

Developed with simplicity in mind, the range of supporting hardware offers the most frequently installed systems with Polycarbonate Diffusers that eliminate the hotspots.

- 220 & 110V Drivers
- Durable aluminium carriers
- Efficient LED 4.8W or 9.6W per metre
- Average lifespan 40,000 Hours
- Simple installation and selection
- Cutting Intervals - 25mm for LED and 50mm for RGB
- IP65 Certified LED and RGB
- 120 LED's per metre
- UL approved diffusers
- Enhanced safety
- Manufactured to A-A++ energy rating
- Remote control and Smart Home options available
- 3M VHB adhesive backing

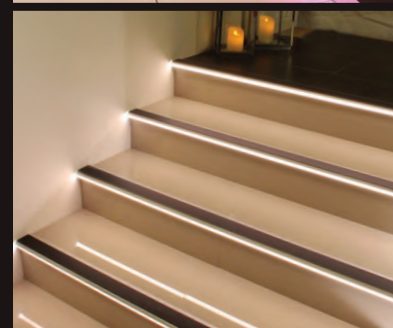

Retro Self Adhesive


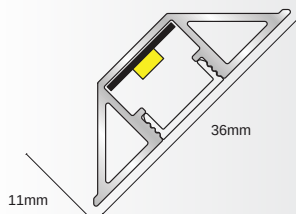


A versatile profile designed for internal corner installations for downlighting or vertical fitting used in conjunction with Vision LED, CCT and RGB lighting systems.

Supplied in anodised Matt Silver finish with frosted polycarbonate diffuser for optimum light dispersion and self-adhesive for easy installation.

Rated IP64 under IEC standard 60529 - resistant to water splashes from any direction.

Code	W x D (mm)	Length (m)	Finish	Box Qty
TRV368	36 x 11	2.8	81	10

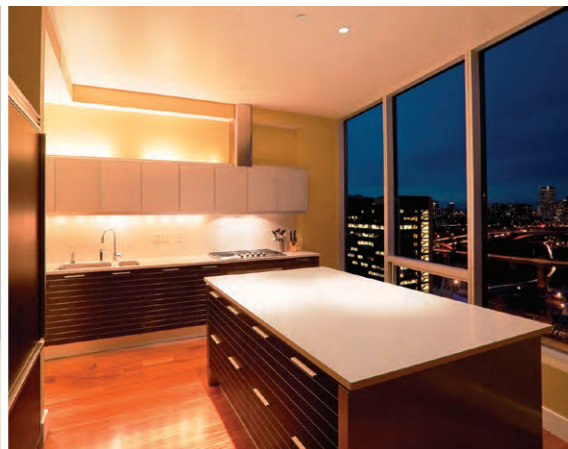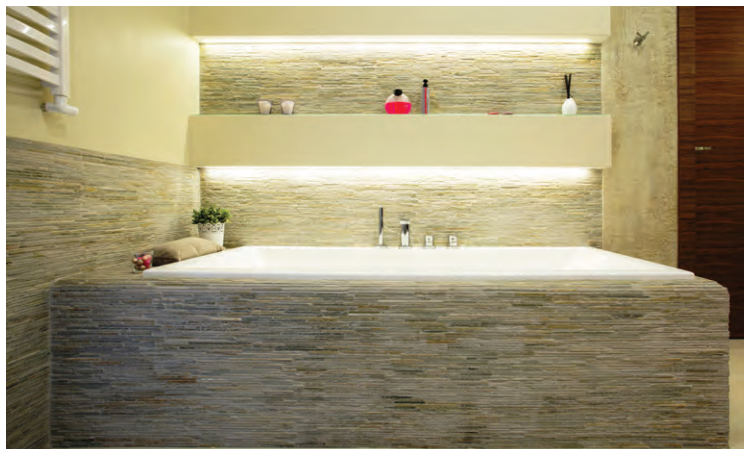

Vision - Light Down & Light Out


Commercial style stair nosing incorporating a range of non-slip PVC based inserts and Vision LED, CCT and RGB lighting systems in a 'light down' configuration.

Supplied in anodised Matt Silver finish, others finishes are available on request. Standard length is 2.8m but we offer a bespoke cutting and drilling service if required and end caps to complete the professional aesthetic. Complete with frosted polycarbonate diffuser to ensure optimum light dispersion.



Channel

81
Matt Silver



Standard Insert

01
White



16
Black



20
Brown



25
Beige



27
Canvas



30
Red



43
Dolphin Grey



44
Ice Grey



46
Midnight Grey



47
Yellow



48
Cobalt Blue



54
Saffron



58
Cloud



68
Haze



78
Sand



113
Tangerine




Tredsafe® Insert


601
White



616
Black






643
Dolphin Grey



647
Yellow



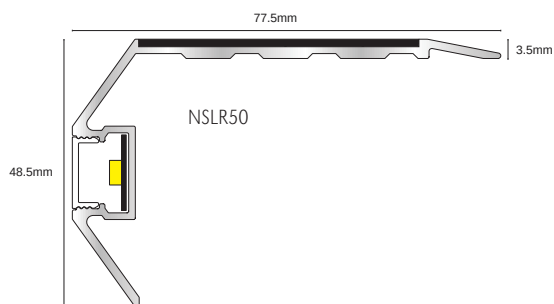


Insert	LRV	NSLR	NALR
Standard			
01 White	79.9	☐	☐
16 Black	4.5	☒	☒
20 Brown	9.1	☒	☒
25 Beige	41.1	☒	☒
27 Canvas	53.2	☒	☒
30 Red	10.6	☒	☒
43 Dolphin Grey	27.6	☒	☒
44 Ice Grey	42.1	☒	☒
46 Midnight Grey	12.8	☒	☒
47 Yellow	55.7	☒	☒
48 Cobalt Blue	9.2	☒	☒
54 Saffron	46.3	☒	☒
58 Cloud	58*	☐	☐
68 Haze	66*	☐	☐
78 Sand	77*	☐	☐
113 Tangerine	32.8	☒	☒

Tredsafe®			
601 White	82.7	☐	☐
616 Black	4.8	☒	☒
643 Dolphin Grey	18.2	☒	☒
647 Yellow	46.1	☒	☒

Channel			
81 Matt Silver		☐	☐

*See page 44


Standard



Tredsafe®



Vision - Step

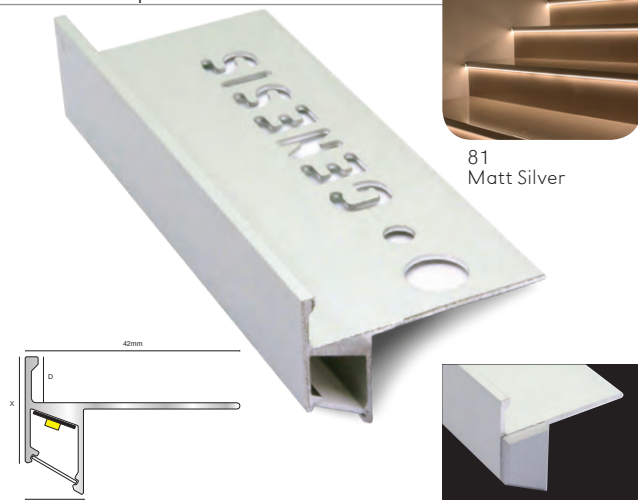

81
Matt Silver

Code	D x X (mm)	Length (m)	Finish	Description	Box Qty
NLD908	9 x 20	2.8	81	Channel	10
NLD118	11 x 22	2.8	81	Channel	10
End Caps					
NPC100	10		81	End Caps	10


Vision - Skirting



81
Matt Silver
94
Brushed Silver

Code	W x D (mm)	Length (m)	Finish	Description	Box Qty
KLD118	100 x 11	2.8	81,94	Channel	10
End Caps					
NPC100	10		81,94	End Caps (pair)	10

Vision - MultiFix

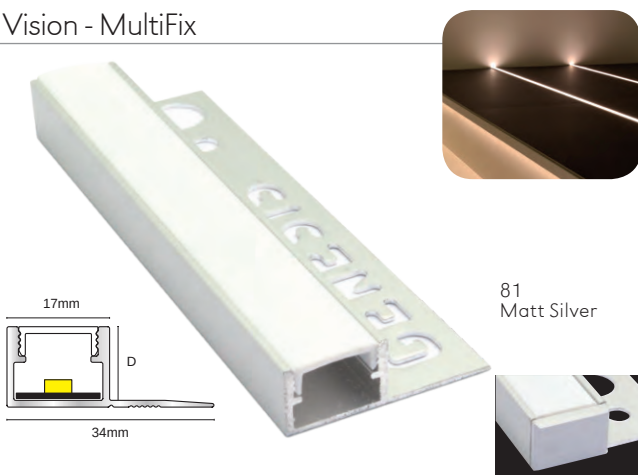

81
Matt Silver


Code	D (mm)	Length (m)	Finish	Description	Box Qty
TLD108	10	2.8	81	Channel	10
TLD128	12	2.8	81	Channel	10
End Caps					
TUC100	10		81	End Caps (pair)	10

Vision - Guidance System



81
Matt Silver

Code	D (mm)	Length (m)	Finish	Description	Box Qty
TUD118	17 x 11	2.8	81	Channel	10
End Caps					
TUC100	10		81	End Caps (pair)	10

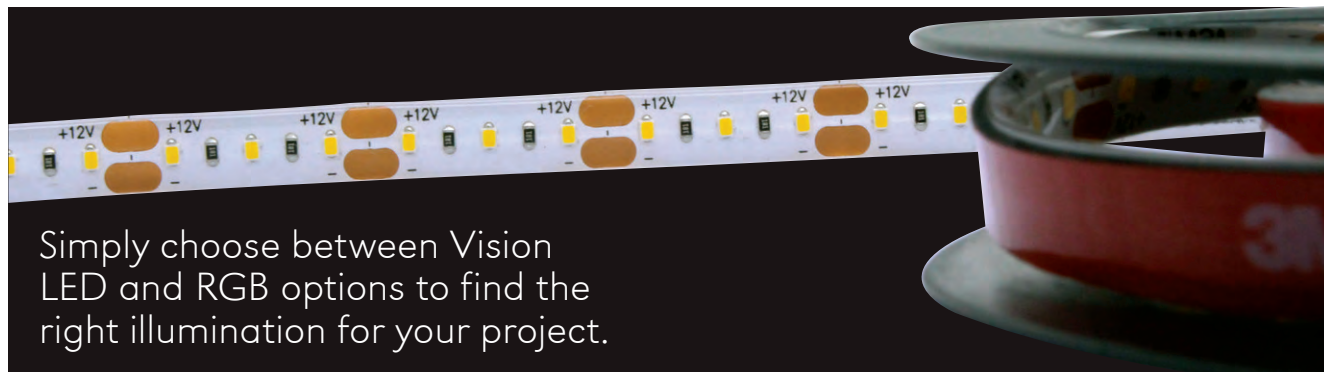

Simply choose between Vision LED and RGB options to find the right illumination for your project.

1. Lighting System

2. Driver

3. Receiver (optional)

Single Zone

or

Multi Zone



LED



CCT
RGB



or



CCT
RGB



or



CCT
RGB



or



Natural White 4000K



Safe and secure with 12V IP65 protection class as standard and premium 4.8W or 9.6W 120 LED's per metre. Available in 4000K, or to achieve the optimal effect, our CCT option offers 4000K in a single length.

4.8W Code	Description	Box Qty
LD12481.NW	4.8W 1MTR LED Natural White	1
LD12482.NW	4.8W 2MTR LED Natural White	1
LD12483.NW	4.8W 3MTR LED Natural White	1
LD12484.NW	4.8W 4MTR LED Natural White	1
LD12485.NW	4.8W 5MTR LED Natural White	1

9.6W Code	Description	Box Qty
LD12961.NW	9.6W 1MTR LED Natural White	1
LD12962.NW	9.6W 2MTR LED Natural White	1
LD12963.NW	9.6W 3MTR LED Natural White	1
LD12964.NW	9.6W 4MTR LED Natural White	1
LD12965.NW	9.6W 5MTR LED Natural White	1

12V Drivers

Selecting the right driver is easy – use the below formula to find the best option for your installation:

Total Power (W) = Length of LED x Power Rating of LED (W)

For example:

5 metres of Vision 9.6W LED tape uses a total of 48W. This installation will need to use a driver with a rating of at least 50W. The perfect option would be our 50W LED driver LDD50.



Drivers have six ports, use LEDCON to add additional ports
(1 x LEDCON = 9 ports, 2 x LEDCON = 12 ports)

Code	Description	Box Qty
LDD008	LED DRIVER 8W	1
LDD30	LED DRIVER 30W	1
LDD50	LED DRIVER 50W	1
LDD100	LED DRIVER 100W	1
LDD180	LED DRIVER 180W	1
LDD1103 (110V)	LED DRIVER 30W	1
LDD1105 (110V)	LED DRIVER 50W	1

Smart Drivers

Vision Smart Drivers can be used to control lights using a compatible smart speaker or smart hub. This allows the user to turn the light on and off, adjust brightness and change the colour of the light using their voice or smartphone.

Code	Description	Box Qty
LAZ030	LED Smart Driver Compatible with Alexa/Zigbee - 30W	1
LAZ050	LED Smart Driver Compatible with Alexa/Zigbee - 50W	1

“Alexa, dim the lights”



Remote Control Options

Single Zone Options - 4 Ports



Code	Description	Box Qty
LEDRAD	LED Remote Dimmer and Controller	1

Need more control? Vision is compatible with single and multi-zone remote control, all you need is a receiver and remote control handset.

Multi Zone Options (4 Zones / 3 Scenes)

1x driver and 1x receiver required per independent zone.



Driver and remote sold separately.

Code	Description	Box Qty
LEDMZR	Single White - LED Receiver - Max 288W	1
LEDREM	Single White - LED Remote - 30M Range	1


Accessories



Code	Description	Box Qty
LEDEXT	LED 2m Extension	1
LEDCON	Additional Connector Block with 4 Ports	1

Code	Description	Box Qty
LMD-DR	Driver powered PIR Motion Detector LED Driver	1
LMD-PD	Mains powered PIR Motion Detector wired before LED Driver	1

Multiple White

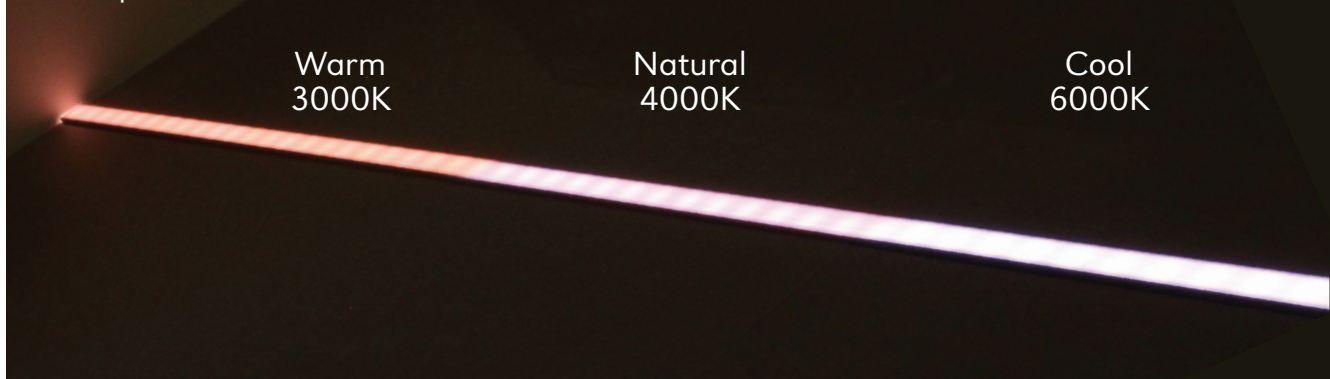

Safe and secure with 12V IP65 protection class as standard and premium 4.8W or 9.6W 120 LED's per metre. The CCT option offers 3000K, 4000K and 6000K in a single length.

Code	Description	Box Qty
LCT12961	9.6W 1MTR CCT Multiple White	1
LCT12962	9.6W 2MTR CCT Multiple White	1
LCT12963	9.6W 3MTR CCT Multiple White	1
LCT12964	9.6W 4MTR CCT Multiple White	1
LCT12965	9.6W 5MTR CCT Multiple White	1


CCT Drivers

Selecting the right driver is easy – use the below formula to find the best option for your installation:

Total Power (W) = Length of LED x Power Rating of LED (W)

For example:

5 metres of Vision 9.6W LED tape uses a total of 48W. This installation will need to use a driver with a rating of at least 50W. The perfect option would be our 50W LED driver LUNDR50.

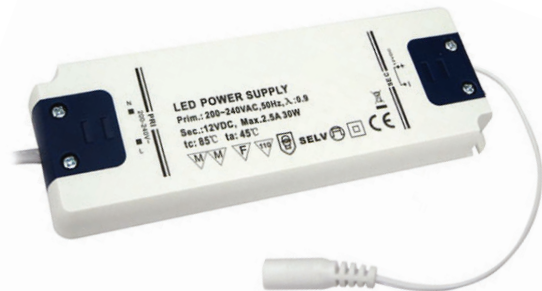

Drivers have six ports, use LEDCON to add additional ports
(1 x LEDCON = 9 ports, 2 x LEDCON = 12 ports)

Code	Description	Box Qty
LUNDR30	CCT DRIVER 30W	1
LUNDR50	CCT DRIVER 50W	1
LUNDR100	CCT DRIVER 100W	1
LUNDR180	CCT DRIVER 180W	1

Smart Adapter

Vision Smart Adapter can be used to control lights using a compatible smart speaker or smart hub. This allows the user to turn the light on and off, adjust brightness and change the colour of the light using their voice or smartphone.

Code	Description	Box Qty
LCZ	LED Smart Driver Compatible 1 with Alexa/Zigbee. Wattage dictated by LUNDR driver	



“Alexa, dim the lights”

Remote Control Options

Single Zone Options - 4 Ports



Code	Description	Box Qty
LCTRAD	Multiple White - CCT Remote Dimmer and Controller	1

Need more control? Vision is compatible with single and multi-zone remote control, all you need is a receiver and remote control handset.

Multi Zone Options (4 Zones / 3 Scenes)

1x driver and 1x receiver required per independent zone.



Driver and remote sold separately.




Code	Description	Box Qty
LCTMZR	Multiple White - CCT Receiver - Max 720W	1
LCTREM	Multiple White - CCT Remote - 30M Range	1

Accessories

Code	Description	Box Qty
LCTEXT	Extension Cable for Vision CCT - 2m	
LCTCON	Additional Connector Block with 2 Ports	



Colour Spectrum

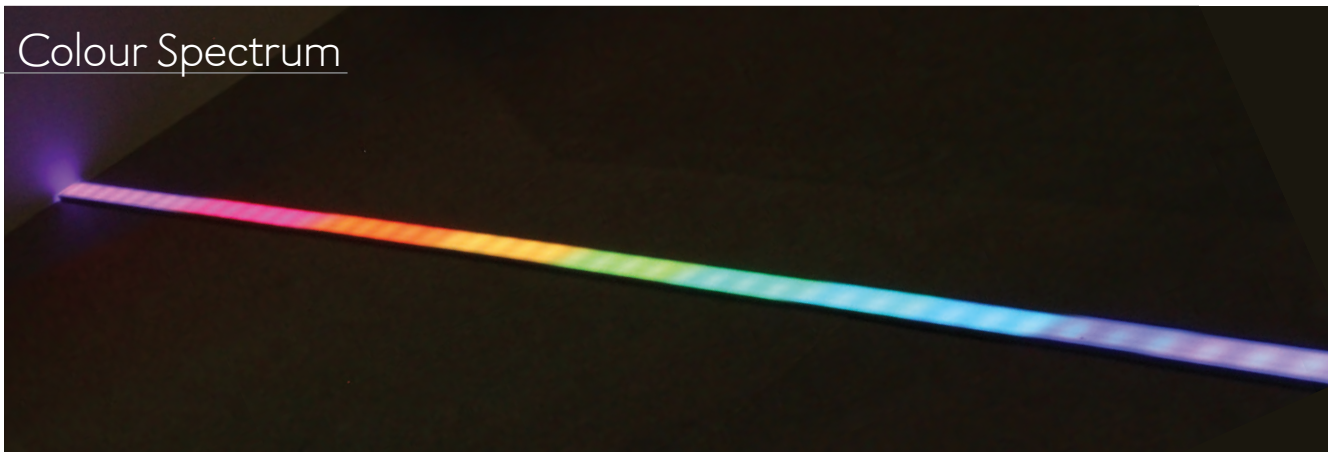

This dynamic system offers a range of mood lighting powered by 12V IP65 protection, the 60 LED per metre powers varying colours with remote colour changing and dimming within a maximum of 4 Zones.

RGB is 14.4W per metre and cuttable every 50mm.

Code	Description	Box Qty
LGB12141	14.4W 1MTR RGB	1
LGB12142	14.4W 2MTR RGB	1
LGB12143	14.4W 3MTR RGB	1
LGB12144	14.4W 4MTR RGB	1
LGB12145	14.4W 5MTR RGB	1

CCT Drivers

Selecting the right driver is easy – use the below formula to find the best option for your installation:

Total Power (W) = Length of RGB x Power Rating of RGB (W)

For example:

5 metres of Vision 9.6W RGB tape uses a total of 48W. This installation will need to use a driver with a rating of at least 50W. The perfect option would be our 50W RGB driver LUNDR50.



**Drivers have six ports, use LEDCON
to add additional ports
(1 x LEDCON = 9 ports, 2 x LEDCON = 12 ports)**

Code	Description	Box Qty
LUNDR30	RGB DRIVER 30W	1
LUNDR50	RGB DRIVER 50W	1
LUNDR100	RGB DRIVER 100W	1
LUNDR180	RGB DRIVER 180W	1

Smart Adapter

Vision Smart Adapter can be used to control lights using a compatible smart speaker or smart hub. This allows the user to turn the light on and off, adjust brightness and change the colour of the light using their voice or smartphone.

Code	Description	Box Qty
LRZ030	RGB Smart Driver Compatible 1 with Alexa/Zigbee. Wattage dictated by LUNDR driver	



“Alexa, dim the lights”

Remote Control Options

Single Zone Options - 4 Ports



Code	Description	Box Qty
LGBRAD	RGB - Remote Dimmer and Controller	1

Need more control? Vision is compatible with single and multi-zone remote control, all you need is a receiver and remote control handset.

Multi Zone Options (4 Zones / 3 Scenes)

1x driver and 1x receiver required per independent zone.




Driver and remote sold separately.

Code	Description	Box Qty
LGBMZR	RGB - Receiver - Max 720W	1
LGBREM	RGB - Remote - 30M Range	1

Accessories

Code	Description	Box Qty
LGBEXT	Extension Cable for Vision RGB - 2m	
LGBCON	Additional 2 Port Connector Block for Vision RGB	

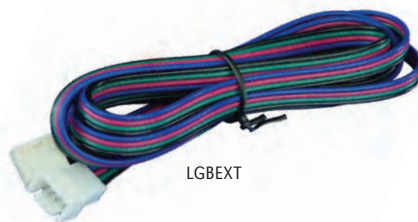

LGBEXT



LGBCON

EyeLEDs



Natural White (4000K) EyeLEDs are an individual, recess mounted LED unit which can be used to accentuate your installation. Compatible with our standard LED drivers.

Cool (6000K) and Warm (3000K) White available on demand.

EyeLEDs are Ø30mm, 12V, IP65 0.4W recess mounted with micro connectors.




Code	Description	Box Qty
LDP1204.NW	4000K. 1 x EyeLED, Driver required	1
LDP1204.NW1	4000K. 1 x EyeLED, LDD008 Driver included	1
LDP1204.NW2	4000K. 2 x EyeLED, LDD008 Driver included	1
LDP1204.NW3	4000K. 3 x EyeLED, LDD008 Driver included	1
LDP1204.NW4	4000K. 4 x EyeLED, LDD008 Driver included	1
LDP1204.NW5	4000K. 5 x EyeLED, LDD008 Driver included	1
LDP1204.NW6	4000K. 6 x EyeLED, LDD008 Driver included	1

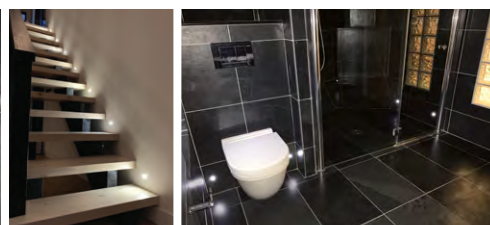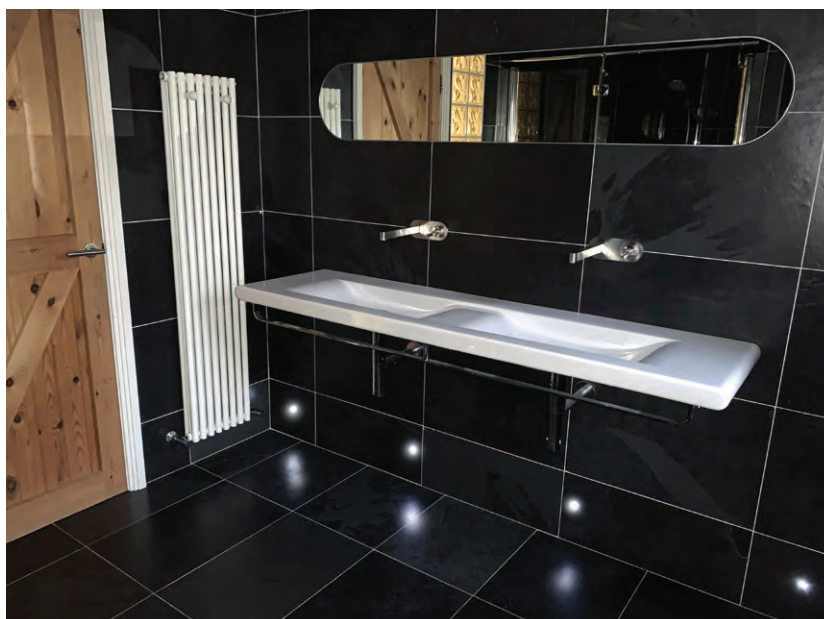



Dotless Flexible LED Tape

A flexible strip of continuous lighting with 144 LED's per metre. Cutting intervals of 21mm with 2m power lead and micro connector.

- 10w per metre
- Natural White
- 1m and 2m coils
- Compatible with our standard drivers

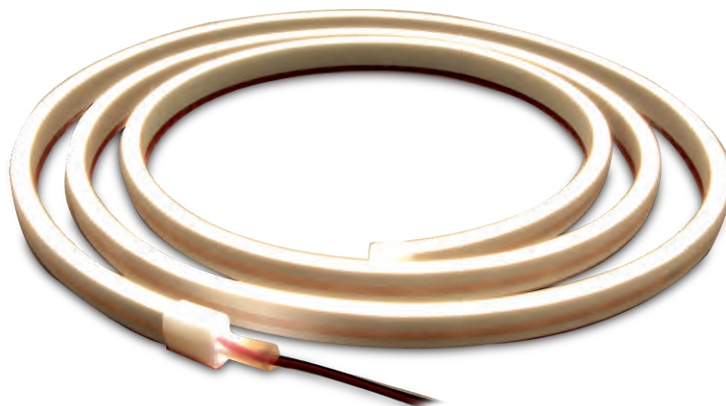

Code	Description	Box Qty
LSD14101.NW	IP66 Continuous LED Tape - 1m Coil	1
LSD14102.NW	IP66 Continuous LED Tape - 2m Coil	1

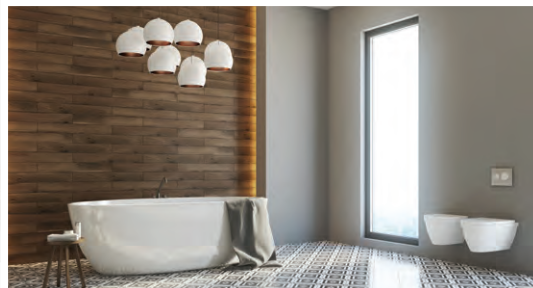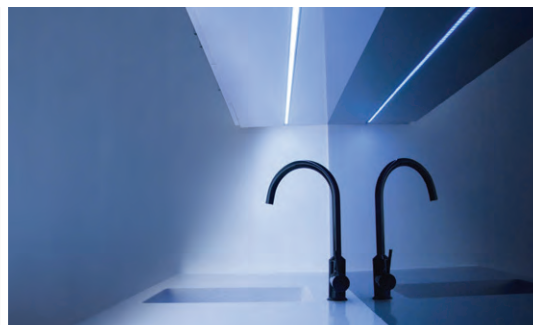


Zones

Zone 0 is IP67 and above

Zone 1 is IP64 plus

Zone 2 is IP64 plus

The tape should be at least 60cm from water source due to the wires / leads.

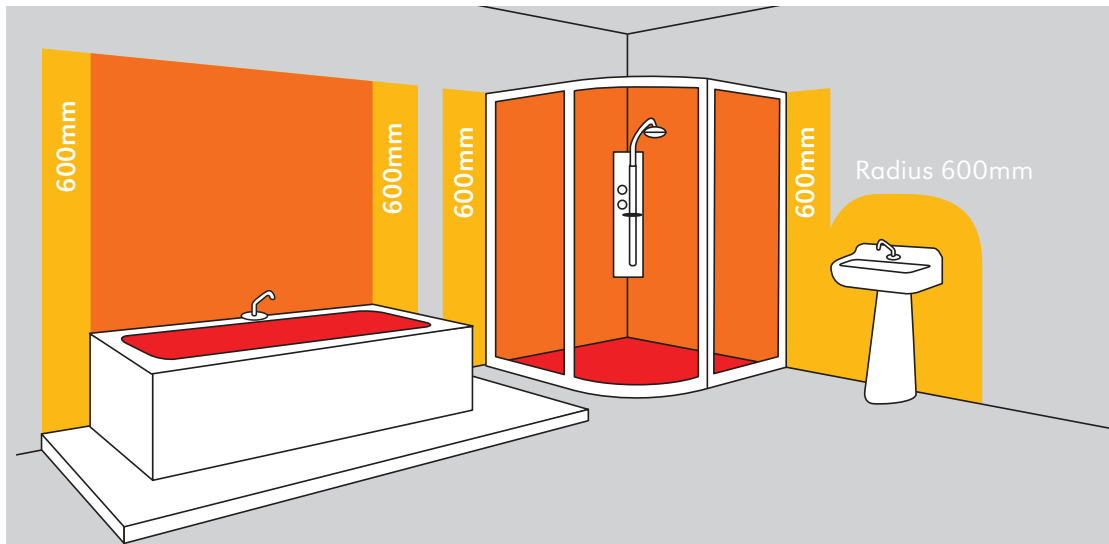

0
ZONE

1
ZONE

2
ZONE

OUTSIDE
ZONES



Movement & Structural Joints

Performance and function are paramount
when making your selection and our
range meets both those requirements.





We make movement as easy as 1,2,3...

- 1 **Material Selection** – the material used to form the joint anchoring legs has no bearing on the movement capacity. Different materials provide added protection to the edge of the floor covering depending on the type and volume of traffic;

PVC - Light duty traffic, foot traffic only. Sight line is a consistent colour making it ideal for domestic applications in large rooms or doorways, removable leg for use as a perimeter in rooms greater than 4sqm, waterproof and suitable for swimming pool surrounds and wet areas.

Aluminium - Grade 6063 Aluminium provides extra protection to the floor covering and can be used in heavy traffic areas with foot and low point loading wheel traffic, ideal for use in car showrooms and shopping centres.

Stainless Steel - Available in Grade 304 and 316, this is the strongest of the materials giving the ultimate protection to the floor covering and ideal for all traffic. Popular with Airports and supermarkets where the wheel traffic has a high point loading and can cause the most impact damage. Grade 316 is recommended in swimming pool surrounds, food prep areas, hospitals and wet areas due to its increased corrosive resistance and strength.





2 Performance – the movement accommodation is determined by the width of the joint infill. All Genesis joints conform to the BS5385 recommendations providing minimum 20% movement capacity on minimum capacity due to its flexibility.

3 Positioning – the following points must be considered when choosing your movement joint:


Key points

- In all applications a movement joint must be used **DIRECTLY** above a joint in the sub-floor, whether this is the same type of subfloor or not. It is often missed domestically on extensions where a new subfloor will be constructed
- In the instance of commercial applications where there is a structural gap in the subfloor the movement joint must not overhang the gap, if the gap is 10mm and the infill of the movement joint is 6mm then select a different movement joint
- When tiling continues from room to room it is good practice to use a movement joint in the doorways, especially if the walls are load bearing

Considerations


- If there are no joints in the subfloor, start from the wall. If there are joints in the subfloor, start from the location of the joint. Positioning should then be 5-8m apart in any direction and ideally in square/rectangular bays. In domestic applications or corridors this can be extended to 10m
- A room 4sqm or larger with load bearing walls should have a perimeter joint in place
- Once a room/project exceeds 20sqm or extends into a second room you should be asking the question about a movement joint!

P.V.C. Movement & Perimeter Joint

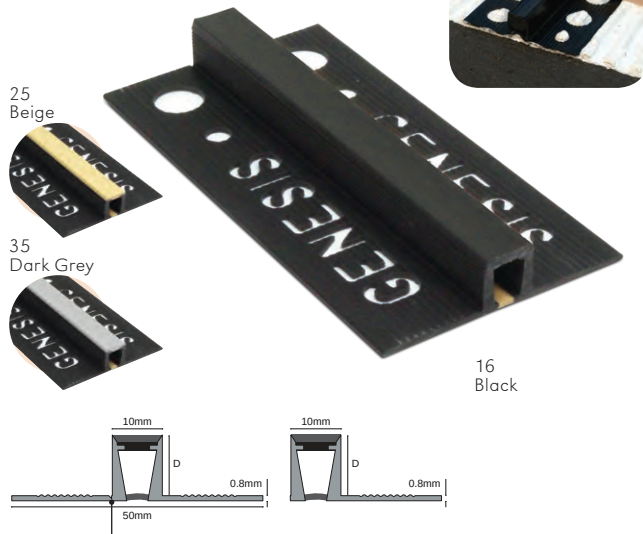

Code	D (mm)	Length (m)	Infill Finish	Box Qty
MLB100	10	2.5	16,25,35	25
MLB125	12.5	2.5	16,25,35	25



P.V.C. Movement & Perimeter Joint - Thin

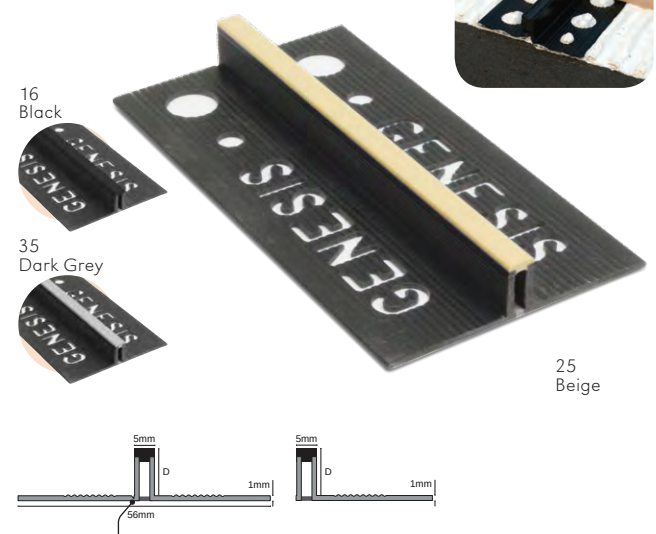

Code	D (mm)	Length (m)	Infill Finish	Box Qty
MLT100	10	2.5	16,25,35	25
MLT125	12.5	2.5	16,25,35	25



Optimax Aluminium Heavy Duty

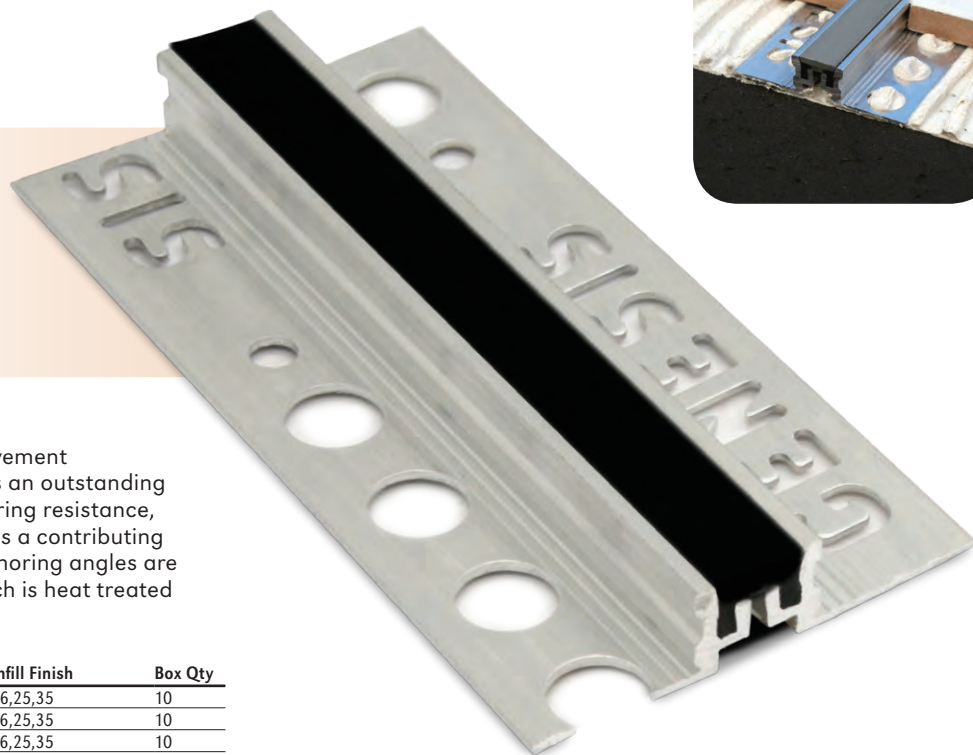

The use of Santoprene as a movement accommodation material offers an outstanding flexibility, chemical and weathering resistance, in addition the tensile strength is a contributing factor to the durability; the anchoring angles are Aluminium grade 6063 T6, which is heat treated to increase tensile strength.


Code	D (mm)	Length (m)	Infill Finish	Box Qty
MSA080	8	2.5	16,25,35	10
MSA100	10	2.5	16,25,35	10
MSA125	12	2.5	16,25,35	10
MSA150	15	2.5	16,25,35	10
MSA180	18	2.5	16,25,35	10
MSA225	22,5	2.5	16,25,35	10

Optimax Aluminium Heavy Duty Replaceable Infill

Code	D (mm)	Length (m)	Finish	Box Qty
MSI100	9,8	2,5	16,25,35	20




Stainless Steel Heavy Duty

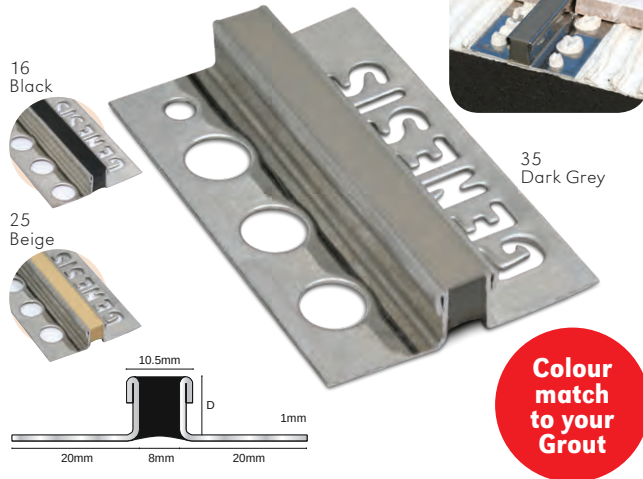

Code	D (mm)	Length (m)	Infill Finish	Box Qty
MHS100	10	2.5	16,25,35	10
MHS120	12	2.5	16,25,35	10
MHS150	15	2.5	16,25,35	10
MHS225	22.5	2.5	16,25,35	10

Optimax Stainless Steel Heavy Duty

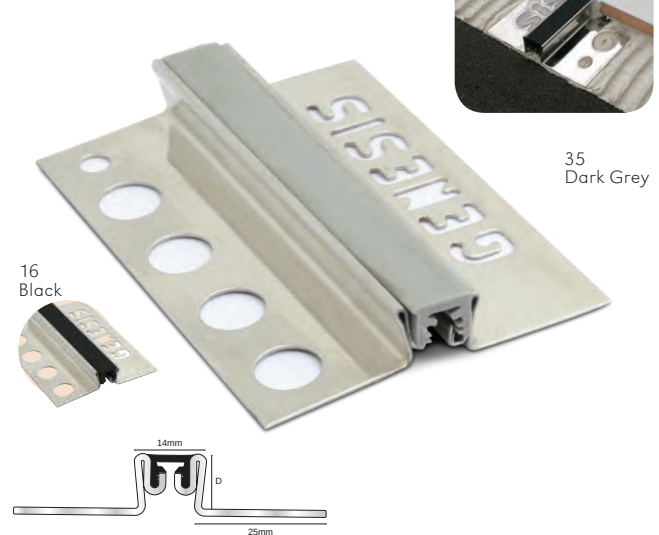


Code	D (mm)	Length (m)	Infill Finish	Box Qty
MSS100	10	2.5	16,35	10
MSS125	12.5	2.5	16,35	10

Case Study: Gatwick Airport

When the Gatwick consortium began to renovate the South terminal of Gatwick Airport they needed to ensure that the new floors were protected against the movement of all the daily traffic that they endure. Genesis were able to provide a solution; working with the main contractors, architects and installation contractors a cost effective Stainless Steel Movement Joint was selected from the Genesis range as the perfect fit. The renovation has been part of a (circa) £850million investment to see the replacement of floors and ceilings and enhance the experience travellers receive; The Genesis Movement Joint meets and exceeds all standards of Movement Joints and will save the floors from cracking long into the future.



Aluminium Intermediate Joint

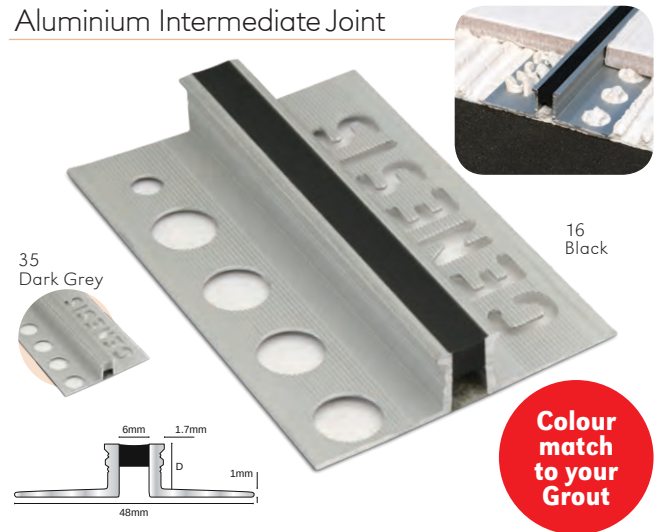

Code	D (mm)	Length (m)	Infill Finish	Box Qty
MMA100	10	2.5	16,35	10
MMA120	12	2.5	16,35	10

We can now colour match our MHS & MMA infills to your grout





Infill Kit

The complete solution for invisible, stress relieving grout lines

Contents:

Part 1 Base

Part 2 Hardener

Pair of Gloves

x2 Empty Cartridges

x2 End Caps

x2 Nozzles

Coverage: 15m based on 10mm x 3mm joint

Code	Description	Qty
M-INVIZ	Invizi-Joint Infill Kit	1



PERFECT FOR:

- ❖ Opus, Brick & Herringbone Patterned Tiles
- ❖ Avoiding cracked and damaged tiles
- ❖ Large living areas
- ❖ Use with underfloor heating

See INVIZI-JOINT technical pack for more information and installation instructions



How INVIZI-JOINT benefits your tiled flooring

When movement joints are required but the tile design mean unattractive cuts, INVIZI-JOINT is the solution. Colour match your grout or any RAL number to provide an even more seamless finish compared to standard joints.

- ❖ Works with heated floors to relieve stress and movement
- ❖ Colour matched to your Tile, Grout or any RAL number
- ❖ Avoid unsightly cuts by following the grout lines
- ❖ Works with herringbone, opus and brick bond tile formats
- ❖ Achieves an approximate 45 Shore A hardness rating once cured

INVIZI-JOINT is not a substitute for structural movement joints.

When structural joints are present please follow British Standard 5383, TTA publications, or the relevant standards and associations in your country.

If any structural joints exist please contact us before installing INVIZI-JOINT.



Heavy Duty Aluminium




Heavy Duty Aluminium - 30mm





Smooth						
Code	W (mm)	D (mm)	A (mm)	Length (m)	Finishes	Lateral Movement (mm)
GFSR3023	36	23	30	3	16,35	8 (± 4)
GFSR3030	36	30	30	3	16,35	8 (± 4)
GFSR3050	36	50	30	3	16,35	8 (± 4)
GFSR3070	36	70	30	3	16,35	8 (± 4)
Grooved						
Code	W (mm)	D (mm)	A (mm)	Length (m)	Finishes	Lateral Movement (mm)
GFGR3023	36	23	30	3	16,35	10 (± 5)
GFGR3030	36	30	30	3	16,35	10 (± 5)
GFGR3050	36	50	30	3	16,35	10 (± 5)
GFGR3070	36	70	30	3	16,35	10 (± 5)



Heavy Duty Aluminium - 50mm





Smooth						
Code	W (mm)	D (mm)	A (mm)	Length (m)	Finishes	Lateral Movement (mm)
GFSR5023	56	23	50	3	16,35	12 (± 6)
GFSR5030	56	30	50	3	16,35	12 (± 6)
GFSR5050	56	50	50	3	16,35	12 (± 6)
GFSR5070	56	70	50	3	16,35	12 (± 6)
Grooved						
Code	W (mm)	D (mm)	A (mm)	Length (m)	Finishes	Lateral Movement (mm)
GFGR5023	56	23	50	3	16,35	14 (± 7)
GFGR5030	56	30	50	3	16,35	14 (± 7)
GFGR5050	56	50	50	3	16,35	14 (± 7)
GFGR5070	56	70	50	3	16,35	14 (± 8)

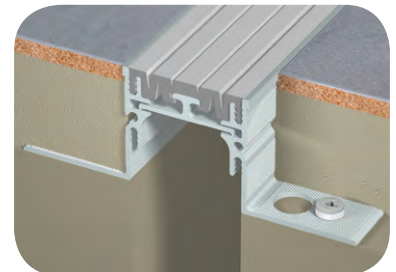

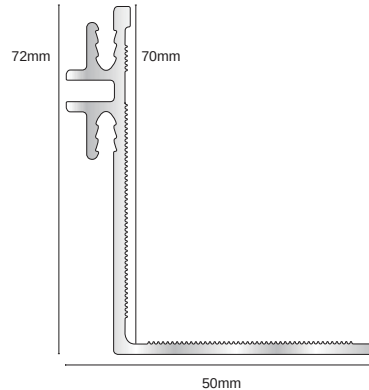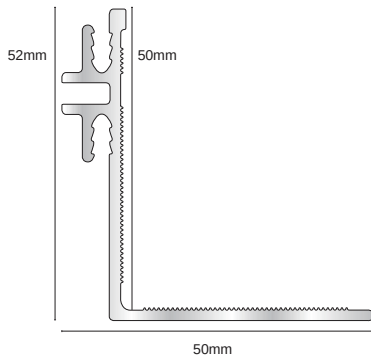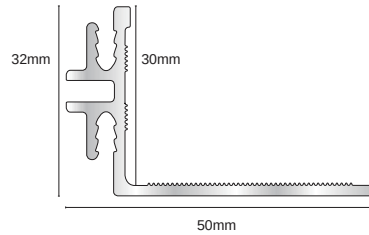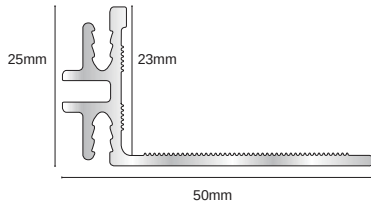

Insert - Smooth

Insert - Grooved



Central Support




Self Adhesive Structural Covers




81
Matt Silver

102
Brushed Stainless Steel

Stainless Steel Covers



Code	W x D (mm)	Length (m)	Finish	Side Drill	Max Load	Box Qty
GC2796	60 x 5	2.5	102	On request	25kg/cm ²	10
GC2797	80 x 5	2.5	102	On request	15kg/cm ²	10
GC2798	100 x 5	2.5	102	On request	11kg/cm ²	10

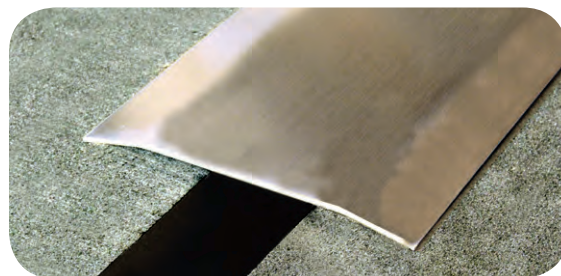

Aluminium Covers



Code	W x D (mm)	Length (m)	Finish	Side Drill	Max Load	Box Qty
GC2806	60 x 4	3	81	On request	8kg/cm ²	10
GC2820	80 x 4	3	81	On request	55kg/cm ²	10
GC2814	100 x 3	3	81	On request	75kg/cm ²	10



Step Edges

Offering anti-slip and decorative solutions with an array of installation options and materials.



Slimline Ceramic Tile-In Edges

Available in 2.8m Standard Lengths.

This Tile-In Nosing offers a cost effective alternative to ceramic treads. The PVC insert on the tread has been designed to provide additional slip resistance. Although mainly used with ceramic tile it can also be used with wood, laminate and stone. Meets DDA Guidelines and Building regulations.

The **Aluminator**® range of profiles are available with the innovative external grade Tredsafe® Insert.

Tredsafe® insert is manufactured from a special blend of P.V.C., silica quartz and polymeric plasticiser giving an homogeneous hard wearing anti-slip flooring for wet and dry conditions. The three dimensional pyramid pattern which provides excellent slip resistance in both wet and dry conditions.

Code	D (mm)	Length (m)	Finish	Box Qty
NTS10	10	2.8	81	10
NTS12	12.5	2.8	81	10
ATS10	10	2.8	81	10
ATS12	12.5	2.8	81	10

Channel

81
Matt Silver




Standard Insert


01
White



16
Black



20
Brown



25
Beige



27
Canvas



30
Red



43
Dolphin Grey



44
Ice Grey



46
Midnight Grey



47
Yellow



48
Cobalt Blue



58
Cloud



68
Haze



78
Sand




Tredsafe® Insert


601
White




616
Black






643
Dolphin Grey



647
Yellow




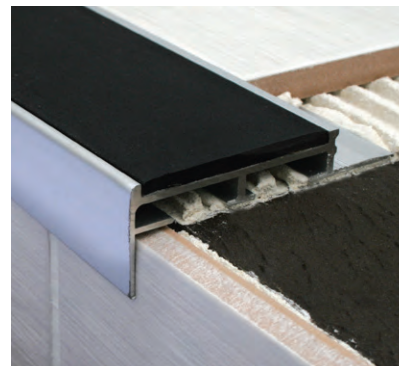

Insert	LRV	
Standard		
01 White	79.9	
16 Black	4.5	
20 Brown	9.1	
25 Beige	41.1	
27 Canvas	53.2	
30 Red	10.6	
43 Dolphin Grey	27.6	
44 Ice Grey	42.1	
46 Midnight Grey	12.8	
47 Yellow	55.7	
48 Cobalt Blue	9.2	
58 Cloud	58*	
68 Haze	66*	
78 Sand	77*	
Tredsafe®		
601 White	82.7	
616 Black	4.8	
643 Dolphin Grey	18.2	
647 Yellow	46.1	

*See page 44

Standard



Tredsafe®



Step Edges


Aluminium Stair Grip + PVC Top and End Caps



16
Black

Code	W x D (mm)	Length (m)	Finish	Box Qty
NIB106	30 x 10	2.5	16,35	10
NIB126	30 x 12	2.5	16,35	10
End Caps				
Code	Description	Finish	Pack Qty	
NUC102	Pair of universal end caps	16,35	2	


Aluminium Tile-In with Carbide Insert

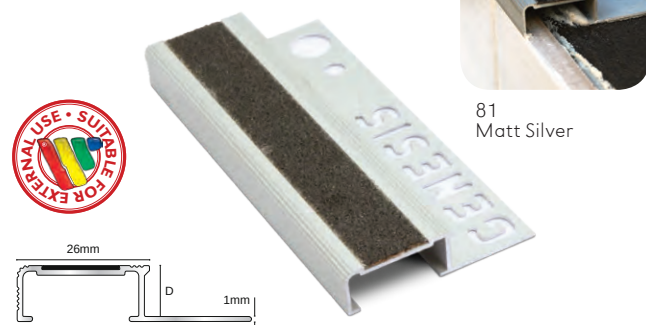

81
Matt Silver

Code	D (mm)	Length (m)	Finish	Box Qty
NLC106	10	2.6	81	10
NLC126	12.5	2.6	81	10

Aluminium Self Adhesive Retro-Fit

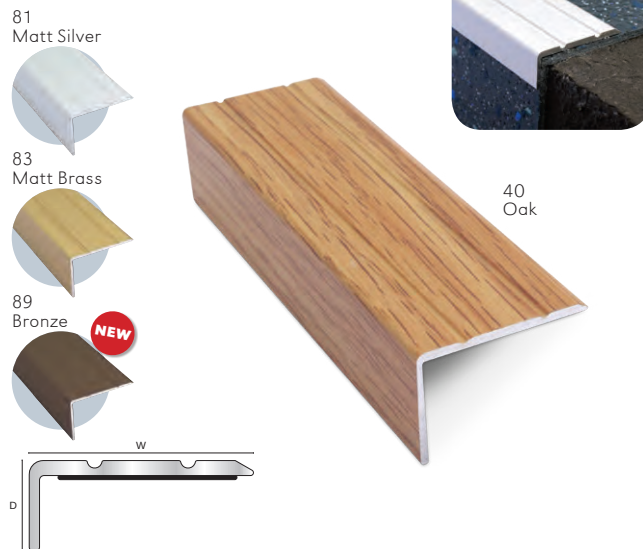

81
Matt Silver


83
Matt Brass

89
Bronze

40
Oak

Code	W x D (mm)	Length (m)	Finish	Box Qty
NAS207	30 x 20	2.7	40,81,83,89	10
NAS209	30 x 20	0.9	40,81,83,89	10
NAS107	25 x 10	2.7	40,81,83,89	10
NAS109	25 x 10	0.9	40,81,83,89	10

Aluminium Tile-In



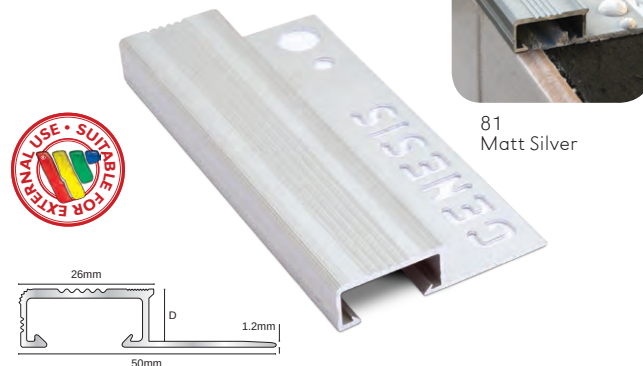


81
Matt Silver

Code	W x D (mm)	Length (m)	Finish	Box Qty
NLM103	26 x 10	3	81	10
NLM123	26 x 12	3	81	10




Aluminium Retro-Fit

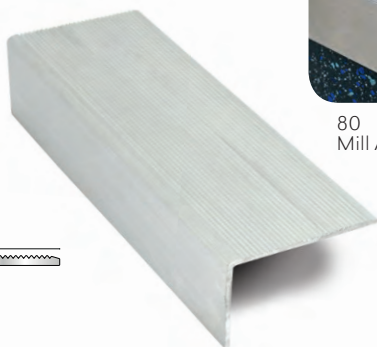



80
Mill Aluminium

Code	W x D (mm)	Length (m)	Finish	Box Qty
NRA50	50 x 30	2.77	80	10

Aluminium Nosing with Black Rubber Insert




16
Black

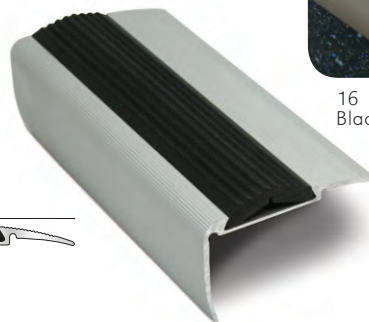


Code	W x D (mm)	Length (m)	Finish	Box Qty
NRE05	54 x 30	2.7	16 (81 Matt Silver Channel)	10


Aluminium Tile-In Step Edge

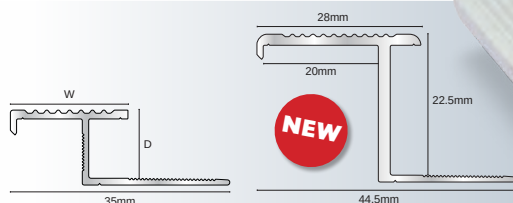


411*
Granite




414*
Bath Stone



425*
Sand Stone



435*
Dark Granite



Code	W x D (mm)	Length (m)	Finish	Box Qty
NLT108	19 x 10	2.8	81	10
NLT128	19 x 12.5	2.8	81	10
NLT225 NEW	28 x 22.5	2.8	17,81,411,414,425,435	10



81
Matt Silver


17
Matt Black



*POWDER COATED FINISHES

Aluminium Formable 2 in 1


81
Matt Silver



91
Bright Silver

Code	W x D (mm)	Length (m)	Finish	Box Qty
NFA125	3 x 10/12	2.6	81,91	20

Stainless Steel Tile-In Nosing



84
Stainless Steel



Code	D (mm)	Length (m)	Finish	Box Qty
NSS106	10	2.5	84	10
NSS126	12	2.5	84	10

P.V.C. Trim

Manufactured to the highest standards from top quality virgin, lead free P.V.C.u. Finished professionally, providing a long lasting protective finish to any ceramic installation.



Trim Regular & Corners

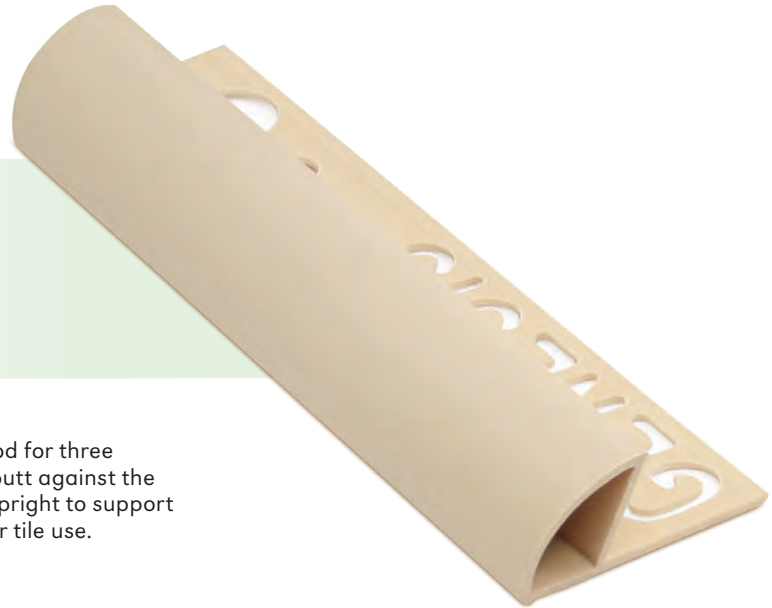

ETR features a smart quadrant face which is good for three dimensional alignment, overhang lips to better butt against the cushion edge of the ceramic tile, and a second upright to support the face making it the most suitable trim for floor tile use.

Plain


01
White



11
Grey



16
Black



32
Soft Cream



34
Soft Grey



111
Glacier



Marble Effect

63
Grey Marble



64
White Marble



70
Toffee Swirl



72
Roman Marble



116
Barley Marble





Code	W x D (mm)	Z (mm)	Length (m)	Finish	Box Qty
ETR608	7.5 x 6	21	2.5	01,11,16,32,34,111	60
ETR708	8.5 x 7	22	2.5	01	60
ETR808	9.5 x 8	25	2.5	01,11,13,16,32,34,63,64,70 72,111,116	60
ETR108	11.5 x 10	26	2.5	01,11,16,32,34, 63,64,70 72,111,116	60
ETR128	12.5 x 12	32	2.5	01,11,16,32,34,64,70,111	60

Corner Pieces

Injection Moulded corner pieces to compliment the profile eliminating the need for mitring - for the perfect finish.

Code	D (mm)	Finish	Pack Qty
PDM603	6	01,11,16,32,34	100
PDP604	6	01,34	4 Blister Pack
PDL803	8	01,11,16,32,34	100
PDP804	8	01,34	4 Blister Pack
PDX103	10	01,11,16,32,34	100
PDP104	10	01,34	4 Blister Pack
PDX123	12	01,11,16,32,34	100
PDP124	12	01,34	4 Blister Pack




Internal Trim




Code	D (mm)	Length (m)	Finish	Box Qty
ETI090	9	2.5	01	50





Eco Trim

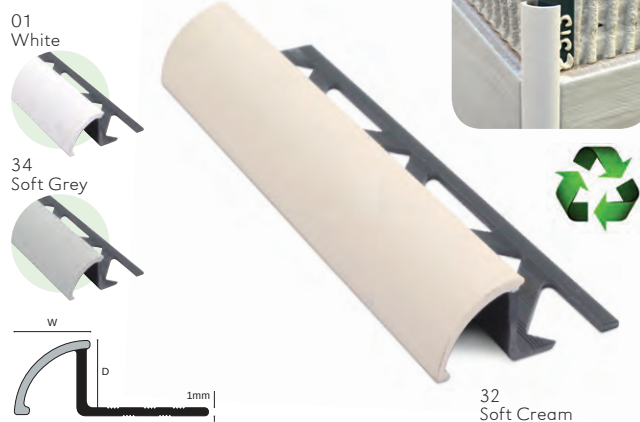

Code	W x D x Z (mm)	Length (m)	Finish	Box Qty
ECT060	7 x 6 x 23	2.5	01,32,34	100
ECT090	10 x 9 x 26	2.5	01,32,34	100
ECT120	13 x 12 x 28	2.5	01	100



Straight Edge Trim



A straight edge alternative to the popular round edge profiles. In addition to being used with standard ceramic tiles the ESP can be used with rectified or square cut tiles. The profile is available in 8, 10, 12 and 15mm depths. The ESP can also be used as a capping on the horizontal where skirting tiles have been fitted or where walls are not fully tiled.

Code	D (mm)	Length (m)	Finish	Box Qty
ESP060	6	2.5	01	60
ESP080	8	2.5	01,11,16,32,34	60
ESP100	10	2.5	01,11,16,32,34	60
ESP120	12	2.5	01,11,16,32,34	60


01
White



11
Grey



16
Black



32
Soft Cream




34
Soft Grey




Seal Under / Over Tile & Seal Plus




01
White



SBS180



SSP180



Seal Under / Over Tile

Code	Fixing	Length(m)	Finish	Box Qty
SBS180	Under / over tile	1.8	01	25
SPS180	Under tile only	1.8	01	25

Corner Pieces

Code	Packed	Finish	Box Qty
SMT100	1 corner + 2 end caps	01	50 packs



Seal Plus

Code	Fixing	Length (m)	Finish	Box Qty
SSP180	Under / over tile	1.8	01	50

Corner Pieces

Code	Packed	Finish	Box Qty
SMP100	1 corner + 2 end caps	01	50 packs

Beading


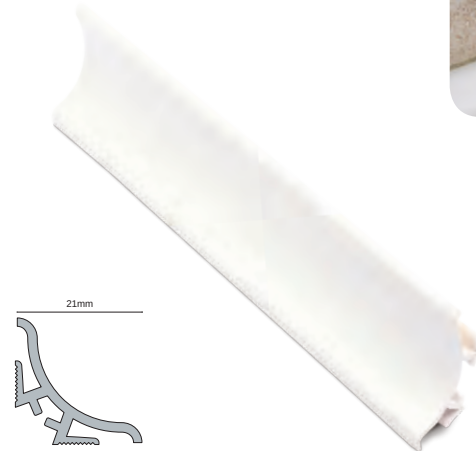


01
White



Code	Fixing	Length (m)	Finish	Box Qty
SRP250	Over tile only	2.5	01	25
Corner Pieces				
Code	Packed		Finish	Box Qty
SRE100	2 way external corner x 5		01	50
SRI100	2 way internal corner x 5		01	50
SRT100	3 way internal corner x 5		01	50

Vinyl to Tile - EVT

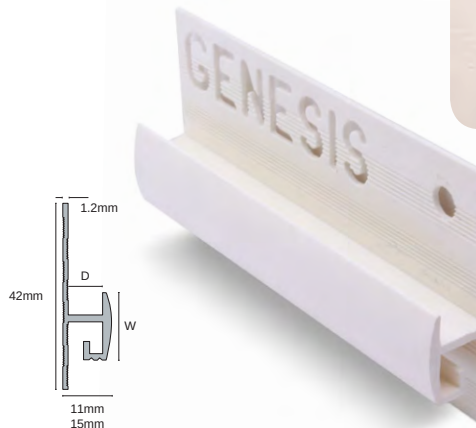

01
White





Code	W x D (mm)	Length (m)	Finish	Box Qty
EVT080	15 x 8	2.5	01	25
EVT120	15 x 12	2.5	01	25

Vinyl to Tile - EVC

01
White




11
Grey



16
Black

Code	W x D (mm)	Length (m)	Finish	Box Qty
EVC080	15 x 8	2.5	01,11,16	50
EVC100	15 x 10	2.5	01	50

Vinyl to Tile - EFU




01
White



Code	W x D (mm)	Length (m)	Finish	Box Qty
EFU080	15 x 8	2.5	01	50

P.V.C. Capping Strip

16
Black



43
Dolphin Grey



01
White



Code	W x D (mm)	Length (m)	Finish	Box Qty
KCS01	40 x 2	2	01,16,43	40

P.V.C. Capping Strip

01
White



16
Black




43
Dolphin Grey

Code	W x D (mm)	Length (m)	Finish	Box Qty
KCS02	40 x 1.5	2	01,16	40
KCS022	40 x 1.5	20 (coil)	01,16,43	3

P.V.C. Flexible Sit On Skirting

43
Dolphin Grey






16
Black

Code	H x D (mm)	Length (m)	Finish	Box Qty
KSO100	100 x 20	2	16,43	30
KSO1015	100 x 20	15 (coil)	16,43	1
KSO150	150 x 20	2	16,43	20

P.V.C. Flexible Set In Skirting


16
Black

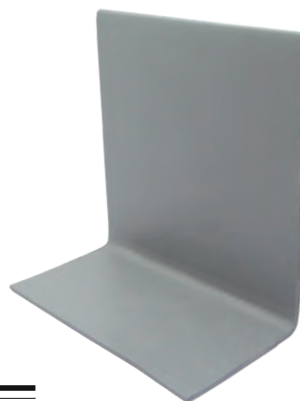


43
Dolphin Grey

Code	H x D (mm)	Length (m)	Finish	Box Qty
KSI100	100 x 50	2	16,43	20


P.V.C. Flexible Cove Former



KCOV2



KCOV1




16
Black

Code	W x D (mm)	Length (m)	Finish	Box Qty
KCOV1	35 x 35	2	16	30
KCOV2	20 x 20	2	16	30

P.V.C. Flexible Cove Former



RDIM25



RDIM20



RDIM60



RDIM45



16
Black

Code	W x D (mm)	Length (m)	Finish	Box Qty
RDIM20	26 x 2	15 (coil)	16	10
RDIM25	26 x 2.5	15 (coil)	16	10
RDIM45	36 x 4.5	2	16	40
RDIM60	40 x 6	2	16	20

Anti-Slip, Matting and Access

Functional and compliant range to protect pedestrians and floor coverings as well as provide guidance to the visually impaired.

RezTred®

Genesis are proud to introduce our anti-slip services to the corporate and retail world. Our patented anti-slip resin finishes can be applied onto virtually any surface including natural stones, terrazzo, ceramics, porcelains, glazed tiles, metal treads, wood and glass. All products can be retro-fitted as well as factory installed.


Theoretical coverage per tube:

- 3 x 10mm = 12m
- 2 x 25mm = 8m
- 25mm Discs = 24m (360 discs)



Code	Description	Finish	Box Qty
NRES	Tube of Resin - 400ml	01,16,47	1
NRES252 - STEN	25mm Strip Stencil - 1.2m		1
NRES103 - STEN	10mm Strip Stencil - 1.2m		1
NRES25D - STEN	25mm Disc Stencil - 1.2m		1
NRES - GUN	Applicator Gun		1
NRES - SQUEEGEE	Applicator Squeegee		1
NRES - CLEAN	Cleaner		1
NRES - NOZZ	Replacement Nozzle		1
NRES - GLOVE	Gloves		1



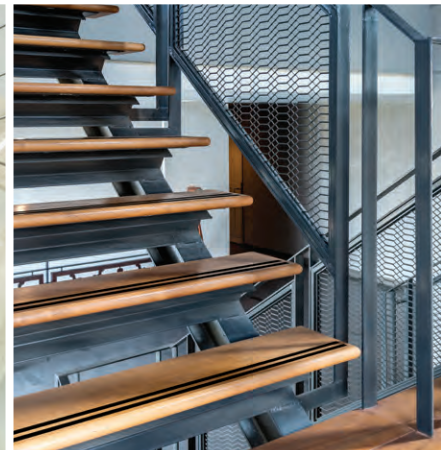

Case Study: Shaare Sedek Synagogue - Manchester


The Shaare Sedek Synagogue in Manchester requested a safer solution to make their stair edges slip resistant as they were currently using caution tape. Our RezTred® Anti Slip Tread Kit provided the perfect solution and we were able to install it the same day so that it was ready for use by the 6pm service. We are not limited to straight lines, think outside the box and we can create almost any design you require.

Stainless Steel Tread Plates

Screw down anti slip plates are ideal for applications exposed to harsh environments with countersunk eyelets for easy application.

Manufactured from resilient Stainless Steel with a Anti slip coating covering most of the top surface and finished with rounded corners for a more aesthetic appearance.

Code	W x L (mm)	Finish
NTP063.16	63 x 635	16,47,120
NTP063.47	63 x 635	16,47,120
NTP115.16	115 x 635	16,47,120
NTP115.47	115 x 635	16,47,120

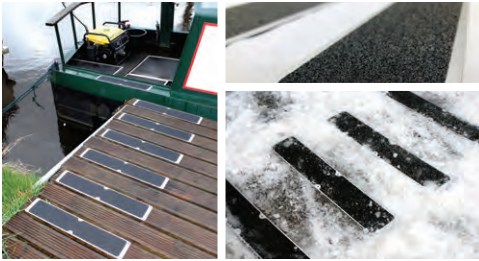


Silicone Carbide Safety Strip

A versatile anti slip tape made from a fine grade aluminium oxide, which makes it suitable for use in a wide range of applications.

The 60 grit is a medium anti slip abrasive coating, perfect for general anti slip requirements possessing excellent levels of grip.

Code	W (mm) x L (M)	Finish
NIW250.16	25 x 18.3 roll	16,47,120
NIW250.47	25 x 18.3 roll	16,47,120
NIW250.120	25 x 18.3 roll	16,47,120
NIW500.16	50 x 18.3 roll	16,47,120
NIW500.47	50 x 18.3 roll	16,47,120
NIW500.120	50 x 18.3 roll	16,47,120

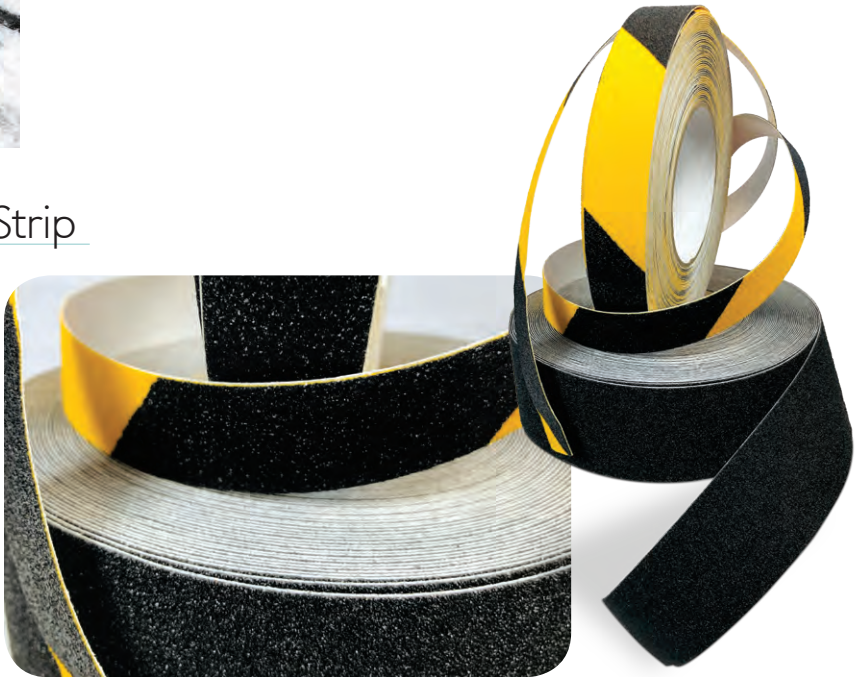




RezTred®

Bespoke Template Service

You can now customise your Anti-Slip needs to best suit your application



PATHWAY GUIDANCE SYSTEM

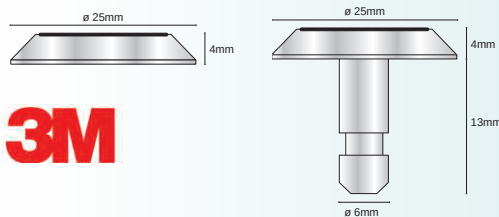

3M




The traditional 9mm Ø shank method or 3M adhered versions offer an incredibly versatile system that can provide an instant DDA and Equality Act 2010 compliant tactile surface to any platform edge, stairway or ramp due to their unique installation methods.

Manufactured from Stainless Steel grade 316 or Polyurethane, both of which are highly durable and offer excellent contrasting options to ensure conformity within internal and external applications.


Aluminium, Brass and other design options available, minimum order quantities may apply.

Based on 60mm centres - 361 tactiles per m²

Standard Pattern



Platform Pattern

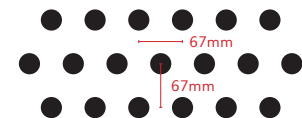

Stainless Steel Shanked

Code	Ø (mm)	Description	Finish	Box Qty
FTSSD25	25	Stainless Steel Anti-Slip Tactile	01,16,47	36
FTSCD25	25	Stainless Steel Circle Tactile	84	36
FTCHD25	25	Stainless Steel Crosshatch Tactile	84	36

Stainless Steel Self Adhesive **3M**

Code	Ø (mm)	Description	Finish	Box Qty
FTSAS25	25	Stainless Steel Anti-Slip Tactile	01,16,47	36
FTSSA25	25	Stainless Steel Circle Tactile	84	36
FTSCA25	25	Stainless Steel Crosshatch Tactile	84	36

Stainless Steel Corduroy Tactile Trim

Code	W x L (mm)	Description	Finish	Box Qty
FTCD280	25 x 280	Stainless Steel Anti-Slip Shanked	01,16,47	12
FTCA280	25 x 280	Stainless Steel Anti-Slip Self Adhesive 3M	01,16,47	12

PU Tactile Shanked

Code	W x L (mm)	Description	Finish	Box Qty
FTPHD25	25 x 25	PU Cross Tactile	16	36

PU Tactile Self Adhesive **3M**

Code	W x L (mm)	Description	Finish	Box Qty
FTPYA25	25 x 25	PU Groove Tactile	16	36
FTPCA25	25 x 25	PU Cross Tactile	16	36

PU Corduroy Tactile Self Adhesive **3M**

Code	W x L (mm)	Description	Finish	Box Qty
FTPA280	27 x 295	PU Corduroy Tactile	16	12


Stainless Steel Tactile





Infill




PU Tactile

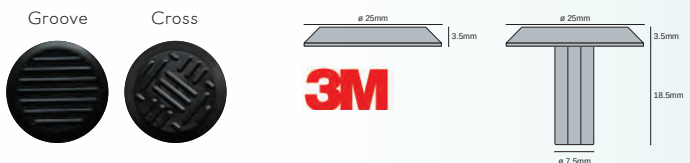

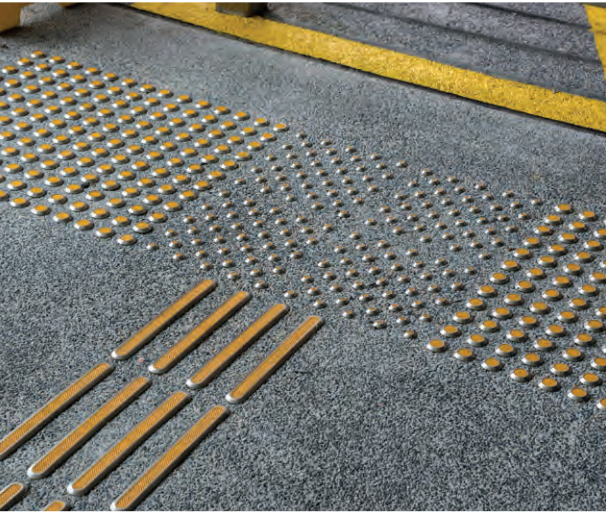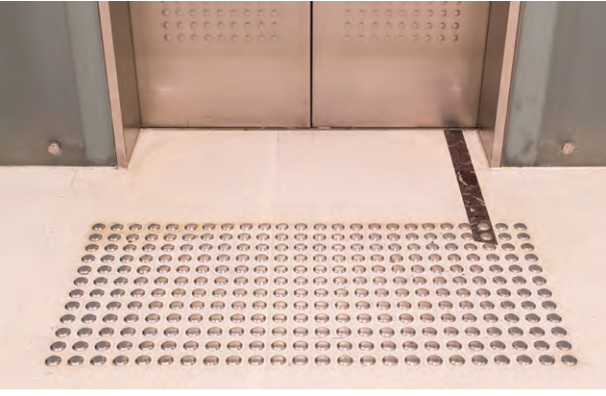

Entrance Matting

TrakMat® ENTRANCE MATTING



A versatile system incorporating aluminium sections with rubber or carpet inserts linked by semi-rigid P.V.C to cushion traffic and reduce noise.

The unique design allows the matting to be rolled easing transport, relocation and cleaning.

Light to medium traffic <2,000/day.

Use TrakMat® Fluted Rubber outside for primary coarse dirt retention.

Use TrakMat® Loop Pile inside to clean and absorb residual moisture and dirt.



TrakMat® Fluted Rubber

Code	Height (mm)	Finish	Size
EM8950	12	16	m ²
EM8951	17	16	m ²
EM8952	22	16	m ²

TrakMat® Loop Pile

Code	Height (mm)	Finish	Size
EM8900	12	Anthracite	m ²
EM8901	12	Grey	m ²
EM8902	12	Natural	m ²
EM8903	12	Red	m ²
EM8910	17	Anthracite	m ²
EM8911	17	Grey	m ²
EM8912	17	Natural	m ²
EM8913	17	Red	m ²
EM8920	22	Anthracite	m ²
EM8921	22	Grey	m ²
EM8922	22	Natural	m ²
EM8923	22	Red	m ²

End Profile



Code	Height (mm)	Finish	Length (m)
EMCAP12	12	16	3



Case Study: Home Furnishings Store - Birmingham

Our TrakMat® Entrance Matting has been installed at a busy market leading store in Birmingham.

The TrakMat® system meets the high traffic specification as it offers a durable, effective, practical solution with simple and efficient installation.

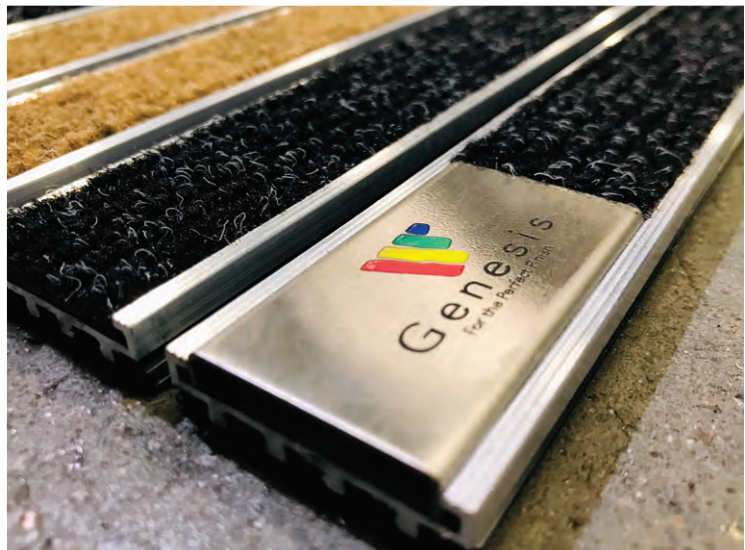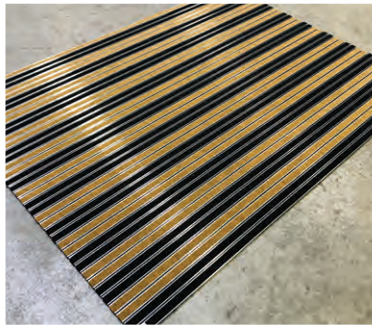

Entrance Matting

TrakMat® HDR - Exterior Rubber



16
Black

Heavy Traffic: >2000/day

Use outside for primary coarse dirt retention.

Aluminium sections containing rubber inserts linked with galvanised steel cables and secured with plated fixings. Designed for internal or external use.

Code	Height (mm)	Finish	Size
EMR8030	18	16	m ²

TrakMat® HDR - Superior Buffed



Black



Grey

Heavy Traffic: >2000/day

Use inside to clean and absorb residual moisture and dirt.

Reversible inserts are fitted between mill profiles and assembled with galvanised steel rods.

Code	Height (mm)	Finish	Size
EMR8000	18	Grey	m ²
EMR8016	18	Black	m ²
EMR8002	12	Grey	m ²
EMR8003	12	Black	m ²

TrakMat®
ENTRANCE MATTING

Now available...

...Entrance Matting
Samples Folder

Order yours today!



Transitions

Our range of transition profiles provide an extensive portfolio of both commercial and DIY products – all giving you performance, function and aesthetics.




Transitions Dividing Strips

Aluminium Dividing Strip




Code	W x D (mm)	Length (m)	Finish	Box Qty
EDA510	5 x 10	2.5	80	20
EDA310	3 x 10	2.5	91	20

Aluminium Dividing Strip

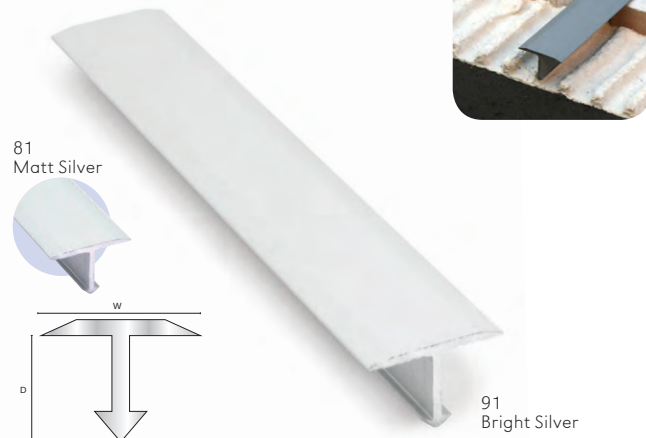

Code	W x D (mm)	Length (m)	Finish	Box Qty
EDA147	14 x 8	2.5	81,91	20

Aluminium Dividing Strip

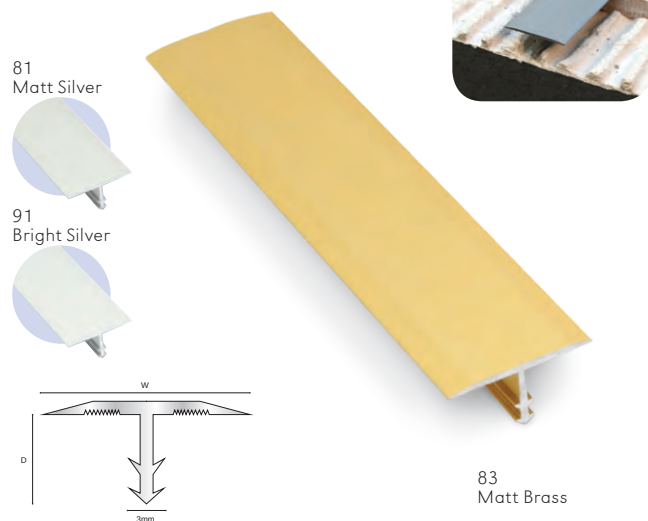

Code	W x D (mm)	Length (m)	Finish	Box Qty
EDA408	22 x 9	2.5	81,83,91	20



Stainless Steel Dividing Strip



Code	W x D (mm)	Length (m)	Finish	Box Qty
EDS209	20 x 9	2.5	84,102	10

Solid Brass available upon request - lead times and MOQ's apply.

Eurocover Strip



- Suitable for transitions between surfaces of similar height.
- New smooth design.
- Quick and easy to install.
- Strong adhesive bond for durability.



Code	W x D (mm)	Length (m)	Finish	Box Qty
CAS407	38 x 3	2.7	40,81,83,89,91,94	10
CAS409	38 x 3	0.9	40,81,83,89,91,94	10

40
Oak



81
Matt Silver



83
Matt Brass



89
Bronze



91
Bright Silver



94
Brushed Effect




Self Adhesive - Cover



Code	W x D (mm)	Length (m)	Finish	Box Qty
CAS257	25 x 3	2.7	81,83	10

Self Adhesive - Nosing

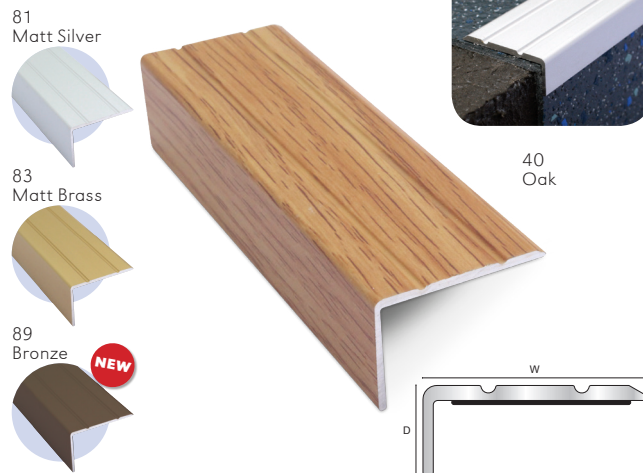

Code	W x D (mm)	Length (m)	Finish	Box Qty
NAS207	30 x 20	2.7	40,81,83,89	10
NAS209	30 x 20	0.9	40,81,83,89	10
NAS107	25 x 10	2.7	40,81,83,89	10
NAS109	25 x 10	0.9	40,81,83,89	10

Self Adhesive - Vinyl/LVT Ramp




Code	W x D (mm)	Length (m)	Finish	Box Qty
TAV257	30 x 2.5	2.7	81,83	10
TAV259	30 x 2.5	0.9	81,83	10

Self Adhesive - Ramp



Code	W x D (mm)	Length (m)	Finish	Box Qty
TAS157	50 x 15	2.7	40,81,83,89	10
TAS159	50 x 15	0.9	40,81,83,89	10
TAS107	43 x 10	2.7	40,81,83,89	10
TAS109	43 x 10	0.9	40,81,83,89	10

Fast Fit Slimline

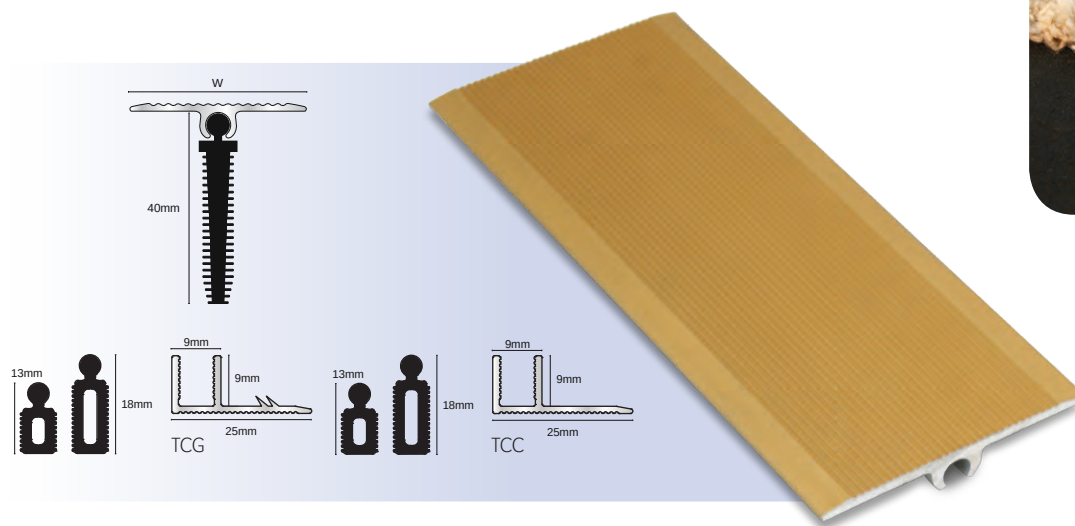


Perfect finishing for junctions of different floor coverings of same height.


- Covers a gap up to 30mm
- TCS for drill fitting option
- TCG Multiflex for Carpet installation
- TCC Multiflex for all other floor coverings

Code	W (mm)	Length (m)	Finish	Box Qty
TCS409	40	0.92	81,83	20
TCS405	40	1.85	81	20
TCG109	9	0.92	80	20
TCC109	9	0.92	80	20



81
Matt Silver



83
Matt Brass



Fast Fit Ramp System

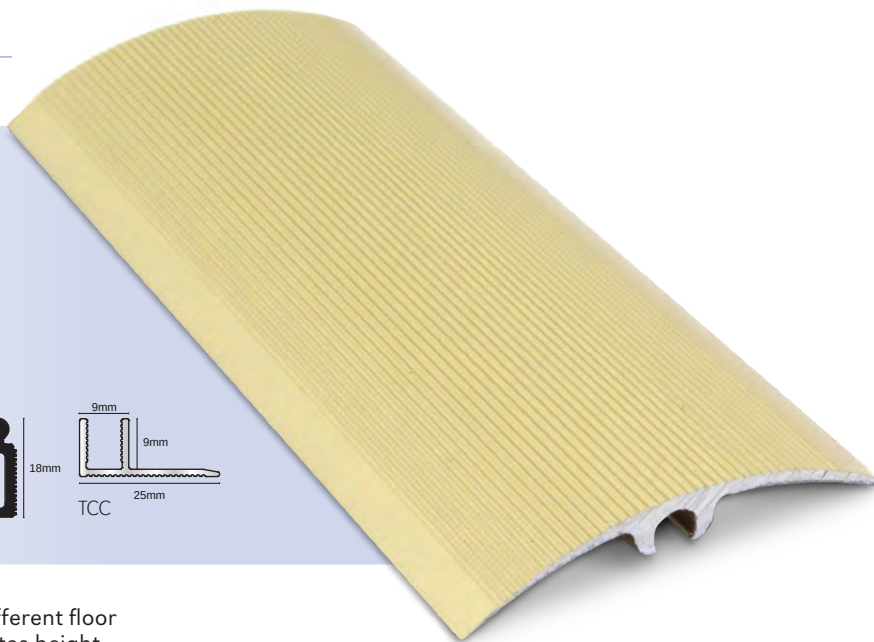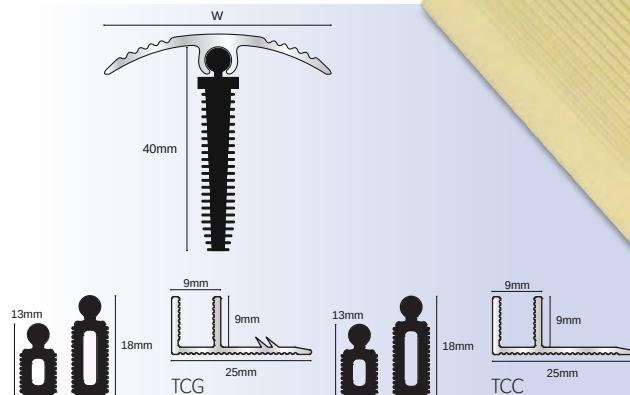


Unique Clip System. Allows use with different floor covering material depths. Accommodates height variation up to 20mm.







- TCR for drill fitting option
- TCG Multiflex base for carpet installation
- TCC Multiflex base for all other floor coverings
- TTG Multiflex set with gripper base
- TTC Multiflex set with universal base
- All Bases include 5 + 5 clips

Code	W (mm)	Length (m)	Finish	Box Qty
TCR409	40	0.92	40,81,83,85,87,91	20
TCR405	40	1.85	81	20
TCG109	9	0.92	80	20
TCC109	9	0.92	80	20
TTG409 ¹	40	0.92	91	20
TTC409 ²	40	0.92	91	20


¹TTG409 (TCR & TCG Combined)

²TTC409 (TCR & TCC Combined)

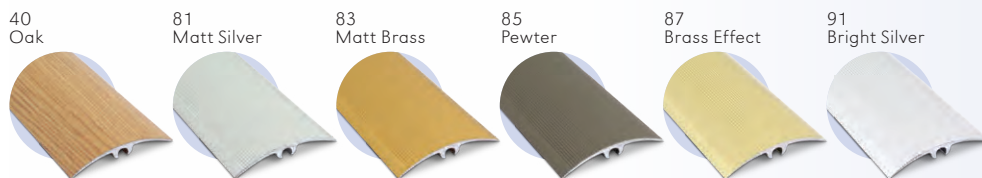

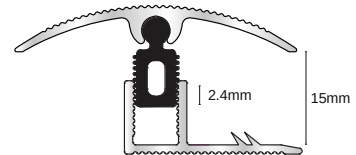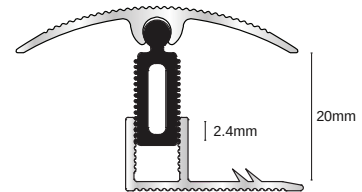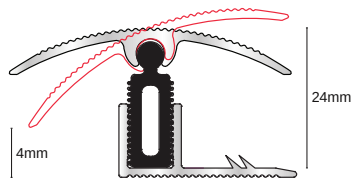

Aluminium Z-Bar Carpet Lock & Z-Bar Pro

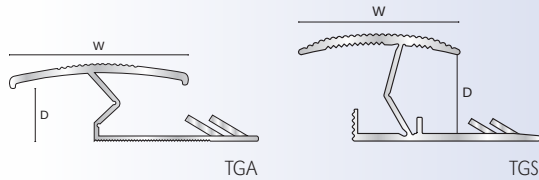

The Aluminum Z-Bar Carpet Lock from Genesis provides an effective transition between different heights and types of floor finishes.

Simple to install the TGA profile provides a neat finish and protects the edges of both floor coverings even when they are slightly different depths.

Code	W x D (mm)	Length (m)	Finish	Box Qty
TGA909	28 x 9	0.9	81,83,87,91	15
TGA907	28 x 9	2.7	81,91	15
TGA149	28 x 14	0.9	81,83	15
TGS159	30 x 15	0.9	87,91	15

81
Matt Silver



83
Matt Brass




87
Bright Brass



91
Bright Silver




Clip Tops



TTOP1

TBAS1



TTOP3

TBAS3



16
Black

43
Dolphin Grey

80
Mill Aluminium





Code	W x D (mm)	Length (m)	Finish	Box Qty
TTOP1	53 x 6.25	2.5	16,43	10
TBAS1	34 x 6.25	2.5	80	10
TTOP3	37 x 8 - 10	2.5	16,43	10
TBAS3	17 x 8.55	2.5	80	10

Aluminium Retro-Fit Vinyl Reducer

Pre drilled



81
Matt Silver

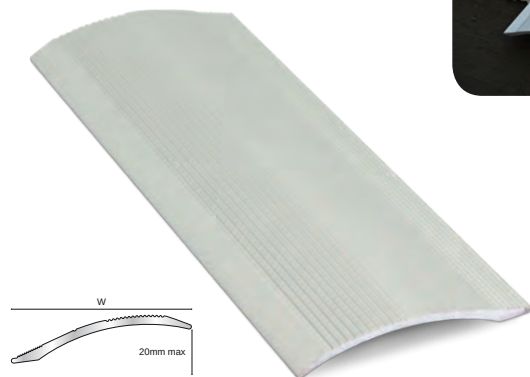


Code	W x D (mm)	Length (m)	Finish	Box Qty
TVA259	40 x 2.5	0.92	81	20
TVA258	40 x 2.5	2.8	81	20

Brushed Stainless Cover

Pre drilled




102
Brushed
Stainless Steel



Code	W x D (mm)	Length (m)	Finish	Box Qty
TSC307	30	2.7	102	40
TSC407	40	2.7	102	40


Aluminium Reducer

Pre drilled

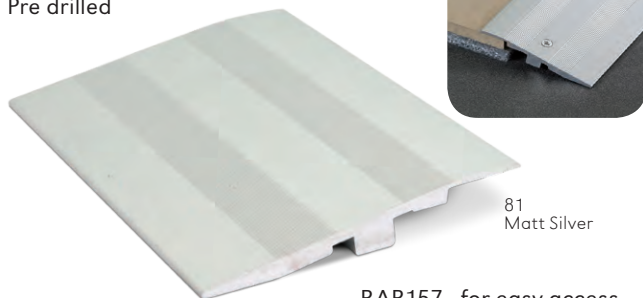


81
Matt Silver

RAR077 - for carpet tiles,
loose lay PVC tiles etc.




RAR157 - for easy access
with pallet trucks, trolleys
and wheelchairs.



Code	H (mm)	Length (m)	Finish	Box Qty
RAR077	5 - 7	2.7	81	10
RAR157	10.5 - 15	2.7	81	10

Stainless Steel Tile-in Ramp



84
Stainless Steel




Code	W x D (mm)	Length (m)	Finish	Box Qty
RSS104	20 x 10	2.5	84	10
RSS124	25 x 12.5	2.5	84	10



Tile Aluminium Ramp



80
Mill Aluminium

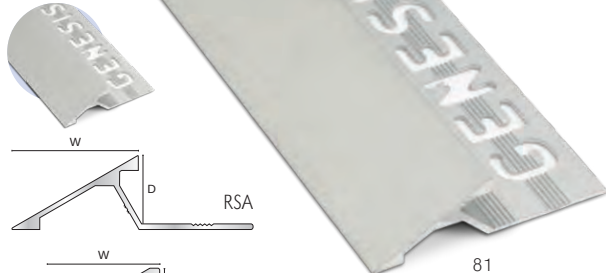

81
Matt Silver




Code	W x D (mm)	Length (m)	Finish	Box Qty
RSA104	20 x 10	2.5	80,81	20
RSA124	23 x 12	2.5	81	20
RUA104	16 x 10	2.5	81	20
RUA124	19 x 12	2.5	81	20

Aluminium Access Ramp



81
Matt Silver



Code	W x D (mm)	Length (m)	Finish	Box Qty
RAA104	65 x 10	2.5	81	10
RAA124	65 x 12.5	2.5	81	8
RAA154	90 x 15	2.5	81	7

Marketing

Grab customer attention with our range of eye catching display stands, POS items, countertop displays and sample folders.



A vast range of eye-catching marketing materials are available to help promote your Genesis products, from robust display stands that offer an excellent way of displaying full length trims to smaller point of sale displays. Promotional items that help to represent the Genesis brand by combining functionality with advertising with such items as pens, calendars, note pads etc.

Bespoke marketing materials are available on request.





Z103 1m Maxi Stand

- 24 slots for leaning profiles in position
- 10 euro hooks (for tools or corner pcs)
- Divider bar clips onto back to divide profiles
- Each slot holds 10 - 20 profiles
- Price tag divider
- Anti slip mat
- Versatile options - tools and / or profiles
- Basket not included, available on request

2200
mm

Code	Description	Qty
Z103	Maxi Stand	1
Z112	Euro Hooks (double prong)	10
Z151	Replacement Header	1
Z103B	Basket	1

600mm

1000mm


Note: Image shows two stands side by side



Z100 Mini Stand

- A bespoke unit to display the Genesis range of tools
- A simple grid system to display products
- Supplied with a display tray and 20 euro hooks
- 12 profile location points
- Basket not included, available on request

Code	Description	Qty
Z100	Mini Stand	1
Z112	Euro Hooks (double prong)	10
Z103B	Basket	1
Z104H	Replacement Header	1

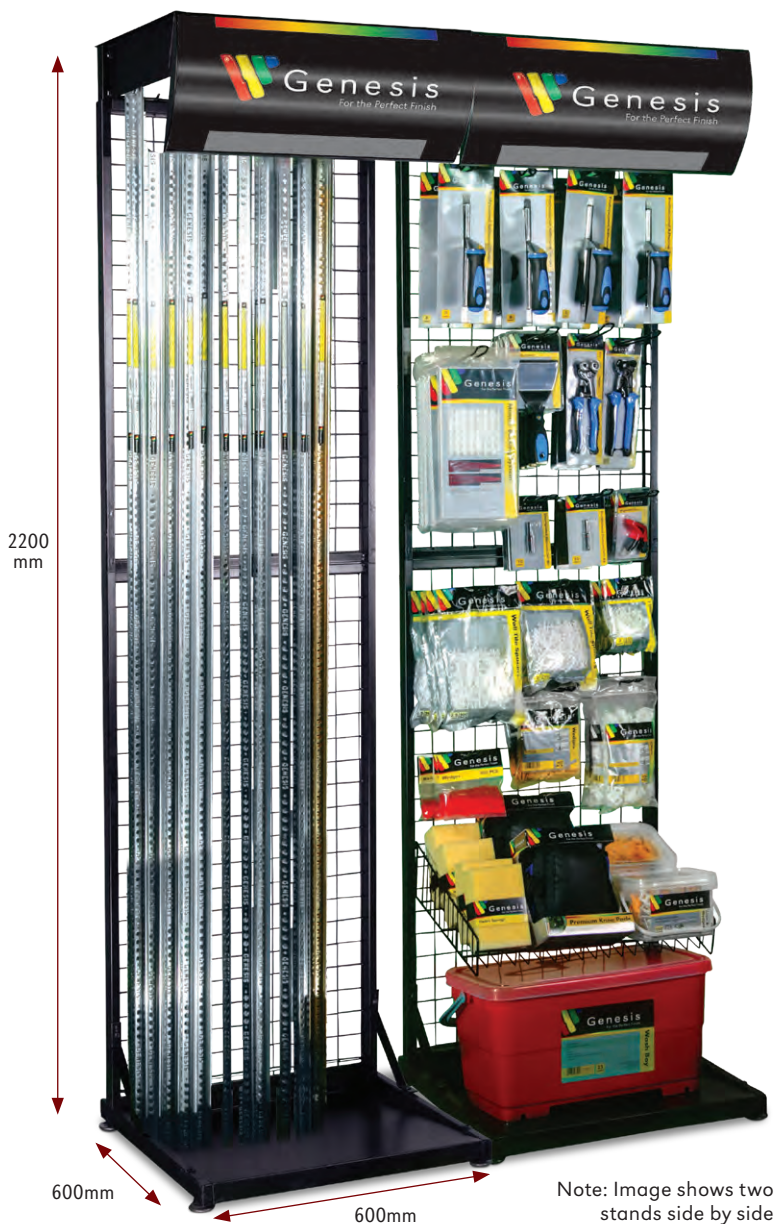

Z110 1m Deluxe Stand

- Rubber mat and specially strengthened base ideal for Metal profiles
- Profiles are simply leaned against the back of the display and rested on the rubber mat on the base
- Works on its own or combined to form a run of displays for larger showrooms
- Dividers create 24 sections on this display
- Each section holds on average 20 profiles depending on the profile shape and size
- The display unit can also be slit 50/50 to display 12 divided sections of profiles and then use the euro hooks to display tools on the other half of the stand. If used this way the stand will hold approximately 180 profiles
- If all 24 divider spaces are used approximately 360 profiles can be displayed
- Complete assembly instructions are included with each display stand

2200 mm

Z115 0.5m Svelte Stand

Due to popular demand the Z110 is now available in a half meter option

600mm

1000mm

Note: Image shows two stands side by side



Personalised Samples Panel for Z110



A brand-new stand attachment is available for the Z110, offering an installed vision of the 4 profile designs offered by Genesis; Triangular, Square, Straight and Round. The Z109 also acts as a sales aid for highlighting and upselling the use of corner pieces to clients and homeowners allowing them to keep their options open on design and finish.

Code	Description	Qty
Z110	Deluxe Stand	1
Z115	Svelt Stand	1
Z111	Single prong hooks	10
Z113	300mm Extension	1
Z109	Framework (board not included)	1
Z109-BOARD	Genesis Branded Board	1
Z109-BESPOKE	Personalised Board	1
Z420	Replacement Header	1



Transition Stand



- 10 hooks to hold Genesis 0.92m lengths of transition profiles
- Comes complete with Genesis header


Code	Description	Qty
Z15	Transition Stand	1

Samples Folders



Code	Description
Z870	RezTred® and Accessibility
Z871	Entrance Matting
Z424	Metal Profiles
Z425	Ramps and Transitions
Z428	Movement Joints & Nosing
Z429	PVC Profiles
Z430	Edge Protection and Skirting
Z432	Vision
Z426	Metal Finish Selector

Samples Boards

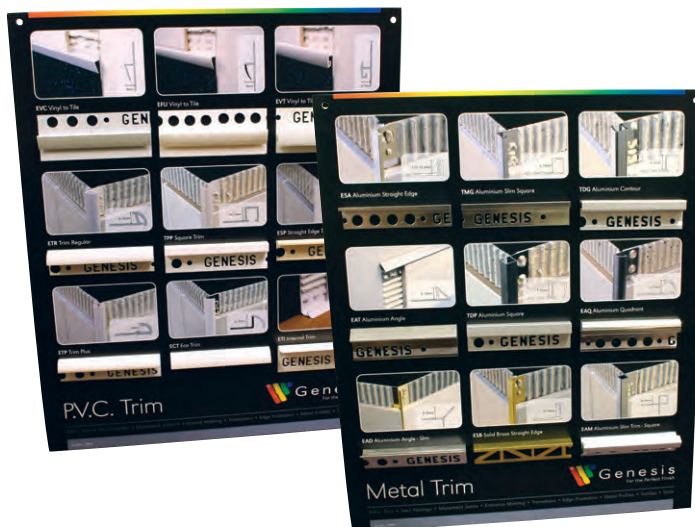


Code	Description
Z422	Self Adhesive
Z865	Panel Profiles
Z889	Transitions Board
Z890	Metal Trim Samples Board (1)
Z895	PVC Trim Samples Board
Z897	Metal Trim Samples Board (2)
Z888	Counter Top Display - Profile Design
Z893	Counter Top Display - Stone
Z894	Counter Top Display - Pathway
Z899	Counter Top Display - Stainless

Luxe Display Box



Code	Description
Z433	Luxe Display Box

Display Modules

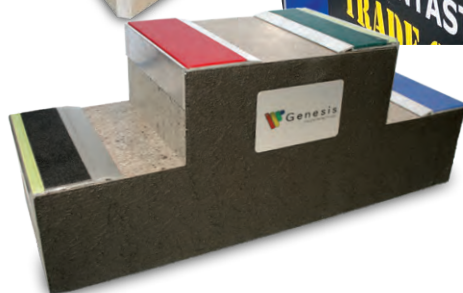

- Individual modules constructed with ceramics specified by you and using prescribed Genesis profiles to create the perfect point of sale display
- These modules have been designed to show a selection of Genesis Profiles and perfectly illustrate the function of the product as well as the aesthetics
- Eye-catching and perfect for displaying corner pieces

Code	Description	Qty
Z123	Display Module	1



Sample Cases



Code	Description	Qty
Z751	Genesis Flooring Sample Case	1
Z752	Contract Tiling Sample Case	1

Promotional Items

External Banner

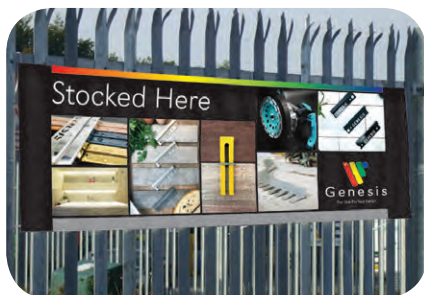

Code	Description	Qty
Z880	External Banner 0.6 x 1.8 m	1
Z880F	External Banner 0.6 x 1.8 m	1

Catalogue & Price List



Code	Description	Qty
Z313	Genesis Catalogue	
Z312	Genesis Price List	
Z400	Contractor Catalogue	

2022 Desk Calendar



Code	Description
Z-CALENDAR	2022 Desk Calendar

Genesis Logo Mat



Code	Description	Qty
Z703	Genesis Logo Mat 90 x 60 cm	1

Hydration Device



Code	Description
Z802HD	Water Bottle

Note Pads



Code	Description
Z502	A5 Note Pad
Z503	Sticky Notes

Pens




Code	Description
Z801	Pen

Got a question? Chat to us online

www.genesis-gs.com

 **Chat**

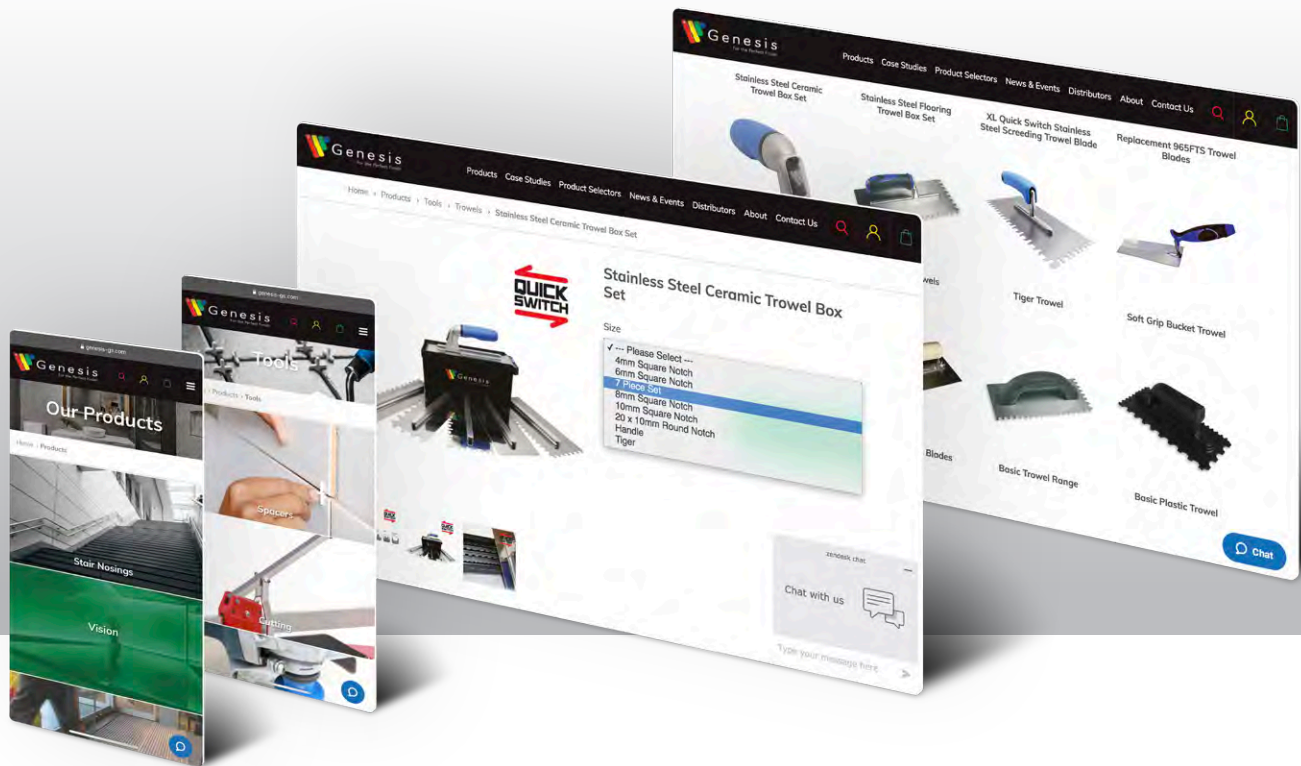

AHB	56-57	ESA	6-7	LFA	21	NSS	142	TAS	164
AHD	52-53	ESB - Luxe	25	LGA	20	NTAB	58	TAV	164
AHP	56-57	ESF	19	Logo Mat	180	NTC	54-55	TCC	165,166
ASB	56-57	ESL	108	LPA	20	NTL	58	TCG	165,166
ASL	46-47	ESP	147	Luxe Display Box	179	NTP	154	TCR	166-167
ASP	56-57	ESQ	18	MHS	130	NTS	138-139	TCS	165
ASR	56-57	ESR	108	MLB	128	NUC	140	TDB - Luxe	25
ATC	54-55	ESS	19	MLT	128	NXF	45	TDG	8
ATS	138-139	ESS - Luxe	24	MMA	130	Pathway Guidance	156-157	TDP	10-11
Calendar	180	ETA	12	MSA	129	PDL	145	TGA	168
CAS	163,164	ETI	146	MSI	129	PDM	145	TGS	168
Display Modules	179	ETR	144-145	MSS	130	PDP	145	TrakMat	158-160
Display Stands	174-177	ETS	20	NAS	140,164	PDX	145	TSC	169
EAC	13	EVC	149	NFA	142	Pens		TSL	28
EAD	12	EVT	148	NFL	58	PHA	32	TTOP/TBAS	169
EAM	8	EWA	16	NHB	56-57	PIA	32	TVA	169
EAQ	13	EWB	16	NHD	50-51	PSA	33	TVB	28
EAT	15	EWE	16	NHP	56-57	PUA	32	TVC	27
ECG	8	EWI	16	NIB	140	PXA	32	TVE	29
ECK	12	External Banners	180	NIHD38	44	RAA	170	TVI	27
ECQ	18	GC2	136	NIHD50	44	RAR	170	TVN	29
ECT	146	GFR	134-135	NISL38	44	RDIM	150	TVR	30
EDA	162	GFSR	134-135	NISL50	44	RSA	170	Vision - EyeLED	122
EDP	11	Invizi Joint - Infill Kit		NITR38	44	RSS	170	Vision - Guidance	114
EDQ	17		132-133	NITR50	44	RUA	170	Vision - Guide	115
EDQ - Luxe	24	KAA	37	NIW	154	Sample Boards	178	Vision - LED System -	
EDS	162	KAC	38	NLC	140	Sample Cases	179	4000K	116-117
EET	15	KCOV	150	NLM	140	Sample Folders	178	Vision - LED System - Multi	
EFA	6-7	KCS	149	NLT	142	SBS	148	White	118-119
EFU	149	KEC	38	Nosing Inserts	44	Shower Shelf	106-107	Vision - LED Tape	123
EIK	12	KIC	38	Note Pads	180	SMP	148	Vision - MultiFix	114
EIQ	13	KLC	38	NRA	141	SMT	148	Vision - Nosing	112-113
EIT	15	KPC	37	NRE	141	SPS	148	Vision - Retro SA	111
EM89	158-159	KPE	37	NRES	152-153	SRE	148	Vision - RGB System	
EMA	8	KPI	37	NSA	58	SRI	148		120-121
EMR	160	KRC	38	NSB	56-57	SRP	148	Vision - Skirting	114
EQQ	17	KSI	150	NSL	46-47	SRT	148	Vision - Step	114
EQQ - Luxe	24	KSO	150	NSP	56-57	SSP	148	Water Bottle	180
ERA	12	LAG - Luxe	25	NSR	56-57	Surface Protectors	108		

73mm Tri Bore	63	BIHUI - Vibration Tile Beater	90	Mosaic Mesh	62
BIHUI - Angle Grinder	98	BIHUI - Workbench	89	Nippers - Soft Grip Heavy Duty	81
BIHUI - Multi Angle Fixer	91	BIHUI - X Lock	99	Pro Caulking Gun	79
BIHUI - Blades	99	Caulking Gun	79	Revolution Blades	67
BIHUI - Contour Gage	103	Cleaning Pads	76	Revolution Blades - Continuous Rim	67
BIHUI - Cutting Guide	104	Combination Spreader	78	Revolution Blades - Cyclone	67
BIHUI - Diamond Wheel	93	Cutting Blade for Stainless Steel	80	Revolution Blades - Multi Wheel	64
BIHUI - Dust Extractor	93	Diamond Hand Pads	66	Revolution Blades - Turbo	67
BIHUI - Electric Cutter	87	Diamond Hole Saws	63	Revolution Drills - Diamond Pro Wet Flex	65
BIHUI - Gloves	101	Dry Drill Bits	63	Revolution Drills - Turbo Dry Drills	64-65
BIHUI - Horseshoe Shims	101	Dust Extraction	68	Spacers	61
BIHUI - Knee Pads	101	Extra Large Screeding Blade - Quick Switch	73	Spacers - Roter Wedge	60
BIHUI - Laser Levels	96	Float - Epoxy Cellulose Sponge	77	Spike Roller	81
BIHUI - Levelling System T Spin	100	Float - Quick Switch	73	Spike Shoes	81
BIHUI - Lifting System	86	Float - with Hydro Sponge	77	Sponges	77
BIHUI - Manual Cutters	97	Floor / Carpet Protector	83	Suction Cup - Mini	80
BIHUI - Multi Angle Fixer	91	Floor Squeegee	78	Tile / Glass Drill Bits	63
BIHUI - Polishing Pads	94	GLS Clip Dozer	70	Tile Magnets	80
BIHUI - Rail Cutting System	87	Grout Float	76	Tile Markers	80
BIHUI - Silicon Application	102	Grout Float - Premium	76	Tile Remover / Scraper	80
BIHUI - Suction Cups	95	Grout Float - Universal	76	Trowel Sets - Quick Switch	72
BIHUI - Tile Support	102	Grout Rake	80	Trowels - Soft Grip	74,75
BIHUI - Tile Space Regulator	91	Knee Pads	82	Trowels - Tiger	75
BIHUI - Transport Cart	88	Levelling System - GLS Spin	71	Washboy	78
BIHUI - Vacuum Attachment (mixing bucket)	103	Levelling System - GLS Wedge	70	Work Wipes	82
BIHUI - Vacuum Sucker	90	Mitre Block	81	Zipper Door	83
		Mixer	80		



Genesis

For the Perfect Finish

Tel: +44 (0)1642 713000 Email: info@genesis-gs.com

www.genesis-gs.com

Genesis Global Systems Ltd

Head Office: Stokesley Business Park Stokesley North Yorkshire TS9 5JZ



Colombia

Genesis LatAm SAS

Cavreia 16A, #163A-05,
Bogotá, 110131. Colombia

Tel: +57 (1) 805 1235 Email: ventas@genesis-latam.com

www.genesis-latam.com

India

Genesis Profile Systems India PVT. Limited

SURYA WAREHOUSE, Door Nos. 21/562-B & 21/562-C,
Marathakkara Village, Thrissur, Kerala 680306

Tel: +91 0487 2355 577 Email: sales@genesis-gs.in

www.genesis-gs.in